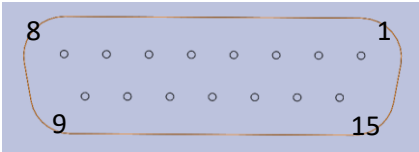


Signal lamp unit simulator


GENERAL DESCRIPTION:

The device simulator is designed to simulate the operation of the original device. The device simulator is not intended for installation on aircraft.

PINOUT INFO:

PIN N	SIGNAL TYPE	VALUES		NOTE
		MIN	MAX	
1	Frame_5	-	-	Connect to ground for turning on frame
2	Frame_7	-	-	Connect to ground for turning on frame
3	Frame_4	-	-	Connect to ground for turning on frame
4	Vcc	7 V	36 V	Common power supply
5	GND	-	-	Common ground
6	Vcc	7 V	36 V	Common power supply
7	GND	-	-	Common ground
8	Vcc	7 V	36 V	Common power supply
9	LC	-	-	Connect to ground for turning lamp control
10	Frame_2	-	-	Connect to ground for turning on frame
11	Frame_3	-	-	Connect to ground for turning on frame
12	Frame_1	-	-	Connect to ground for turning on frame
13	Frame_9	-	-	Connect to ground for turning on frame
14	Frame_8	-	-	Connect to ground for turning on frame
15	Frame_6	-	-	Connect to ground for turning on frame
Reference:				

MEASURES AND TOLERANCES:

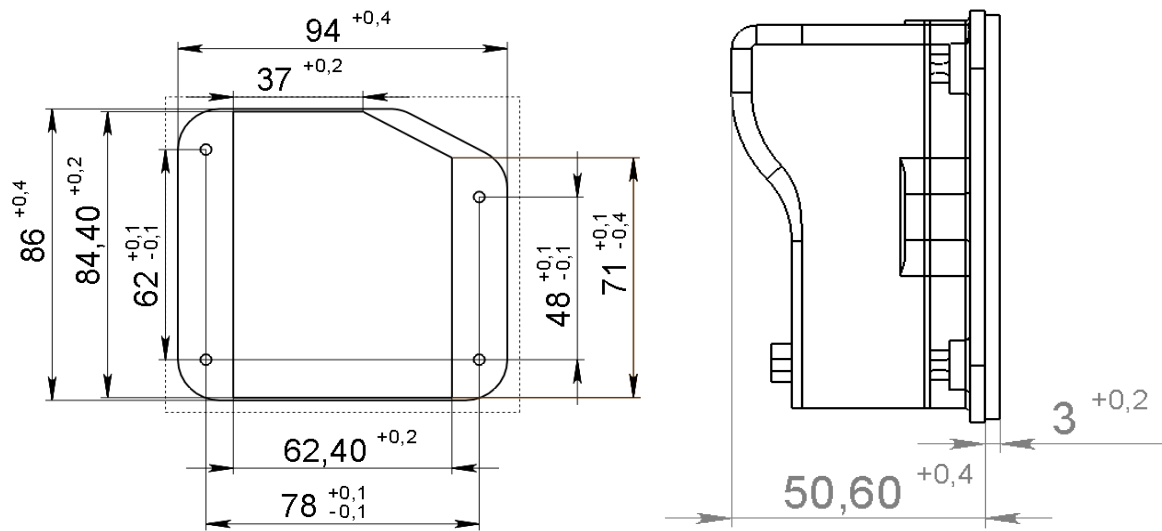

GENERAL OPERATING CONDITIONS:

Storage temperature range	-20C - +60C
Operating temperature range	+10C - +40C
Operating humidity range	0% - 60 %
Bust-proof and wash-down capable	IP 30

EXPLOITATION NOTES:

- 1) Do not use Lamp control more then 10 seconds. It can damage the device
- 2) Warning signal has higher priority then lamp control signal.
- 3) The device do not have any overvoltage protection. Please check power supply before turn on.
- 4) Device do not have reverse polarity protection.
- 5) The device do not have any overheating protection. Use device only in acceptable ambient temperature range.

POSSIBLE PROBLEMS:

No specific problems has been defined during testing. Please connect with producer in case of any device operation problems.