
Controlling multiple drones autonomously inspired by birds ability to keep formation



University:
UNIVERSITY OF SOUTHERN DENMARK

Author:
MATHIAS MIKKEL NEERUP

Bachelor Thesis

In coorperation with:
Jussi Hermansen
Info@viacopter.eu
Cottagevej 4
3300 Frederiksvarerk

Supervisor:
Kjeld Jensen
kjen@mmti.sdu.dk
Maersk Mc-Kinney Moeller
University of Southern Denmark

June 1, 2016

Mathias: : A bachelors thesis (15 ECTS) report from a single student should have a length no more than 35 pages plus maximum 10 pages of appendices.

Mathias: : Ja, men gør det som elektronisk bilag (pdf) og beskriv i rapporten, at den ligger der. Marker det evt. dine bidrag med farve, så det er meget let at se.

Mathias: : Nødvendigt ?

Among other things...

Project title

Project period

Your name, email address etc.

Report type (e.g. Bachelor thesis)

Your education (e.g. Robotics)

“University of Southern Denmark” and name of center, department or faculty. Names of supervisor(s)

Copyright and license statement for report and material in the electronic archive

Todo list

: A bachelors thesis (15 ECTS) report from a single student should have a length no more than 35 pages plus maximum 10 pages of appendices.	2
: Ja, men gør det som elektronisk bilag (pdf) og beskriv i rapporten, at den ligger der. Marker det evt. dine bidrag med farve, så det er meget let at se.	2
: Nødvendigt ?	3
Hypothesis: Sæt krav til 10 hz i hypotesen (målebart)	5
Materials and methods: Less calculations on the drone, better to move to another computer/cluster with more power than the drone has available from its battery	7
Materials and methods: Image of camera and drone seen from the side. Show what happens to the drones position estimation when it drifts down/up	7
Indoor localization: Smaller dot size - almost impossible to see the drone in the frames..	8
Indoor localization: Red is above blue, not because the drone wasn't detected	8
Indoor localization: WiFi test distance, see what happens to latency	8
Block schmeatic: Create schematic appendix	8
Block schmeatic: Add GPS, WIFI, PCB, PC to forkortelses liste	8
Block schmeatic: Thanks to Carsten Albertsen for PCB development	8
Wireless Communication: 'footmotemark til at referere til samme fodnote flere gange	10
Wireless Communication: vægt på ESP til 3 gram med link - det er hvad der er oplyst. Efterfølgende skrive at det er vejet til 1.51 gram(hen mod slutningen)	10
Debug/ISP: Refer to image of board	11
AutoQuad M4 firmware: Write about my implementation in Aq firmware. Can_sensors.c,h and main_ctrl.c where flag is checked	12
: Ændre 0:3 til 0:1 da en uint16_t kun tager 2 bytes og ikke 4	18
: Dette er forkert, eftersom alle defines er taget fra AQ's can.h så der passer det..	21
: Fixe ref til section om GPS spoof	22
Test of spoofed positions outdoore: Opdater billede med test-equipment	39
Documentation made through out this thesis: Ja, men gør det som elektronisk bilag (pdf) og beskriv i rapporten, at den ligger der. Marker det evt. dine bidrag med farve, så det er meget let at se	41

Abstract

Until now drones keeps getting bigger and larger to carry bigger batteries with more capacity and to lift heavier payloads. This leads to drones getting less efficient, less responsive and gets more dangerous. Instead it has become popular to make drones smaller and increase the number of drones needed to solve a task.

(Materials & methods)

This thesis describes how to make three drones follow a leader drone with a preprogrammed path as an example of drones cooperating. A Linux PC running MarkerLocator tracks each drone's position and wirelessly transmits, using Xbee, the drone's positions to all drones. The position of each drone is spoofed into the drone using the CAN-bus and thereby overwriting the onboard GPS. An outdoor test has been made using the onboard GPS to test the leader-follower algorithm in a bigger scale. A small PCB has been developed and mounted on each drone to route packages from the Xbee module to the CAN-bus of the drone and to measure the local altitude of the drone using a ultrasonic sensor. The PCB carries an AT90CAN128 as microcontroller which build-in CAN support making it obsolete to carry an external USB CAN-controller.

(Results -*i*, discussion)

The accuracy of the vision based localisation is measured using a laser pointer pointing out the drone's 2D position on the floor making it possible to measure the variance of the drone's position. The leader-follower algorithm was also tested outside using the onboard GPS. The performance of the leader-follower algorithm is measured and discussed using plots that reveal the distance between the drones.

(Conclusion -*i*, perspective)

It is shown that it is possible to implement the leader-follower algorithm using a vision and ultrasonic based positioning system. The distance between all drones when flying indoor was +/- 10 cm which is less than the maximum accepted error. It was possible to add 5 follower-drones without editing the code showing it is a generic system. The system can further be used to indoor testing of navigation algorithms and explore the many possibilities drones has to offer. If drones at some point needs to fly indoor to help eg. Mobile robots navigating, vision might be a way to obtain an absolute indoor position for the drones.

Resumé

abstract på dansk

Reading Guide

This thesis contains three parts.

Chapter 1 gives background information about the purpose of this project. It starts giving an overview of the topic and ends up focusing on why it makes sense to make the project and what other universities have done. It further contains related work, problem statement, defined hypothesis and assumptions and limitations. A image of the final extension board can be seen to make it clear to the reader how the developed extension board and AutoQuad Ladybird drone looks

Chapter 2 describes materials and methods used in this thesis. It explains how and why the following design chooses where made concerning firmware as well as developed PCB. Each chapter starts with an introduction and ends with test results evaluating weather the choices made works or not.

Chapter 3,4,5 concerns showing, analyzing and discussing results. Evaluation of the design choices made throughout chapter 2 with respect to the hypothesis is summarized in the conclusion.

Figure 1 has been made to help the reader so he is aware of the different component mentioned through the thesis.

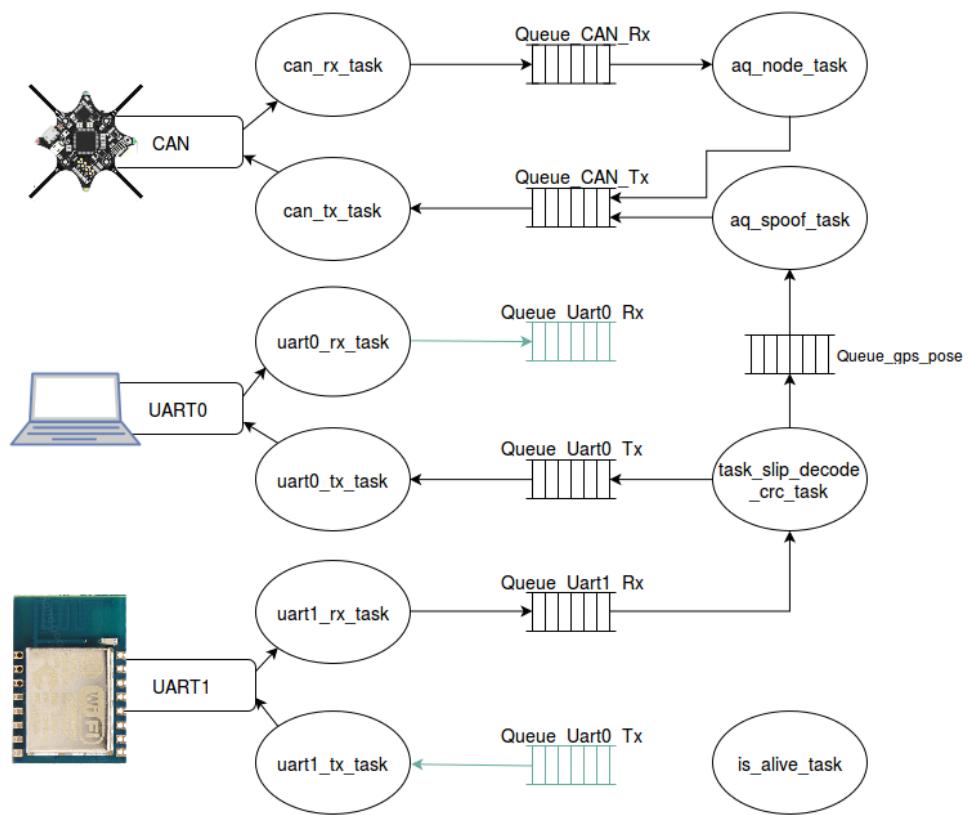


Figure 1 Tasks diagram showing overview of the running tasks on the At90Can128

List of Abbreviations

AQ AutoQuad Flight Pilot

Acknowledgement

Throughout the project period my classmates has been at great help to discuss and generate ideas.

Especially thanks to the people listed below.

- My supervisor Kjeld Jensen for giving solutions and help when needed.
- Developer of MarkerLocator Henrik Midtiby for helping me understand and adding functionality to his software.
- Friend Morten Albeck Nielsen for meeting once a week to help generating ideas, debugging, sparring and proof reading the thesis.
- Friends Mads Tilgaard Jensen, Eskild Andresen & Michael René Andersen for listening to technical issues, evaluating solutions and carrying out tests.
- My girlfriend Anna Riisberg Soerensen for proofreading the thesis and understanding the time required throughout this project period.

AutoQuad is the flight controller used in this project. The Author was among the first students using AutoQuad on SDU, but the first student to make changes to the firmware and to communicate with AQ using CAN-bus. The AutoQuad firmware is not documented at all, so much time was spent reading through code and trying to figure out how it works. A great amount of time was also spent on more practical things like getting to know their Development Environment (CrossWorks for ARM)¹ in order to compile their firmware, waiting for Quatos² license and getting familiar with the flashing process of AutoQuad.

Much of the gained knowledge about AutoQuad and how to do debugging has been written down to share with other students. It can be found on the USB-key handed in *Appendix/SDU-UASAAutoQuaddocumentation.pdf* and *SDU-UASAAutoQuadsourcecodedocumentation.pdf*. Text marked with green is written by the author.

¹<http://www.rowley.co.uk/arm/>

²The controller, Quatos, used in AutoQuad is not Open Source so a license had to be bought by SDU

Table of Contents

Abstract	iii
Resumé	iv
Reading Guide	v
List of Abbreviations	vii
Preface	viii
1 Introduction	1
1.0.1 Problem Statement	4
1.0.2 Related Work	4
1.0.3 Hypothesis	5
1.0.4 Aim of project	6
2 Materials and methods	7
2.1 Indoor localization	7
2.2 AutoQuad extension board	8
2.2.1 Introduction	8
2.2.2 Block schmeatic	8
ATmega	9
Wireless Communication	9
Pins	11
Debug/ISP	11
2.3 AutoQuad M4 firmware	12
2.4 AutoQuad extension board firmware	13
2.4.1 Scheduler	13
2.4.2 Queues	15
2.4.3 Tasks	17
2.4.4 Wireless communication	18
2.4.5 CAN	19
CAN Protocol description	19
3 Results	29
4 Discussion	30
5 Conclusion	31
Appendices	35

CHAPTER 1

Introduction

This chapter will give the reader background information about UAVs and point out a problem SDU is currently facing in two ongoing projects. Further more it will describe the focus of this project and how others have managed to solve it.

Background

UAS is an emerging¹ technology used in lots of different areas. They are used in military purposes since UAVs are better suited for dull, dirty, or dangerous missions than manned aircraft. They are also widely used commercially to provide images of fields, power lines, pipelines² and so forth.

Since UAVs, especially multirotors or quadcopters, have become less expensive to produce, a marked for civilians and hobbyists has emerged. At the moment of writing, SDU is developing³ a registration plate, so that it is possible to see where drones are flying and who to be held responsible when accidents occur.

A challenge concerning multirotors and especially multirotors is the amount of energy they are capable of carrying. A drone designed with long flytime in mind is capable of flying approximately 20 minutes depending on weather and payload. If the drone is equipped with a heavy camera or other kind of payload, then the flight time begins to decrease rapidly. So far the solution has been to increase the size of the drones to mount bigger batteries, but this might not be right way of doing it. Drones become less efficient, less responsive and gets more dangerous due to increase in weight.

By looking at the nature, one can see how small animals like ants and birds manage to cooperate and thereby build or move bigger things that they would not be able to do on their own. This way of small independent, decentralized units working together is called a swarm⁴.

By making UAVs smaller, they get more efficient, their flight time increase and they get cheaper but of the cost of their ability to lift⁵. Therefore it seems like an idea to make small drones cooperate to solve more complex tasks.

Many different flight pilots exists on the marked. SDU UAS has decided to use AutoQuad since the code is Open Source⁶ and the multiroters show reliable and steady flying. An Auto-

¹Suraj G Gupta, Mangesh M Ghonge, and PM Jawandhiya. “Review of unmanned aircraft system (UAS)”. in: *technology* 2.4 (2013).

²https://en.wikipedia.org/wiki/Unmanned_aerial_vehicle#Civil

³<http://videnskab.dk/teknologi/droner-skal-have-elektronisk-nummerplade>

⁴https://en.wikipedia.org/wiki/Swarm_intelligence

⁵Vijay Kumar. *Robots that fly ... and cooperate*. 2016. URL: https://www.ted.com/talks/vijay_kumar_robots_that_fly_and_cooperate (visited on 05/18/2016).

⁶Quatos, which is their control algorithm is not Open Source.

Quad multirotor delivered by ViaCopter⁷ comes with the AutoQuad flight controller M4, Electronic Speed Controllers⁸ ESC32 and rotors. ViaCopter smallest drone is delivered without Electronic Speed Controllers since H-bridges are built into the M4 flight pilot. ViaCopter delivers drones in different sizes but their flight controller is the same. This means that code developed for ViaCopter's Ladybird can be deployed on a large drone and it will continue to work⁹



(a) *M4* flight pilot (b) *Ladybird* with mounted *M4* (c) *Eduquad* with *M4* + *ESC32*

(b) Ladybird with mounted M

(c) Eduquad with M4 + ESC32

Figure 1.1 Pictures of AutoQuad hardware

At the time of writing, SDU is collaborating with HCA airport to find anomalies in fences. Airports are burdened by a number of required inspection tasks to maintain a high level of safety and security. Some of these tasks may advantageously be performed by a drone rather than the current manual labour, and this will save significant resources. In this project they are targeting a specific need for frequent inspection of the fence surrounding the airport shown in figure 1.2a. The inspection concerns fence holes or similar anomalies. We hypothesize that a drone is capable of unsupervised autonomous inspecting the airport fence detecting small holes down to a radius of 5 cm.¹⁰



(a) Part of the fence surrounding HCA Airport.

(b) Drone spreading ladybirds and gall midges

In order to avoid flying into the fence and to fly accurate enough for the camera to film, it is required to use an RTK GPS¹¹.

⁷ <https://viacopter.eu/>

⁸Number depends of rotors on UAV

⁹ Assumed the developer did not break important lowlevel tasks

¹⁰ Application sent to Energi Fyns Udviklingsfond which has been granted, Ansøgning 2015-01-30 Energi Fyns Udviklingsfond-1.pdf on USB

¹¹Eric Gakstatter. *Centimeter-Level RTK Accuracy More and More Available for Less and Less.* 2014. URL: <http://gpsworld.com/centimeter-level-rtk-accuracy-more-and-more-available-for-less-and-less/> (visited on 05/18/2016).

In another project, SDU is working together with a company, Ecobotix, to avoid the need of pesticides in organic crops. Pesticides are used to kill pests from the crops. When using pesticides a health risks exists for those who eat the crops. The use of pesticides also reduce the amount of diversity in nature since it is also killing beneficial organisms and potentially harm other animals in the food chain like birds. If nothing is used the crops might die, and that is very expensive to the farmer.¹²

SDU and Ecobix use drones to spread bugs like ladybirds and gall midges, over the crops to eat pests as shown in figure 1.2b.

It is required the drones fly approximately 1 meter above ground at 1.5 meter/sec. It is therefore necessary to use an RTK-GPS in order to avoid hitting the ground in case of pumps in the fields.¹³

Both projects tends to use AutoQuad to solve their tasks. The AutoQuad version available at the moment of writing only supports autonomous flying using its onboard GPS. This project extends AutoQuads functionality by making it support global positioning from an RTK-GPS.

¹²<http://naturerhverv.dk/tvaergaaende/gudp/gudp-projekter/2015/oekodrone-skal-sprede-mariehoens-i-stedet-for-pesticider/>
last visited 18-04-2016

¹³Jensen, K.; Larsen, R.; Laursen M.S.; Neerup, M.M.; Skriver, M. and Jørgensen, R.N. Towards UAV contour flight over agricultural fields using RTK-GNSS and a Digital Height Model. Accepted for oral presentation at CIGR-AgEng June 2016.

1.0.1 Problem Statement

The current AutoQuad version does not support any other source of global positioning than the onboard GPS and thereby does not accurate support flying within 3 cm¹⁴. For AutoQuad to be used in applications requiring high accuracy this functionality is needed.

RTK-GPSs are unfortunately very expensive especially when they are small enough to be mounted on a drone. In order to add this functionality to AutoQuad, an indoor environment needs to be created in case of code behaving unexpected. Instead of using RTK-GPS indoor, a indoor positioning system will be developed. This test environment might be used later on to test swarm, navigation and control algorithms

1.0.2 Related Work

In order to find relevant research about drones flying indoor, a few search phrases was conducted. The following keywords were used to create different phases: Indoor, environment, swarm, localization, AutoQuad, quadrotor, mini UAV, test facilities, ETH, accurate, RTK, totalstation. Based on the keywords a few papers was deemed relevant to the project and has been combined in order to give the reader an overview within the field of this project.

Developers of AutoQuad did previously try to implement RTKLib¹⁵ in AQ. Unfortunately they did manage to make it work as expected¹⁶.

One of the big players within the field of indoor navigation and controlling multiple drones accurately is the university ETHZürich and their Institute for Dynamic Systems and Modelling¹⁷. They have developed a test flying area they call "Flying Machine area" which provides facilities for doing prototype testing of new control algorithms¹⁸. The FMAs dimensions is 10*10*10m and provides nets to protect people and mattresses to protect the drone if a crash. The FMA has further been developed into a mobile installation to be used in demonstrations in Europe and North America. One of their demonstrations where used in a TED video about multirotors and their capabilities¹⁹. The multirotor usually used in the FMA is Ascending Technologies' Hummingbird with custom wireless communication and electronics.

They have build it as a module design in order to be easy to replace parts of their system by simulations and to make it scalable. One of their modules is a copilot that implements an accident handler in case of user-code crashing or sending invalid commands to the drones. They are using UDP multicast packets as communication between ground computation and flying objects. The use of UDP multicast packets between modules since to makes the system more simple but also to avoid the need of buffers to handle unsuccessful transmissions and retransmissions.

In order to detect the quadroters they are using a commercial motion capture system. Three reflective markers is mounted on each flying object in order to obtain attitude and position. They are using three cameras to reduce the risk of false positive even though two cameras would be enough to get a flying objects 6D position.

¹⁴W Stempfhuber and M Buchholz. "A precise, low-cost RTK GNSS system for UAV applications". In: *Conference on Unmanned Aerial Vehicle in Geomatics, Zürich*. 2011, pp. 289–293.

¹⁵<http://www.rtklib.com>

¹⁶Jussi Hermansen, owner of <http://ViaCopter.eu>

¹⁷<http://www.idsc.ethz.ch/research-dandrea/research-projects/aerial-construction.html>

¹⁸Sergei Lupashin et al. "A platform for aerial robotics research and demonstration: The Flying Machine Arena". In: *Mechatronics* 24.1 (2014), pp. 41–54.

¹⁹https://www.ted.com/talks/raffaello_d_andrea_the_astounding_athletic_power_of_quadcopters

Hyun-gyu Kang, Byoung-kyun Kim, and Wangheon Lee. “Indoor localization of DRON using vision based sensor fusion”. In: *Control, Automation and Systems (ICCAS), 2015 15th International Conference on*. IEEE. 2015, pp. 932–934 proposes a more simplistic approaches to do indoor navigation. They use bluetooth 4 to communicate between their multiroter(Rolling Spider) and an android phone which controls the multiroter. They have mounted a camera on the ceiling to detect the target and the flying multiroter. By doing background subtraction they can detect where the drone is in the frame by subtracting the background from each frame²⁰. By doing a convolution sum, the targets can be located. By analyzing the pixels around the location of the multiroter, they can get the heading.

Jose Luis Sanchez-Lopez et al. “A system for the design and development of vision-based multi-robot quadrotor swarms”. In: *Unmanned Aircraft Systems (ICUAS), 2014 International Conference on*. IEEE. 2014, pp. 640–648 proposes a framework to accelerate the process of prototyping multiroters behaviors. Their framework is designed for a swarm of drones to fly in a environment with obstacles. One of their design requirements is, that the framework should be highly decoupled from the application the researcher is testing in order to speed up the development process. Position estimates is obtain by using onboard IMU and optic flow. To avoid expensive motion capture systems they have used markers that can easily be recognized by cameras mounted on the drones to get a absolute 3D estimate. Each obstacle got a ArUco-marker²¹ that can be detected by the front camera mounted on the multiroter. They have decided to use ROS as middleware to provide generic interfaces between the modules used in their framework. Different multiroters can be used as long they use the same interface. Communication between multiroters and ground station(if used) is done using WIFI.

The most common type of indoor localization is using vision where the camera is either mounted in the environment or where the drone is equipped with cameras to obtain position estimates.

Timothy Stirling et al. “Indoor navigation with a swarm of flying robots”. In: *Robotics and Automation (ICRA), 2012 IEEE International Conference on*. IEEE. 2012, pp. 4641–4647 uses a different approach where they use a *Robot Sensor Network* to map the environment. The idea is that each drone can either be a beacon or explorer. Each drone alternates between these two states. Beacons stays still below the ceiling without moving while explorer flies around to unknown locations. Beacons emit IR light in order to triangulate beacons position. Beacons detecting unexplored locations calls for explorer that will become beacons and so forth until the environment is mapped. To synchronize the beacons 2.4 ghz WIFI is used. When the environment is mapped, graph searching algorithms can be used to find a path through the environment.

1.0.3 Hypothesis

If a If each drone’s 2D position is obtained using vision and spoofed into the drone using CAN, then it is possible for at least 3 drones to follow a leader drone with a preprogrammed flight path and keep a euclidean distance at 50 cm within plus minus 10 cm to the leader and its neighbours.

²⁰Wikipedia. *Background subtraction* — Wikipedia, The Free Encyclopedia. <http://en.wikipedia.org/w/index.php?title=Background%20subtraction&oldid=697931050>. [Online; accessed 17-May-2016]. 2016.

²¹S. Garrido-Jurado et al. “Automatic generation and detection of highly reliable fiducial markers under occlusion”. In: *Pattern Recognition* 47.6 (2014), pp. 2280 –2292. ISSN: 0031-3203. DOI: <http://dx.doi.org/10.1016/j.patcog.2014.01.005>. URL: <http://www.sciencedirect.com/science/article/pii/S0031320314000235>.

Mathias: Hypothesis: Sæt krav til 10 hz i hypotesen (målebart)

1.0.4 Aim of project

The aim of this project is to test the hypothesis by making a indoor test environment and try to fly more than one drone. The initial test of the system will be to control two drones, and make them fly in a circle. If this works, more drones can be added and leader-follower can be implemented

CHAPTER 2

Materials and methods

This chapter concerns the most important parts about how this project has been implemented. It has been split into several sections.

Mathias: Materials and methods: Less calculations on the drone, better to move to another computer/cluster with more power than the drone has available from its battery

Mathias: Materials and methods: Image of camera and drone seen from the side. Show what happens to the drones position estimation when it drifts down/up

2.1 Indoor localization

- Introduction to section(chapter)
- Why use vision as lozalization. cheap, no expensive sensors.
- About the MarkerLocator(out of scope), how it works,(Overview - not in depth, why it's slow, how window-mode works) how it's implemented, scalability.
- Quality measure, why is it nessecary.
- How I arrived to a good way of measureing the found marker.
- One drone detection
- Two drones detection, different ways of detecting orders.
- Implementation in ROS, splitting into different nodes. optimization

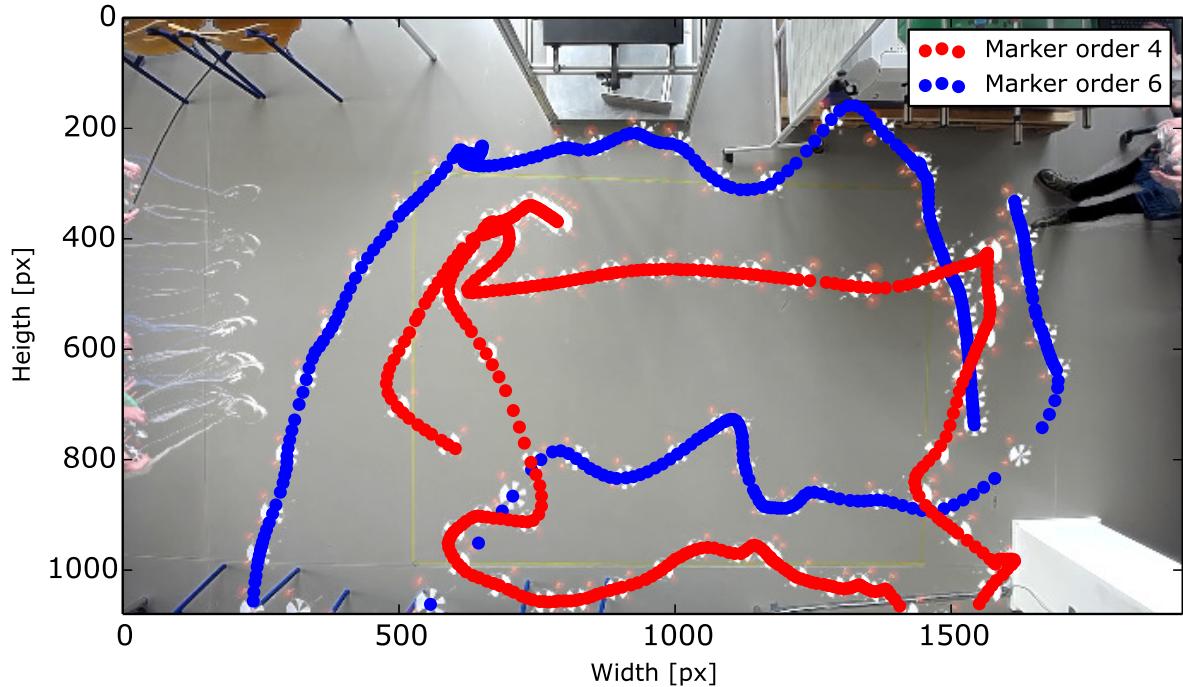


Figure 2.1 Figure showing every 7'th frame merged into one frame combined with the tracked positions of the drones

Mathias: Indoor localization: Smaller dot size - almost impossible to see the drone in the frames..

Mathias: Indoor localization: Red is above blue, not because the drone wasn't detected

Mathias: Indoor localization: WiFi test distance, see what happens to latency

newpage

2.2 AutoQuad extension board

2.2.1 Introduction

This section will go in depth about the extentionboard created as an addon to the AQ M4 board. The extentionboard was developed to act as a bridge between the PC and the CAN-bus using wireless communication.

v The block schematic shown in figure 2.2 was created by the author of the report. It was then given to Carsten Albertsen who created the schematic and did rest of the creation of the PCB.

2.2.2 Block schmeatic

Mathias: Block schmeatic: Create schematic appendix

Mathias: Block schmeatic: Add GPS, WIFI, PCB, PC to forkortelses liste

Mathias: Block schmeatic: Thanks to Carsten Albertsen for PCB development

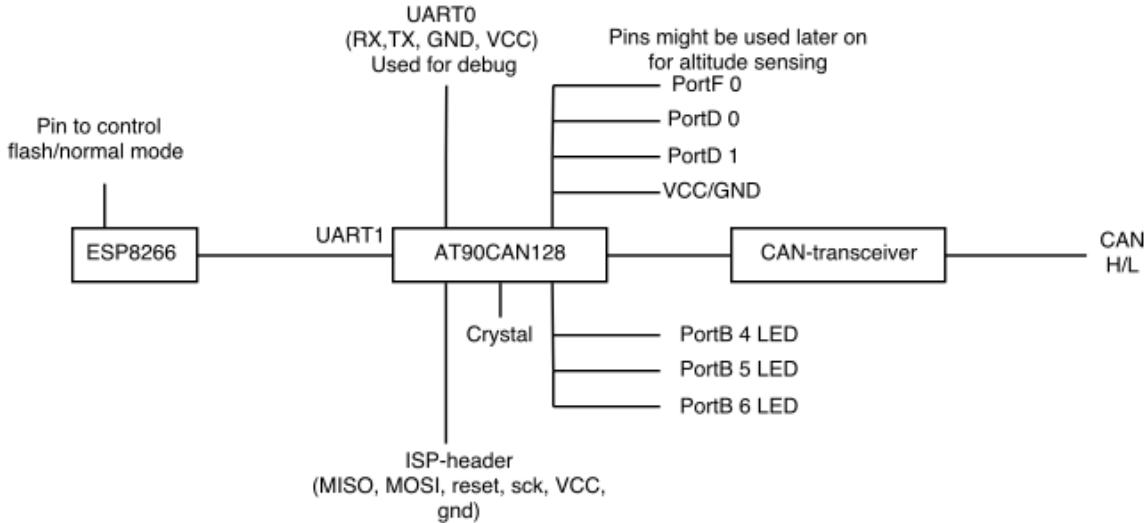


Figure 2.2 Block schematic of the WiFi-extensionboard developed to AQ M4

ATmega

Wireless Communication

An important part of the hardware is the wireless communication used between the PC and the drones. The wireless communication module has several requirements it needs to fulfill in order to make the whole system work as expected. A comparison table has been made in table 2.1 to find the wireless communication module that is best suited for the task.

The following wireless modules were considered and compared.

- **ESP8266**

ESP8266 is a general purpose 32 bit SOC with integrated WIFI 802.11 b/g/n support and buildin TCP/IP stack. It can be setup its own access point or it can connect to an existing wireless network. It runs at 80MHz and can be flashed with a custom firmware. The SOC is sold as modules with different pinouts and features such as extra flash memory¹ and different antennas. The chip has been on the market for about two years and costs approximately 7\$. It has been widely used in DIY-projects due to its low price and because it requires a minimum of network knowledge to get up and running.² When the SOC is shipped, it comes with a preloaded firmware which either accepts AT commands or LUA scripting depending on the version of the module. These simple programming interfaces makes it quick and easy to interface the cheap.

This leads to a large community where most of the problems have been found and solved already. Arduino has been ported to ESP8266 which makes it even easier to get it up and running. Their official Arduino GitHub has 2125 commits on their master branch at the time of writing³

¹<https://www.olimex.com/Products/IoT/MOD-WIFI-ESP8266/open-source-hardware>

²<http://www.esp8266.com/> - 43.000 posts in forum

³<https://github.com/esp8266/Arduino>

- **EMW3165**

EMW3165 is a SOC much like the ESP8266 supporting 802.11 b/g/n WIFI with buildin TCP/IP stack. As with ESP8266 it supports setting up an access point aswell as connecting to an existing network. It has a Cortex-M4 μ C which run at 100MHz. It supports custom firmware and can be aswell be bought as different modules with different pinouts and antennas. It differentiates itself from the ESP8266 by its higher frequency its 5 volts compatible pins⁴ which makes it easier to connect other hardware which run 5 volt without the need of a logic level shifter. It has been on the marked for only one year and costs approximately 9\$. Since it is a newer board than ESP8266 it has not been used in the same number of applications and thereby has a smaller community behind⁵. Their most active GitHub has 147 commits on their master branch at the time of writing⁶.

- **nRF51822**

nRF51822 is also a SOC, but it is using Bluetooth instead of WIFI. The nRF51822 μ C is implementing BLE which is a power efficient way of sending and receiving data. The chip supports broadcasting which could be used in this project. The μ C can be bought as a standalone component or mounted on modules as the two other μ Cs. Different modules offers different types of antenna connectors or buildin antenna on the PCB. It has not been possible to find an Arduino ported firmware that supports this μ C. To write a firmware for the μ C it has to be done using Nordic Semiconductor's proprietary SDK.

- **XBee**

XBee is a module that implements the Zbee standard. The Xbee modules work as a wireless serial connection. The Xbee modules supports mesh networking which means the modules by themself figure out which module is closest and makes the connection. This idea makes sense in this application since there will be multiple drones and one computer. If one drone gets too far from the PC, it can just connect to one of the other drones closer to the PC.

The Xbee solution is ready to use and requires a minimum of programming to get up and running. The modules also support GPIO for digital in and output and analog input.

Mathias: Wireless Communication: 'footmotemark til at referere til samme fodnote flere gange

Product	Size	Weight	Price	Documentation	Range	Score
ESP8266	24x16mm ⁷	{7}	1.5g ⁸	{8}	7.5\$ ⁹	{9}
EMW3165	32x16mm ¹⁰	{6}	5g ¹¹	{2}	9\$ ¹²	{3}
nRF51822	18x10mm ¹³	{8}	3g ¹⁴	{0}	7.5\$	{2} 30 Meters ¹⁵ {9}
XBee	24.38x27.61mm ¹⁶	{3}	3g ¹⁷	{4}	25\$ ¹⁸	{9} 91 Meters ¹⁹ {9}

Table 2.1 Comparisontable used to compare different wireless communication modules

Mathias: Wireless Communication: vægt på ESP til 3 gram med link - det er hvad der er oplyst. Efterfølgende skrive at det er vejet til 1.51 gram(hen mod slutningen)

⁴<https://hackadaycom.files.wordpress.com/2015/07/emw3165.pdf>

⁵<http://www.emw3165.com/> - 200 posts in forum

⁶<https://github.com/SmartArduino/WiFiMCU>

The products compared in 2.1 are chosen to have approximately same specs. Onboard antenna, breakout for easy pin access.

Pins

A few pins were made available through solder pads for easy access if needed later on.

The following pins were available as solder pads:

- PortF 0 - Alternative function as ADC, channel 0
- PortD 0 - Alternative function as interrupt, INT0
- PortD 1 - Alternative function as interrupt, INT1

In case the onboard barometer isn't accurate enough, an alternative distance could be used to measure the drone's altitude with respect to the ground. PortF0 has been made available since some distance sensors give output as an analogue value. An example of such sensor is an Infrared proximity sensor.²⁰

As an alternative type of distance sensor, a ultrasonic could be used such as HCSR04. As output it gives a binary output with high-time proportional with the distance.²¹. To detect the high-time, one of PortD1/0 would be useful.

Which type of sensor suits best as a distance sensor to provide altitude information to the drone is out of the scope of this report. The PCB has just been made ready to different types of sensors.

Debug/ISP

In the final schematic UART0 and ISP pins were combined in one pinheader for easy access through one cable.

Mathias: Debug/ISP: Refer to image of board

To program the AtMega the ISP pins were required to be easily accessible. UART0 was made accessible to be used as debug and programming of the ESP8266 board. The plan was to setup the AtMega as UART passthrough from UART0 to UART1. Due to a mistake²² in the final schematic, both UART0 and UART1 were made accessible through the ISP/debug header. This ended up making it easier to program the ESP8266-board without using the AtMega as UART passthrough.

ESP noteS: - GPIO15 = bootmode, low for ... - GPIO0 = flash mode

<https://zoetrope.io/tech-blog/esp8266-bootloader-modes-and-gpio-state-startup>

²⁰http://www.sharpsma.com/webfm_send/1208

²¹<http://www.micropik.com/PDF/HCSR04.pdf>

²²The wrong pair of MISO/MOSI pins were made available in the ISP-header. The correct pair of MISO/MOSI is also RXD0/TXD0 as alternative function

2.3 AutoQuad M4 firmware

Mathias: AutoQuad M4 firmware: Write about my implementation in Aq firmware.
Can_sensors.c,h and main_ctrl.c where flag is checked

2.4 AutoQuad extension board firmware

2.4.1 Scheduler

Test of RTCS timing

In order to test the timing of the scheduler, a led_task was written. The task can be seen in code 2.1

Listing 2.1 RTCS task used in timing test

```

1 void is_alive_task(uint8_t my_state){
2
3     // Write to UART0
4     UDRO = my_state+'0';
5
6     switch(my_state){
7         case 0:
8             INT_LED_ON_GREEN;
9             INT_LED_OFF_RED;
10            INT_LED_OFF_BLUE;
11            set_state( 1 );
12            break;
13        case 1:
14            INT_LED_OFF_GREEN;
15            INT_LED_ON_RED;
16            INT_LED_OFF_BLUE;
17            set_state( 2 );
18            break;
19        case 2:
20            INT_LED_OFF_GREEN;
21            INT_LED_OFF_RED;
22            INT_LED_ON_BLUE;
23
24            // Set next state
25            set_state( 0 );
26            break;
27    }
28    // Wait one second
29    wait( 1000 );
30 }
```

The test was done by writing the current state of the task to UART0. A python script were made that measures the time between each character received. The script can be seen in code 2.2.

Listing 2.2 Python code used to measure time between received byte

```

1 #!/usr/bin/python
2 import serial
3 import time
4
5 ser = serial.Serial( port='/dev/ttyUSB0', baudrate=57600 )
6
7 t = time.time()
```

```
8 while True:
9     for char in ser.read(1):
10        print time.time() - t, ","
11        t = time.time()
12
13 ser.close()
```

The output of the script were redirected to a file. After receiving 700 bytes the standard deviation and mean was calculated using matlab. The mean is 1.0089 sec with a standard deviation of 0.0042 sec.

Part of the variance is caused by the inaccuracy of the timing on the PC running the python code. If a more accurate measure was needed, a scope could be attached to the μ C's GPIO. Each time the scheduler enters the task the GPIO should be set high, and when it exists the GPIO should be set low. The scopes at SDU is capable of telling the variance of the off signal. It can be concluded that the scheduler performs well.

2.4.2 Queues

Test of CAN, queues

In order to test CAN and queues, a task was written. The purpose of the task was to receive a CAN-message if any available from the queue and send the ID and data from the CAN message to a PC using UART. The task used can be seen in code 2.3.

Listing 2.3 Task used to test CAN

```

1  CAN_frame frame;
2  if(QueueReceive(&Queue_CAN_Rx, &frame)) {
3      char ch;
4      /* ID out uart0 */
5      for(int i = 3; i >=0; i--){
6          ch = ((frame.id >> i*8) & 0x000000FF);
7          QueueSend(&Queue_Uart0_Tx,&ch);
8      }
9      /* ID end*/
10
11     /* MSG out uart0 */
12     for(int i = (frame.dlc-1); i >=0; i--){
13         ch = ((frame.msg >> i*8) & 0x00000000000000FF);
14         QueueSend(&Queue_Uart0_Tx,&ch);
15     }
16     /* MSG end */
17
18     /* End of line */
19     ch = '\r';
20     QueueSend(&Queue_Uart0_Tx,&ch);
21     ch = '\n';
22     QueueSend(&Queue_Uart0_Tx,&ch);
23 }
```

The command used to send CAN-messages can be seen in code 2.4.

Listing 2.4 Task used to test CAN

```
1 while true; do sleep 1; print $(date); cansend can0 1DEADB#FEDCBA9876543210; done
```

The command sends a CAN-message using a connected PEAK-CAN adapter. It sends a message each second and prints out the date to make it clear when it is sending a message.

1deadbe is the 29 bit ID and *fedcba9876543210* is the 64 bit data.

The command used to show the received HEX values can be seen in code 2.5

Listing 2.5 Command used to get UART messages

```
1 cat /dev/ttyUSB0 | xxd -c 14
```

Cat reads from /dev/ttyUSB0 and pipes its output to xxd where it is shown in HEX. -c is number of columns which is 14 due to 4 ID bytes, 8 data bytes and 2 as newline.

The result can be seen in figure ??.

00020de: 1dea dbef fedc ba98 7654 3210 0d0a	vT2...	Wed May 11 11:09:37 CEST 2016
00020ec: 1dea dbef fedc ba98 7654 3210 0d0a	vT2...	Wed May 11 11:09:38 CEST 2016
00020fa: 1dea dbef fedc ba98 7654 3210 0d0a	vT2...	Wed May 11 11:09:39 CEST 2016
0002108: 1dea dbef fedc ba98 7654 3210 0d0a	vT2...	Wed May 11 11:09:40 CEST 2016
0002116: 1dea dbef fedc ba98 7654 3210 0d0a	vT2...	Wed May 11 11:09:41 CEST 2016
0002124: 1dea dbef fedc ba98 7654 3210 0d0a	vT2...	Wed May 11 11:09:42 CEST 2016
0002132: 1dea dbef fedc ba98 7654 3210 0d0a	vT2...	Wed May 11 11:09:43 CEST 2016
0002140: 1dea dbef fedc ba98 7654 3210 0d0a	vT2...	Wed May 11 11:09:44 CEST 2016
000214e: 1dea dbef fedc ba98 7654 3210 0d0a	vT2...	Wed May 11 11:09:45 CEST 2016
000215c: 1dea dbef fedc ba98 7654 3210 0d0a	vT2...	Wed May 11 11:09:46 CEST 2016
000216a: 1dea dbef fedc ba98 7654 3210 0d0a	vT2...	Wed May 11 11:09:47 CEST 2016

Figure 2.3 Left shows output from command 2.5 and right shows command 2.4

It can be seen that the received ID and data is *1deadbef* and *fedcba9876543210* respectively. *0d0a* is \r and \n respectively.

2.4.3 Tasks

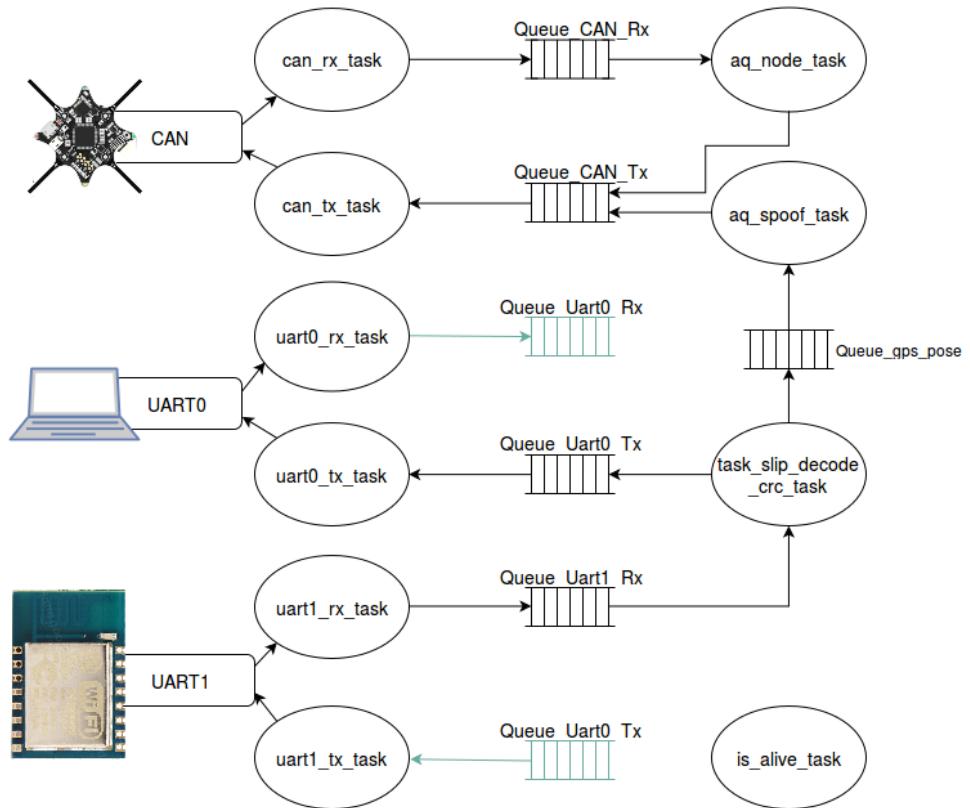


Figure 2.4 Tasks diagram showing overview of the running tasks on the At90Can128

2.4.4 Wireless communication

Communication flow

Content	Lat	Lon	Height	DOP	CRC-16
Datatype	double	double	float	float	uint16_t
Bytes	31:24	23:16	15:8	7:4	3:0

Mathias: : Ændre 0:3 til 0:1 da en uint16_t kun tager 2 bytes og ikke 4

Table 2.2 Message sent from PC to ESP8266

2.4.5 CAN

In order to spoof the onboard GPS, the CAN-bus was chosen as input to AQ. The CAN-bus is already implemented and widely used on a ViaCopter drone to communicate between AQ and hardware like ESCs, PDB etc. Much time was spent reading through the source code and trying to figure out how the protocol works. The developers behind AQ say, that the code is the documentation and thereby have not written any real documentation.

Figuring out how it works was done using debugging utilities such as breakpoints and looking at the content of the different memory locations in CrossWorks.

More debugging tricks can be seen in appendix ???. To further investigate the protocol a PEAK-CAN adapter were connected to a Ladybird drone and several python scripts were developed to send and receive messages from AQ.

The author did not go into details about messages used between AQ \leftrightarrow ESC's and AQ \leftrightarrow OSD.

CAN Protocol description

A Peak-CAN adapter were used throughout the project. It supports High-speed ISO 11898-2²³ which is a standard that states the properties of physical layer. Its max speed is 1 mbit which is the speed AQ uses to communicate on the CAN-bus. AQ uses CAN 2.0B which has 29 identifier bits. AQ is not using an existing protocol on top of ISO 11898-2. The developers created their own to suit their needs.

Identifier bits

A generic look at a AQ CAN messages can be seen in table 2.3. The normal function of the identifier bits is the priority of the messages. A CAN controller can then be setup to only allow certain messages to be processed depending on their identifier bits. The identification bits has been split up in AQ to contain information about the sender, receiver etc. Which is not normally saved information in a CAN message.

CAN Message							
Identifier bits [29 bits]							Data bits [max 64 bits]
LCC [28:27]	TT [26]	FID [25:22]	DOC [21:16]	SOID [15:11]	TID [10:16]	SEID [5:0]	

Table 2.3 Table shows the identifier bits used in AutoQuad CAN messages

In figure 2.4 the abbreviations can be seen.

LCC	Logical Communications Channel
TT	Target Type
FID	Function ID
DOC	Data Object Code
SOID	Source ID
TID	Target ID
SEID	Sequence ID

Table 2.4 Table shows abbreviations used in table 2.3

²³<http://www.peak-system.com/PCAN-USB.199.0.html?&L=1>

Each of the elements in an AQ messages will be explained how they are used in AQ.

Logic Communication Channel

LCC is the priority of the message. To understand how LCC works, one needs to look into CAN arbitration. As stated in ISO-11898-2, a 0 is the dominant bit and a 1 is the recessive bit. The example in figure 2.5 shows two nodes each transmitting a packet. The arbitration only happens during the transmission of the identifier bits. In the example on bit 8, Node 16 losses the arbitration and stops transmitting. Node 15 keeps transmitting its packet because it has lower identifier bits and thereby higher priority.

	Start Bit	ID Bits												The Rest of the Frame
		10	9	8	7	6	5	4	3	2	1	0		
Node 15	0	0	0	0	0	0	0	0	1	1	1	1		
Node 16	0	0	0	0	0	0	0	1					Stopped Transmitting	
CAN Data	0	0	0	0	0	0	0	0	1	1	1	1		

Figure 2.5 Example of CAN arbitration where node 15 has the lowest ID and thereby highest priority

LLC in a message can take one of the defines in code 2.6

Listing 2.6 LLC defines

```

1 #define CAN_LCC_EXCEPTION ((uint32_t)0x0<<30)
2 #define CAN_LCC_HIGH      ((uint32_t)0x1<<30)
3 #define CAN_LCC_NORMAL    ((uint32_t)0x2<<30)
4 #define CAN_LCC_INFO      ((uint32_t)0x3<<30)

```

Table 2.5 Table showing the 4 types of priority in AQ

Name	Value	Priority (lowest first)
EXCEPTION	0000	0
HIGH	0001	1
NORMAL	0010	2
INFO	0011	3

Target Type

Target type can either be “node” or “group” depending on if the receiver(s) is one or more nodes.

Listing 2.7 Target type defined in AQ

```

1 #define CAN_TT_GROUP      ((uint32_t)0x0<<29)
2 #define CAN_TT_NODE       ((uint32_t)0x1<<29)

```

The GROUP is used when AQ sends its reset-msg upon startup.

When the authors node sends a sensor-measure to AQ it will be of type CAN_TT_NODE.

Function ID

Function ID describes the function of the CAN message. If it is a PING, ACK, NACK, etc. It simply states the function of packet so the receiver node knows what to do with the message. Different types of functions can be seen in code 2.8

Listing 2.8 Excerpts from AQ’s list of function defines

```

1 #define CAN_FID_RESET_BUS ((uint32_t)0x0<<25)
2 #define CAN_FID_ACK        ((uint32_t)0x1<<25)
3 #define CAN_FID_REQ_ADDR   ((uint32_t)0x7<<25)
4 #define CAN_FID_GRANT_ADDR ((uint32_t)0x8<<25)
5 #define CAN_FID_CMD        ((uint32_t)0x3<<25)

```

Table 2.6 describes the FIDs shown in listing 2.8.

Mathias: : Dette er forkert, eftersom alle defines er taget fra AQ’s can.h så der passer det..

If a message is if FID CAN_FID_CMD, the Data Object code will be used as the command. It should be noted from code 2.8 that the FID’s is moved 25 positions to the left but FID is shown in table 2.3 is at bits 22:25. The offset of three bits is due to the way ARM’s CAN

registers is implemented. The three initial bits in CAN_TIxR and CAN_RIxR (registers used to transmit and receive respectively)²⁴ registers are general information about the CAN messages like whether it is extended (Part B.0) or not.

Table 2.6 Descriptions of the FIDs mentioned in code 2.8

FID	Description
CAN_FID_RESET_BUS	Message sent by AQ when powered up
CAN_FID_ACK	Message sent to AQ when acknowledging a received message
CAN_FID_REQ_ADDR	Messaged used when a node on the bus tries to register itself as a node on the bus
CAN_FID_GRANT_ADDR	Messaged sent by AQ when it registers a node as a node on the bus.

Table 2.6 shows a description of the 4 FIDs used when a node is registered.

Data Object Code

Data Object code is used as a parameter to the FID. Data Object Code can have different values depending on the fid. Code 2.9 shows a function using DOC when message FID is CAN_FID_CMD.

Listing 2.9 Snippet of AQ's can.c:365

```

1 void canProcessCmd(... ,uint8_t doc, ...) {
2     switch (doc) {
3         case CAN_CMD_STREAM:
4             ...
5             break;
6         case CAN_CMD_TELEM_VALUE:
7             ...
8             break;
9         case CAN_CMD_TELEM_RATE:
10            ...
11            break;
12    }
13 }
```

In section 2.4.5 DOC is used by the author to tell which part of the GPS data is getting sent but where FID is CAN_FID_TELEM.

Mathias:: Fixe ref til section om GPS spoof

Source/Target/Network ID

When referred to source/target ID but without respect to either sender or receiver but just a CAN-node, then it is referred to as NetworkId. When a node registers itself in AQ, it gets assigned a NetworkId.

²⁴http://www2.st.com/content/ccc/resource/technical/document/reference_manual/59/b9/ba/7f/11/af/43/d5/CD00171190.pdf/files/CD00171190.pdf/jcr:content/translations/en.CD00171190.pdf:688

Sequence ID

The sequence id is incremented on transmission of each message. It is used when eg. A CAN-node sends a reply to a get-message, it is then including the sequence id of the get-message so AQ knows what it receives a reply for.

Data bits

The data bytes does not have a general definition, it depends on the function id. With some FIDs the data field may contain additional parameters.

Eg. When FID is CAN_FID_REQ_ADDR, data has the fields shown in table 2.7

Table 2.7 *Packet sent from node when registering in AQ*

64 bits							
0	0	CanId	CanType	UUID3	UUID2	UUID1	UUID0
7	6	5	4	3	2	1	0

UUID is a unique address generated by each node on the bus. In ESC32v2²⁵ the address is calculated using XXH-hashing algorithm. The algorithm generates a 32 bit hash from a given input value and a salt. The input to XXH in ESC32v2 is the unique ID that every ARM in the STMF32²⁶ family has. Code 2.10 shows how it is implemented in AQ.

Listing 2.10 Snippet showing UUID generated in ESC32v2

```

1 can.h:20
2 #define CAN_UUID 0x1FFF7E8
3
4 can.c:753
5 canData.uuid = XXH32((void *)CAN_UUID, 3*4, 0);

```

CanType is the type of the node trying to register. Eq. SENSOR, ESC and SERVO.

CanID is the number of the CanType node trying to register. When an ESC32v2 is trying to register it sends CanId as the ESC number ranging from 1 to the number of ESC's mounted on the drone. The CanID is assign to each ESC manually as part of the configuring.

Registering a node in AQ

When the AQ is starting up, it is transmitting a CAN_FID_RESET_BUS to the bus. When each CAN-node receives the messages, they send out a CAN_FID_REQ_ADDR message in order to get registered as a node in AQ. If a node on the bus does not get registered it will not be able to communicate with AQ.

When AQ receives an CAN_FID_REQ_ADDR, it sends back a CAN_FID_GRANT_ADDR to tell the node that the registration is successful and to assign the node its networkID. This id is used later to identify the node when it is transmitting a message or when AQ wants to send

²⁵<https://github.com/bn999/esc32/blob/master/onboard/can.c>

²⁶http://www2.st.com/content/ccc/resource/technical/document/reference_manual/59/b9/ba/7f/11/af/43/d5/CD00171190.pdf/files/CD00171190.pdf/jcr:content/translations/en.CD00171190.pdf

out a message to that specific node. The sequence diagram in figure 2.6 shows the described sequence.

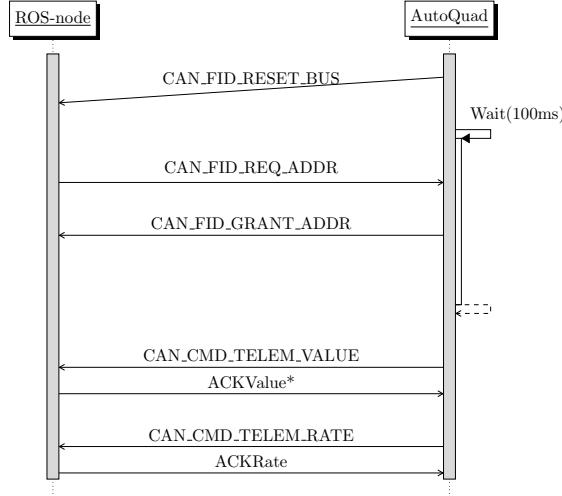


Figure 2.6 Registering a new node in AQ

Depending on the canType set in the data-field when a node is transmitting a CAN_FID_REQ_ADDR, AQ might send zero or more messages back to the node.

In figure 2.6 it can be seen that AQ sends back CAN_CMD_TELEM_VALUE and CAN_CMD_TELEM_RATE because the CanType is set to SENSOR. Each of the two messages has two fields in the data field, that contains information about the stream. CAN_CMD_TELEM_VALUE is used to request telemetry from a node that registered itself as a SENSOR. CAN_CMD_TELEM_RATE is the requested telemetry rate from AQ. Default is 10 hz²⁷.

A timeout timer is started when each message has been sent. If an ACK is not received after each message within 250 ms²⁸ a timeout counter is incremented. At the time of writing this information is not used but might be later on.

Code in 2.11 shows a snippet²⁹ from AQ where AQ waits for nodes to request an address.

Listing 2.11 Snippet showing AQ waits for devices

```

1 canResetBus();
2
3 // wait 100ms for nodes to report in
4 micros = timerMicros() + 100000;
5 while (timerMicros() < micros)
6     // extend wait period if more nodes found
7     if (canCheckMessage(0))
8         micros = timerMicros() + 100000;
  
```

AQ waits default 100 ms for nodes to request an address. If canProcessMessage() returns true a node tried to register and the registration period is extended 100 ms.

²⁷<https://github.com/bn999/autoquad/blob/master/onboard/canSensors.h:24>

²⁸<https://github.com/bn999/autoquad/blob/master/onboard/can.h:71>

²⁹<https://github.com/bn999/autoquad/blob/master/onboard/can.c:547>

Registering node test

Implementation of a CAN-node running on a PC was initially done in python. The python module *SocketCan*³⁰ supports PeakCAN adapter out of the box.

Code 2.12 shows a snippet of main.py.

Listing 2.12 Snippet showing AQ registration from python

```

1 # Create autoquad handle
2 autoquadNode = AutoQuadNode('can1', 'socketcan')
3
4 # Wait for reset msg transmitted by AQ.
5 autoquadNode.WaitForReset(timeout=1000);
6 print "Recevied readymsg"
7
8 # Register node, CanType as sensor and CanID as PDB ampere
9 msg = autoquadNode.RegisterNode(CAN_TYPE_SENSOR, CAN_SENSORS_PDB_BATA)
10
11 # Wait for telemetryTryValue
12 msg = autoquadNode.recv()
13 # Parse message
14 msg = CanMessage(msg)
15
16 # Print all values received, __str__(self) overwrited
17 print msg
18
19 # ACK TelemValue
20 autoquadNode.AnswerRequestTelemValue(msg)
21
22 # Wait for telemetryRate
23 msg = autoquadNode.recv()
24
25 # Parse message
26 msg = CanMessage(msg)
27
28 # ACK TelemRate
29 autoquadNode.AnswerRequestTelemRate(msg)

```

When a node has successfully registered, it is shown in QgroundStation as shown in figure 2.7. It can be seen 4 motors were connected to the CAN bus, but also that the spoofed sensor was registered.

³⁰http://python-can.readthedocs.io/en/latest/socketcan_native.html

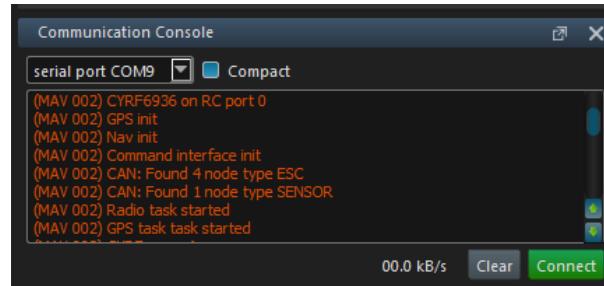


Figure 2.7 Successful SENSOR registration

Spoofed current test

When an AQ PDB is mounted on a drone, the PDB measures voltage, current and temperature and sends the measurements to AQ where they get logged.

The code in section 2.4.5 was further developed into a sensor simulator that spoofs current measurements into AQ to test the registering works probably.

A logger extension-board was mounted on the M4-board in order to save the measurements to a MicroSD-card.

Code 2.13 shows the implementation where a sinus is generated to simulate a current and how it is transmitted to AQ.³¹

Listing 2.13 Snippet spoofing current measurements into AQ

```

1  def RegistrerTelem(self):
2      # self.sinus is a list of sinus values
3      sensor_value = self.sinus[self.phase]
4
5      # Get next value next time and do overrun
6      self.phase+=1
7      self.phase = self.phase % 20
8
9      # Pack as IEEE754 float
10     sensor_value_float = pack('>f', sensor_value)
11
12     # Create list of float-bytes as integers
13     data_float = [int(ord(elm)) for elm in sensor_value_float]
14
15     # Reverse list and append empty data
16     data_float.reverse()
17
18     # Send to AQ. id = CAN_FID_TELEM (02c00000) | Sourceid 1 (00000800) |
19     #           CAN_SENSORS_PDB_BATA (00004000)
20     self.send(0x02c04800, data_float)
```

The method defined in code 2.13 was run every 100ms.

After the code ran for a few seconds the SD card was plugged into a PC and QgroundStation configured to make a plot of the PDB_CURRENT-field. The plot can be seen in figure 2.8

³¹someguy2993.

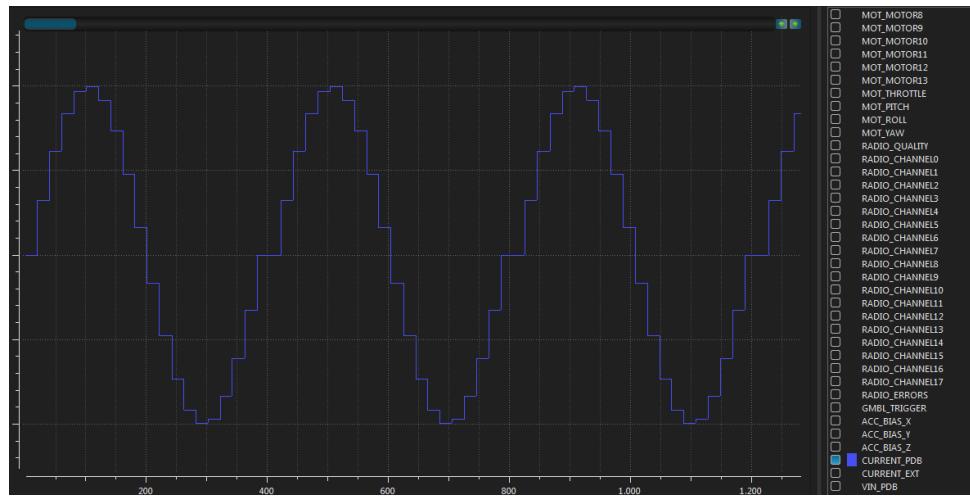


Figure 2.8 Test of python CAN test

Figure 2.8 shows the sinus generated from the node as expected.

can0 00000000 [0] can0 01C00000 [8] EF BE AD DE 03 09 00 00 can0 0E000041 [6] EF BE
AD DE 00 00 can0 14CD0042 [2] 00 08 can0 14CC0043 [2] 0A 00

seq tæller op så rate/value bliver acknowledged can0 00000000 [0] can0 01C00000 [8] EF BE
AD DE 03 09 00 00 can0 0E000041 [6] EF BE AD DE 00 00 can0 14CD0042 [2] 00 08 can0
00400002 [8] 00 00 00 00 00 00 00 00 can0 14CC0043 [2] 0A 00 can0 00400003 [8] 00 00 00 00
00 00 00 00

CHAPTER 3

Results

CHAPTER 4

Discussion

CHAPTER 5

Conclusion

List of Figures

1	Tasks diagram showing overview of the running tasks on the At90Can128	vi
1.1	Pictures of AutoQuad hardware	2
2.1	Figure showing every 7'th frame merged into one frame combined with the tracked positions of the drones	8
2.2	Block schematic of the WIFI-extentionboard developed to AQ M4	9
2.3	Left shows output from command 2.5 and right shows command 2.4	16
2.4	Tasks diagram showing overview of the running tasks on the At90Can128	17
2.5	Example of CAN arbitration where node 15 has the lowest ID and thereby highest priority	20
2.6	Registering a new node in AQ	24
2.7	Successful SENSOR registration	26
2.8	Test of python CAN test	27
5.1	Block schematic of the connected components	36
5.2	Test-setup shown	37
5.3	Comment	37
5.4	Test coordinates plotted	38
5.5	QgroundStations plot of AQ's belief in where the drone is	38
5.6	The EduQuad drone with the hardware used in the test	40
5.7	Plot of h/vDOP from logs when the drone was airborn	41

List of Tables

2.1	Comparisontable used to compare different wireless communication modules	10
2.2	Message sent from PC to ESP8266	18
2.3	Table shows the identifier bits used in AutoQuad CAN messages	19
2.4	Table shows abbreviations used in table 2.3	19
2.5	Table showing the 4 types of priority in AQ	21
2.6	Descriptions of the FIDs mentioned in code 2.8	22
2.7	Packet sent from node when registering in AQ	23

Bibliography

- [1] Eric Gakstatter. *Centimeter-Level RTK Accuracy More and More Available for Less and Less*. 2014. URL: <http://gpsworld.com/centimeter-level-rtk-accuracy-more-and-more-available-for-less-and-less/> (visited on 05/18/2016).
- [2] S. Garrido-Jurado et al. “Automatic generation and detection of highly reliable fiducial markers under occlusion”. In: *Pattern Recognition* 47.6 (2014), pp. 2280 –2292. ISSN: 0031-3203. DOI: <http://dx.doi.org/10.1016/j.patcog.2014.01.005>. URL: <http://www.sciencedirect.com/science/article/pii/S0031320314000235>.
- [3] Suraj G Gupta, Mangesh M Ghonge, and PM Jawandhiya. “Review of unmanned aircraft system (UAS)”. In: *technology* 2.4 (2013).
- [4] Hyun-gyu Kang, Byoung-kyun Kim, and Wangheon Lee. “Indoor localization of DRON using vision based sensor fusion”. In: *Control, Automation and Systems (ICCAS), 2015 15th International Conference on*. IEEE. 2015, pp. 932–934.
- [5] Vijay Kumar. *Robots that fly ... and cooperate*. 2016. URL: https://www.ted.com/talks/vijay_kumar_robots_that_fly_and_cooperate (visited on 05/18/2016).
- [6] Sergei Lupashin et al. “A platform for aerial robotics research and demonstration: The Flying Machine Arena”. In: *Mechatronics* 24.1 (2014), pp. 41–54.
- [7] Jose Luis Sanchez-Lopez et al. “A system for the design and development of vision-based multi-robot quadrotor swarms”. In: *Unmanned Aircraft Systems (ICUAS), 2014 International Conference on*. IEEE. 2014, pp. 640–648.
- [8] W Stempfhuber and M Buchholz. “A precise, low-cost RTK GNSS system for UAV applications”. In: *Conference on Unmanned Aerial Vehicle in Geomatics, Zürich*. 2011, pp. 289–293.
- [9] Timothy Stirling et al. “Indoor navigation with a swarm of flying robots”. In: *Robotics and Automation (ICRA), 2012 IEEE International Conference on*. IEEE. 2012, pp. 4641–4647.
- [10] Wikipedia. *Background subtraction — Wikipedia, The Free Encyclopedia*. <http://en.wikipedia.org/w/index.php?title=Background%20subtraction&oldid=697931050>. [Online; accessed 17-May-2016]. 2016.

Appendices

5.1 Test of spoofed GNSS

Testing of the spoofed GNS was split intro two subtests.

The first test was conducted in order to validate the GPS spoofing using the CAN-bus works when the drone is laying on a table.

Test 1 can be seen in 5.1.1.

The second test was conducted as the first test, but when the drone is airborn.

Test 2 can be seen in 5.1.2

Figure Y shows the waypoint list uploaded to the drone. It is expected that the drone will behave as if it was using its onboard GPS. The GPS positions will be gathered in a rosbag to be used later on in test2. A flight with the onboard GPS will be done in order to have a reference flight.

Testx Test two will be conducted much the same way as test1. However the GPS will be replaced with a lightweight RTK GPS. The RTK GPS positions will also be saved in a rosbag for later analyse. Is is expected that when using the RTK GPS the drone is closer to its waypoints shown in figure Y, than when using a normal GPS.

5.1.1 Test of spoofed positions indoore

Introduction The purpose of this test was to see if the GPS coordinates was spoofed correctly and read probably by AQ and to validate the ROS node responsible for creating CAN messages was working as long as the drone is laying on a table. If this works, it shows that the UKF works with the spoofed coordinates as expected, and that the author of the report can spoof the GPS position from a vision based localization system.

A rosbag was used to collect data from the GPS since it publishes data to a topic when played as a node did when the recording took place. This results in no code has to be written and when the code works with a rosbag it also works when it is replaced with a node providing real-world data.

Test



Figure 5.1 Block schematic of the connected components

Figure5.1 shows the connected componenets.

To get the NMEA strings from the GPS, an already existing Frobomind component will be used. It reads from a serial port, and publishes the parsed NMEA string to /fmData/nmea_from_gps. Rosbag was then used to save the messages. The code written by the author will then subscribe to /fmData/nmea_from_gps and publish the CAN-messages to another topic. A third node which is also a part of Frobomind will then subscribe and send the CAN-messages.

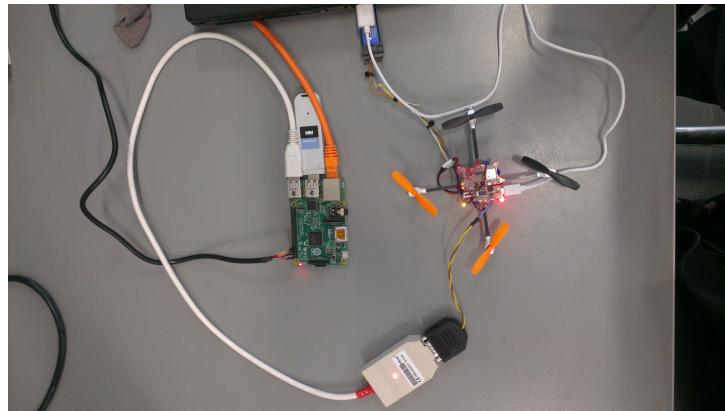


Figure 5.2 Test-setup shown

The RPi is connected directly to the PC using the orange ethernet cable. The rosbag was stored and played on the PC, so the ethernet cable were used to share rostopics between the PI and the PC. The roscore where running on the PC.

The Ladybird drone is connected to the RPI using a PEAK CAN-adapter to transfer CAN messages. The Ladybird is powered by the white USB-cable and to show the position of the drone in QgroundStation. The PC is connected to the drone using ST-Link SWD to easier start, stop and restart the drones firmware during the test. To access a TTY on the PI, an FTDI cable has been connected to the PC.

In order to obtain GPS-testdata to spoof into AQ, a rosbag was used to record data collected by the GPS mounted on the authors laptop. The setup can be seen in figure 5.3

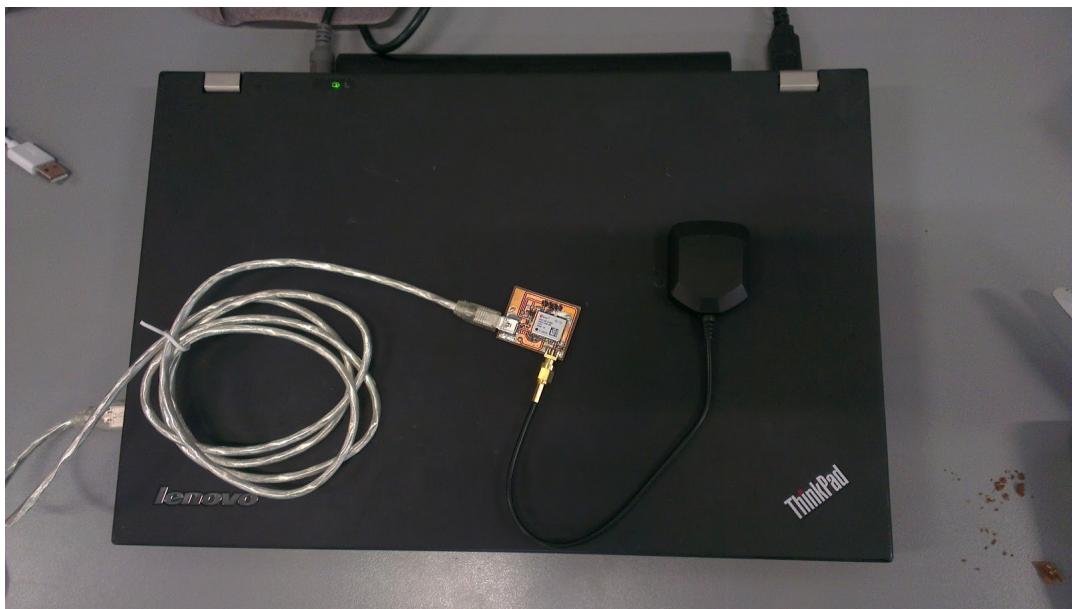


Figure 5.3 The Neo6-P GPS (PCB developed by SDU), u-blox active GPS antenna¹ and authers laptop used in this test

The coordinates recorded by the rosbag is shown in figure 5.4. FreeNMEA² was used to plot the GPGGA messages obtained from the GPS.

²<http://freenmea.net/>



Figure 5.4 Test coordinates plotted

The rosbag containing the GPS coordinates where played on the Rpi, to see if the ROS node responsible for converting GPGGA messages into CAN messages were working. QgroundStation plots AQ's belief in where the drone is. The plot can be seen in figure 5.5

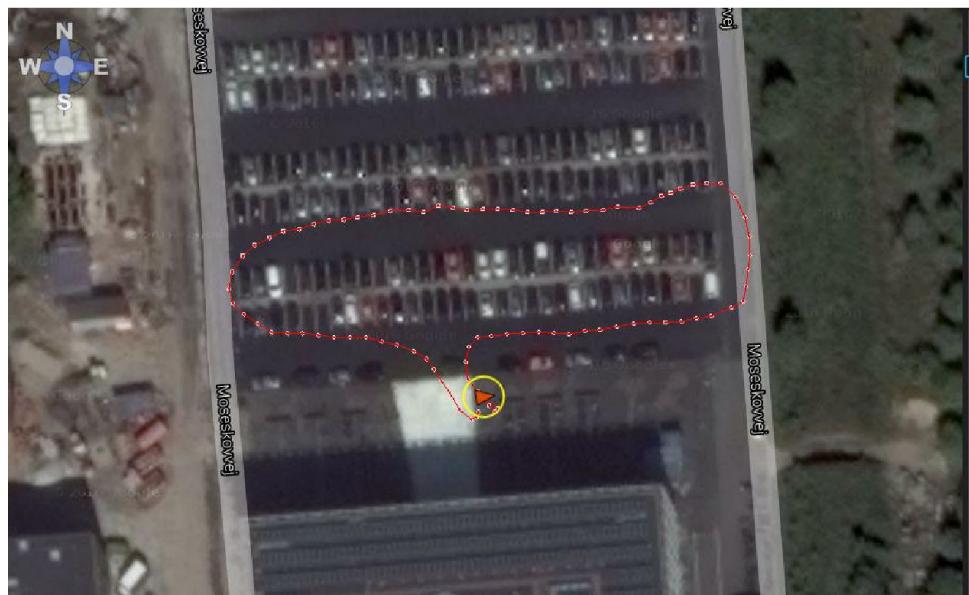


Figure 5.5 QgroundStations plot of AQ's belief in where the drone is

Conclusion This test visually confirms that the coordinates is spoofed correctly and read probably by AQ as long as the drone is laying on a table. Passing this test means there is reason to believe that it also works when the drone is airborne.

5.1.2 Test of spoofed positions outdoor

Introduction The purpose of this test was to see if the GPS spoofing worked when the drone was airborn. The same hardware and software were used as in section 5.1.1, though with a few changes.

The GPS used in test 1 to collect coordinates were mounted on the EduQuad.

The idea was to pass-through the GPS coordinates from the Neo 6-P GPS to AQ. If the CAN spoofing works as expected the drone should behave normally when flying in position-hold

mode.

Test

Figure 5.6 shows how the hardware were mounted on the EduQuad. It was temporary mounted with strips and tape to avoid short circuiting.

Mathias: Test of spoofed positions outdoore: Opdater billede med test-equipment

In test 1 the altitude of the drone was hardcoded since it had no relevance in the test. Though in test 2 if was necessary since the UKF³ uses the altitude from the GPS to estimate the position of the drone. Furthermore the following check where inserted to make sure only valid GPS coordinates were fed into the AQ:

Listing 5.1 Quality checks added to discard bad positions

```
1 // default low accuracy
2 gpsData.hAcc = 5; // Meters
3 gpsData.vAcc = 5; // Meters
4
5 if(gpsData.fix == 1){ // Single point solution
6     if(gpsData.hdop < 3){
7         if(gpsData.satellites >= 5){
8             AQ_PRINTF("Recv. Valid GPGGA\n",0);
9             // High accuracy
10            gpsData.hAcc = 2.5; // Meters
11            gpsData.vAcc = 2.5; // Meters
12            // Set flag to process new message
13            CoSetFlag(gpsData.gpsPosFromCanFlag);
14        } else {
15            AQ_PRINTF("Satellites: %f \n", gpsData.satellites);
16        }
17    } else {
18        AQ_PRINTF("HDOP: %f\n", gpsData.hdop);
19    }
20 } else {
21     AQ_PRINTF("Fix: %f\n", gpsData.fix);
22 }
```

³<https://github.com/bn999/autoquad/blob/master/onboard/run.c#L111>

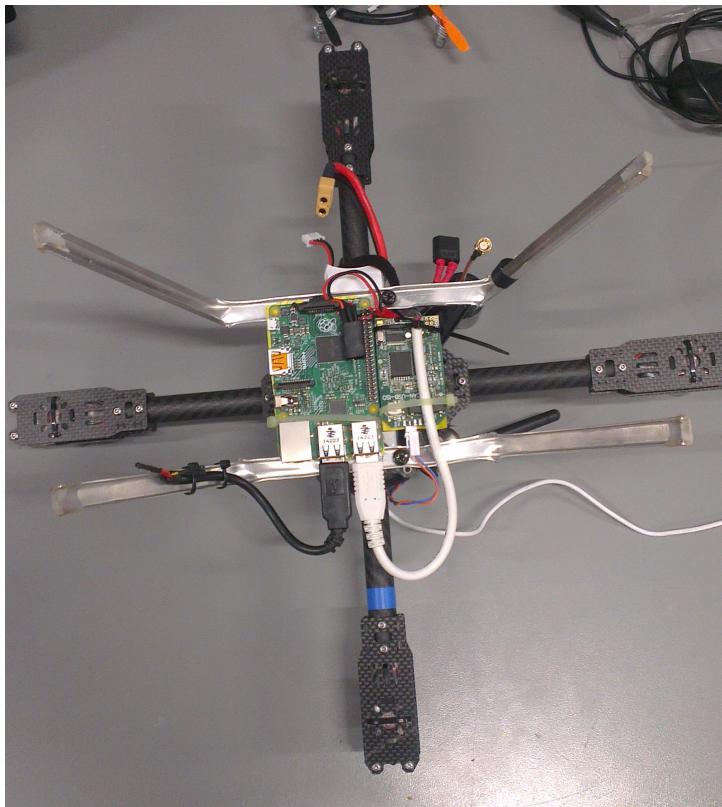


Figure 5.6 The EduQuad drone with the hardware used in the test

An extra battery was mounted on the drone to supply the RPi. The ROS nodes running on the RPi had to be start up before AQ starts registering notes on the CAN-bus. If the nodes was not started up, they would not reply to AQs reset-msg it sends when it is booting.

When the ROS-node were connected to the CAN bus, it showed that the ROS-node needed extra checking on CAN messages in order to detect difference between messages targeted the ROS-node and messages targeted the ESC32-nodes.

A bug in the *can_socketcan* -node used to communicate with the Peak-Can adapter where found a fixed. It was later on merged back into Frobomind ⁴ **Conclusion**

The test did not go as expected. The test was carried out under a time pressure since the author's supervisor only had 30 minutes to carry out the test.

The author did though gain experience when having multiple CAN devices connected to the CAN-bus.

Several things went wrong through the test:

- The onboard GPS was not disabled
- The author accidentally forgot to set the DOP values used in AQ
- No reference flight after the firmware were flashed for the first time.
- The GPS antenna was not mounted in the middle of the frame as the onboard antenna.

⁴<https://github.com/FroboLab/frobomind/pull/12>

Figure 5.7 shows the DOP value is lowering which indicates that AQ was using its onboard GPS.

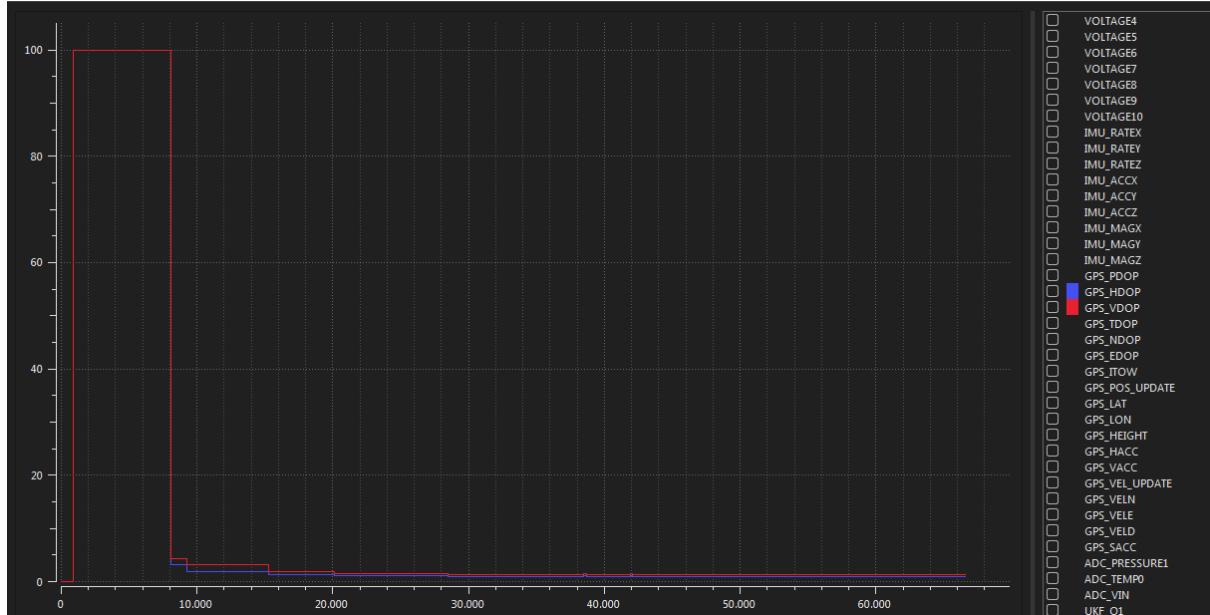


Figure 5.7 Plot of $h/vDOP$ from logs when the drone was airborn

The test will be carried out again.

5.2 Documentation made through out this thesis

Mathias: Documentation made through out this thesis: Ja, men gør det som elektronisk bilag (pdf) og beskriv i rapporten, at den ligger der. Marker det evt. dine bidrag med farve, så det er meget let at se