
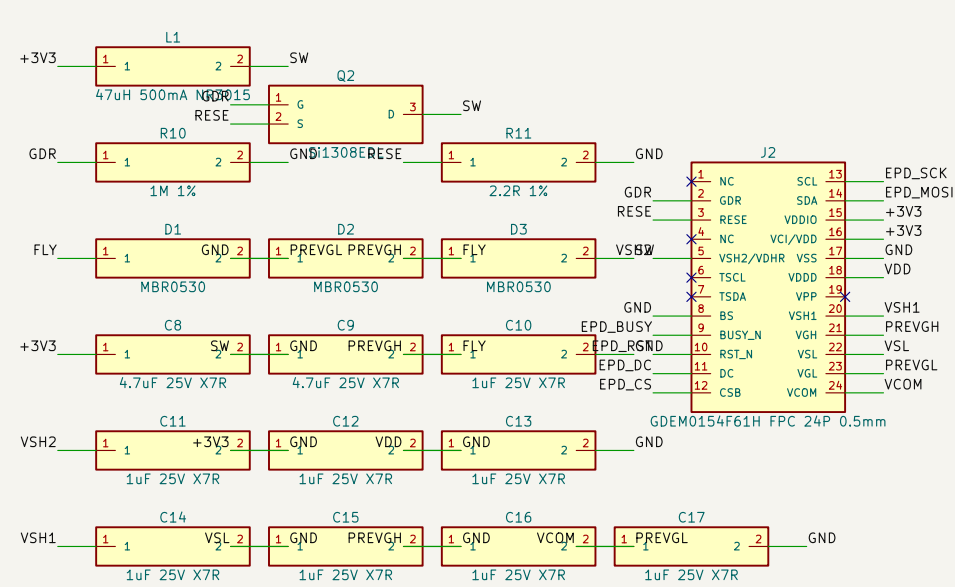
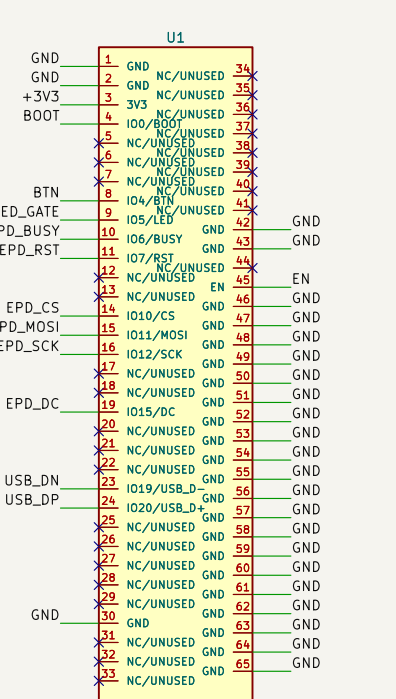



USB-C DEVICE + ESD + 3V3 POWER

ESP32-S2-MINI-2-N4R2 / NATIVE USB


GDEM0154F61H / SSD2681 OFFICIAL APPLICATION

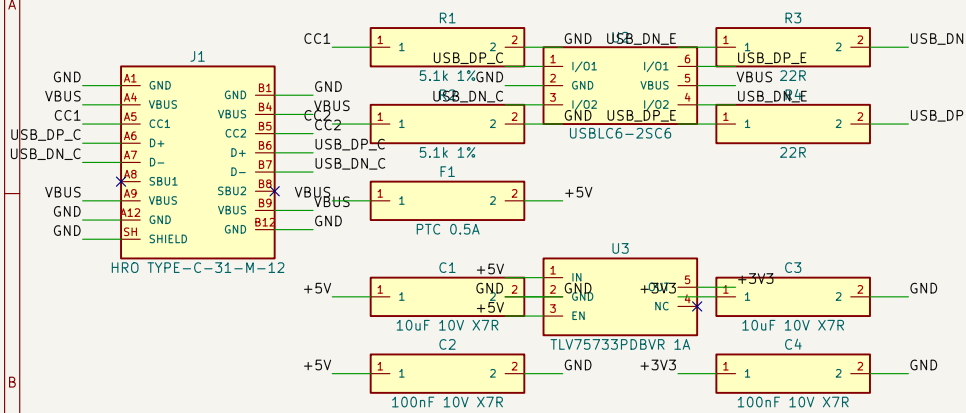

Rev A2: GDEM0154F61H specification Rev 1.0 (2026-05-15).\nD1-D3 pad 1 = cathode, pad 2 = anode. BS/TSCL/TSDA tied to GND.\nPrototype requires EPD HV measurement, USB SI and RF validation.

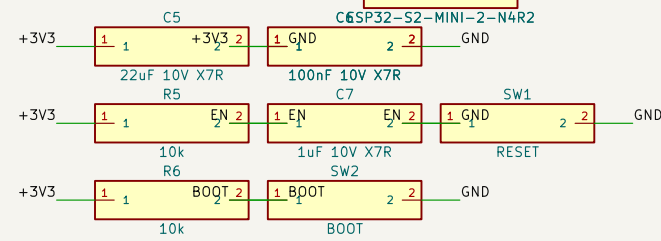

WIRED RED LED-RING BUTTON

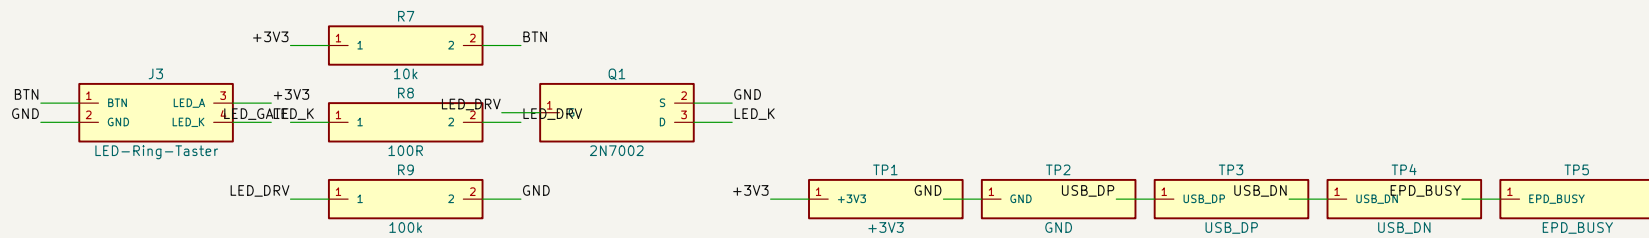

Official panel boost values; electrical bring-up required
USB-C rear / E-Paper front / wired LED-ring button
46 x 45 mm four-layer prototype

chaya2mqtt

Sheet: /
File: chaya2mqtt-s2.kicad_sch

Title: *chaya2mqtt-s2 - ESP32-S2-MINI-2 + GDEM0154F61H*

Size: A2	Date: 2026-08-10
----------	------------------

KiCad E.D.A. 10.0.5

Rev: A2