



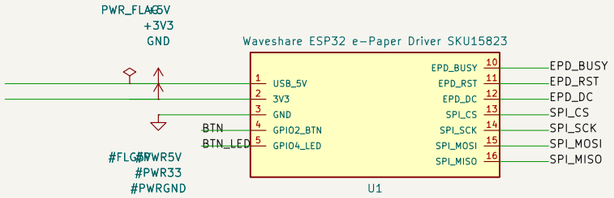

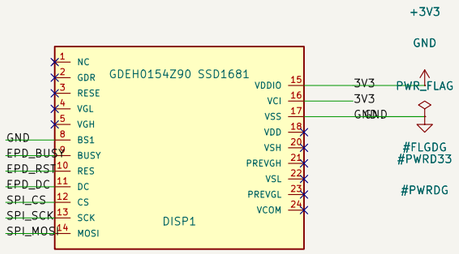

current-reference — Waveshare COTS wiring\nFirmware pins: src/hw/pins_esp32_waveshare.h\nBTN=GPIO2 LED=GPIO4 BUSY=25 RST=26 DC=27\nSPI SCK=13 MISO=12 MOSI=14 CS=15\nPanel: GDEH0154Z90 controller SSD1681\nHV boost lives on the Waveshare driver board (NC on pan

Panel GDEH0154Z90 / SSD1681
GPIO map synced with src/hw/pins_esp32_waveshare.h
Real schematic symbols — reference wiring, not a fab PCB
chaya2mqtt

Sheet: /
File: current-reference.kicad_sch

Title: chaya2mqtt current-reference (Waveshare COTS)

Size: A3	Date: 2026-08-09	**Rev: B1**
KiCad E.D.A. 10.0.5		Id: 1/1