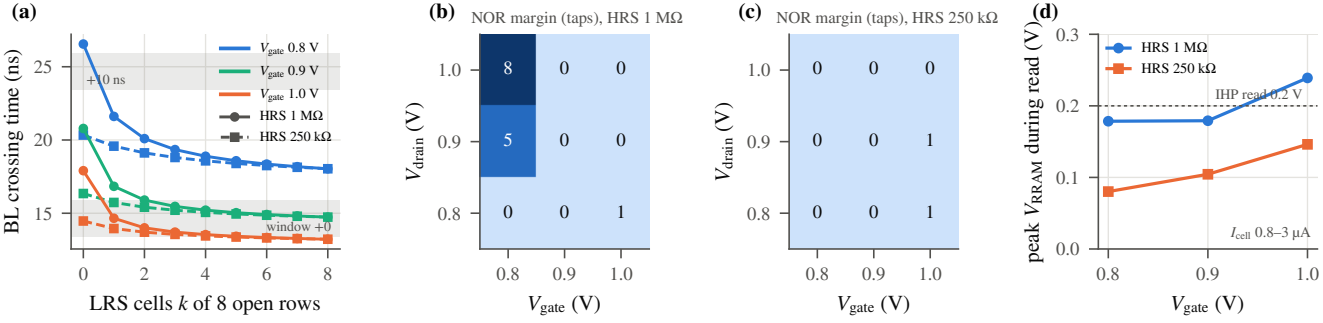
(a)
BL crossing time (ns)
LRS cells k of 8 open rows
+10 ns
window +0
V_gate 0.8 V
V_gate 0.9 V
V_gate 1.0 V
HRS 1 MΩ
HRS 250 kΩ
(b)
NOR margin (taps), HRS 1 MΩ
V_drain (V)
V_gate (V)
(c)
NOR margin (taps), HRS 250 kΩ
V_drain (V)
V_gate (V)
(d)
peak V_RRAM during read (V)
V_gate (V)
HRS 1 MΩ
HRS 250 kΩ
IHP read 0.2 V
I_cell 0.8–3 µA