



Operating Systems – 234123

Homework Exercise 2 - Wet

Teaching Assistant in charge:

Sami Zreik

Assignment Subjects & Relevant Course material:

Virtual Memory & Memory Management Recitations 4-5, Lectures 4-5

Abstract and Assignment Objectives

The infamous rivalry between the EE and CS departments has intensified. Last week, while it was dark and rainy outside, the EE operating systems students hacked into our systems and stole the memory allocation units from your Linux virtual machines!

Now, the malloc() family of functions no longer exists.

It is time to fight back. You must implement a new memory allocation unit and show the EE OS students your strong OS skills.

The CS department's honor and future are now in your hands!



On a more serious note:

In this homework you will implement a simple memory allocation library, which will include your own implementation of the notorious malloc(), free(), calloc() and realloc() functions.

The homework consists of **four parts**, out of which **three are mandatory** and **one is optional**. The optional part can grant you extra credit. The homework increases in difficulty, with each part relying on the understanding and implementation of the previous parts. Therefore, you are encouraged to follow it step-by-step (recommendation – do not start reading one part until you finished implementing the one before it). At the end of this homework you will have gained knowledge and skills in **virtual memory**, **memory regions**, **memory-related system calls**, and *libc*.

Throughout this homework, you cannot use any of malloc(), free(), calloc(), realloc(), operator new, or any library/language-specific memory allocating function. Failure to comply with this may result in the disqualification of your homework.

Introduction

About libc and Memory Management

Libc refers to any standard library for the C programming language, that complies with the <u>ANSI</u> C standard. Those libraries are so integrated within operating systems, that they are often even considered to be a part of them. The application programming interface (API) of *libc* is declared in several header files, such as *assert.h*, *stdlib.h*, *stdio.h*, etc.

Memory Management in this context refers to the unit of functions within *libc* that provides functions that **manage** dynamic memory. The four most common functions in the <u>C programming language</u> are malloc(), free(), calloc() and realloc(), which are defined in the "stdlib.h" interface.

Note: Different operating systems and compilers use different *libc* implementations. In Linux, for example, we use the <u>GNU</u> C Library (also referred to as *glibc*).

About memory regions

As you've learned, every process In Linux has multiple memory regions, which are maintained and managed by the OS. Memory regions within a process vary from one another in size and access permissions but are all, except the kernel region, governed by the same struct – the vm_area_struct. The memory regions of a process look something like this:

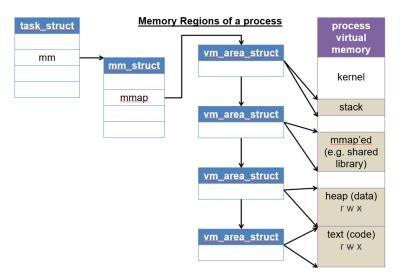



Figure 1 - structs that represent the virtual memory space of the process that we saw in the tutorial

NOTE: This illustration is imprecise: there may be multiple mmap'ed regions and not necessarily a single region. In fact, each mmap () is served with a unique region.

To manage dynamic memory, Linux uses <u>two memory regions</u> – the **heap** and the **memory mapped regions**.

About the "heap" and the "data" segment

There is certain confusion about the definition of data segment. Some define it as an independent segment (figure 2), while others tend to put the Data, BSS and Heap segments all together into one big segment, **also** called the 'Data' segment (figure 3).

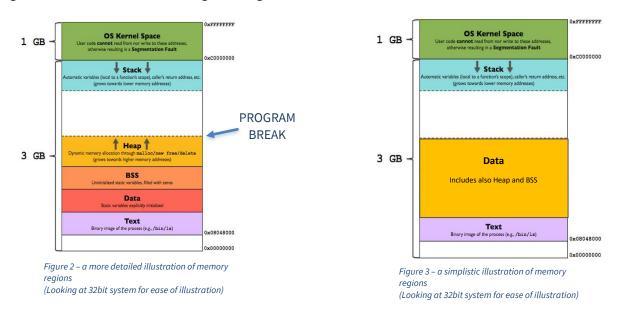

There is no right or wrong answer here, as it primarily depends on the context of the conversation. We only depict those differences because you might come across them while reading on the subject online.

NOTE: In this homework and throughout the course we <u>will differentiate</u> between the Heap, BSS and the Data segments, and will use **figure 2** to discuss memory regions.

The heap area is defined by a component called the **program break**, which is defined to be "the end of the heap segment" (refer to figure 2). This program break can be manipulated using **sbrk()**, a library function based on the **brk()** system call (you should only use **sbrk()**). Memory mapped regions, on the other hand, are controlled by the **mmap()** system call.

In <u>parts 1 & 2</u> of the homework, we will use the *heap* in our memory management units. In <u>part 3</u>, we will incorporate *memory mapped regions* as well. **DO NOT** use memory mapped regions in parts 1 & 2 of the homework.

NOTE: malloc() and friend functions are not system calls. They use system calls such as **mmap**() and **sbrk**() in their implementation, as you will in this homework.

To allocate dynamic space during runtime, we want to manipulate the program break to create space in the heap. **sbrk()**, which is declared in **<unistd.h>** is a perfect fit for the job -

void* sbrk(intptr_t increment):

- Increases the current program break by *increment* bytes.
- Note: intptr t is like long int.
- Calling sbrk (0) is used to get the current program break.
- Return value:
 - 1. On Success previous program break
 - 2. On <u>Failure</u> **(void*)(-1)**, e.g. system out of memory/target address is bad/process out of heap memory.

Part 1 - Naïve Malloc

In the previous discussion, you were provided with enough tools and information for you to begin working on your memory management unit. For this part, you are required implement a naïve (simple) implementation of malloc. Open a new file, call it **malloc_1.cpp**, and implement the following function:

void* smalloc(size t size)

- Tries to allocate 'size' bytes.
- Return value:
 - i. <u>Success</u> –a pointer to the first allocated byte within the allocated block.
 - ii. Failure
 - a. If 'size' is 0 returns NULL.
 - b. If 'size' is more than 10^8 , return NULL.
 - c. If sbrk fails, return NULL.

Notes:

- size_t is a typedef to unsigned int in 32-bit architectures, and to unsigned long long in 64-bit architectures. This means that trying to insert a negative value will result in compiler warning.
- You do not need to implement free (), calloc() or realloc() for this section.

Discussion: Before proceeding, try discussing the current implementation with your partner. What's wrong with it? What's missing? Are we handling fragmentation? What would you do differently?

Part 2 - Basic Malloc

You've probably noticed that in the previous part you did not implement free(). However, to implement free(), we must understand what "freeing" means and how it works.

A few questions arise when thinking how to add support for free ():


1. How do we know the size of the allocated space that was sent to free?

• We can allow the user to send the size of the block size to free () with the pointer. That, however, will not be optimal for the user.

2. How could we mark a space that was just allocated as free?

as well, although it was not explicitly freed.

- Ideally, we can adjust the heap with sbrk () and remove the allocated space. In other words, we would move the program break back to its location before the allocation.
- But what if 3 consecutive allocations occurred, and the middle allocation is freed?
 In this situation, we can't just change the program break, as reducing the heap space will cause the top allocation to disappear



3. Maybe we should simply reuse previously freed memory sectors? How would we do it?

TIP: Before proceeding, challenge yourself by thinking how you can make your current implementation less wasteful (in memory management terms). How can you provide support for your own free() in the prior naïve implementation? **Think about above questions before proceeding**.

Proposed Solution

In this part (part 2), you'll implement our proposed solution, which is a simplified version of the universal implementation. Below are the answers to the questions:

1. How do we know the size of the allocated space that was sent to free?

On each allocation, do allocate the required memory, but <u>before</u> it – append a **meta-data** structure to the block. This means your **total allocation** would be the **requested** size + the **meta-data structure** size. The meta-data will contain an unsigned integer that will save the size of the **effective allocation** (i.e. the requested size).

2. How could we mark a space that was just allocated as free?

• Add a Boolean to the meta-data structure – "is_free".

3. How can we easily look-up and reuse previously freed memory sectors?

We can save a **global** pointer to a list that will contain all the data sectors described before.
 We can use this list to search for freed spaces upon allocation requests, instead of increasing the program break again and enlarging the heap unnecessarily.
 The global pointer to the list will point to the first metadata structure (see metadata figure).

Conclusion: to support your Basic Malloc unit, you will need to define a struct/class that will be attached to every allocation you make. It will contain meta-data for each allocation, which is for our own use only and the user shouldn't be aware of its existence. Below is an example of what the heap of a process could look like this after 3 consecutive allocations, alongside a meta-data structure you could use in your implementation:

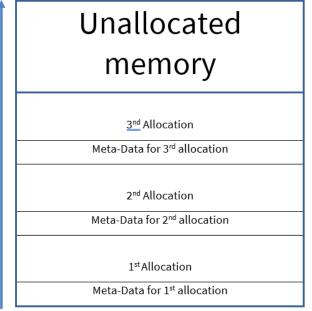


Figure 4 – possible heap of a process after 3 allocations

```
struct MallocMetadata {
    size_t size;
    bool is_free;
    MallocMetadata* next;
    MallocMetadata* prev;
};
```

Figure 5 – suggested meta-data structure, the global pointer to the list will point to the first metadata structure

Above discussion provided you with enough background information to improve your first memory management unit. Open a new file, call it **malloc_2.cpp** and in it implement the following functions:

1. void* smalloc(size t size):

- Searches for a block with 'size' bytes or allocates (sbrk ()) one if none are found.
- Return value:
 - i. <u>Success</u> returns pointer to the first byte in the allocated block (excluding the metadata of course)
 - ii. Failure
 - a. If size is 0 returns NULL.
 - b. If 'size' is more than 10⁸, return NULL.
 - c. If sbrk fails in allocating the needed space, return NULL.

2. void* scalloc(size t num, size t size):

- Searches for a block of 'num' elements, each 'size' bytes that are all set to 0 or allocates if none are found. In other words, find/allocate size * num bytes and set all bytes to 0.
- Return value:
 - i. <u>Success</u> returns pointer to the first byte in the allocated block.
 - ii. Failure
 - a. If size is 0 returns NULL.
 - b. If 'size * num' is more than 10⁸, return NULL.
 - c. If sbrk fails in allocating the needed space, return NULL.

3. void sfree(void* p):

- Releases the usage of the block that starts with the pointer 'p'.
- If 'p' is NULL or already released, simply returns.
- Presume that all pointers 'p' truly points to the beginning of an allocated block.

4. void* srealloc(void* oldp, size t size):

- If 'size' is smaller than the current block's size, reuse the same block. Otherwise, finds/allocates 'size' bytes for a new space, copies content of old space into new space and frees the old space.
- Return value:
 - i. Success
 - a. Returns pointer to the first byte in the (newly) allocated space.
 - b. If 'oldp' is NULL, allocate space for 'size' bytes and return a pointer to it.
 - ii. Failure
 - a. If size is 0 returns NULL.
 - b. If 'size' if more than 10⁸, return NULL.
 - c. If sbrk or brk fail in allocating the needed space, return NULL.
 - d. Do not free 'oldp' if srealloc() fails.

5. size t num free blocks():

• Returns the number of allocated blocks in the heap that are currently free.

6. size t num free bytes():

• Returns the number of **bytes** in all allocated blocks in the heap that are currently free, excluding the bytes used by the meta-data structs.

7. size_t _num_allocated_blocks():

• Returns the overall (**free and used**) number of allocated blocks in the heap.

8. size_t _num_allocated_bytes():

• Returns the overall number (**free and used**) of allocated **bytes** in the heap, excluding the bytes used by the meta-data structs.

9. size t num meta data bytes();

Returns the overall number of meta-data bytes currently in the heap.

10. size t size meta data():

• Returns the number of bytes of a single meta-data structure in your system.

Important Notes:

- 1. Note that once **size** field in the metadata is set for a block in this section in the metadata, it's not going to change.
- 2. You should always search for empty blocks in an **ascending manner**. This means if there are two free (and large enough) pre-allocated blocks at 0x1000 and at 0x2000, you should choose the block that starts at 0x1000. **Hint:** you should **maintain a sorted list** of all the allocations in the systems, as described in the proposed solution. You can use large freed blocks for small allocations. This might cause fragmentation but **ignore it for now.**
- **3.** An initial underline in function names means "hidden" or "private" functions in programmer lingo these are not meant to be called directly by the user. We will use these in our testing, and so should you.
- **4.** Wrong usage of sfree () and srealloc() (e.g. sending bad pointers) is not your responsibility, it is the library user's problem. Therefore, such action is undefined and there's no need to check for it. In other words, assume that the pointers sent to these functions are legal pointers that point to the first allocated byte, the same ones that are returned by the allocation functions.
- **5.** This part we will not look at optimizations other than reusing pre-allocated areas. If you come up with optimization ideas, keep them up for the next parts.
- **6.** You should use std::memcpy for copying data in srealloc().
- 7. You should use std::memset for setting values to 0 in your scalloc().
- **8.** You are **NOT PERMITED** use **STL** data structures for this part (e.g. std::vector or std::list). Use only primitive arrays or linked lists you implemented by yourselves.
- **9.** A "block" in the context above means **both** the meta-data structure and the usable memory next to it.
- 10. You should not count un-allocated space that's not been added to the heap by sbrk ().
- **11.** You are not required to "narrow down" the heap (e.g. use sbrk() with a negative value).
- 12. If your algorithm chooses a large block (e.g. 1000 bytes) for a small allocation (e.g. 10 bytes), you should mark the entire block as used. This means that if the system had "X free bytes" before such allocation, it should have "X 1000" free bytes after the allocation. This should be reflected in your _num_free_bytes () function.
- **13.** You should not perform any alignments in this part.

Part 3 - Better Malloc

Our current implementation has a few **fragmentation** issues. Below are some which you might have noticed while working on the previous section (with their solutions). In this section you will work on solutions for some of those issues.

Open a new file, call it **malloc_3.cpp**, copy the content from malloc_2.cpp into it, and in it implement the following changes:

• **Challenge 1** (Memory utilization):

If we reuse freed memory sectors with bigger sizes than required, we'll be wasting memory (internal fragmentation).

Solution: Implement a function that smalloc() will use, such that if a pre-allocated block is reused and is *large enough*, the function will cut the block into two smaller blocks with two separate meta-data structs. One will serve the current allocation, and another will remain unused for later (marked free and added to the list).

Definition of "large enough": After splitting, the remaining block (the one that is not used) has at least **128** bytes of free memory, **excluding** the size of your meta-data structure.

Note: Once again, you are not requested to find the "best" free block for this section, but the first block that satisfies the allocation defined above.

• **Challenge 2** (Memory utilization):

Many allocations and de-allocations might cause two **adjacent** blocks to be free, but separate. **Solution: Implement a function** that sfree() will use, such that if one adjacent block (next or previous) was free, the function will automatically combine both free blocks (the current one and the adjacent one) into one large free block. On the corner case where both the next and previous blocks are free, you should combine all 3 of them into one large block.

• Challenge 3 (Memory utilization):

Define the "Wilderness" chunk as the topmost **allocated** chunk. Let's presume this chunk is free, and all others are full. It is possible that the new allocation requested is bigger than the wilderness block, thus requiring us to call $\mathtt{sbrk}()$ once more – but now, it is easier to simply enlarge the wilderness block, saving us an addition of a meta-data structure.

Solution: Change your current implementation, such that if:

- 1. A new request has arrived, and no free memory chunk was found big enough.
- 2. And the wilderness chunk is free.

Then enlarge the wilderness chunk enough to store the new request.

• **Challenge 4** (Large allocations):

Recall from our first discussion that modern dynamic memory managers not only use \mathtt{sbrk} () but also \mathtt{mmap} (). This process helps reduce the negative effects of memory fragmentation when large blocks of memory are freed but locked by smaller, more recently allocated blocks lying between them and the end of the allocated space. In this case, had the block been allocated with \mathtt{sbrk} (), it would have probably remained unused by the system for some time (or at least most of it).

Solution: Change your current implementation, by looking up how you can use mmap () and munmap () instead of sbrk () for your memory allocation unit. Use this **only** for allocations that require **128kb space or more**.

Note: You are not requested to "narrow" down the heap anywhere in this section. The only exception for allowing free memory to go back to the system is in challenge 4, when using munmap ().

Note: As opposed to the previous section, the 'size' field in the metadata for blocks here changes.

Notes about srealloc():

srealloc() requires some complicated edge-case treatment now. Use the following guidelines:

- 1. If srealloc() is called on a block and you find that this block and one of or both neighboring blocks are large enough to contain the request, merge and use them. Prioritize as follows:
 - a. Try to reuse the current block without any merging.
 - b. Try to merge with the adjacent block with the higher address.
 - c. Try to merge with the adjacent block with the lower address.
 - d. Try to merge all those three adjacent blocks together.
 - e. Try to find a different block that's large enough to contain the request (don't forget that you need to free the current block, therefore you should, if possible, merge it with neighboring blocks before proceeding).
 - f. Allocate a new block with sbrk().
- 2. After the process described in the previous section, if one of the options 'a' to 'd' worked, and the unused section of the block is **large enough**, split the block (according to the instructions in challenge 1)!
- 3. If srealloc() is called on the "wilderness" chunk and the chunk can be enlarged (with sbrk()) to accommodate the new request, go ahead and enlarge it.
- 4. You can assume that we will not test cases where we will reallocate an mmap() allocated block to be resized to a block (excluding the meta-data) that's less than 128kb.
- 5. You can assume that we will not test cases where we will reallocate a normally allocated block to be resized to a block (excluding the meta-data) that's more than 128kb.

Notes about mmap():

- 1. It is recommended to have another list for mmap () allocated blocks, separate from the list of other allocations.
- 2. To find whether the block was allocated with mmap () or regularly, you can either add a new field to the meta-data, or simply check if the 'size' field is greater than 128kb or not.
- 3. Remember to add support for your debug functions (function 5-10). Note that functions 5-6 should not consider munmapp () 'ed areas as free.

Part 4 (OPTIONAL) - Aligned Malloc

There are many other optimizations that could be added to the system. The following change, for example, could improve the performance of your memory allocation unit:

Challenge 5 (Memory allocation performance):
 Memory Alignment - recall that the load & store operations work by the granularity of a memory word (in 64-bit architectures – 64 bits).

When a CPU calls for an unaligned memory access, more CPU cycles are required than a call for an aligned memory access (i.e. more load/store operations are needed). Aligned access could also increase cache hits in L1/L2.

Solution: Change your current implementation, such that each request for new memory is aligned. Because we're working with 64-bit machines, we must align every request for a memory access to a **multiplication of 8** (explained below).

You should make sure that both the meta-data and the data provided to the user reside between aligned (multiplication of 8) addresses.

More explanation: As we know, each address stores one byte (8 bits) of information. Since we work with 64-bit systems, each load/store operation loads/stores 64-bits (information from 8 consecutive addresses) together. This limitation makes the system work faster, thus forcibly loading or storing information from or to unaligned memory requires more CPU cycles. **NOTE:** This might waste several bytes for each allocation, but overall, it's negligible.

If you wish to implement this part, open a new file, name it **malloc_4.cpp**, copy the current content from malloc_3.cpp and implement the suggested change.

NOTE: This is an optional section, so little support will be provided on the Piazza. Try finding answers to your questions alone before submitting them to the staff.

Advice and Grading Policy

- 1. The maximum grade for the wet part of this homework is **110**, where a grade out of 100 will be given to your work on parts 1, 2 and 3, and up to **additional 10** points will be given for a successful submission of part 4.
- 2. Each part will be graded and tested individually. This means you have overall 2 options:
 - a. Submit malloc 1.cpp, malloc 2.cpp, malloc 3.cpp
 - b. Submit malloc 1.cpp, malloc 2.cpp, malloc 3.cpp, malloc 4.cpp
- 3. You CANNOT #include malloc_x.cpp in malloc_y.cpp (when $x, y \in \{1,2,3,4\}$), even if you must rewrite similar lines of code in the two files. Each part to its own.
- 4. You should write, compile and test **ALL your code on your virtual machines (Azure lab or a pre-installed version as explained in HWO)**. You should not test it on any of the department servers (e.g. CSL3). The reason for this is that the servers contain different versions of *glibc*, allocation functions and system calls and therefore what works on them may not work on your virtual machine.
- 5. You must implement this exercise in C++. You may use C, but your code will be compiled and tested with g++ (C++ compiler).

Questions & Answers / Piazza

- The Q&A for the exercise will take place at a public forum Piazza **only**. Please **DO NOT** send questions to the private email addresses of any of the TAs.
- Critical updates about the HW will be published in **pinned** notes in the piazza forum. These notes are mandatory, and it is your responsibility to stay updated.
- Read previous Q&A carefully before asking the question; repeated questions will probably go without answers.
- Be **polite**, remember that course staff does this as a service for the students.
- You're not allowed to post any kind of solution and/or source code in the forum as a hint for other students; In case you feel that you must discuss such a matter, please come to the reception hours.
- When posting questions regarding hw2, put them in the hw2 folder

Late Days

Please <u>DO NOT</u> send postponement requests to the TA responsible for this assignment. Only
the <u>TA in charge</u> can authorize postponements. In case you need a postponement, please fill
out the attached form: https://forms.gle/9CWW9sBygmyJbf1RA

Submission

- You are to electronically submit a single zip file named **XXX_YYY.zip** where XXX and YYY are the IDs of the participating students.
- The zip should contain all source files you wrote with no subdirectories of any kind.
- Make sure to also add to the zip a file named **submitters.txt** which includes the ID, name and email of the participating students. The following format should be used:

```
Linus Torvalds linus@gmail.com 234567890
Ken Thompson ken@belllabs.com 345678901
```

Important Note: Make the outlined zip structure exactly. In particular, the zip should contain only the following files (no subdirectories):

```
zipfile -+
|
+- malloc_1.cpp
|
+- malloc_2.cpp
|
+- malloc_3.cpp
|
```

```
+- malloc_4.cpp (for potential extra credit)
|
+- submitters.txt
```

Important Note: when you submit, **retain your confirmation code and a copy of the file(s)**, in case of technical failure. Your confirmation code is **the only valid proof** that you submitted your assignment when you did.

Important Note: Make sure you keep an eye on the Piazza. If we see that a change is required, we will give you the heads up there.

We hope you managed to fight back and restore what was stolen from us from by the EE students! Next semester - we'll be stealing Ohm's law from the EE department.