

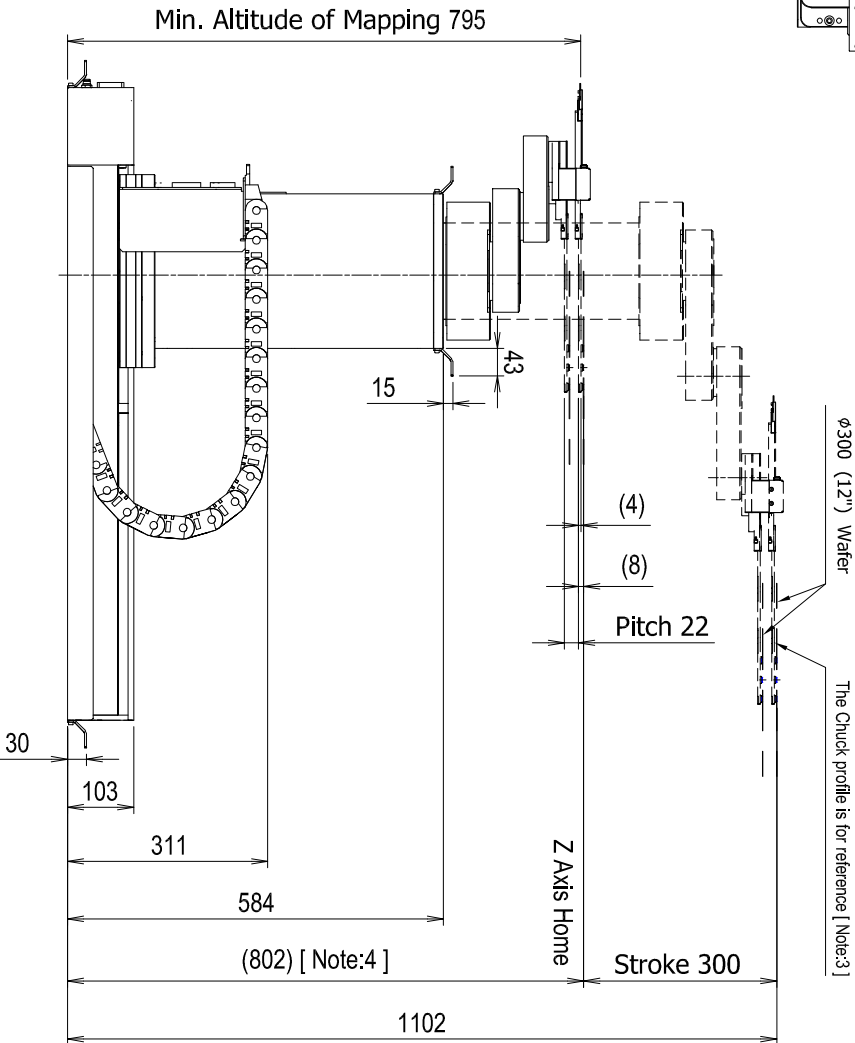
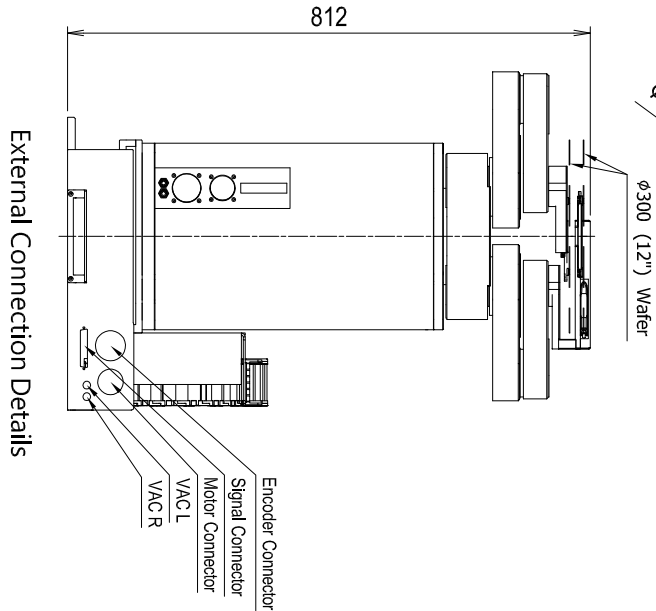
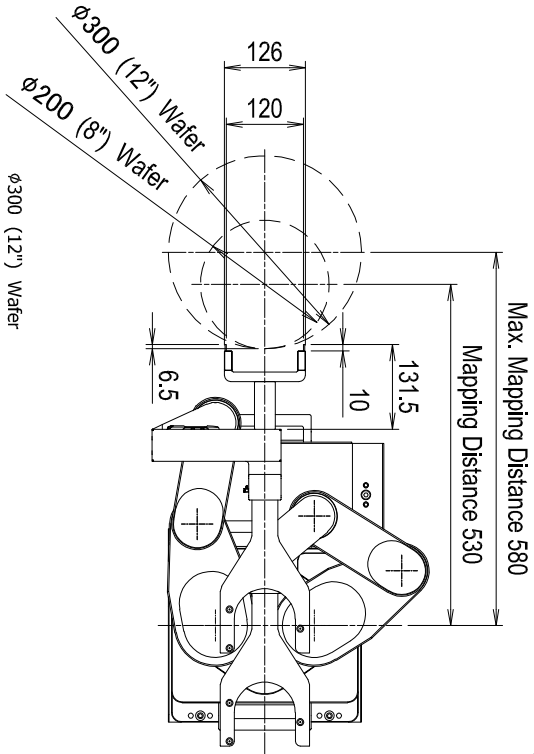


Details for Installation

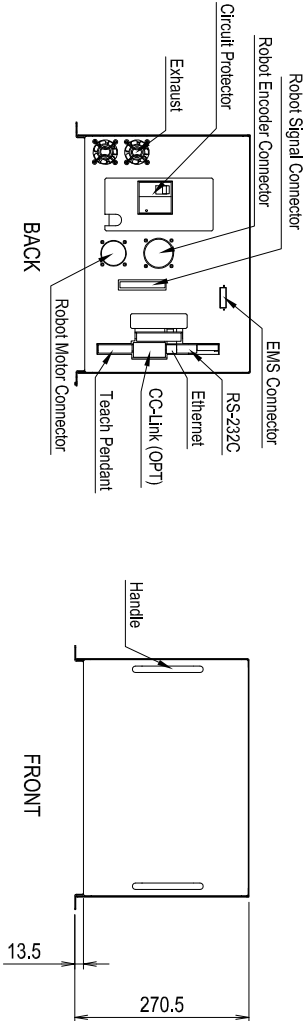


SA-6000-05

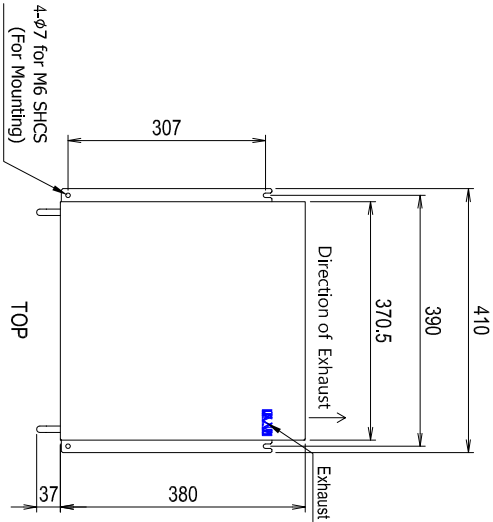

Cable Length Between Robot and Controller : 2M

- Note:
- 1.Unlabeled Dimensions Might Be Adjusted For Needs.
 - 2.The Concept Outline Drawing Is For Equipment Layout Evaluation.
 - 3.The Chuck To Be Supplied By Customer.
 - 4.The Distance Would Be Adjusted Upon Customer-Supplied Chuck.

Ra		Rz	代用符號	一般加工公差			設計變更內容		日期	變更者	Ambient temperature:25°C			材質	表面處理				
0.01/ ~	0.1/ ~	0.4~0.04	▽▽▽▽	尺寸範圍	切削	熔接	鉚金				承認	檢圖	設計	製圖	質量	Kg	個數	熱處理	
0.8/ ~	1.6/ ~	3.2~6.3	▽▽▽	0.5 ~ 6	±0.05	±0.2	B			品號					SEC-E0210150			版次	A
3.2/ ~	6.3/ ~	12.5~25	▽▽	7 ~ 30	±0.1	±0.4	C			品名					SAD201-R03000635S-Z300_SL505			比例	
12.5/ ~	25/ ~	50~100	▽	31 ~ 120	±0.15	±0.6	D				 三和技研股份有限公司	曾國鎮	曾國鎮	品名	RD-O3DR-21722A 外觀檢討圖			建立	2021/11/11
80/ ~	125/ ~		2	121 ~ 400	±0.2	±0.8	E			圖名							日期		
				401 ~ 1000	±0.3	±1.0	F												
				1001 ~ 2000	±0.5	±1.0													