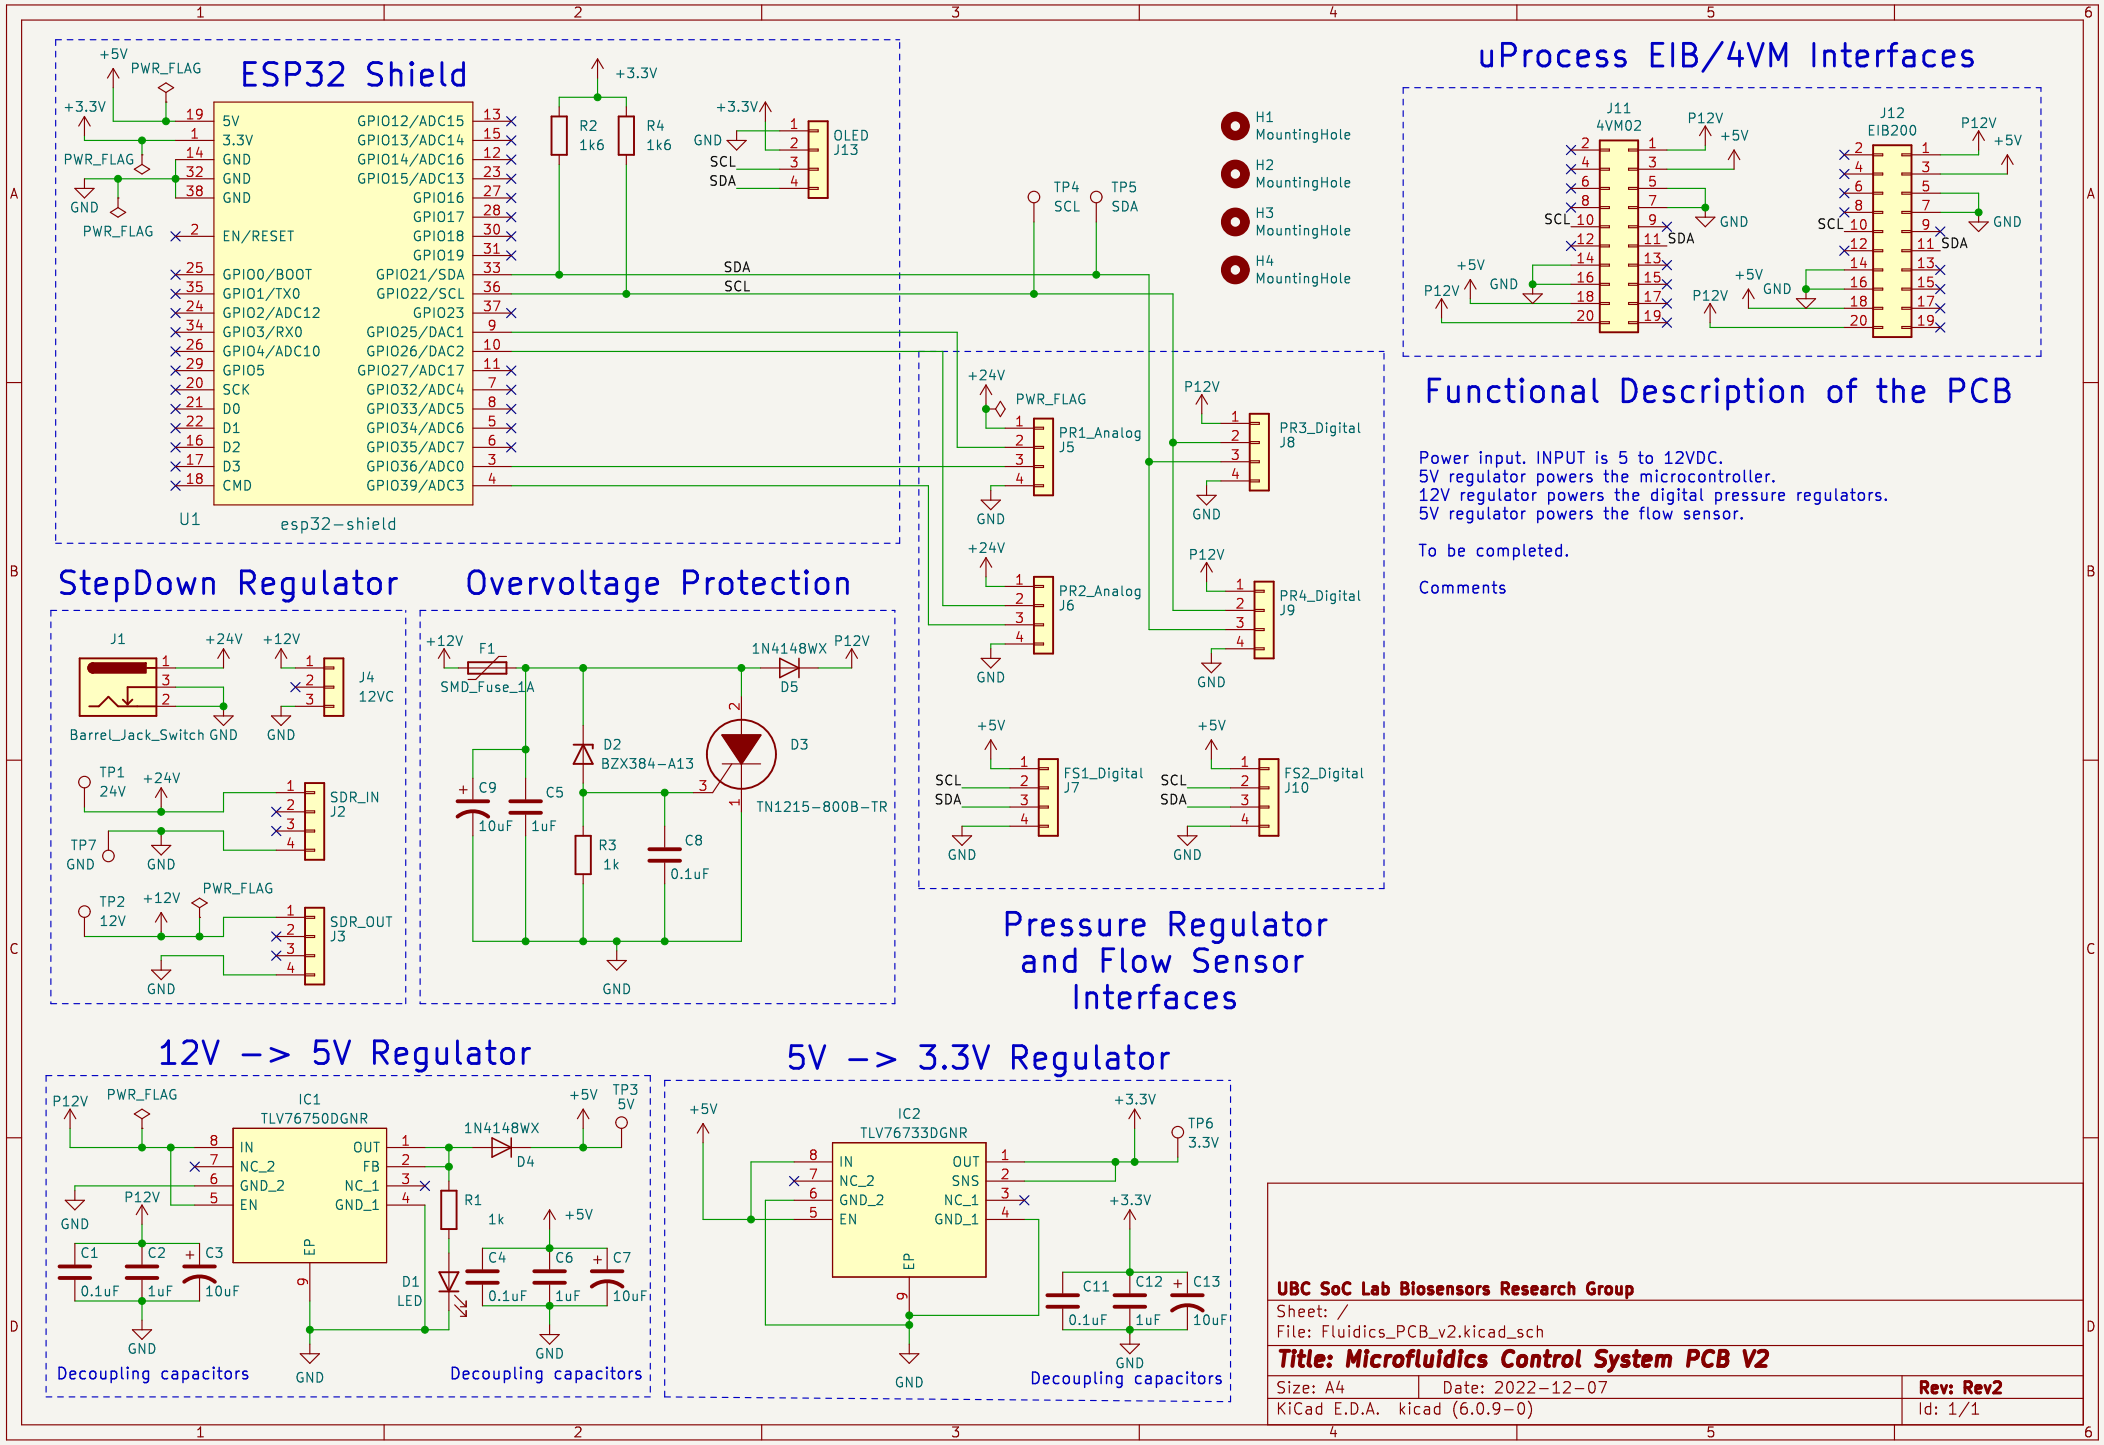

ESP32 Shield
U1
esp32-shield
StepDown Regulator
Overvoltage Protection
Pressure Regulator and Flow Sensor Interfaces
uProcess EIB/4VM Interfaces
Functional Description of the PCB
Power input. INPUT is 5 to 12VDC.
5V regulator powers the microcontroller.
12V regulator powers the digital pressure regulators.
5V regulator powers the flow sensor.
To be completed.
Comments
12V -> 5V Regulator
5V -> 3.3V Regulator
Decoupling capacitors
Decoupling capacitors
Decoupling capacitors
UBC SoC Lab Biosensors Research Group
Sheet: /
File: Fluidics_PCB_v2.kicad_sch
Title: Microfluidics Control System PCB V2
Size: A4
Date: 2022-12-07
Rev: Rev2
KiCad E.D.A. kicad (6.0.9-0)
Id: 1/1