





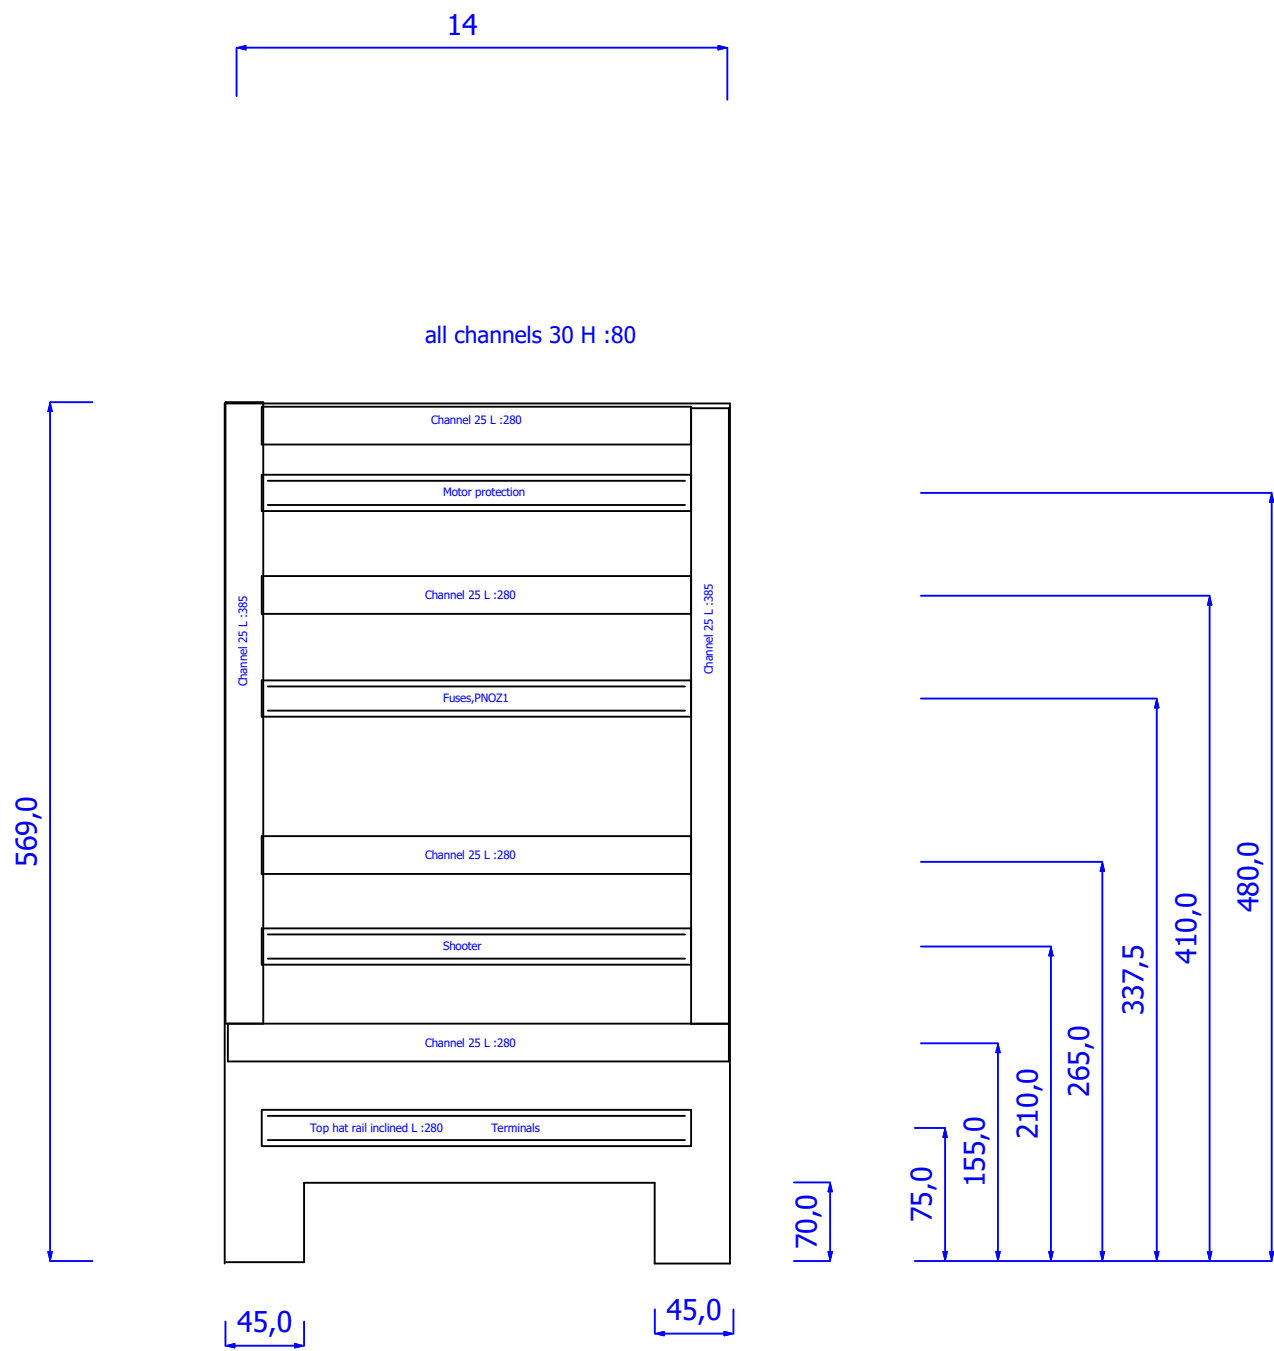

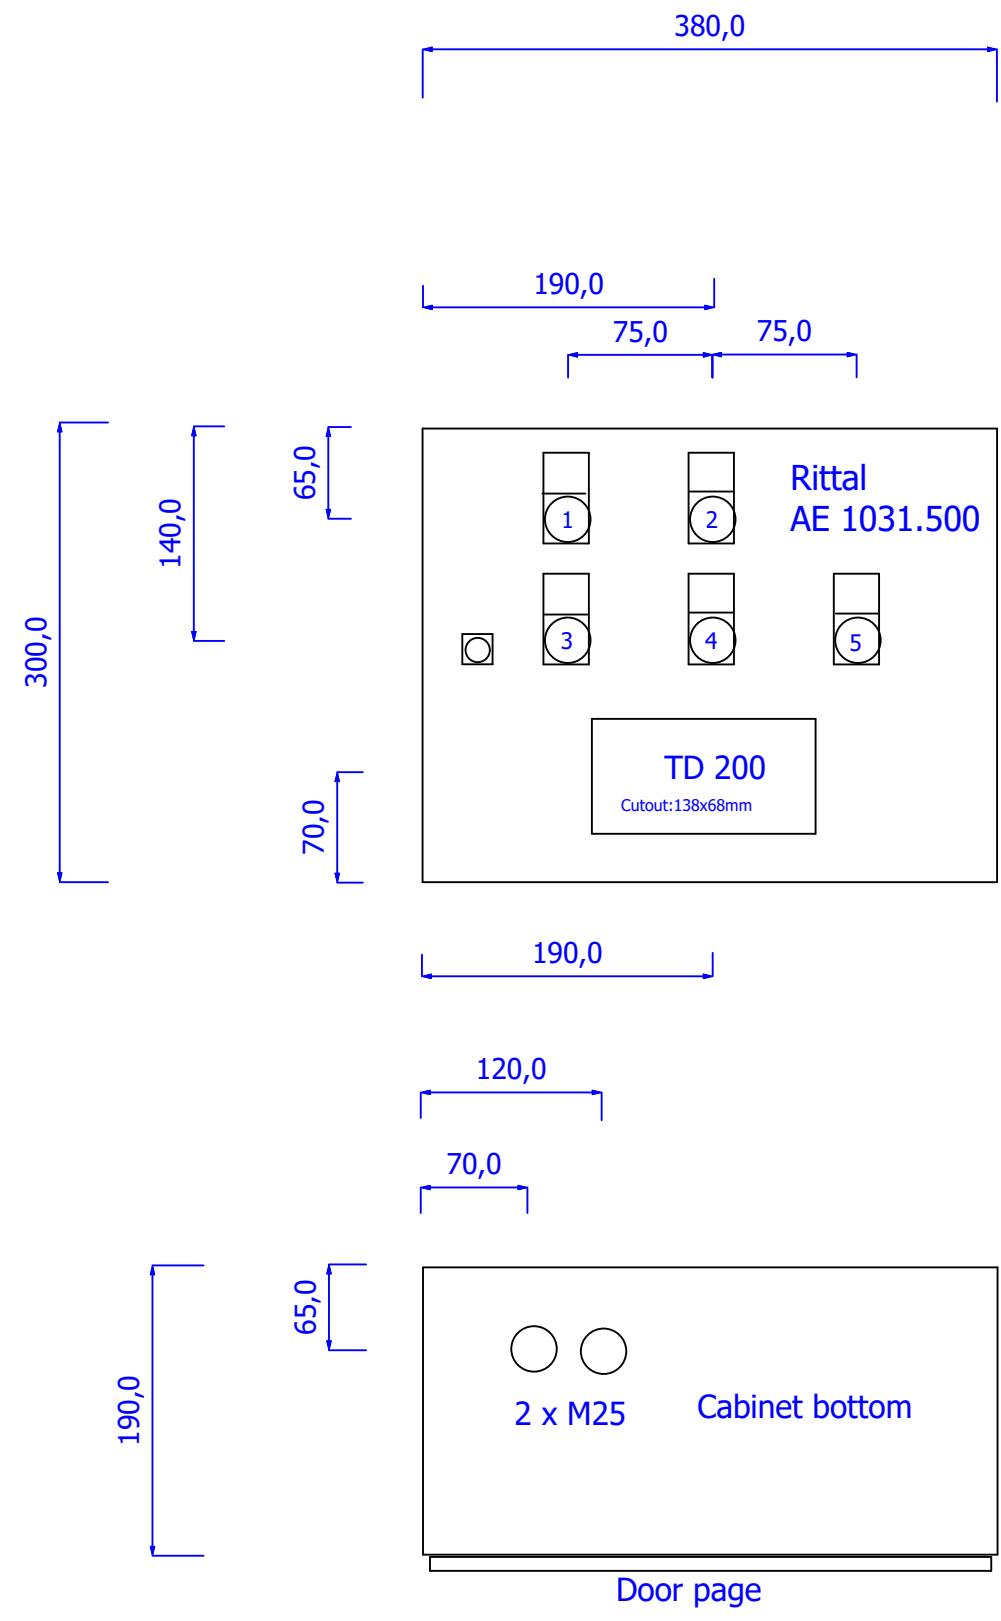

- 1= LM ws Hand
- 2= LM ws Automatic
- 3= WSR Hand/Auto
- 4= DT bl Single step
- 5= LDT ws Initial position

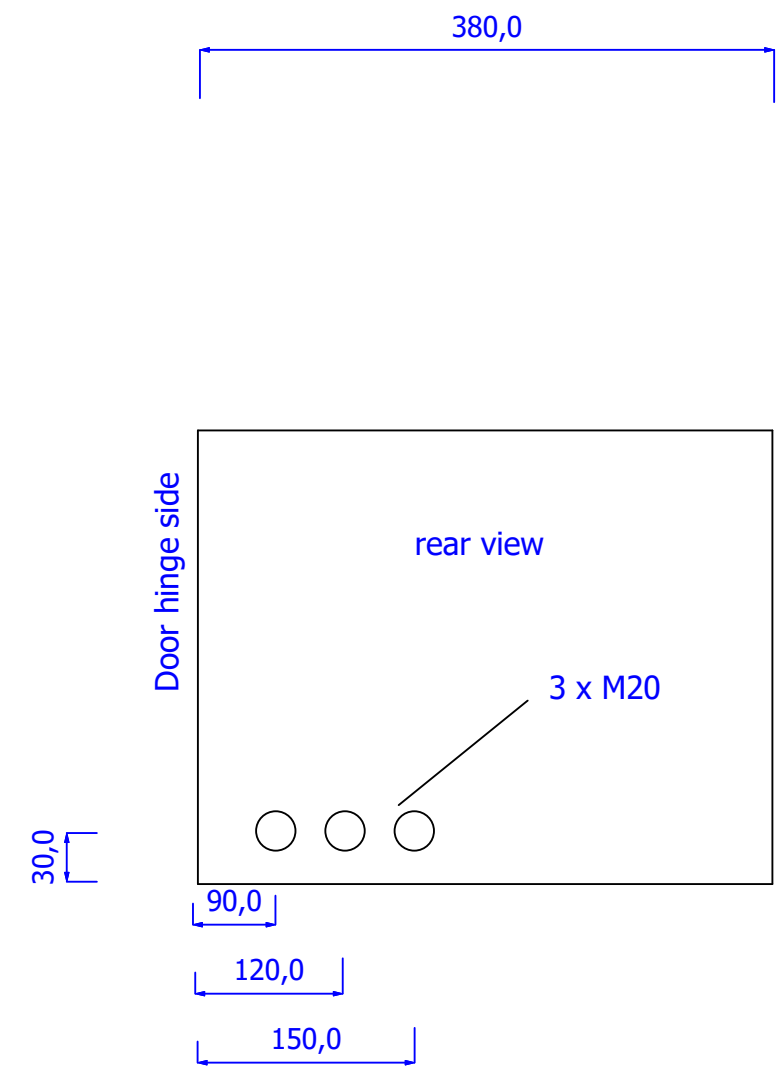

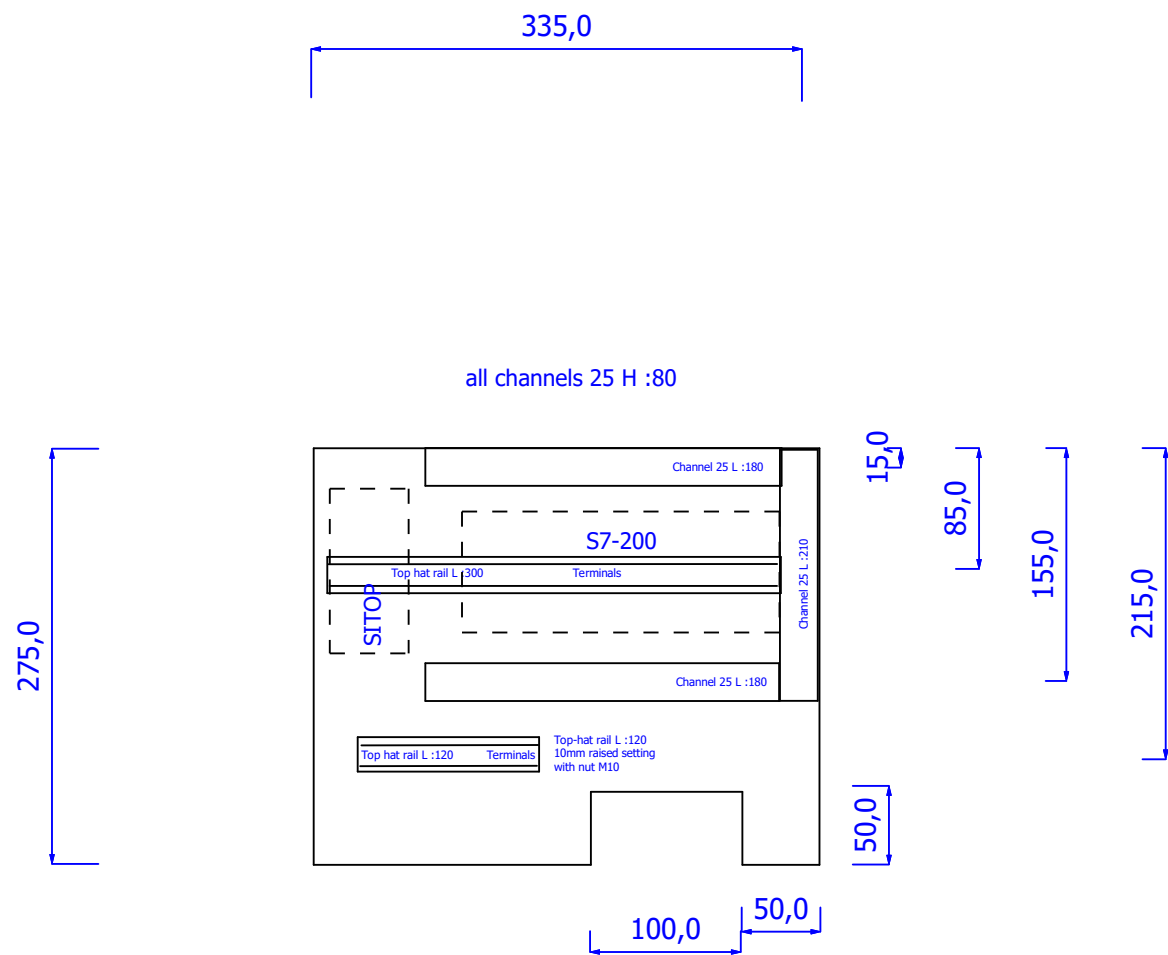

	Mfg. Part No. Vendor Part No.	Item Desc.	Manufacturer	Vendor	
=+S-S1_G =+S/40.4	AX 1338.000 RIT-1338000	AX compact cabinet (WxHxD) 380x600x350mm, 1-door, with mounting plate, with 1 gland plate, painted	Rittal	GCG	
=+S-S1_K =+S/42.4	AX 1031.500 RIT-1031500	AX compact cabinet (WxHxD) 380x300x210mm, 1-door, with mounting plate, with 1 gland plate, painted	Rittal		
=+S1-3A1 =+S1/3.0	FX5UC-32MR/DS-TS FX5UC-32MR/DS-TS	MELSEC IQ-F FX5UC Series PLC, 32 I/O, 16DI 24VDC Sink, 16DO Rly. NO contacts 2A	Mitsubishi		
=+S1-3A1 =+S1/5.0	FX5-C32ET/DSS-TS FX5-C32ET/DSS-TS	MELSEC F (FX) Series, 32 I/O, 16DI 24Vdc, 16DO 24Vdc Source	Mitsubishi		
=+S1-3A2 =+S1/6.0	GS2107-WTBD-N GS2107-WTBD-N	GS21 GOT Simple Series HMI, 7” screen 800x480 pixels	Mitsubishi		
=+S1-1F1 =+S1/1.0	CP30BA3P2M10A CP30BA3P2M10A	Miniature circuit breaker (WS-V series) - curve M - three-pole - 10 A/250 V AC	Mitsubishi		
=+S1-1F3 =+S1/1.8	CP30BA1P1M7A CP30BA1P1M7A	Miniature circuit breaker (WS-V series) - curve M - single pole - 7 A/250 V AC	Mitsubishi		
=+S1-2F2 =+S1/2.1	CP30BA1P1M2A CP30BA1P1M2A	Miniature circuit breaker (WS-V series) - curve M - single pole - 2 A/65 V DC	Mitsubishi		
=+S1-2F4 =+S1/2.5	CP30BA1P1M2A CP30BA1P1M2A	Miniature circuit breaker (WS-V series) - curve M - single pole - 2 A/65 V DC	Mitsubishi		
=+S1-2F5 =+S1/2.6	CP30BA1P1M2A CP30BA1P1M2A	Miniature circuit breaker (WS-V series) - curve M - single pole - 2 A/65 V DC	Mitsubishi		
=+S1-2F6 =+S1/2.6	CP30BA1P1M2A CP30BA1P1M2A	Miniature circuit breaker (WS-V series) - curve M - single pole - 2 A/65 V DC	Mitsubishi		
=+S1-2H1 =+S1/2.4					
=+S1-4H0.1 =+S1/4.3	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=+S1-4H0.1 =+S1/4.3	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=+S1-4H0.1 =+S1/4.3	M22-L-R MOE.216772	Indicator lamp, red, flat			
=+S1-4H0.1 =+S1/4.3	M22-LED-R MOE.216558	LED element, red, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power 0,26W			
=+S1-6H1 =+S1/6.3	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=+S1-6H1 =+S1/6.3	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=+S1-6H1 =+S1/6.3	M22-L-W MOE.216771	Indicator lamp, white, flat			

	Mfg. Part No. Vendor Part No.	Item Desc.	Manufacturer	Vendor	
=+S1-6H1 =+S1/6.3	M22-LED-W MOE.216557	LED element, white, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=+S1-6H2 =+S1/6.3	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=+S1-6H2 =+S1/6.3	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=+S1-6H2 =+S1/6.3	M22-L-W MOE.216771	Indicator lamp, white, flat			
=+S1-6H2 =+S1/6.3	M22-LED-W MOE.216557	LED element, white, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=+S1-7H1 =+S1/7.2					
=+S1-7H1.1 =+S1/7.3					
=+S1-7H1.2 =+S1/7.3					
=+S1-7H3/4 =+S1/7.5					
=+S1-7H5 =+S1/7.6	M22-LED-W MOE.216557	LED element, white, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=+S1-8H1 =+S1/8.4					
=+S1-1K1 =+S1/7.1	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K1 =+S1/7.1	3RH2911-1HA12 SIE.3RH2911-1HA12	AUXILIARY SWITCH BLOCK, 22E,1S+2OE, DIN EN 50012, SCREW TERMINALS, FOR MOTOR	Siemens		
=+S1-1K1 =+S1/7.1	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		
=+S1-1K2 =+S1/7.2	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K2 =+S1/7.2	3RH2911-1HA12 SIE.3RH2911-1HA12	AUXILIARY SWITCH BLOCK, 22E,1S+2OE, DIN EN 50012, SCREW TERMINALS, FOR MOTOR	Siemens		
=+S1-1K2 =+S1/7.2	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		
=+S1-1K3 =+S1/7.4	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K3 =+S1/7.4	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		


	Mfg. Part No. Vendor Part No.	Item Desc.	Manufacturer	Vendor	
=+S1-1K4 =+S1/7.4	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K4 =+S1/7.4	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		
=+S1-1K5 =+S1/7.5	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K5 =+S1/7.5	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		
=+S1-1K6 =+S1/7.6	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K6 =+S1/7.6	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		
=+S1-2K1 =+S1/2.4	PSR-SCP- PHO.2963763	2-channel safety relay for emergency stop and safety door circuits, 3 NO contact, 1 NC contact, undelayed,	PHOENIX CONTACT GmbH & Co. KG		
=+S1-1Q1 =+S1/1.0	T0-2-1/EA/SVB MOE.038873	Main switch as emergency stop device, for front mounting, 20A, 3-pole	Eaton		
=+S1-1Q2 =+S1/1.2	MMP-T32 4.0A MMP-T32 4.0A	CIRCUIT BREAKER FOR MOTOR PROTECTION, EXCL. 2,5...4A, N-EXT. 3 Pole, SCREW	Mitsubishi		
=+S1-1Q2 =+S1/1.2	xxx xxx	AUXILIARY SWITCH CROSSWISE, 1S+10E, FOR CIRCUIT BREAKER, BGR. S00...S3	Mitsubishi		
=+S1-1Q3 =+S1/1.3	MMP-T32 4.0A MMP-T32 4.0A	CIRCUIT BREAKER FOR MOTOR PROTECTION, EXCL. 2,5...4A, N-EXT. 3 Pole, SCREW	Mitsubishi		
=+S1-1Q3 =+S1/1.3	xxx xxx	AUXILIARY SWITCH CROSSWISE, 1S+10E, FOR CIRCUIT BREAKER, BGR. S00...S3	Mitsubishi		
=+S1-1Q4 =+S1/1.5	MMP-T32 4.0A MMP-T32 4.0A	CIRCUIT BREAKER FOR MOTOR PROTECTION, EXCL. 2,5...4A, N-EXT. 3 Pole, SCREW	Mitsubishi		
=+S1-1Q4 =+S1/1.5	xxx xxx	AUXILIARY SWITCH CROSSWISE, 1S+10E, FOR CIRCUIT BREAKER, BGR. S00...S3	Mitsubishi		
=+S1-1Q5 =+S1/1.7					
=+S1-1Q5 =+S1/1.7					
=+S1-2S1 =+S1/2.4	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=+S1-2S1 =+S1/2.4	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=+S1-2S1 =+S1/2.4	M22-D-R MOE.216594	Pushbutton, red, flat, tactile, front ring titanium			


=WAMA 02 09+S1-2S1 =WAMA 02 09+S1/2.4	M22-K01 MOE.216378	Contact element, 1 NC contact, front mounting, screw terminals							
=WAMA 02 09+S1-2S2 =WAMA 02 09+S1/2.4	M22-PV MOE.216876	Emergency stop button, unlit, reset by pulling							
=WAMA 02 09+S1-2S2 =WAMA 02 09+S1/2.4	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements							
=WAMA 02 09+S1-2S2 =WAMA 02 09+S1/2.4	M22-K01 MOE.216378	Contact element, 1 NC contact, front mounting, screw terminals							
=WAMA 02 09+S1-2S2 =WAMA 02 09+S1/2.4	M22-XBK1 MOE.216483	Emergency stop sign, round (d) 60mm, in four languages (de, en, fr, it), plastic, golden yellow							
=WAMA 02 09+S1-2S4 =WAMA 02 09+S1/2.8	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements							
=WAMA 02 09+S1-2S4 =WAMA 02 09+S1/2.8	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm							
=WAMA 02 09+S1-2S4 =WAMA 02 09+S1/2.8	M22-DL-G MOE.216927	illuminated pushbutton, green, flat, tactile, front ring titanium							
=WAMA 02 09+S1-2S4 =WAMA 02 09+S1/2.8	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals							
=WAMA 02 09+S1-2S4 =WAMA 02 09+S1/2.8	M22-LED-G MOE.216559	LED element, green, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power							
=WAMA 02 09+S1-4S0.0 =WAMA 02 09+S1/4.1	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements							
=WAMA 02 09+S1-4S0.0 =WAMA 02 09+S1/4.1	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm							
=WAMA 02 09+S1-4S0.0 =WAMA 02 09+S1/4.1	M22-D-R MOE.216594	Pushbutton, red, flat, tactile, front ring titanium							
=WAMA 02 09+S1-4S0.0 =WAMA 02 09+S1/4.1	M22-K01 MOE.216378	Contact element, 1 NC contact, front mounting, screw terminals							
=WAMA 02 09+S1-4S0.2 =WAMA 02 09+S1/4.4	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements							
=WAMA 02 09+S1-4S0.2 =WAMA 02 09+S1/4.4	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm							
=WAMA 02 09+S1-4S0.2 =WAMA 02 09+S1/4.4	M22-DL-G MOE.216927	illuminated pushbutton, green, flat, tactile, front ring titanium							
=WAMA 02 09+S1-4S0.2 =WAMA 02 09+S1/4.4	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals							
=WAMA 02 09+S1-4S0.2 =WAMA 02 09+S1/4.4	M22-LED-G MOE.216559	LED element, green, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power							


=WAMA 02 09+S1-4S0.3 =WAMA 02 09+S1/4.4	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-4S0.3 =WAMA 02 09+S1/4.4	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-4S0.3 =WAMA 02 09+S1/4.4	M22-DL-G MOE.216927	illuminated pushbutton, green, flat, tactile, front ring titanium			
=WAMA 02 09+S1-4S0.3 =WAMA 02 09+S1/4.4	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-4S0.3 =WAMA 02 09+S1/4.4	M22-LED-G MOE.216559	LED element, green, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=WAMA 02 09+S1-4S0.4 =WAMA 02 09+S1/4.5	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-4S0.4 =WAMA 02 09+S1/4.5	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-4S0.4 =WAMA 02 09+S1/4.5	M22-DL-G MOE.216927	illuminated pushbutton, green, flat, tactile, front ring titanium			
=WAMA 02 09+S1-4S0.4 =WAMA 02 09+S1/4.5	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-4S0.4 =WAMA 02 09+S1/4.5	M22-LED-G MOE.216559	LED element, green, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=WAMA 02 09+S1-6S2.0 =WAMA 02 09+S1/6.1	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-6S2.0 =WAMA 02 09+S1/6.1	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-6S2.0 =WAMA 02 09+S1/6.1	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-6S2.0 =WAMA 02 09+S1/6.1	M22-D-B MOE.216600	Push button IP67			
=WAMA 02 09+S1-6S2.1 =WAMA 02 09+S1/6.2	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-6S2.1 =WAMA 02 09+S1/6.2	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-6S2.1 =WAMA 02 09+S1/6.2	M22-WRK MOE.216867	Selector button, white, toggle handle, two positions 0-I, detent, 60°, front ring titanium			
=WAMA 02 09+S1-6S2.1 =WAMA 02 09+S1/6.2	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-6S2.1 =WAMA 02 09+S1/6.2	M22-K01 MOE.216378	Contact element, 1 NC contact, front mounting, screw terminals			


Version	V01_00		Modification	20.02.2020	Wegmann rolling machine 02 09		Artikelstückliste : MOE.216374 - MOE.216378	PGr.: 1361		= WAMA 02 09	
Date			Edited by	sps_pm				+ S			
Creator			Checked	sps_pm						Bl. 204	
										from	

=WAMA 02 09+S1-6S2.2 =WAMA 02 09+S1/6.4	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-6S2.2 =WAMA 02 09+S1/6.4	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-6S2.2 =WAMA 02 09+S1/6.4	M22-LED-W MOE.216557	LED element, white, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=WAMA 02 09+S1-6S2.2 =WAMA 02 09+S1/6.4	M22-DL-W MOE.216922	illuminated pushbutton, white, flat, tactile, front ring titanium			
=WAMA 02 09+S1-6S2.2 =WAMA 02 09+S1/6.4	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-6S2.4 =WAMA 02 09+S1/6.5	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-6S2.4 =WAMA 02 09+S1/6.5	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-6S2.4 =WAMA 02 09+S1/6.5	M22-WRK MOE.216867	Selector button, white, toggle handle, two positions 0-I, detent, 60°, front ring titanium			
=WAMA 02 09+S1-6S2.4 =WAMA 02 09+S1/6.5	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-2V1 =WAMA 02 09+S1/2.1	6EP1333-2BA01 SIE.6EP1333-2BA01	SITOP SMART 120 W REGULATED POWER SUPPLY INPUT: AC 120/230 V OUTPUT: DC 24 V/5 A VERSION	Siemens		
=WAMA 02 09+S1-0X1 =WAMA 02 09+S1/1.0	CT516/6H ELK.CT516/6H	Cekon connector, 5-pin (3P+N+PE), voltage 400VAC, current 16A			

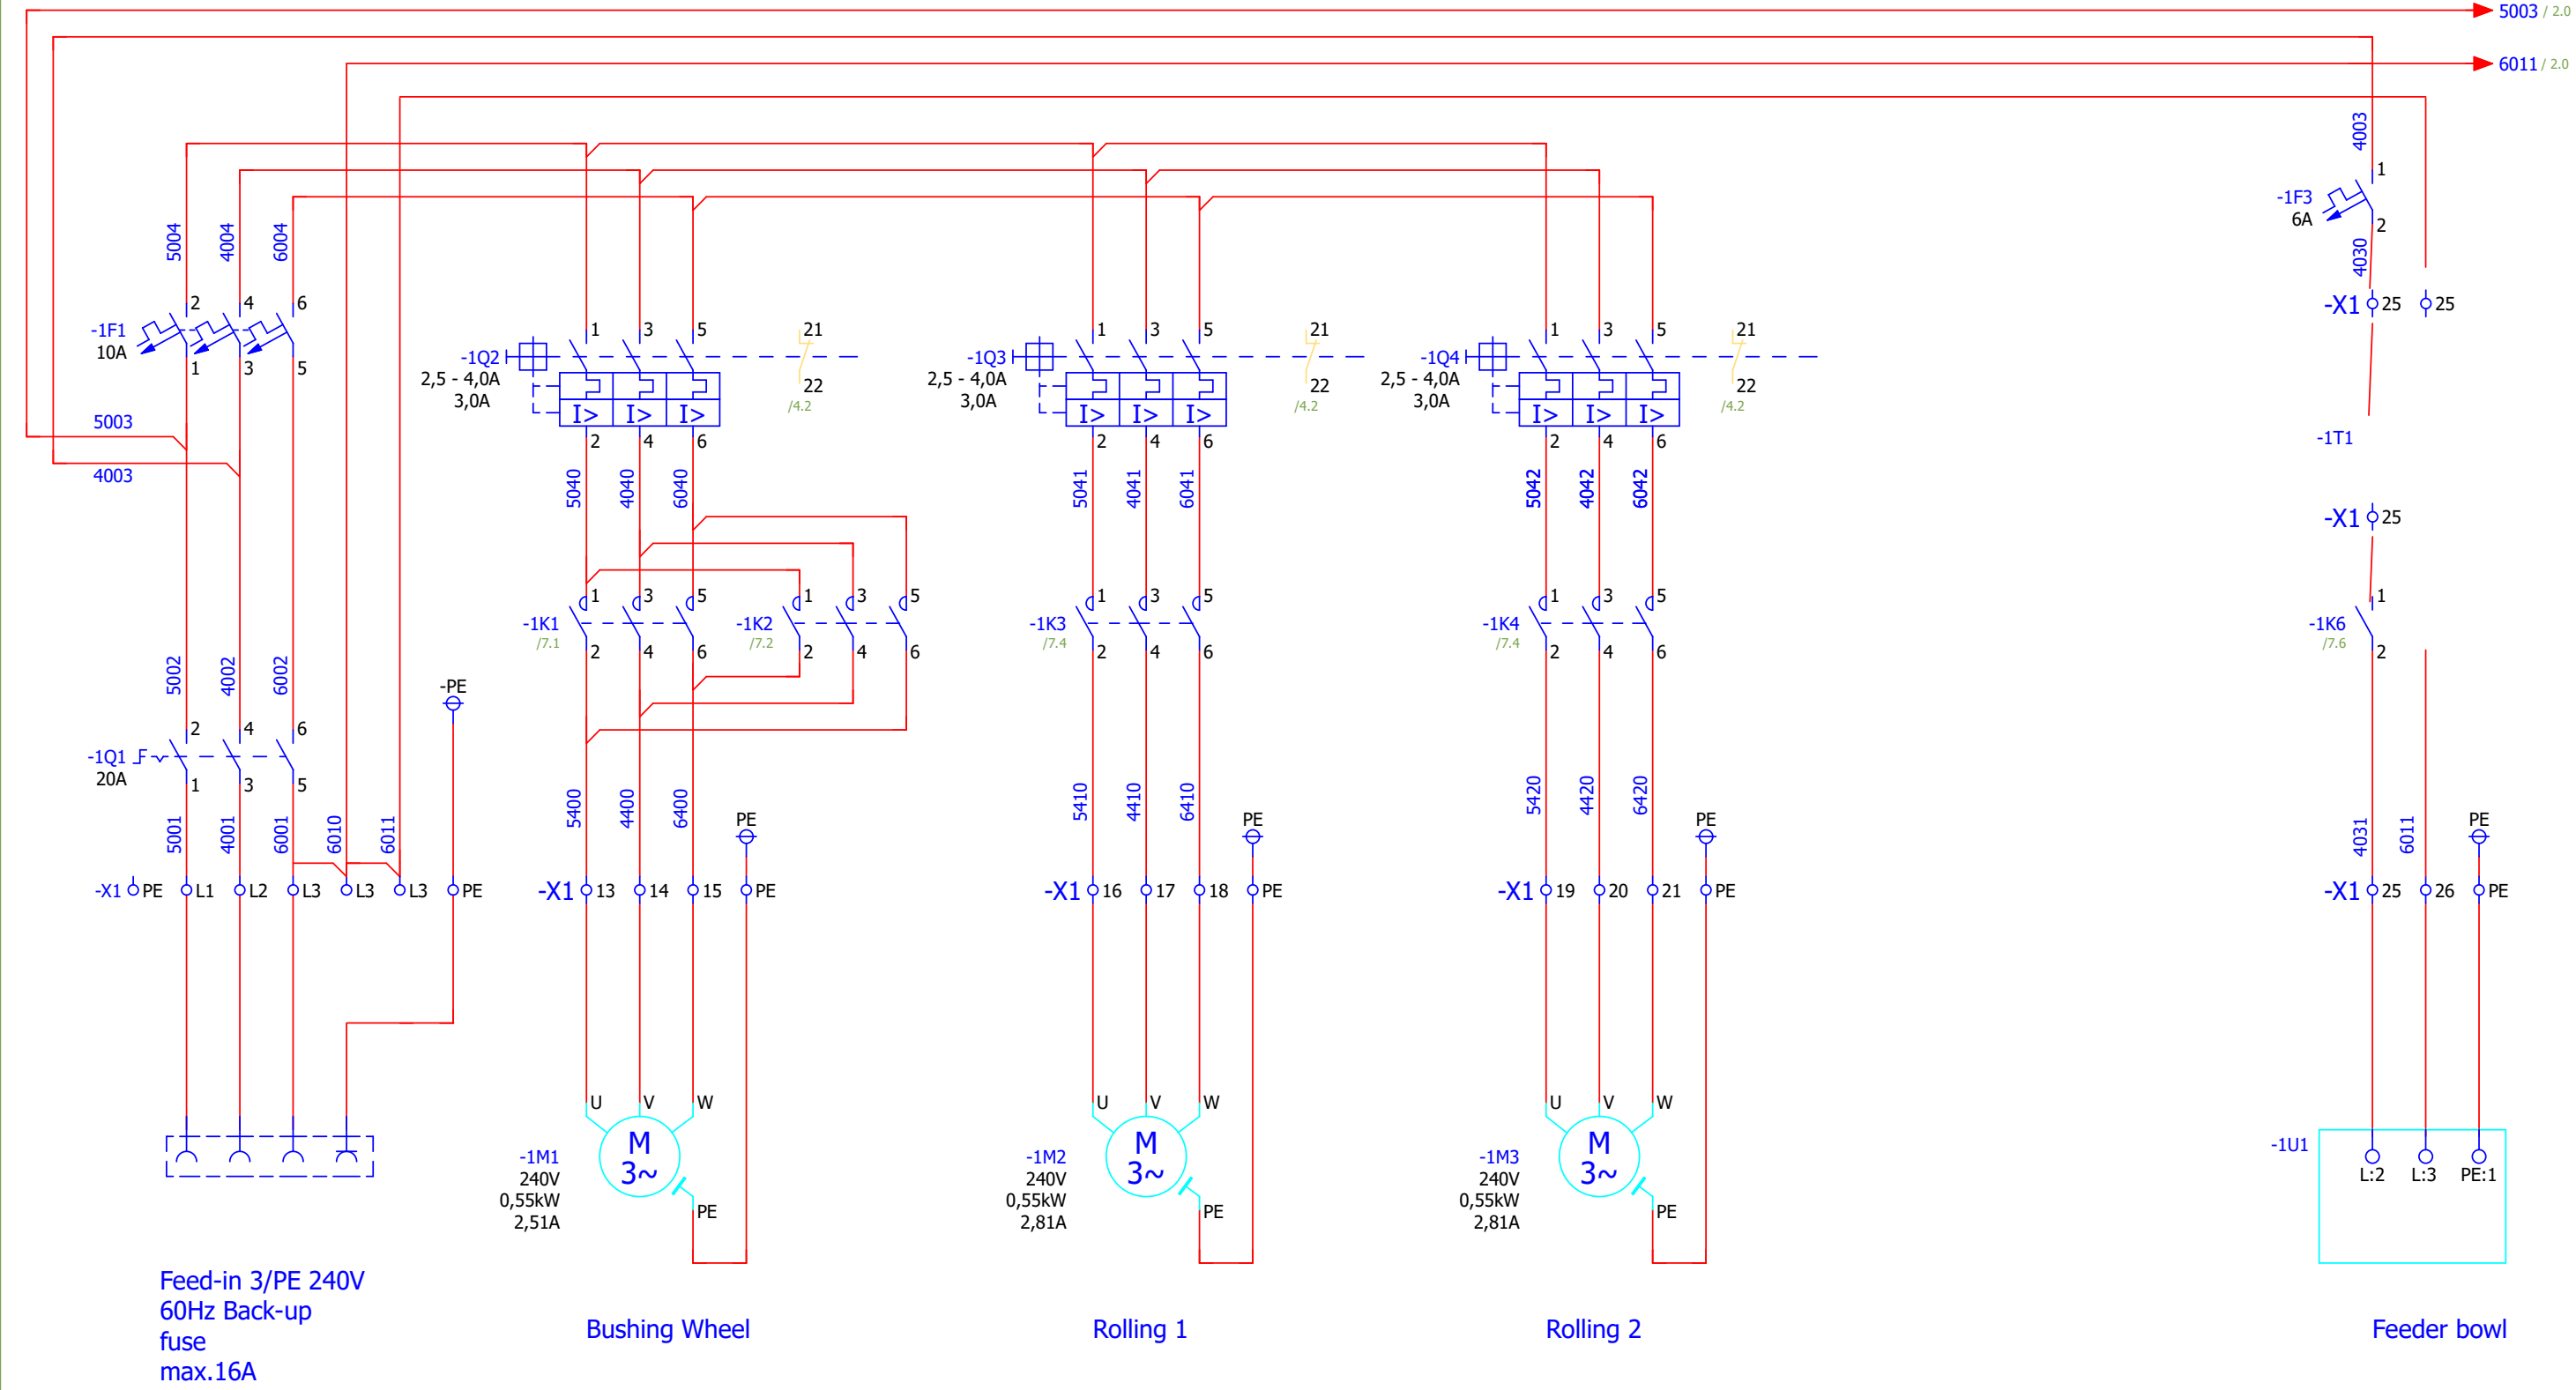


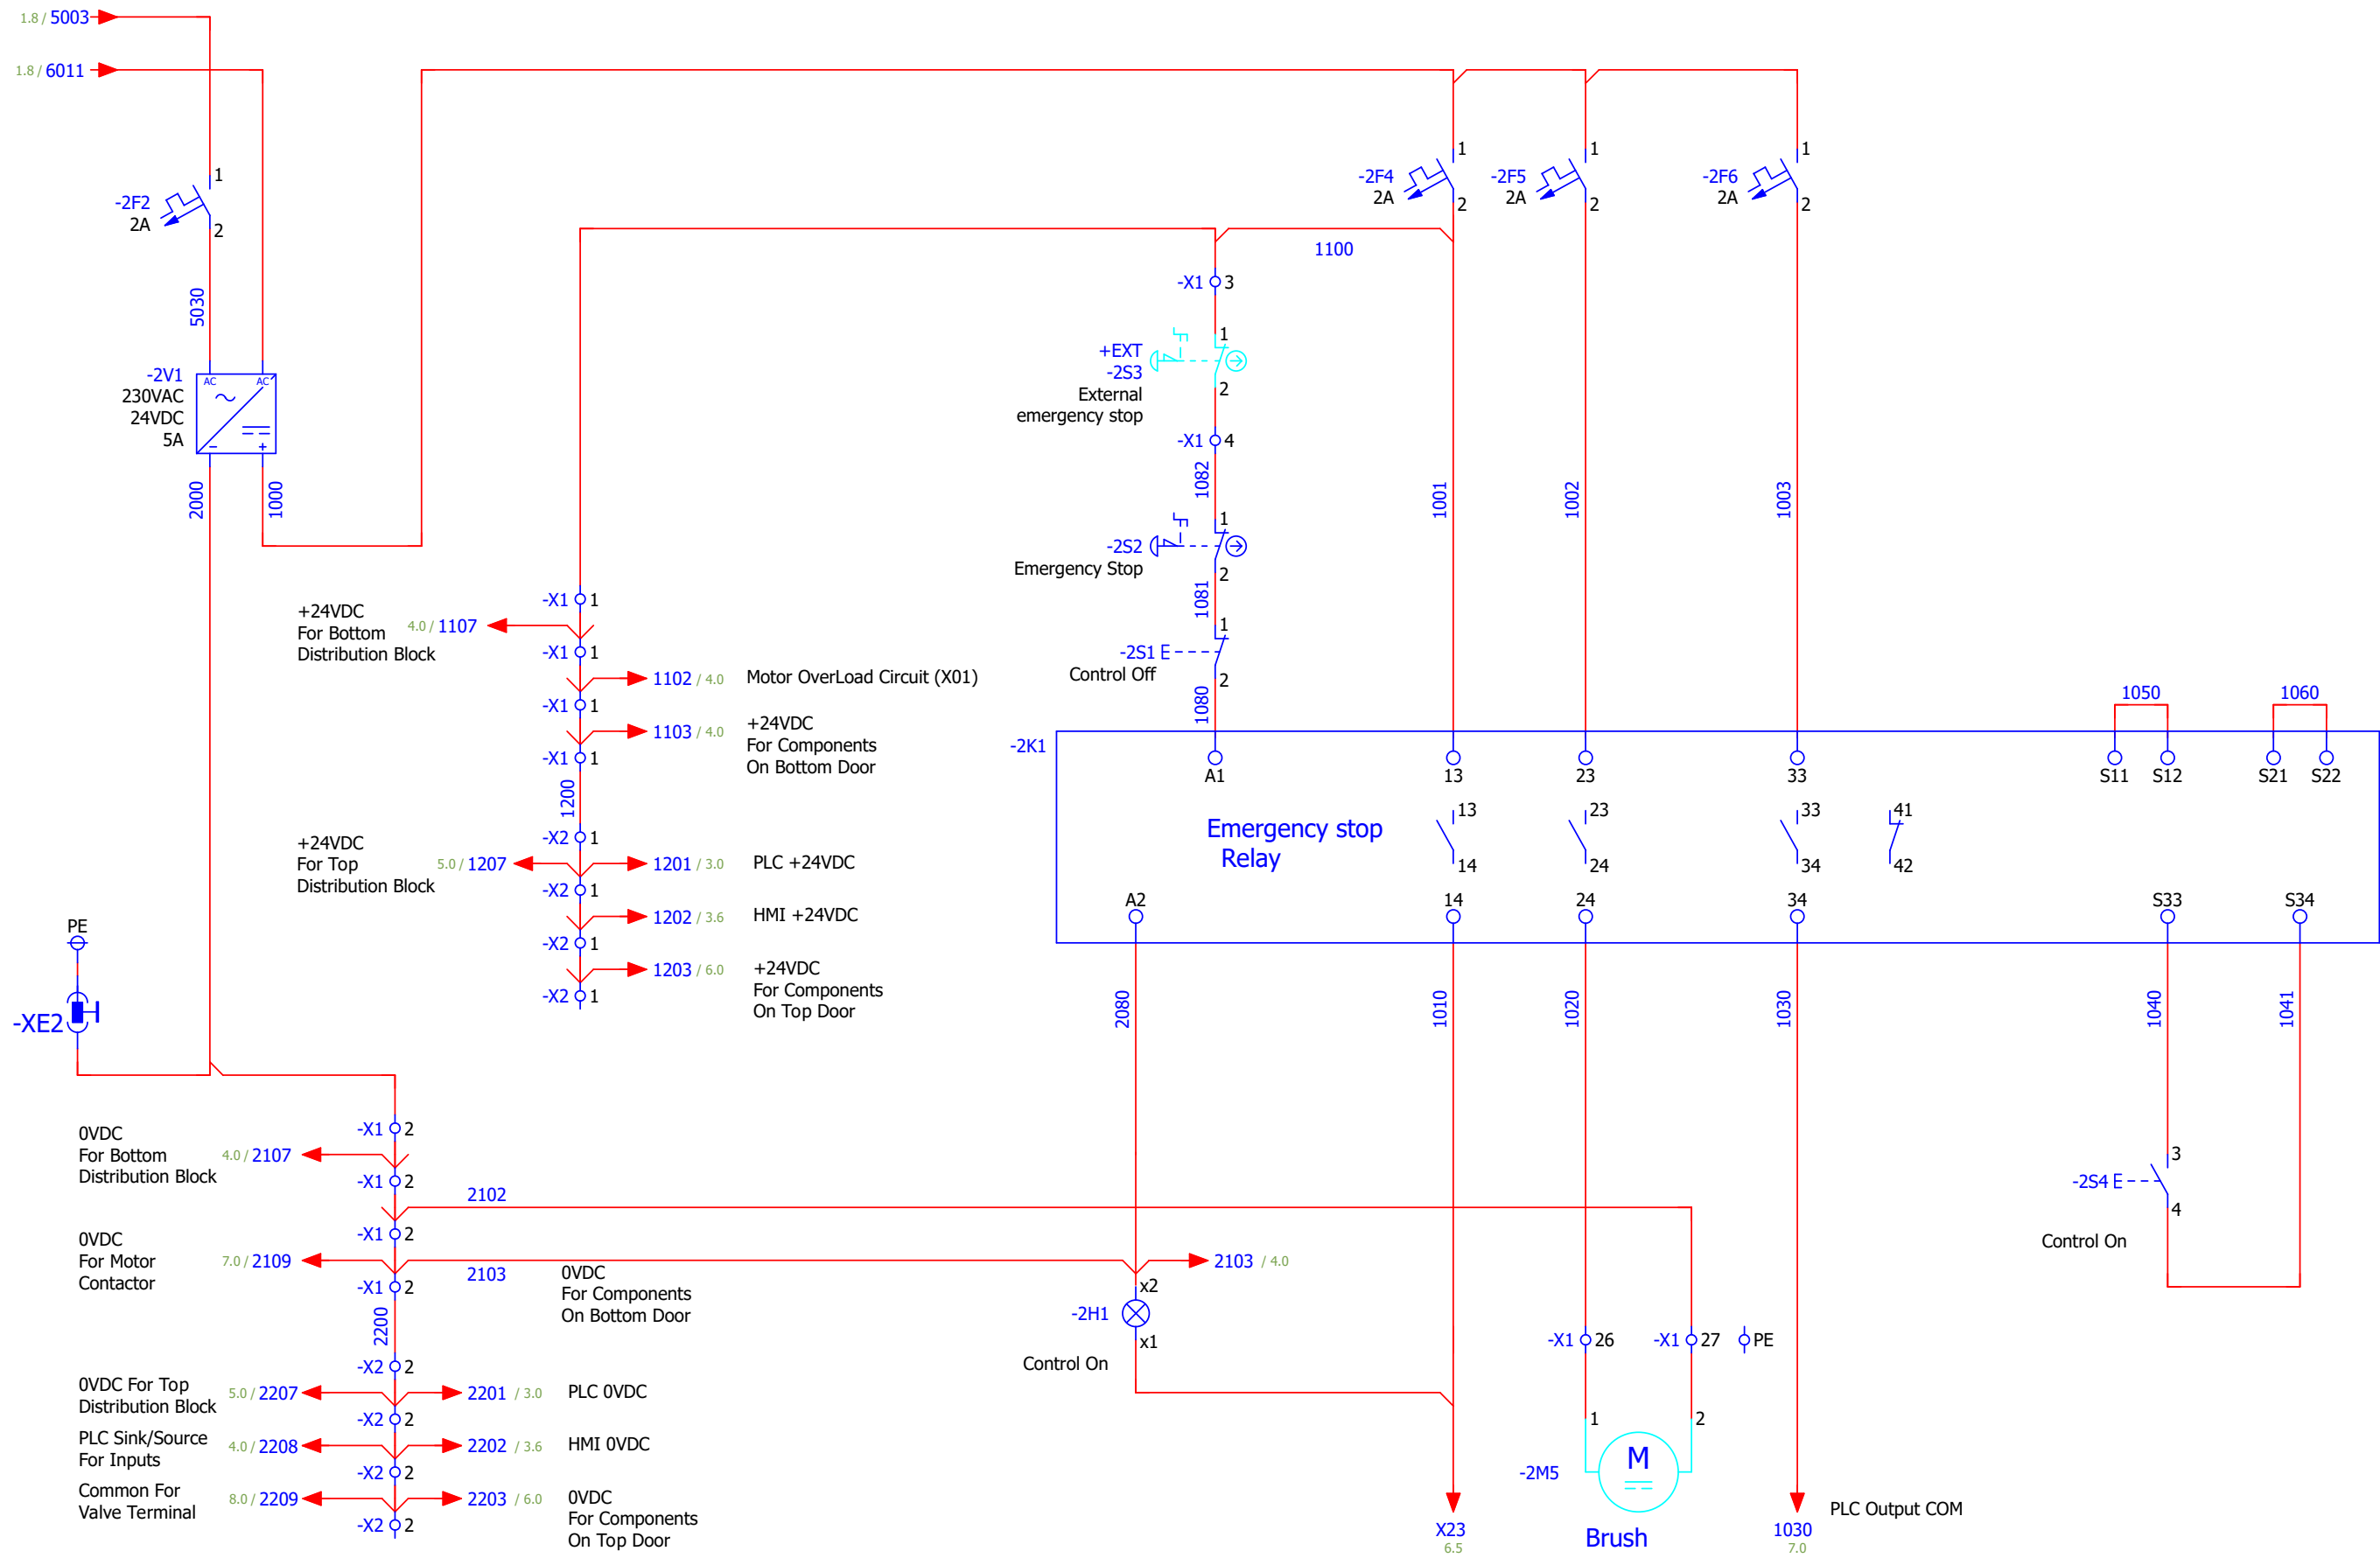

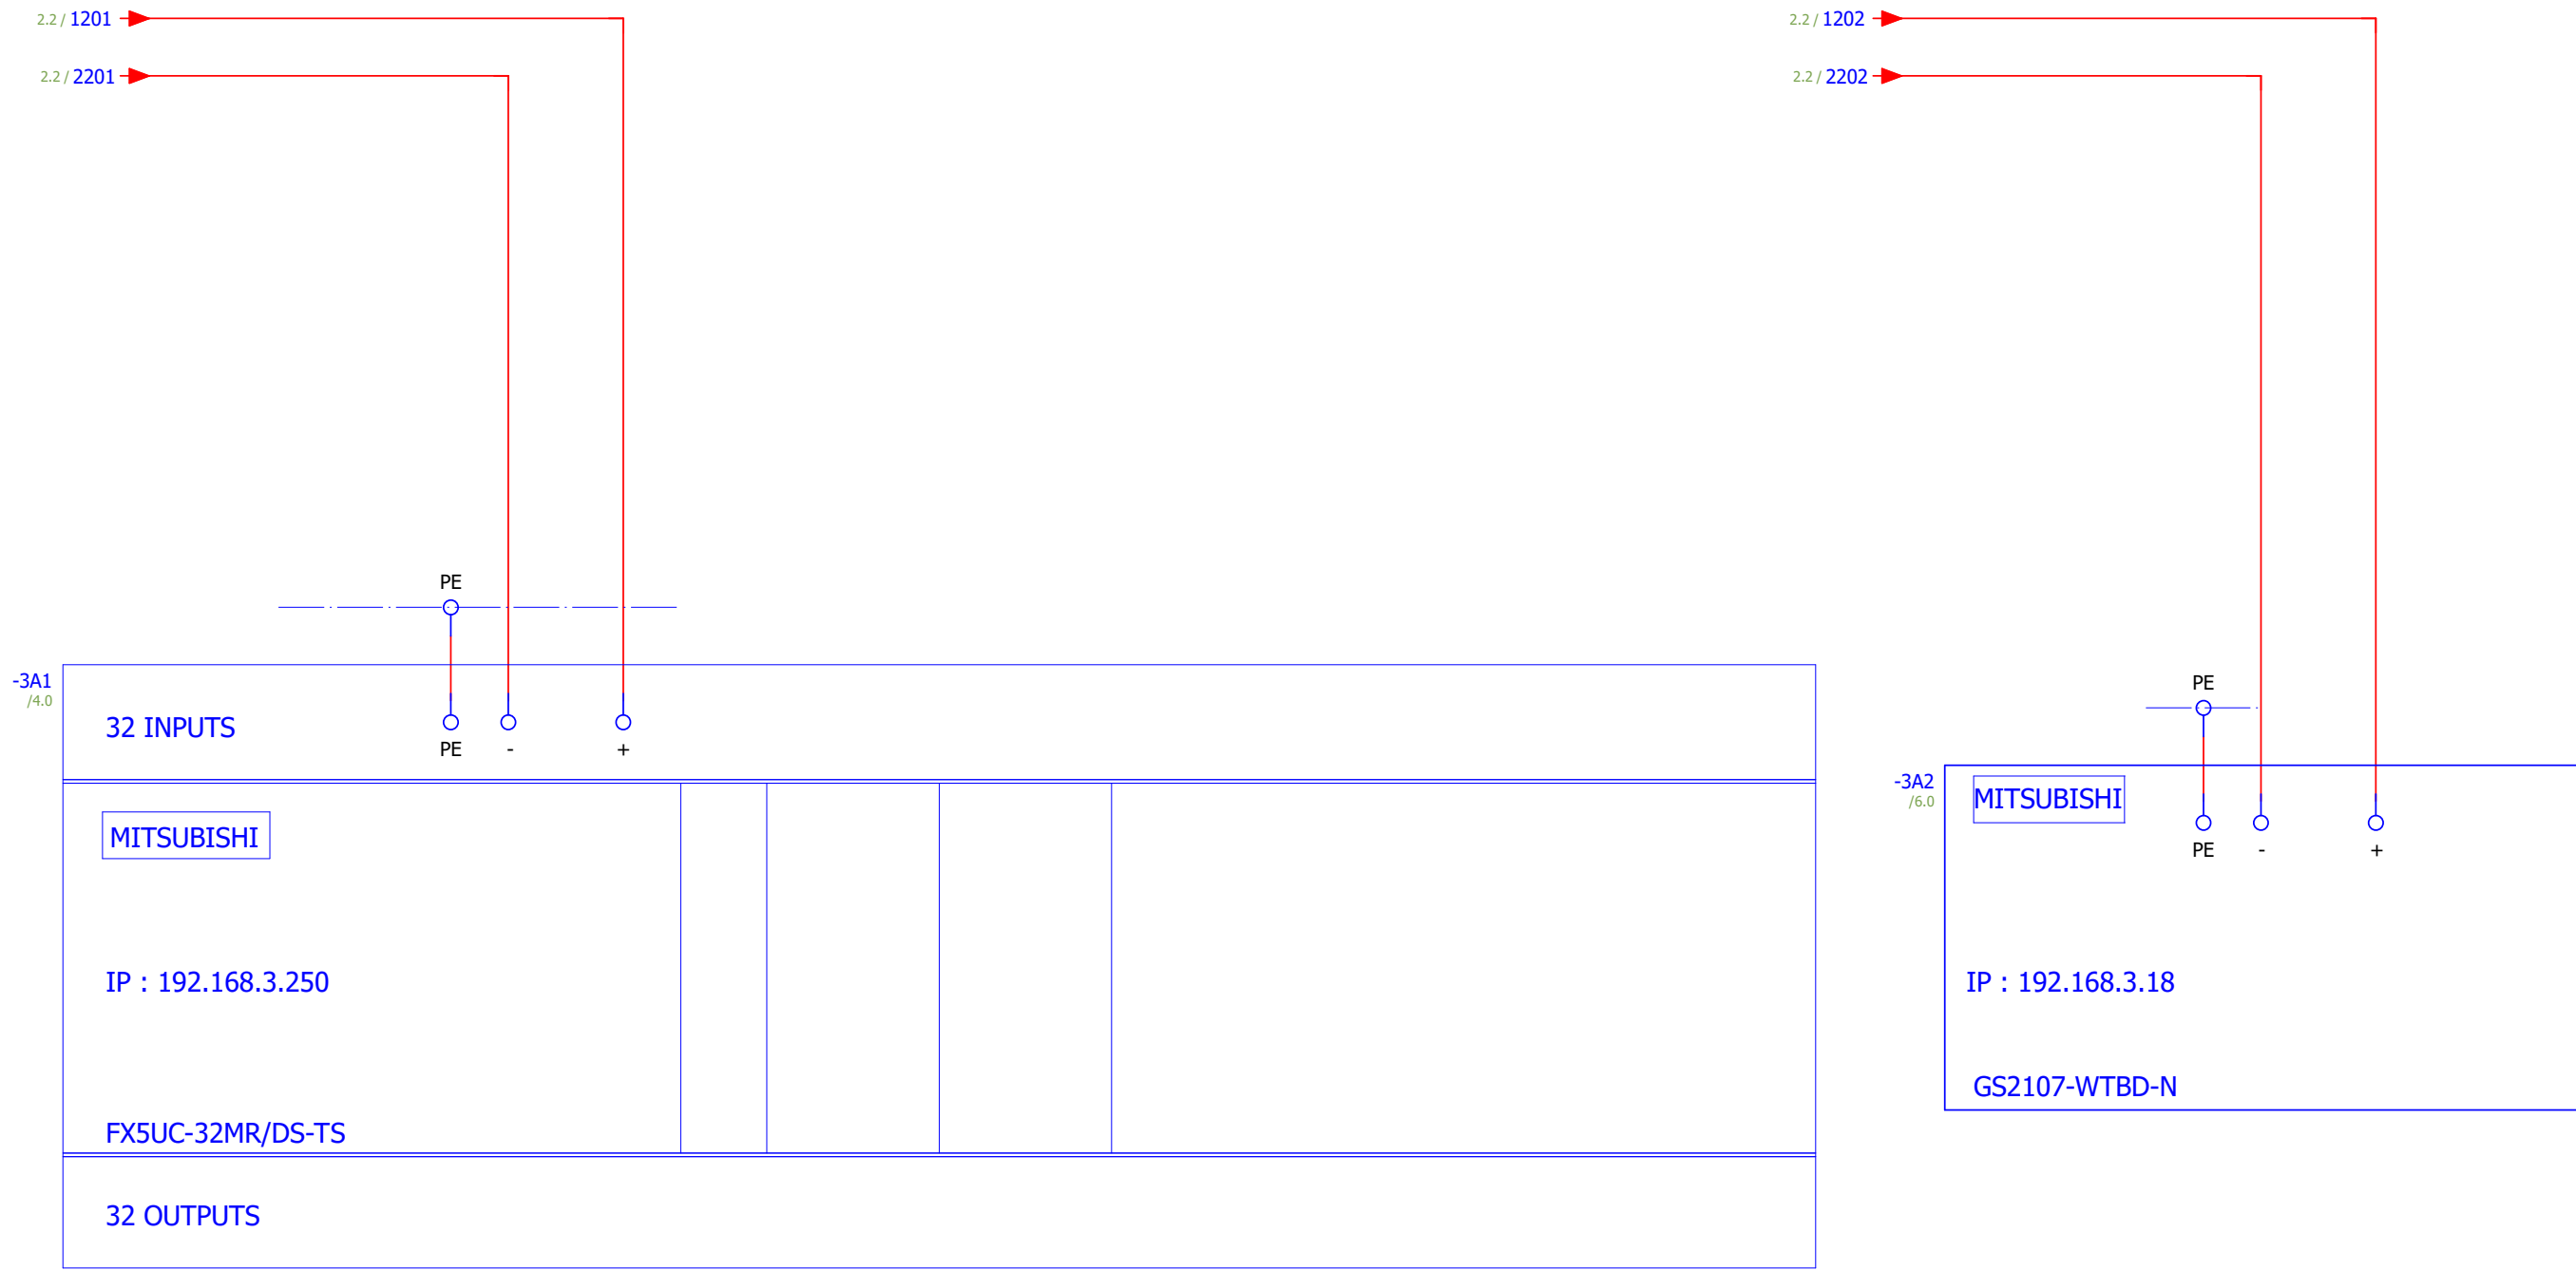


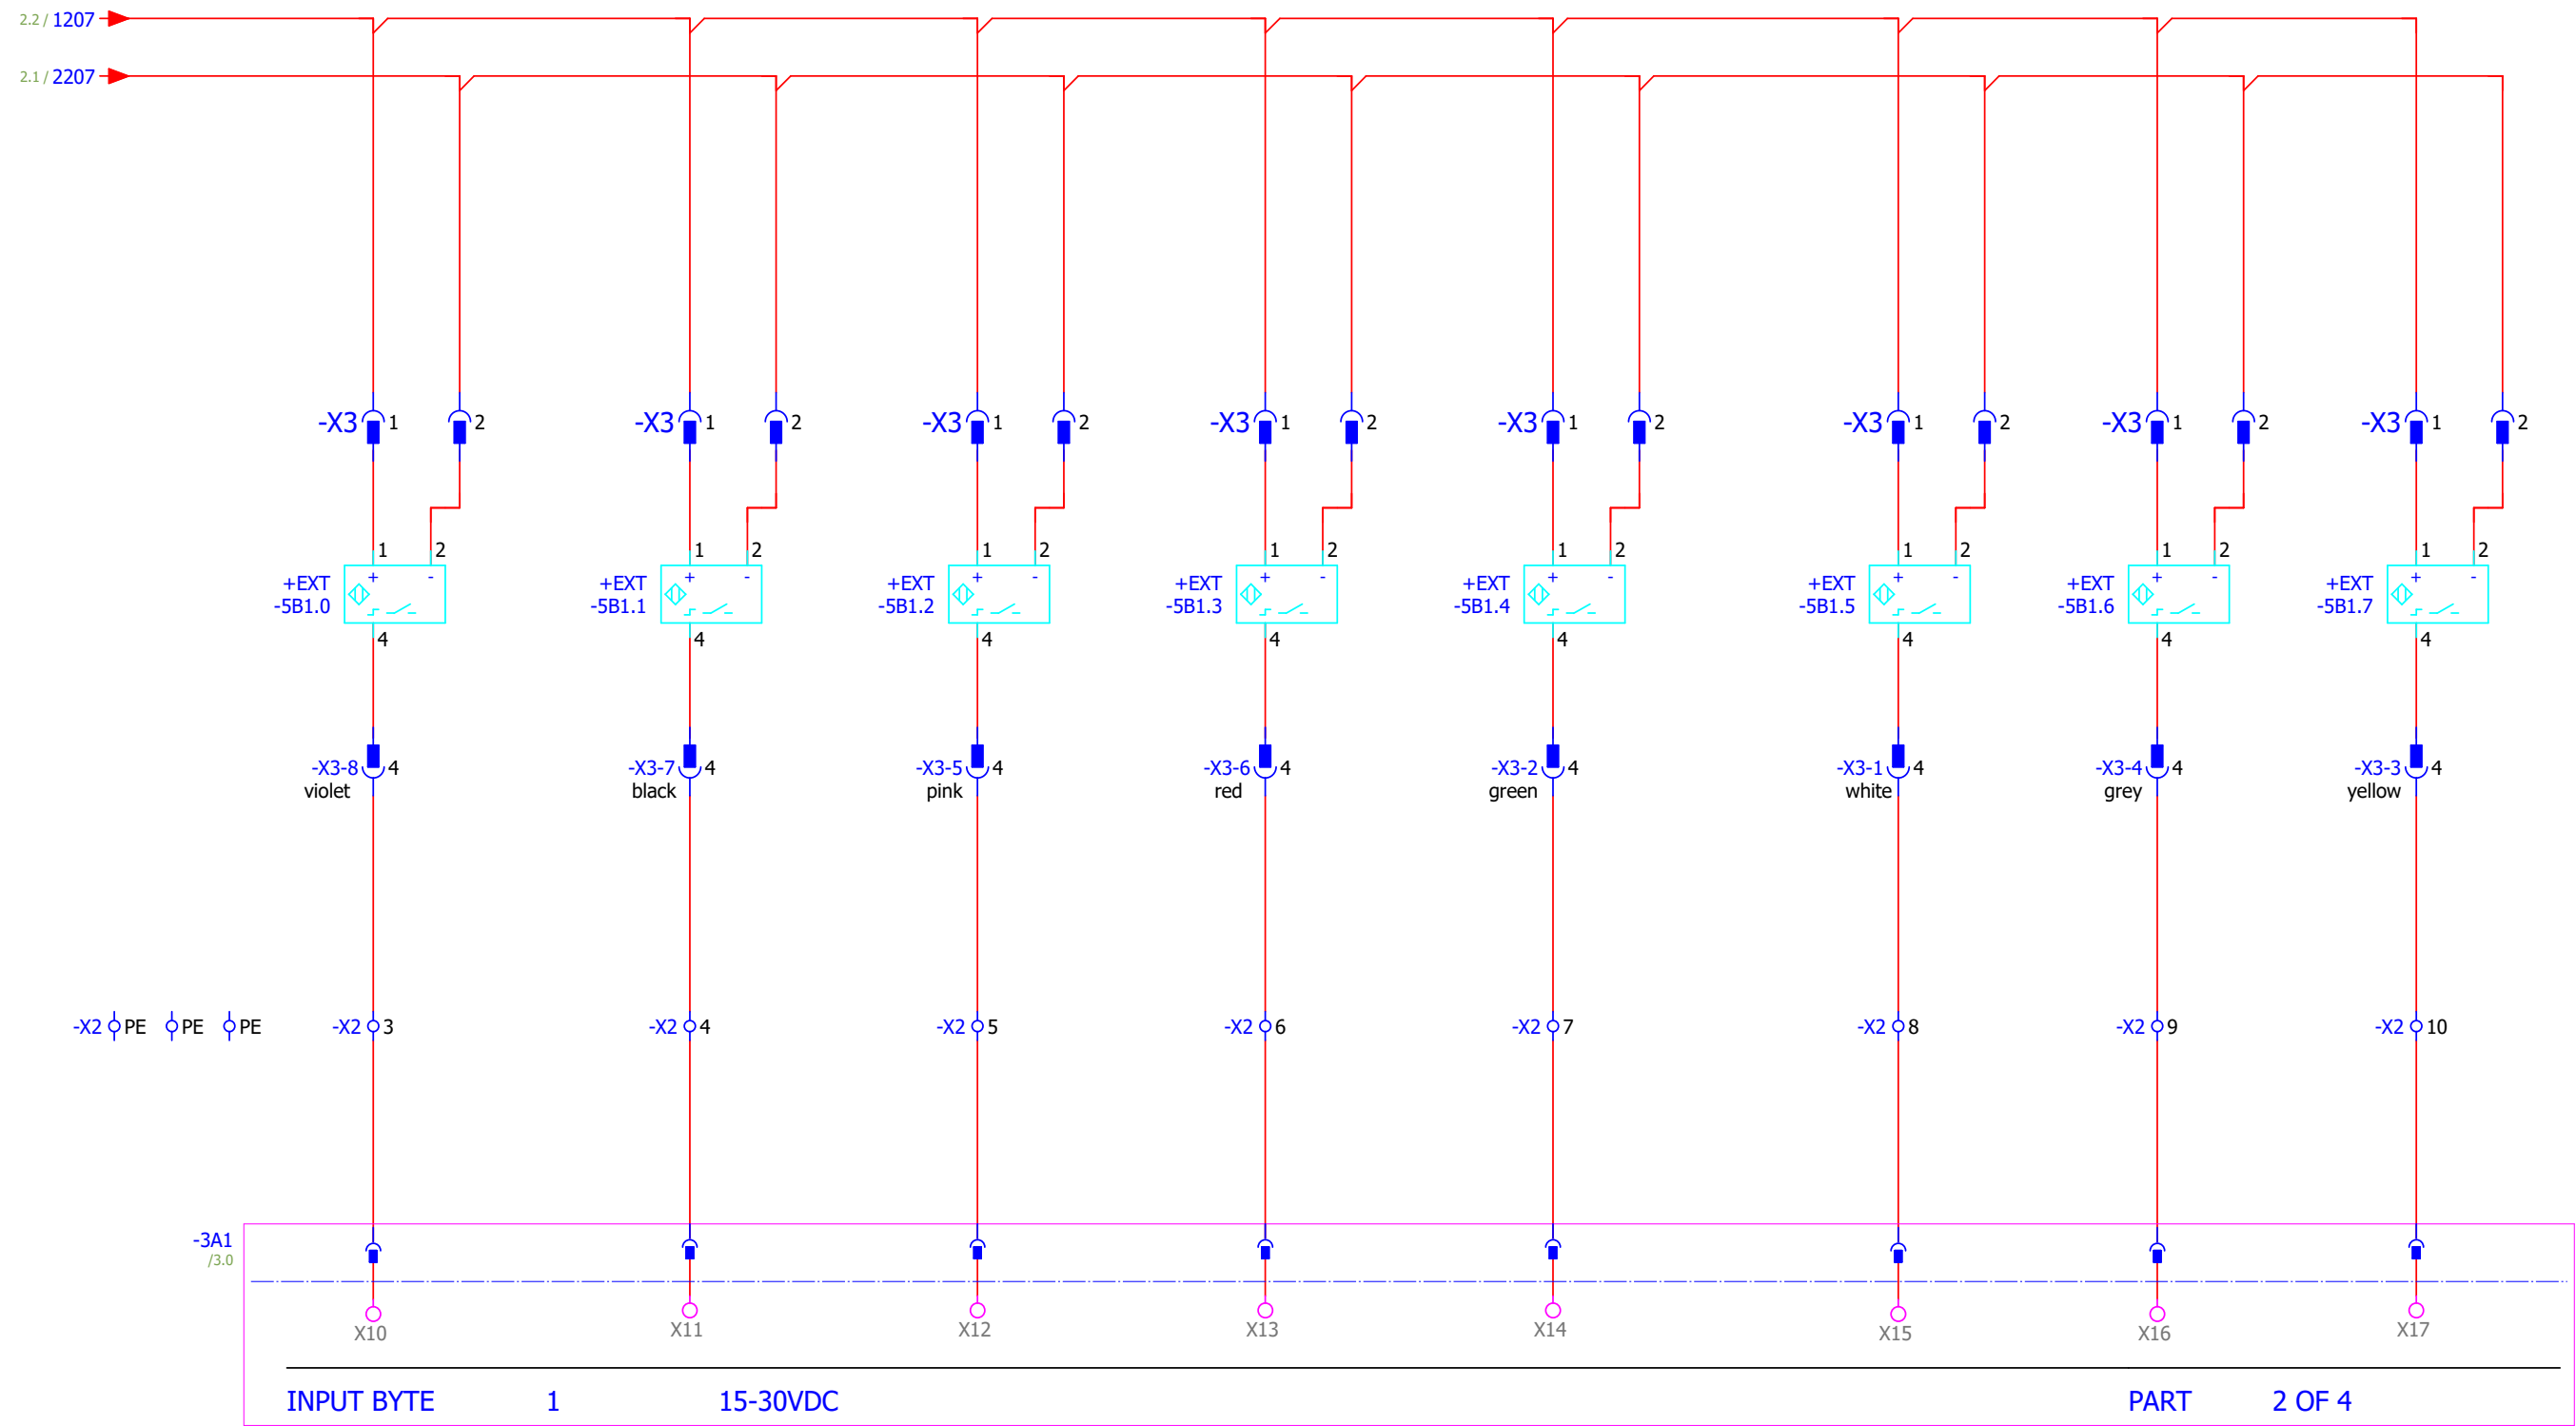

pole sleeves available	Start sequence of the firing unit	Verticle Cylinder Extended	Vertical Cylinder Retracted	Horizontal Cylinder Extended	Horizontal Cylinder Retracted	Pusher Cylinder Retracted	Pusher Cylinder Extended
------------------------	-----------------------------------	----------------------------	-----------------------------	------------------------------	-------------------------------	---------------------------	--------------------------

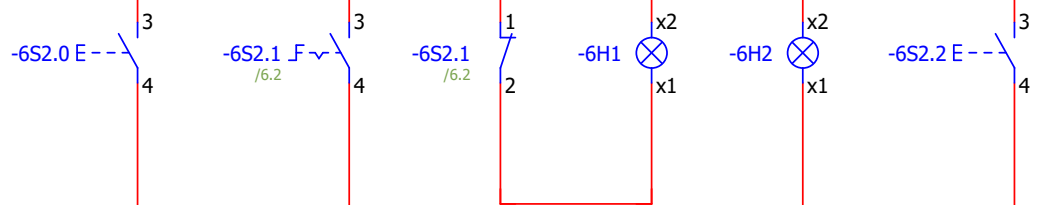

X23 /2.5

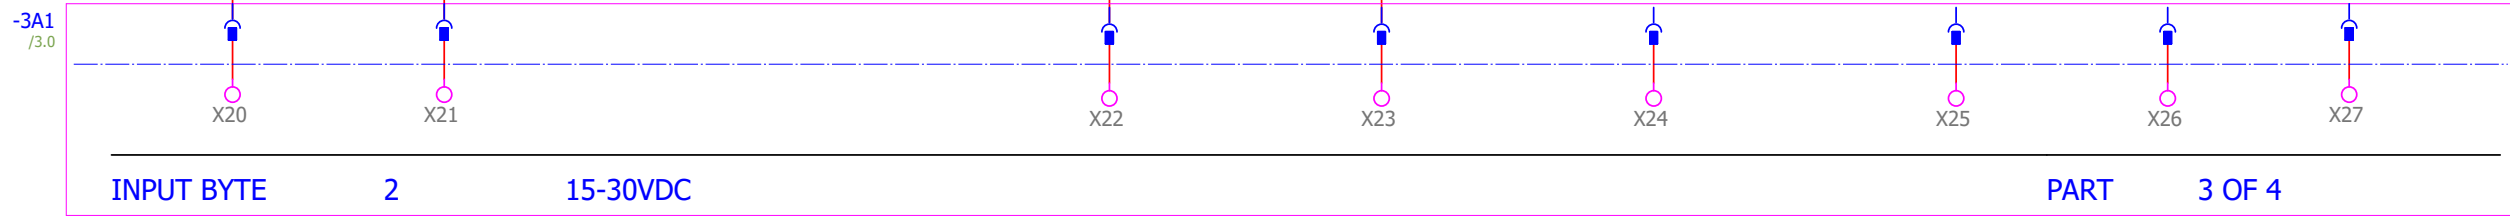

Single step Automatic Lamp Hand Lamp Automatic Initial position Home Control On emergency stop o.k. Reserve Reserve Reserve Reserve



