




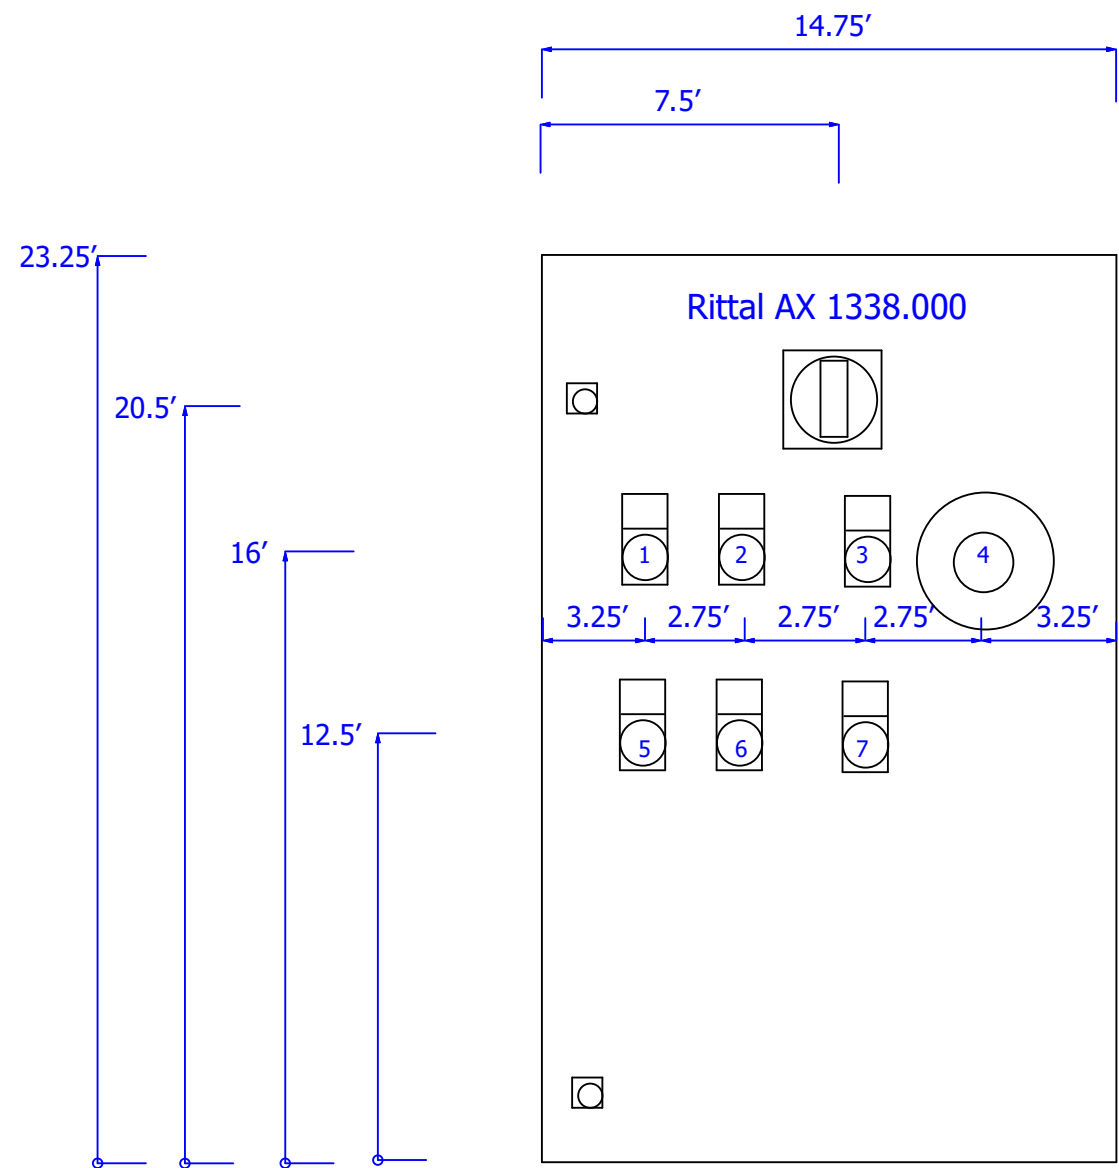



- 1= Control Off
- 2= Control On
- 3= Motor fault
- 4= Emergency stop
- 5= Motors Off
- 6= Pin Wheel On
- 7= Rollers On

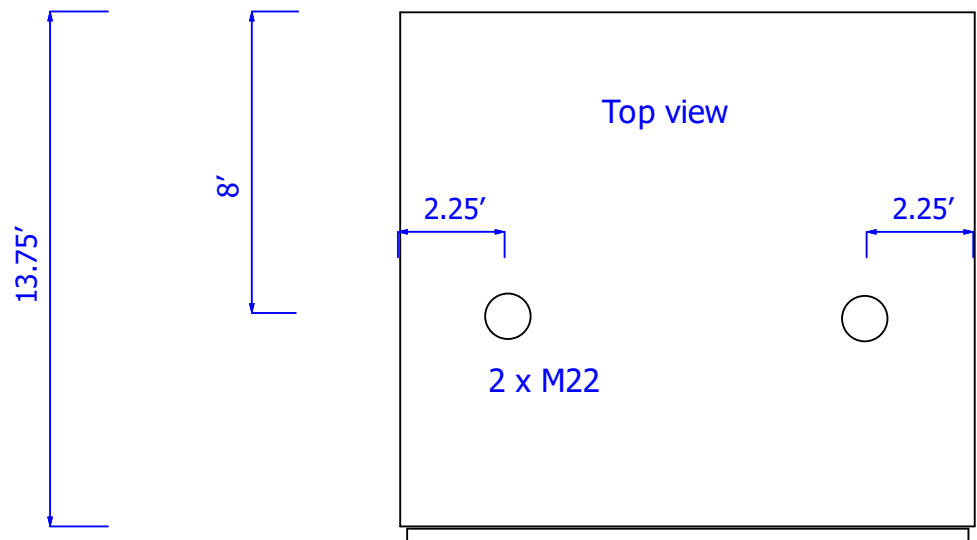


Door page

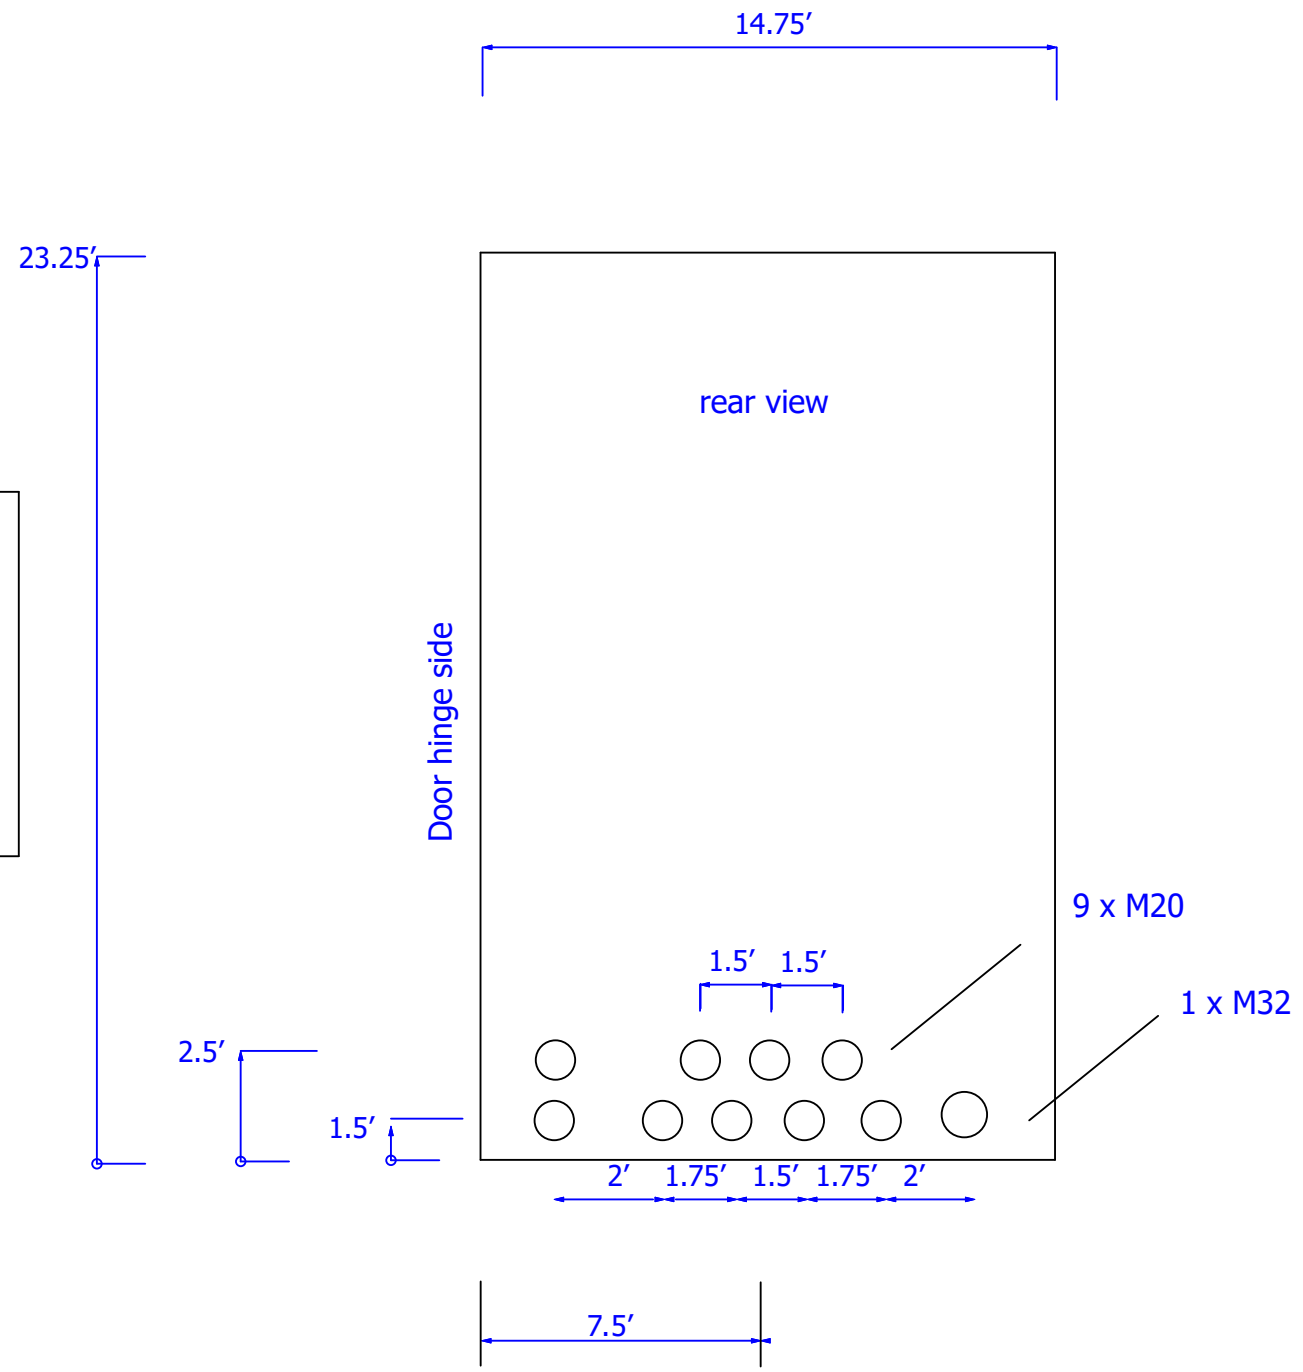

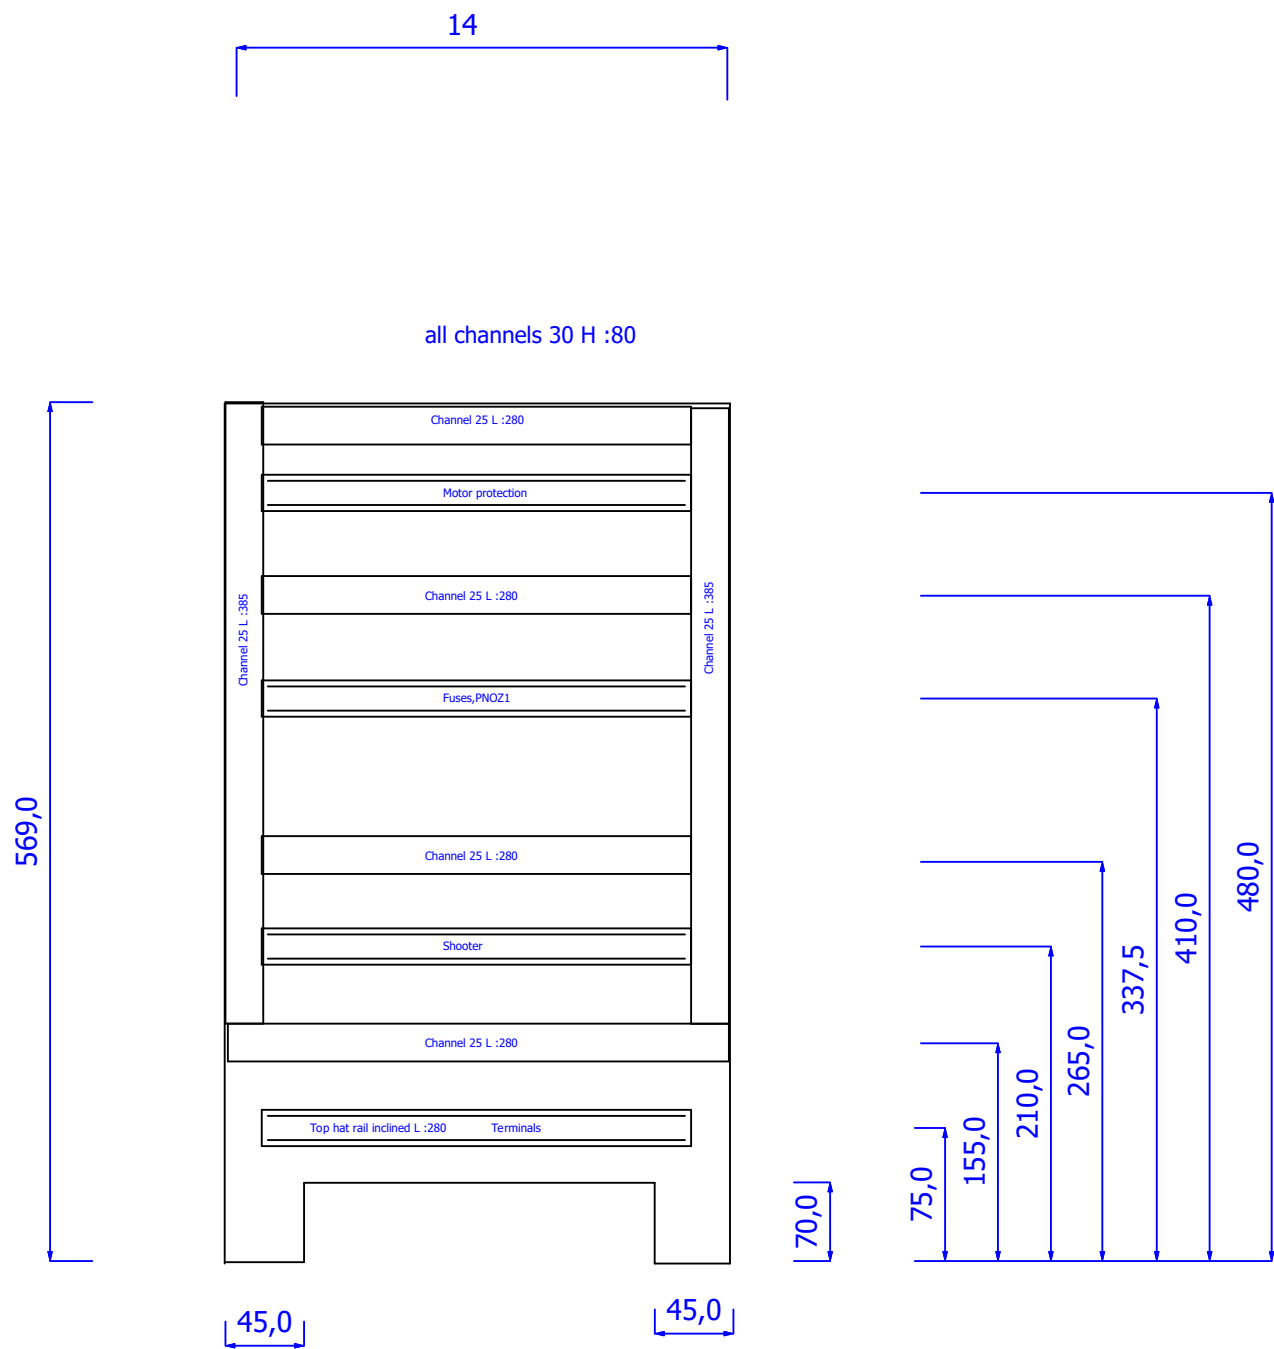

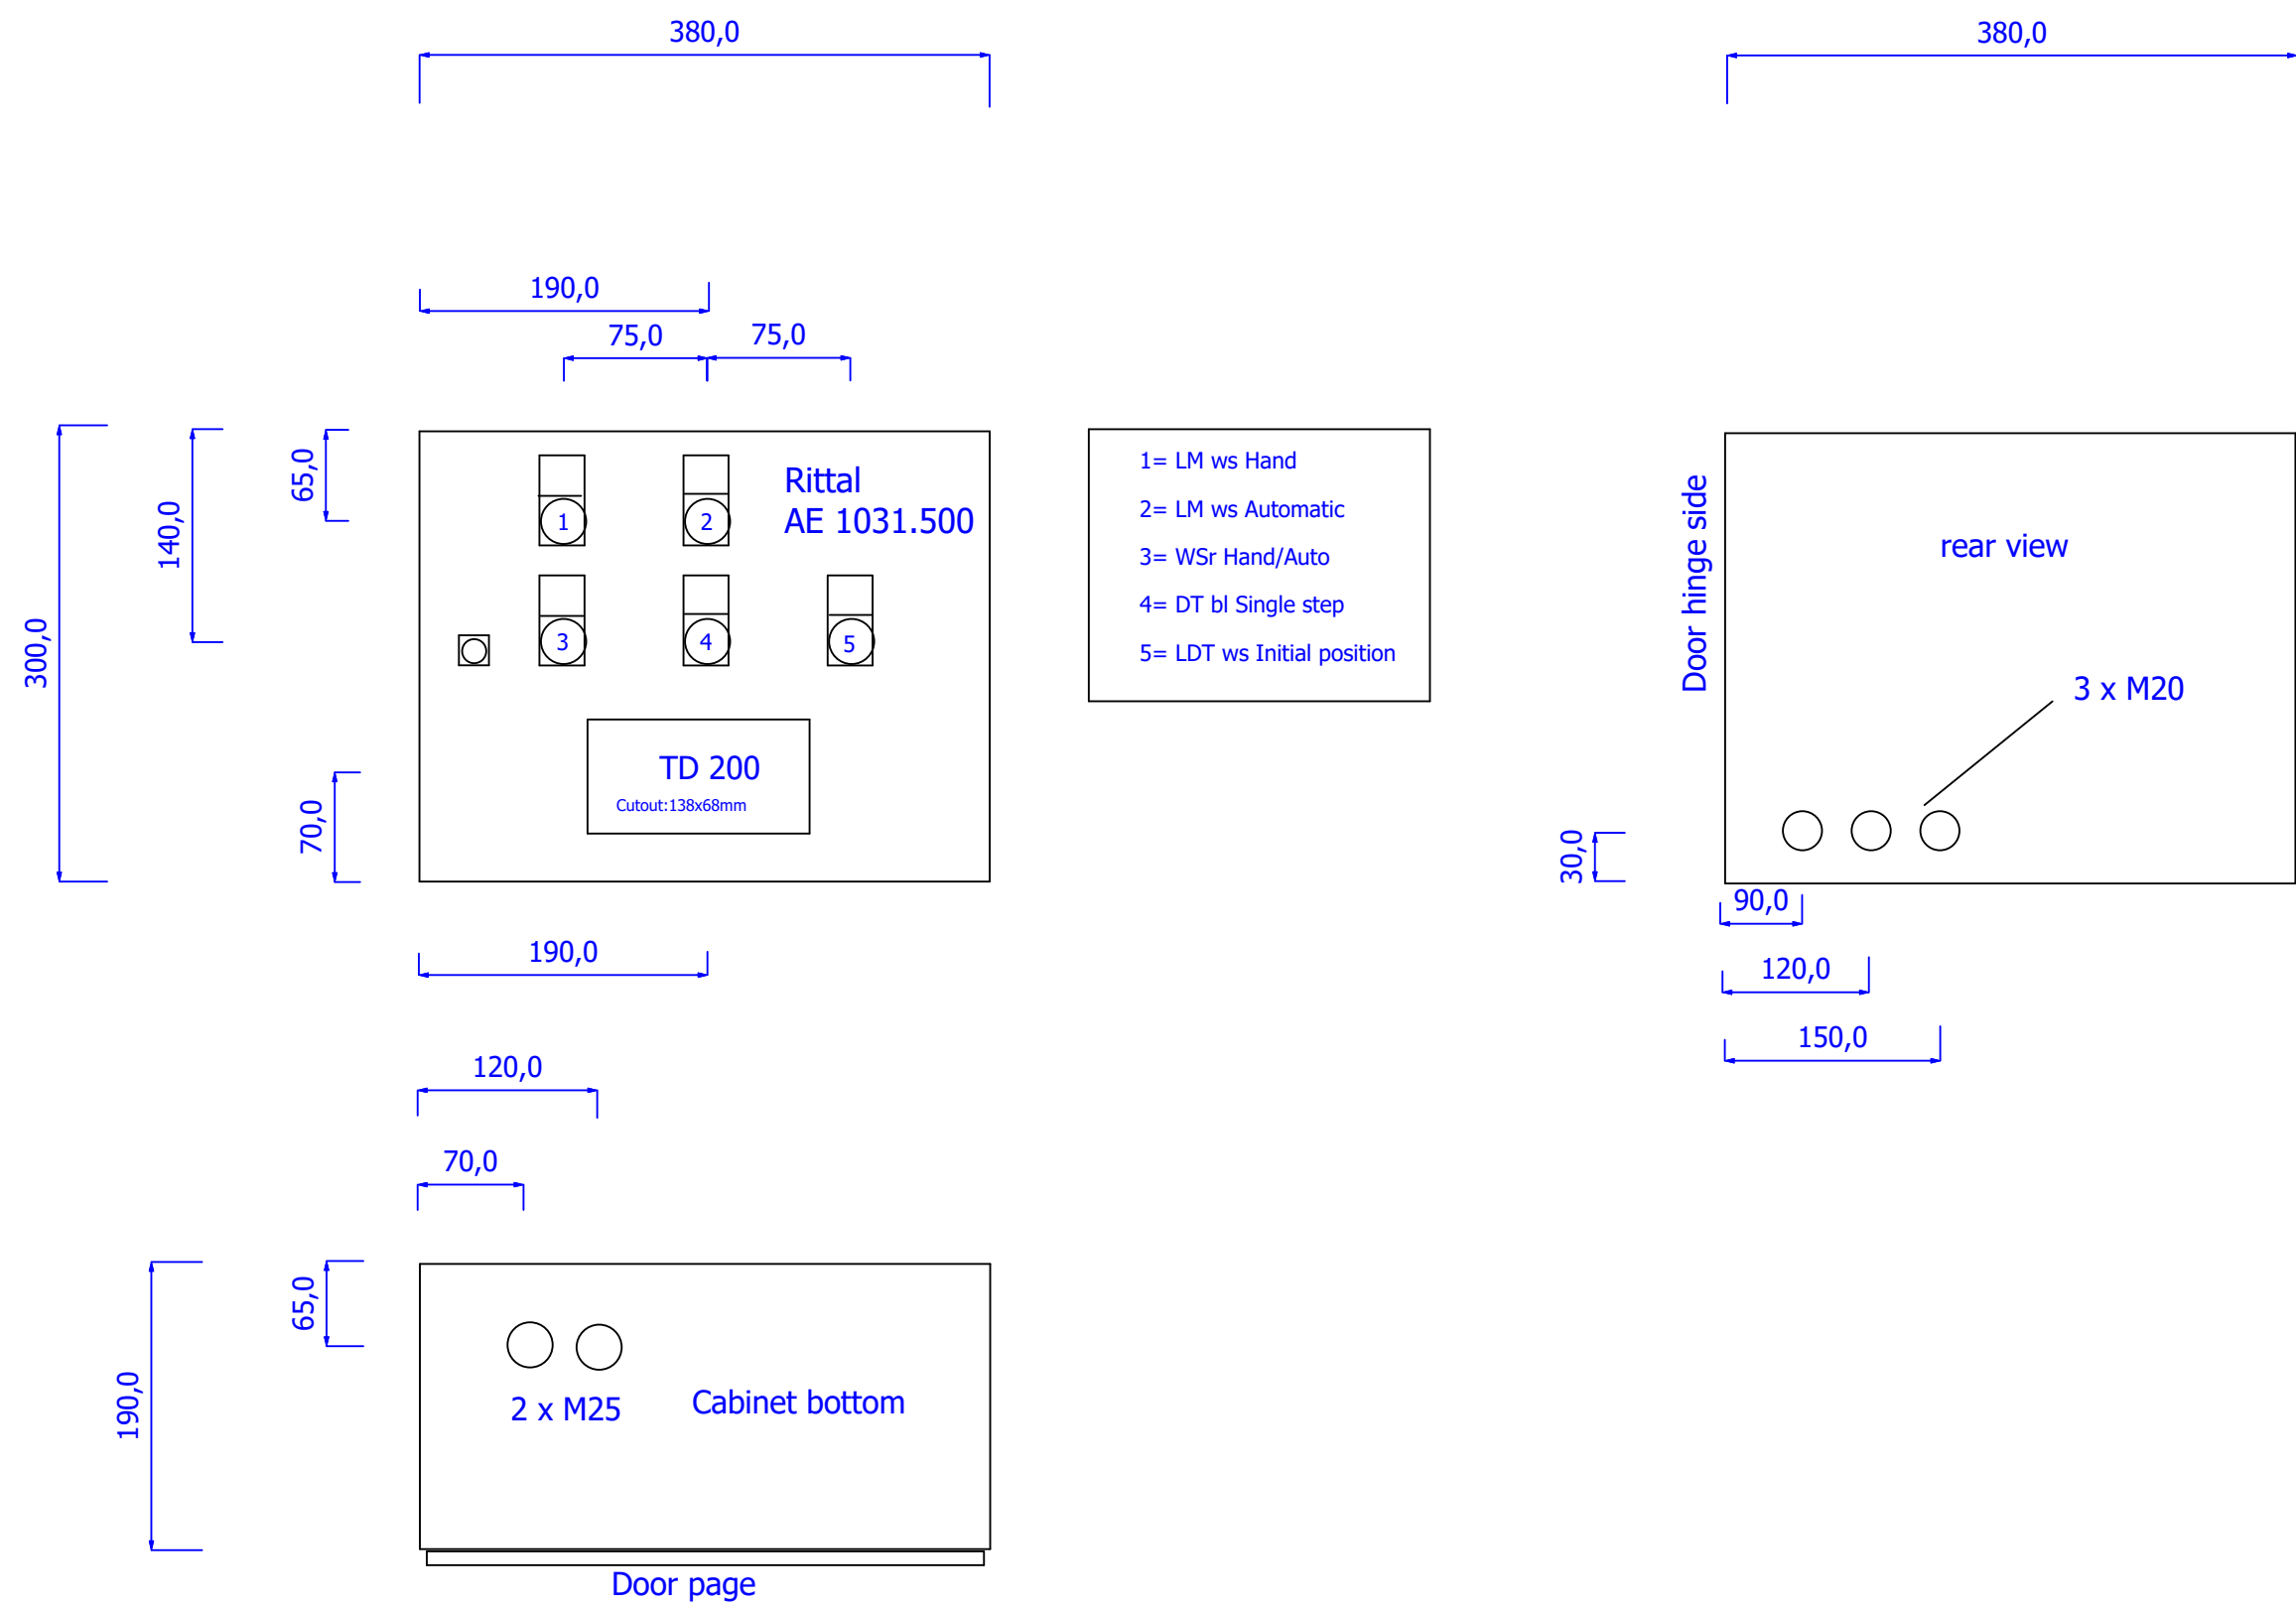

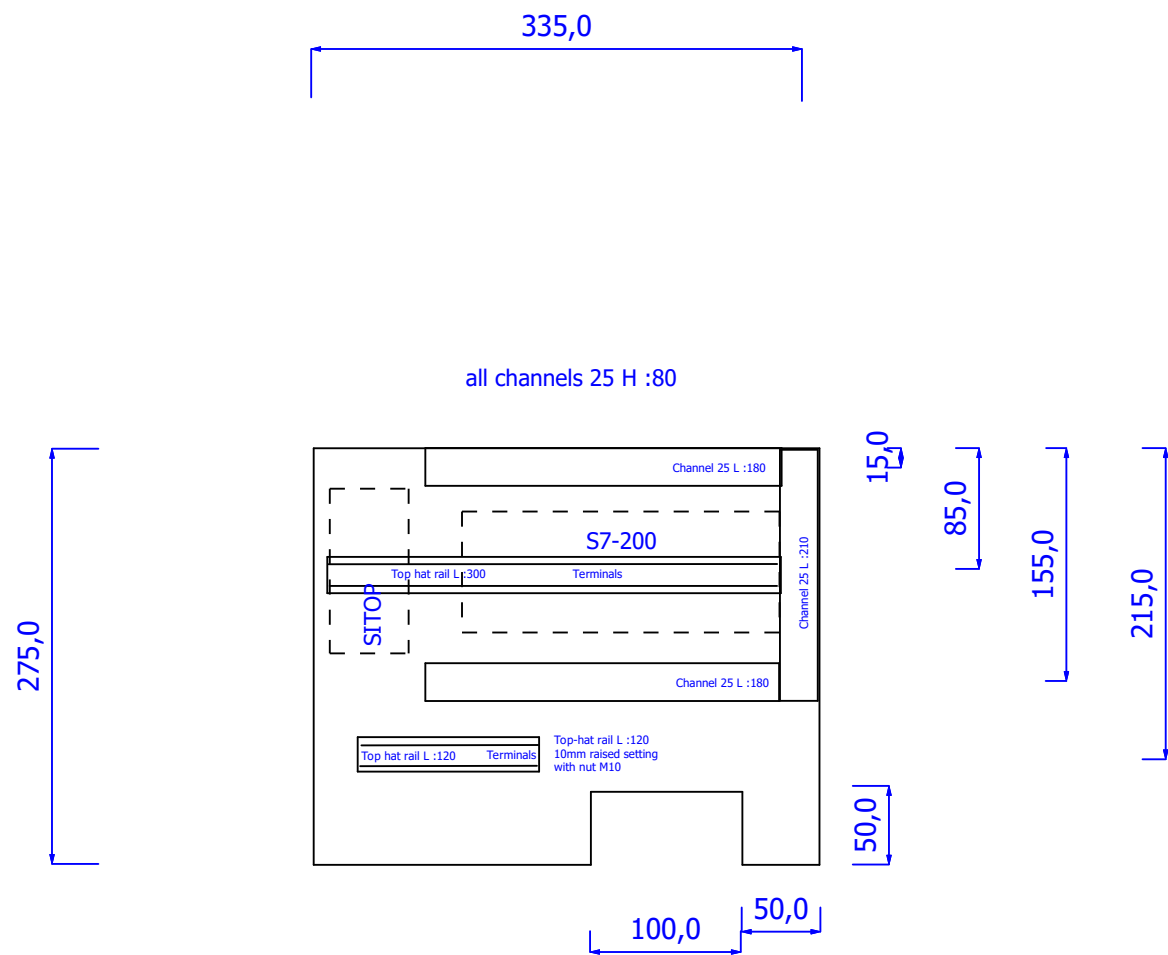

	Mfg. Part No. Vendor Part No.	Item Desc.	Manufacturer	Vendor	
=+S-S1_G =+S/40.4	AX 1338.000 RIT-1338000	AX compact cabinet (WxHxD) 380x600x350mm, 1-door, with mounting plate, with 1 gland plate, painted	Rittal	GCG	
=+S-S1_K =+S/42.4	AX 1031.500 RIT-1031500	AX compact cabinet (WxHxD) 380x300x210mm, 1-door, with mounting plate, with 1 gland plate, painted	Rittal		
=+S1-3A1 =+S1/3.0	FX5UC-32MR/DS-TS FX5UC-32MR/DS-TS	MELSEC IQ-F FX5UC Series PLC, 32 I/O, 16DI 24VDC Sink, 16DO Rly. NO contacts 2A	Mitsubishi		
=+S1-3A1 =+S1/5.0	FX5-C32ET/DSS-TS FX5-C32ET/DSS-TS	MELSEC F (FX) Series, 32 I/O, 16DI 24Vdc, 16DO 24Vdc Source	Mitsubishi		
=+S1-3A2 =+S1/6.0	GS2107-WTBD-N GS2107-WTBD-N	GS21 GOT Simple Series HMI, 7” screen 800x480 pixels	Mitsubishi		
=+S1-1F1 =+S1/1.0	CP30BA3P2M10A CP30BA3P2M10A	Miniature circuit breaker (WS-V series) - curve M - three-pole - 10 A/250 V AC	Mitsubishi		
=+S1-1F3 =+S1/1.8	CP30BA1P1M7A CP30BA1P1M7A	Miniature circuit breaker (WS-V series) - curve M - single pole - 7 A/250 V AC	Mitsubishi		
=+S1-2F2 =+S1/2.1	CP30BA1P1M2A CP30BA1P1M2A	Miniature circuit breaker (WS-V series) - curve M - single pole - 2 A/65 V DC	Mitsubishi		
=+S1-2F4 =+S1/2.5	CP30BA1P1M2A CP30BA1P1M2A	Miniature circuit breaker (WS-V series) - curve M - single pole - 2 A/65 V DC	Mitsubishi		
=+S1-2F5 =+S1/2.6	CP30BA1P1M2A CP30BA1P1M2A	Miniature circuit breaker (WS-V series) - curve M - single pole - 2 A/65 V DC	Mitsubishi		
=+S1-2F6 =+S1/2.6	CP30BA1P1M2A CP30BA1P1M2A	Miniature circuit breaker (WS-V series) - curve M - single pole - 2 A/65 V DC	Mitsubishi		
=+S1-2H1 =+S1/2.4					
=+S1-4H0.1 =+S1/4.3	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=+S1-4H0.1 =+S1/4.3	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=+S1-4H0.1 =+S1/4.3	M22-L-R MOE.216772	Indicator lamp, red, flat			
=+S1-4H0.1 =+S1/4.3	M22-LED-R MOE.216558	LED element, red, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power 0,26W			
=+S1-6H1 =+S1/6.3	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=+S1-6H1 =+S1/6.3	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=+S1-6H1 =+S1/6.3	M22-L-W MOE.216771	Indicator lamp, white, flat			


	Mfg. Part No. Vendor Part No.	Item Desc.	Manufacturer	Vendor	
=+S1-6H1 =+S1/6.3	M22-LED-W MOE.216557	LED element, white, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=+S1-6H2 =+S1/6.3	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=+S1-6H2 =+S1/6.3	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=+S1-6H2 =+S1/6.3	M22-L-W MOE.216771	Indicator lamp, white, flat			
=+S1-6H2 =+S1/6.3	M22-LED-W MOE.216557	LED element, white, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=+S1-7H1 =+S1/7.2					
=+S1-7H1.1 =+S1/7.3					
=+S1-7H1.2 =+S1/7.3					
=+S1-7H3/4 =+S1/7.5					
=+S1-7H5 =+S1/7.6	M22-LED-W MOE.216557	LED element, white, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=+S1-8H1 =+S1/8.4					
=+S1-1K1 =+S1/7.1	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K1 =+S1/7.1	3RH2911-1HA12 SIE.3RH2911-1HA12	AUXILIARY SWITCH BLOCK, 22E,1S+2OE, DIN EN 50012, SCREW TERMINALS, FOR MOTOR	Siemens		
=+S1-1K1 =+S1/7.1	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		
=+S1-1K2 =+S1/7.2	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K2 =+S1/7.2	3RH2911-1HA12 SIE.3RH2911-1HA12	AUXILIARY SWITCH BLOCK, 22E,1S+2OE, DIN EN 50012, SCREW TERMINALS, FOR MOTOR	Siemens		
=+S1-1K2 =+S1/7.2	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		
=+S1-1K3 =+S1/7.4	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K3 =+S1/7.4	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		



	Mfg. Part No. Vendor Part No.	Item Desc.	Manufacturer	Vendor	
=+S1-1K4 =+S1/7.4	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K4 =+S1/7.4	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		
=+S1-1K5 =+S1/7.5	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K5 =+S1/7.5	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		
=+S1-1K6 =+S1/7.6	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K6 =+S1/7.6	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		
=+S1-2K1 =+S1/2.4	PSR-SCP- PHO.2963763	2-channel safety relay for emergency stop and safety door circuits, 3 NO contact, 1 NC contact, undelayed,	PHOENIX CONTACT GmbH & Co. KG		
=+S1-1Q1 =+S1/1.0	T0-2-1/EA/SVB MOE.038873	Main switch as emergency stop device, for front mounting, 20A, 3-pole	Eaton		
=+S1-1Q2 =+S1/1.2	MMP-T32 4.0A MMP-T32 4.0A	CIRCUIT BREAKER FOR MOTOR PROTECTION, EXCL. 2,5...4A, N-EXT. 3 Pole, SCREW	Mitsubishi		
=+S1-1Q2 =+S1/1.2	xxx xxx	AUXILIARY SWITCH CROSSWISE, 1S+10E, FOR CIRCUIT BREAKER, BGR. S00...S3	Mitsubishi		
=+S1-1Q3 =+S1/1.3	MMP-T32 4.0A MMP-T32 4.0A	CIRCUIT BREAKER FOR MOTOR PROTECTION, EXCL. 2,5...4A, N-EXT. 3 Pole, SCREW	Mitsubishi		
=+S1-1Q3 =+S1/1.3	xxx xxx	AUXILIARY SWITCH CROSSWISE, 1S+10E, FOR CIRCUIT BREAKER, BGR. S00...S3	Mitsubishi		
=+S1-1Q4 =+S1/1.5	MMP-T32 4.0A MMP-T32 4.0A	CIRCUIT BREAKER FOR MOTOR PROTECTION, EXCL. 2,5...4A, N-EXT. 3 Pole, SCREW	Mitsubishi		
=+S1-1Q4 =+S1/1.5	xxx xxx	AUXILIARY SWITCH CROSSWISE, 1S+10E, FOR CIRCUIT BREAKER, BGR. S00...S3	Mitsubishi		
=+S1-1Q5 =+S1/1.7					
=+S1-1Q5 =+S1/1.7					
=+S1-2S1 =+S1/2.4	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=+S1-2S1 =+S1/2.4	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=+S1-2S1 =+S1/2.4	M22-D-R MOE.216594	Pushbutton, red, flat, tactile, front ring titanium			

=WAMA 02 09+S1-2S1 =WAMA 02 09+S1/2.4	M22-K01 MOE.216378	Contact element, 1 NC contact, front mounting, screw terminals			
=WAMA 02 09+S1-2S2 =WAMA 02 09+S1/2.4	M22-PV MOE.216876	Emergency stop button, unlit, reset by pulling			
=WAMA 02 09+S1-2S2 =WAMA 02 09+S1/2.4	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-2S2 =WAMA 02 09+S1/2.4	M22-K01 MOE.216378	Contact element, 1 NC contact, front mounting, screw terminals			
=WAMA 02 09+S1-2S2 =WAMA 02 09+S1/2.4	M22-XBK1 MOE.216483	Emergency stop sign, round (d) 60mm, in four languages (de, en, fr, it), plastic, golden yellow			
=WAMA 02 09+S1-2S4 =WAMA 02 09+S1/2.8	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-2S4 =WAMA 02 09+S1/2.8	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-2S4 =WAMA 02 09+S1/2.8	M22-DL-G MOE.216927	illuminated pushbutton, green, flat, tactile, front ring titanium			
=WAMA 02 09+S1-2S4 =WAMA 02 09+S1/2.8	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-2S4 =WAMA 02 09+S1/2.8	M22-LED-G MOE.216559	LED element, green, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=WAMA 02 09+S1-4S0.0 =WAMA 02 09+S1/4.1	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-4S0.0 =WAMA 02 09+S1/4.1	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-4S0.0 =WAMA 02 09+S1/4.1	M22-D-R MOE.216594	Pushbutton, red, flat, tactile, front ring titanium			
=WAMA 02 09+S1-4S0.0 =WAMA 02 09+S1/4.1	M22-K01 MOE.216378	Contact element, 1 NC contact, front mounting, screw terminals			
=WAMA 02 09+S1-4S0.2 =WAMA 02 09+S1/4.4	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-4S0.2 =WAMA 02 09+S1/4.4	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-4S0.2 =WAMA 02 09+S1/4.4	M22-DL-G MOE.216927	illuminated pushbutton, green, flat, tactile, front ring titanium			
=WAMA 02 09+S1-4S0.2 =WAMA 02 09+S1/4.4	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-4S0.2 =WAMA 02 09+S1/4.4	M22-LED-G MOE.216559	LED element, green, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			

=WAMA 02 09+S1-4S0.3 =WAMA 02 09+S1/4.4	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-4S0.3 =WAMA 02 09+S1/4.4	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-4S0.3 =WAMA 02 09+S1/4.4	M22-DL-G MOE.216927	illuminated pushbutton, green, flat, tactile, front ring titanium			
=WAMA 02 09+S1-4S0.3 =WAMA 02 09+S1/4.4	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-4S0.3 =WAMA 02 09+S1/4.4	M22-LED-G MOE.216559	LED element, green, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=WAMA 02 09+S1-4S0.4 =WAMA 02 09+S1/4.5	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-4S0.4 =WAMA 02 09+S1/4.5	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-4S0.4 =WAMA 02 09+S1/4.5	M22-DL-G MOE.216927	illuminated pushbutton, green, flat, tactile, front ring titanium			
=WAMA 02 09+S1-4S0.4 =WAMA 02 09+S1/4.5	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-4S0.4 =WAMA 02 09+S1/4.5	M22-LED-G MOE.216559	LED element, green, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=WAMA 02 09+S1-6S2.0 =WAMA 02 09+S1/6.1	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-6S2.0 =WAMA 02 09+S1/6.1	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-6S2.0 =WAMA 02 09+S1/6.1	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-6S2.0 =WAMA 02 09+S1/6.1	M22-D-B MOE.216600	Push button IP67			
=WAMA 02 09+S1-6S2.1 =WAMA 02 09+S1/6.2	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-6S2.1 =WAMA 02 09+S1/6.2	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-6S2.1 =WAMA 02 09+S1/6.2	M22-WRK MOE.216867	Selector button, white, toggle handle, two positions 0-I, detent, 60°, front ring titanium			
=WAMA 02 09+S1-6S2.1 =WAMA 02 09+S1/6.2	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-6S2.1 =WAMA 02 09+S1/6.2	M22-K01 MOE.216378	Contact element, 1 NC contact, front mounting, screw terminals			

=WAMA 02 09+S1-6S2.2 =WAMA 02 09+S1/6.4	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-6S2.2 =WAMA 02 09+S1/6.4	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-6S2.2 =WAMA 02 09+S1/6.4	M22-LED-W MOE.216557	LED element, white, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=WAMA 02 09+S1-6S2.2 =WAMA 02 09+S1/6.4	M22-DL-W MOE.216922	illuminated pushbutton, white, flat, tactile, front ring titanium			
=WAMA 02 09+S1-6S2.2 =WAMA 02 09+S1/6.4	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-6S2.4 =WAMA 02 09+S1/6.5	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-6S2.4 =WAMA 02 09+S1/6.5	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-6S2.4 =WAMA 02 09+S1/6.5	M22-WRK MOE.216867	Selector button, white, toggle handle, two positions 0-I, detent, 60°, front ring titanium			
=WAMA 02 09+S1-6S2.4 =WAMA 02 09+S1/6.5	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-2V1 =WAMA 02 09+S1/2.1	6EP1333-2BA01 SIE.6EP1333-2BA01	SITOP SMART 120 W REGULATED POWER SUPPLY INPUT: AC 120/230 V OUTPUT: DC 24 V/5 A VERSION	Siemens		
=WAMA 02 09+S1-0X1 =WAMA 02 09+S1/1.0	CT516/6H ELK.CT516/6H	Cekon connector, 5-pin (3P+N+PE), voltage 400VAC, current 16A			

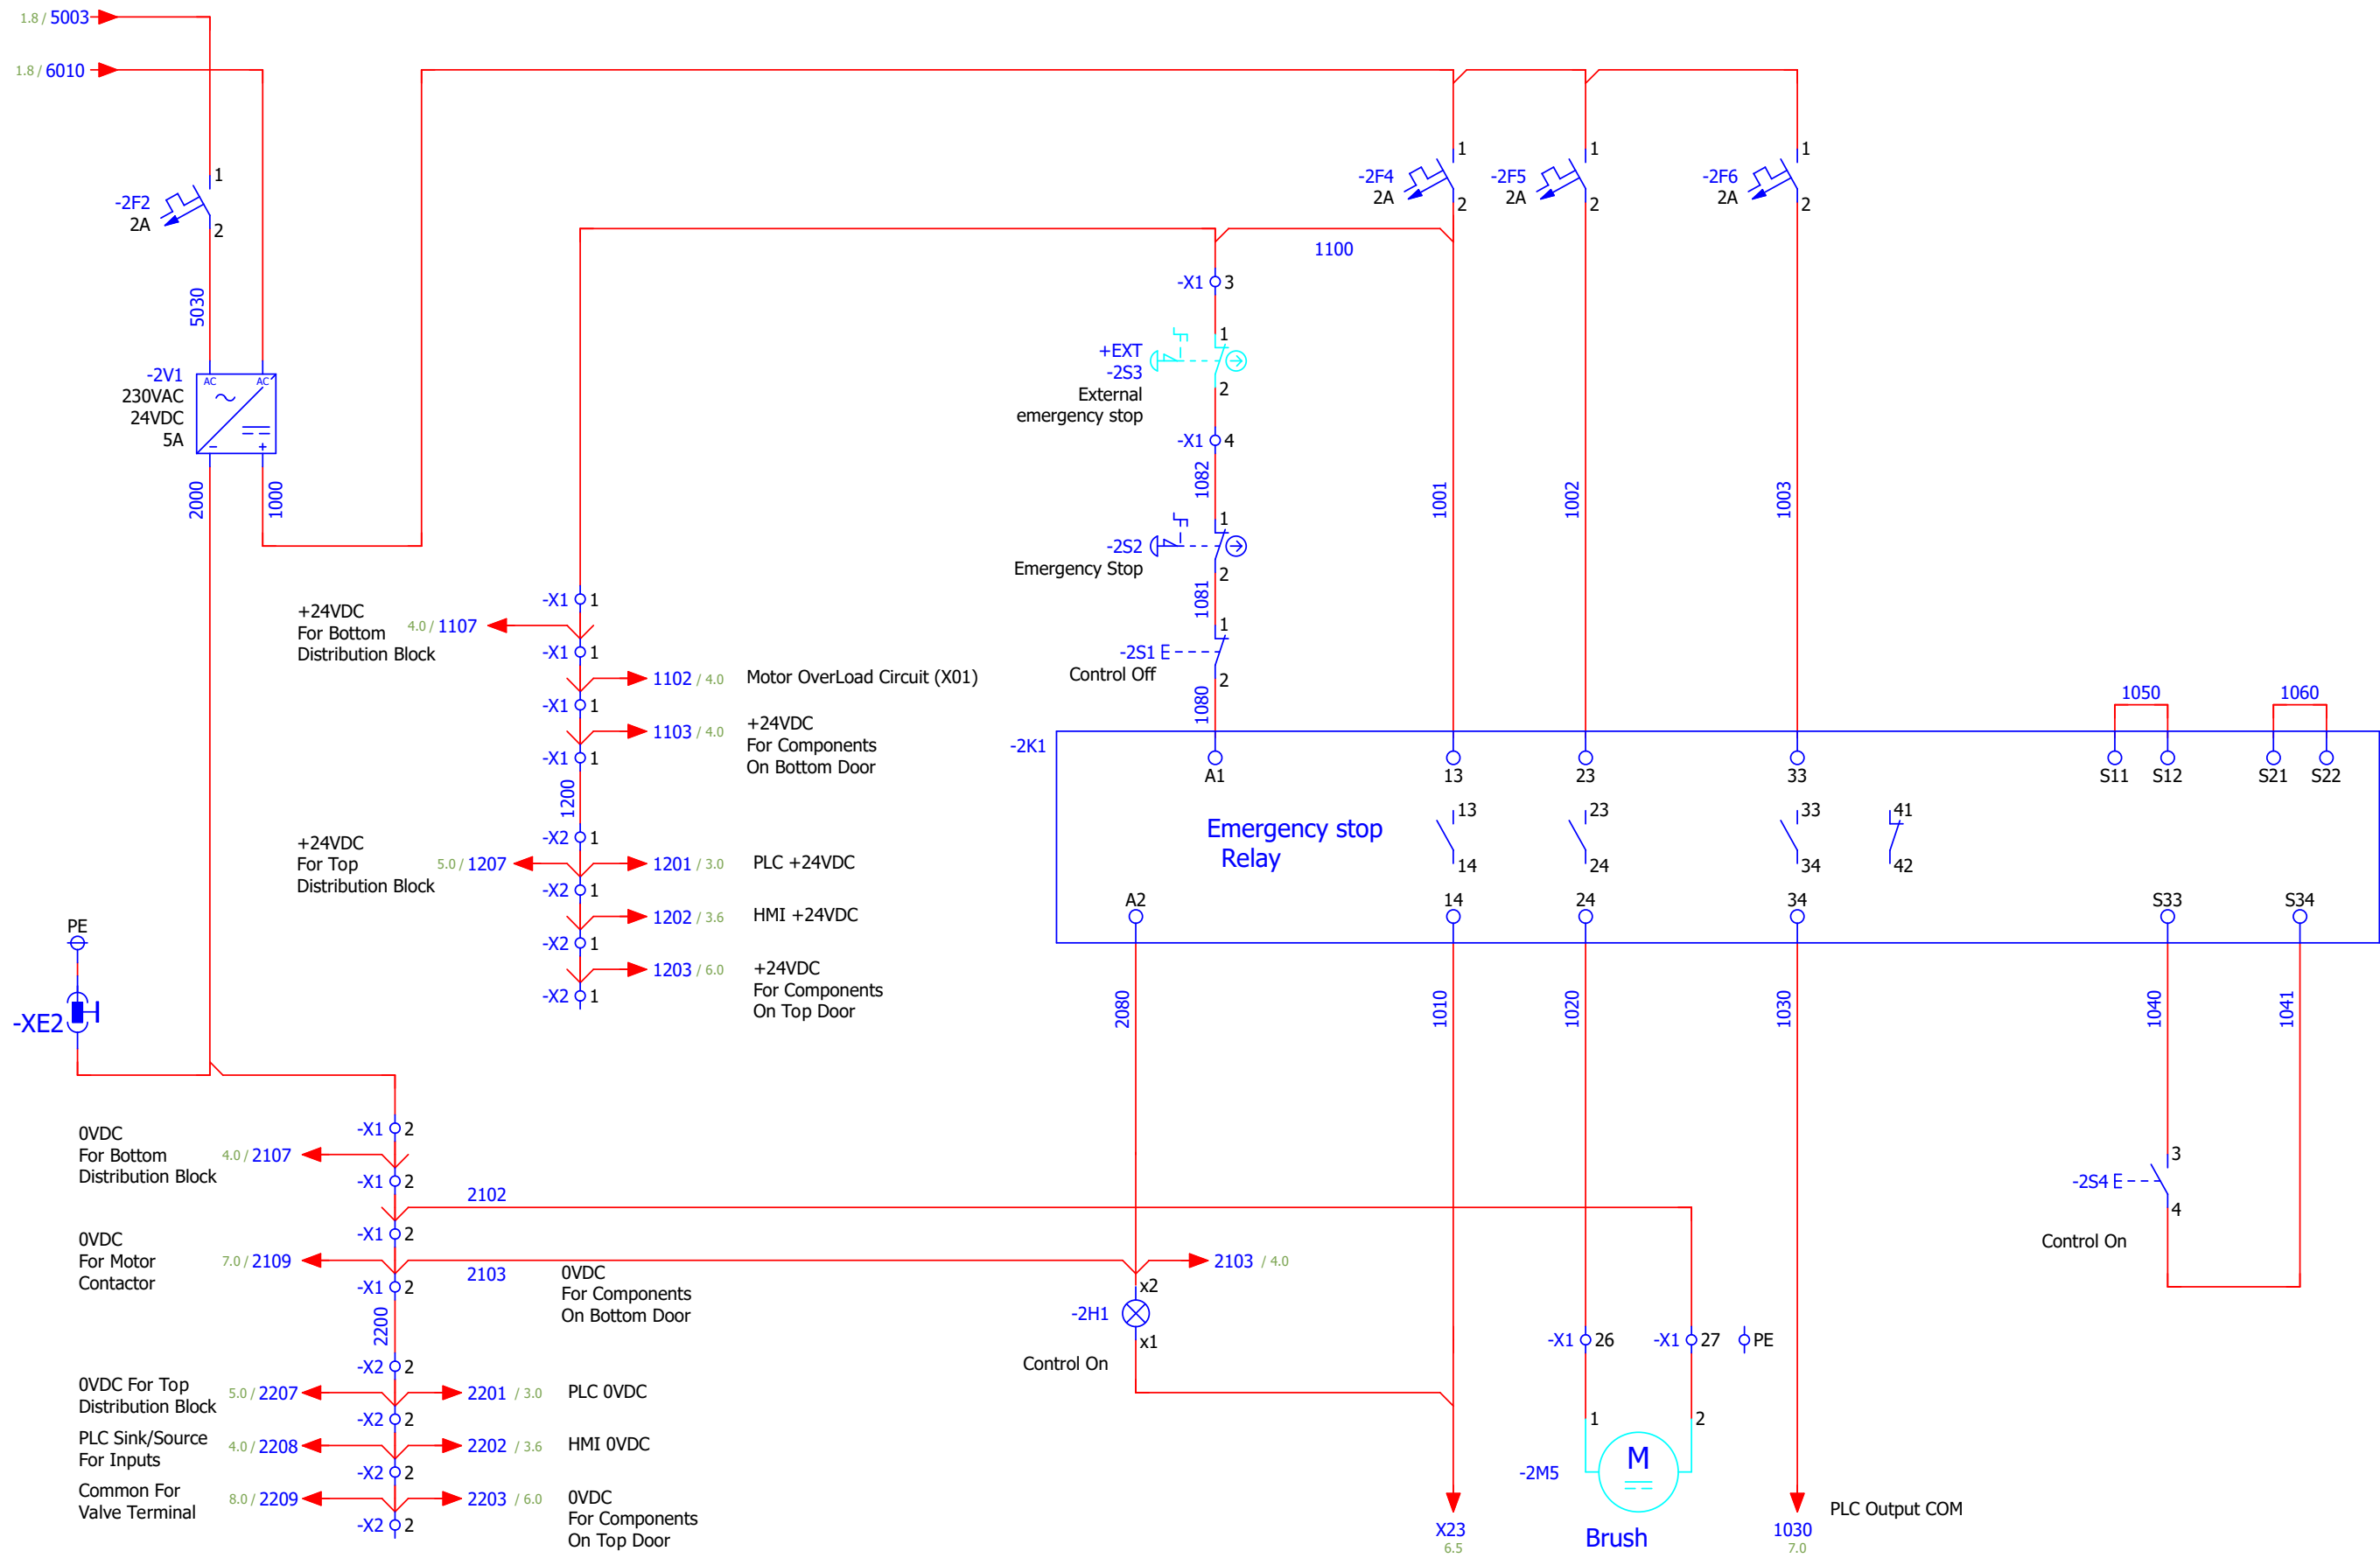

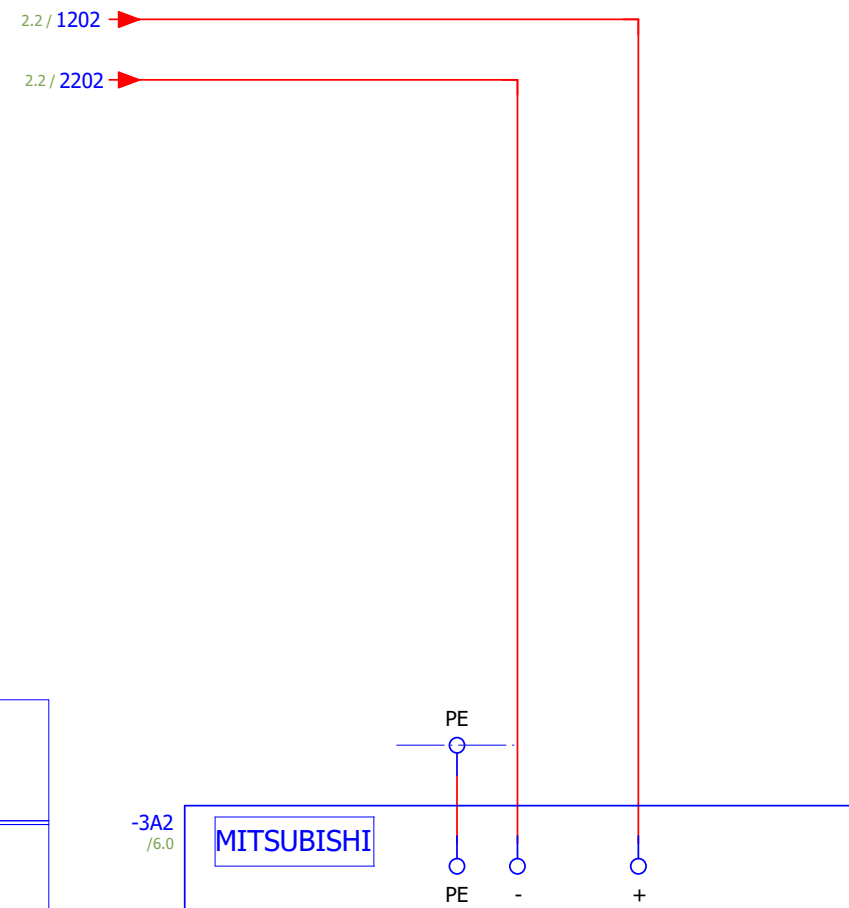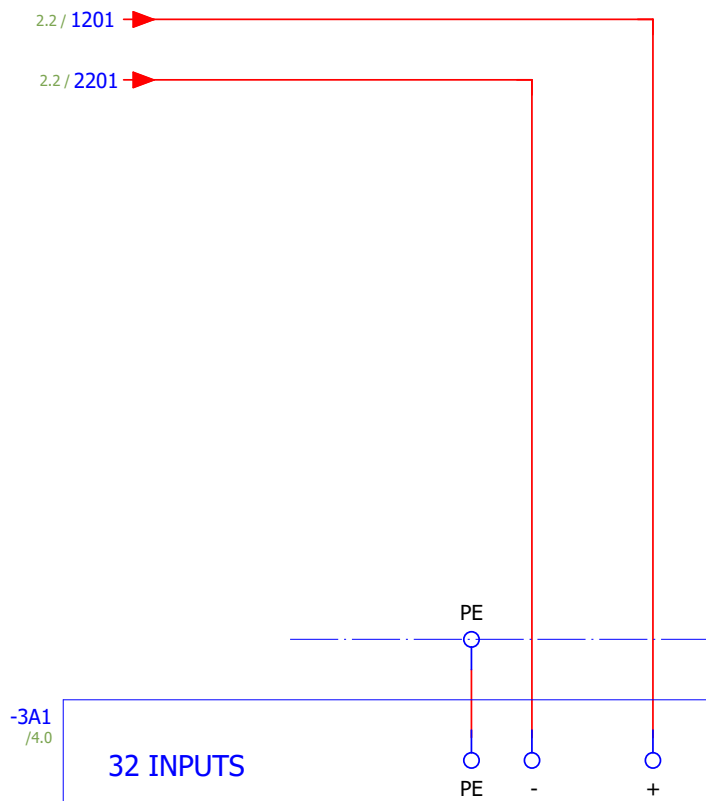

MITSUBISHI

IP : 192.168.3.250


FX5UC-32MR/DS-TS

32 OUTPUTS


MITSUBISHI

IP : 192.168.3.18



GS2107-WTBD-N

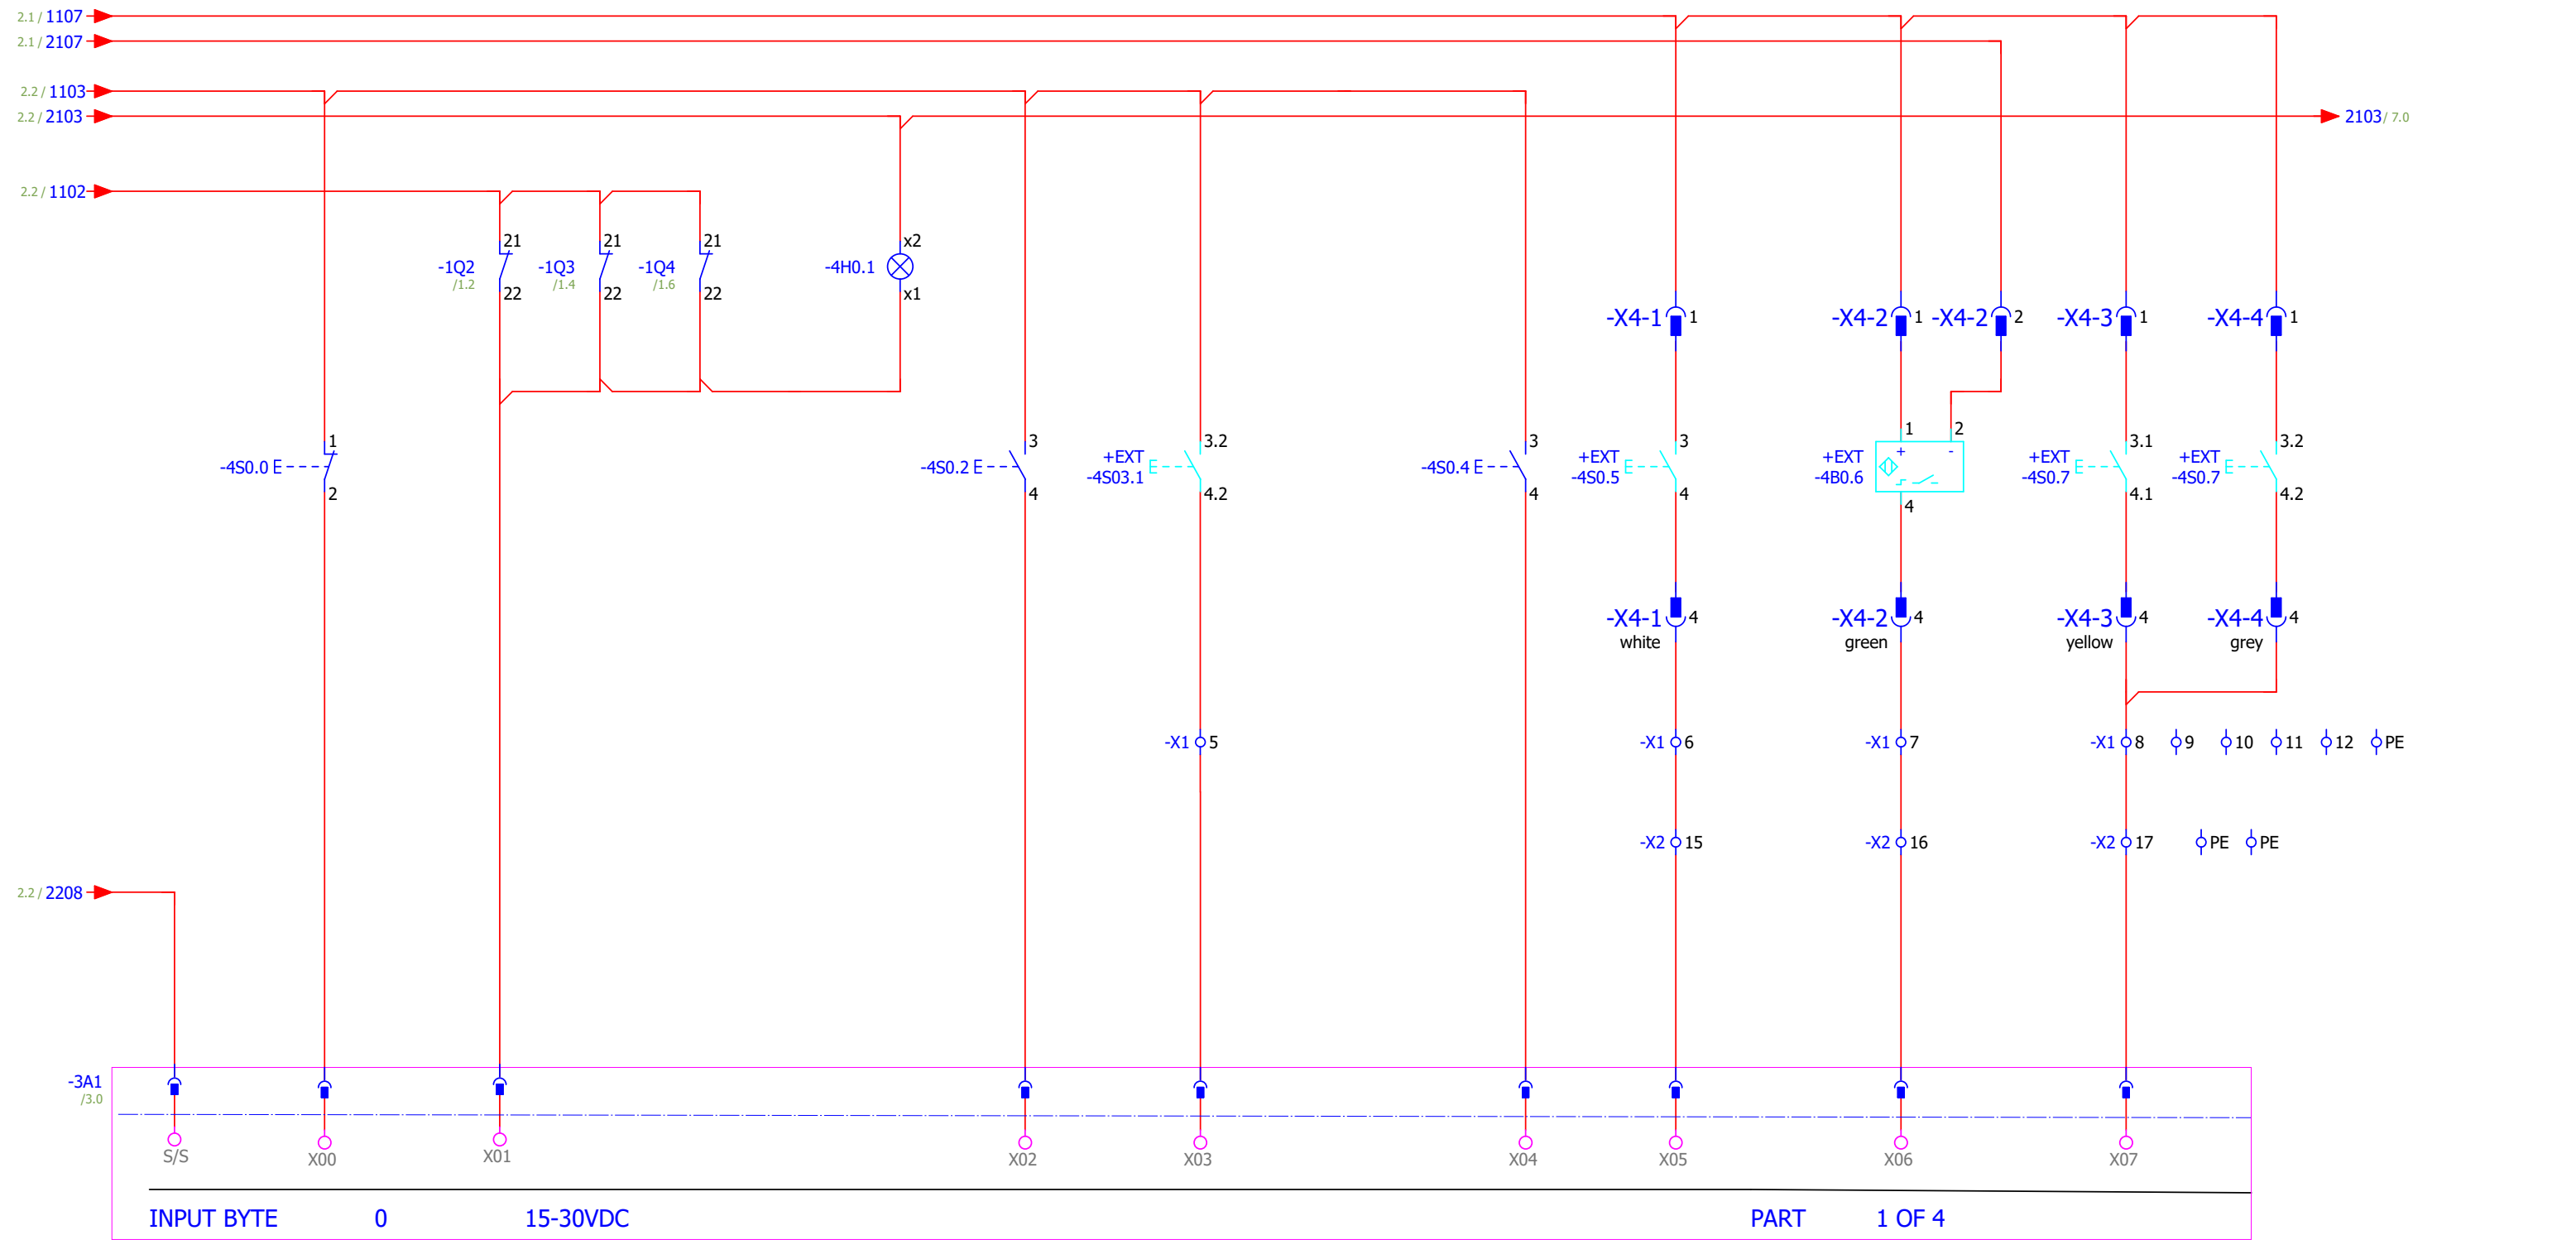

Rollers and Pin Wheel Off	Motor protection fault	Pin wheel In clockwise rotation	Pin wheel In anti-clockwise rotation	Rollers On	Parts Counter	Magazine sleeve bunker full	pole sleeves not ejected
---------------------------	------------------------	---------------------------------	--------------------------------------	------------	---------------	-----------------------------	--------------------------

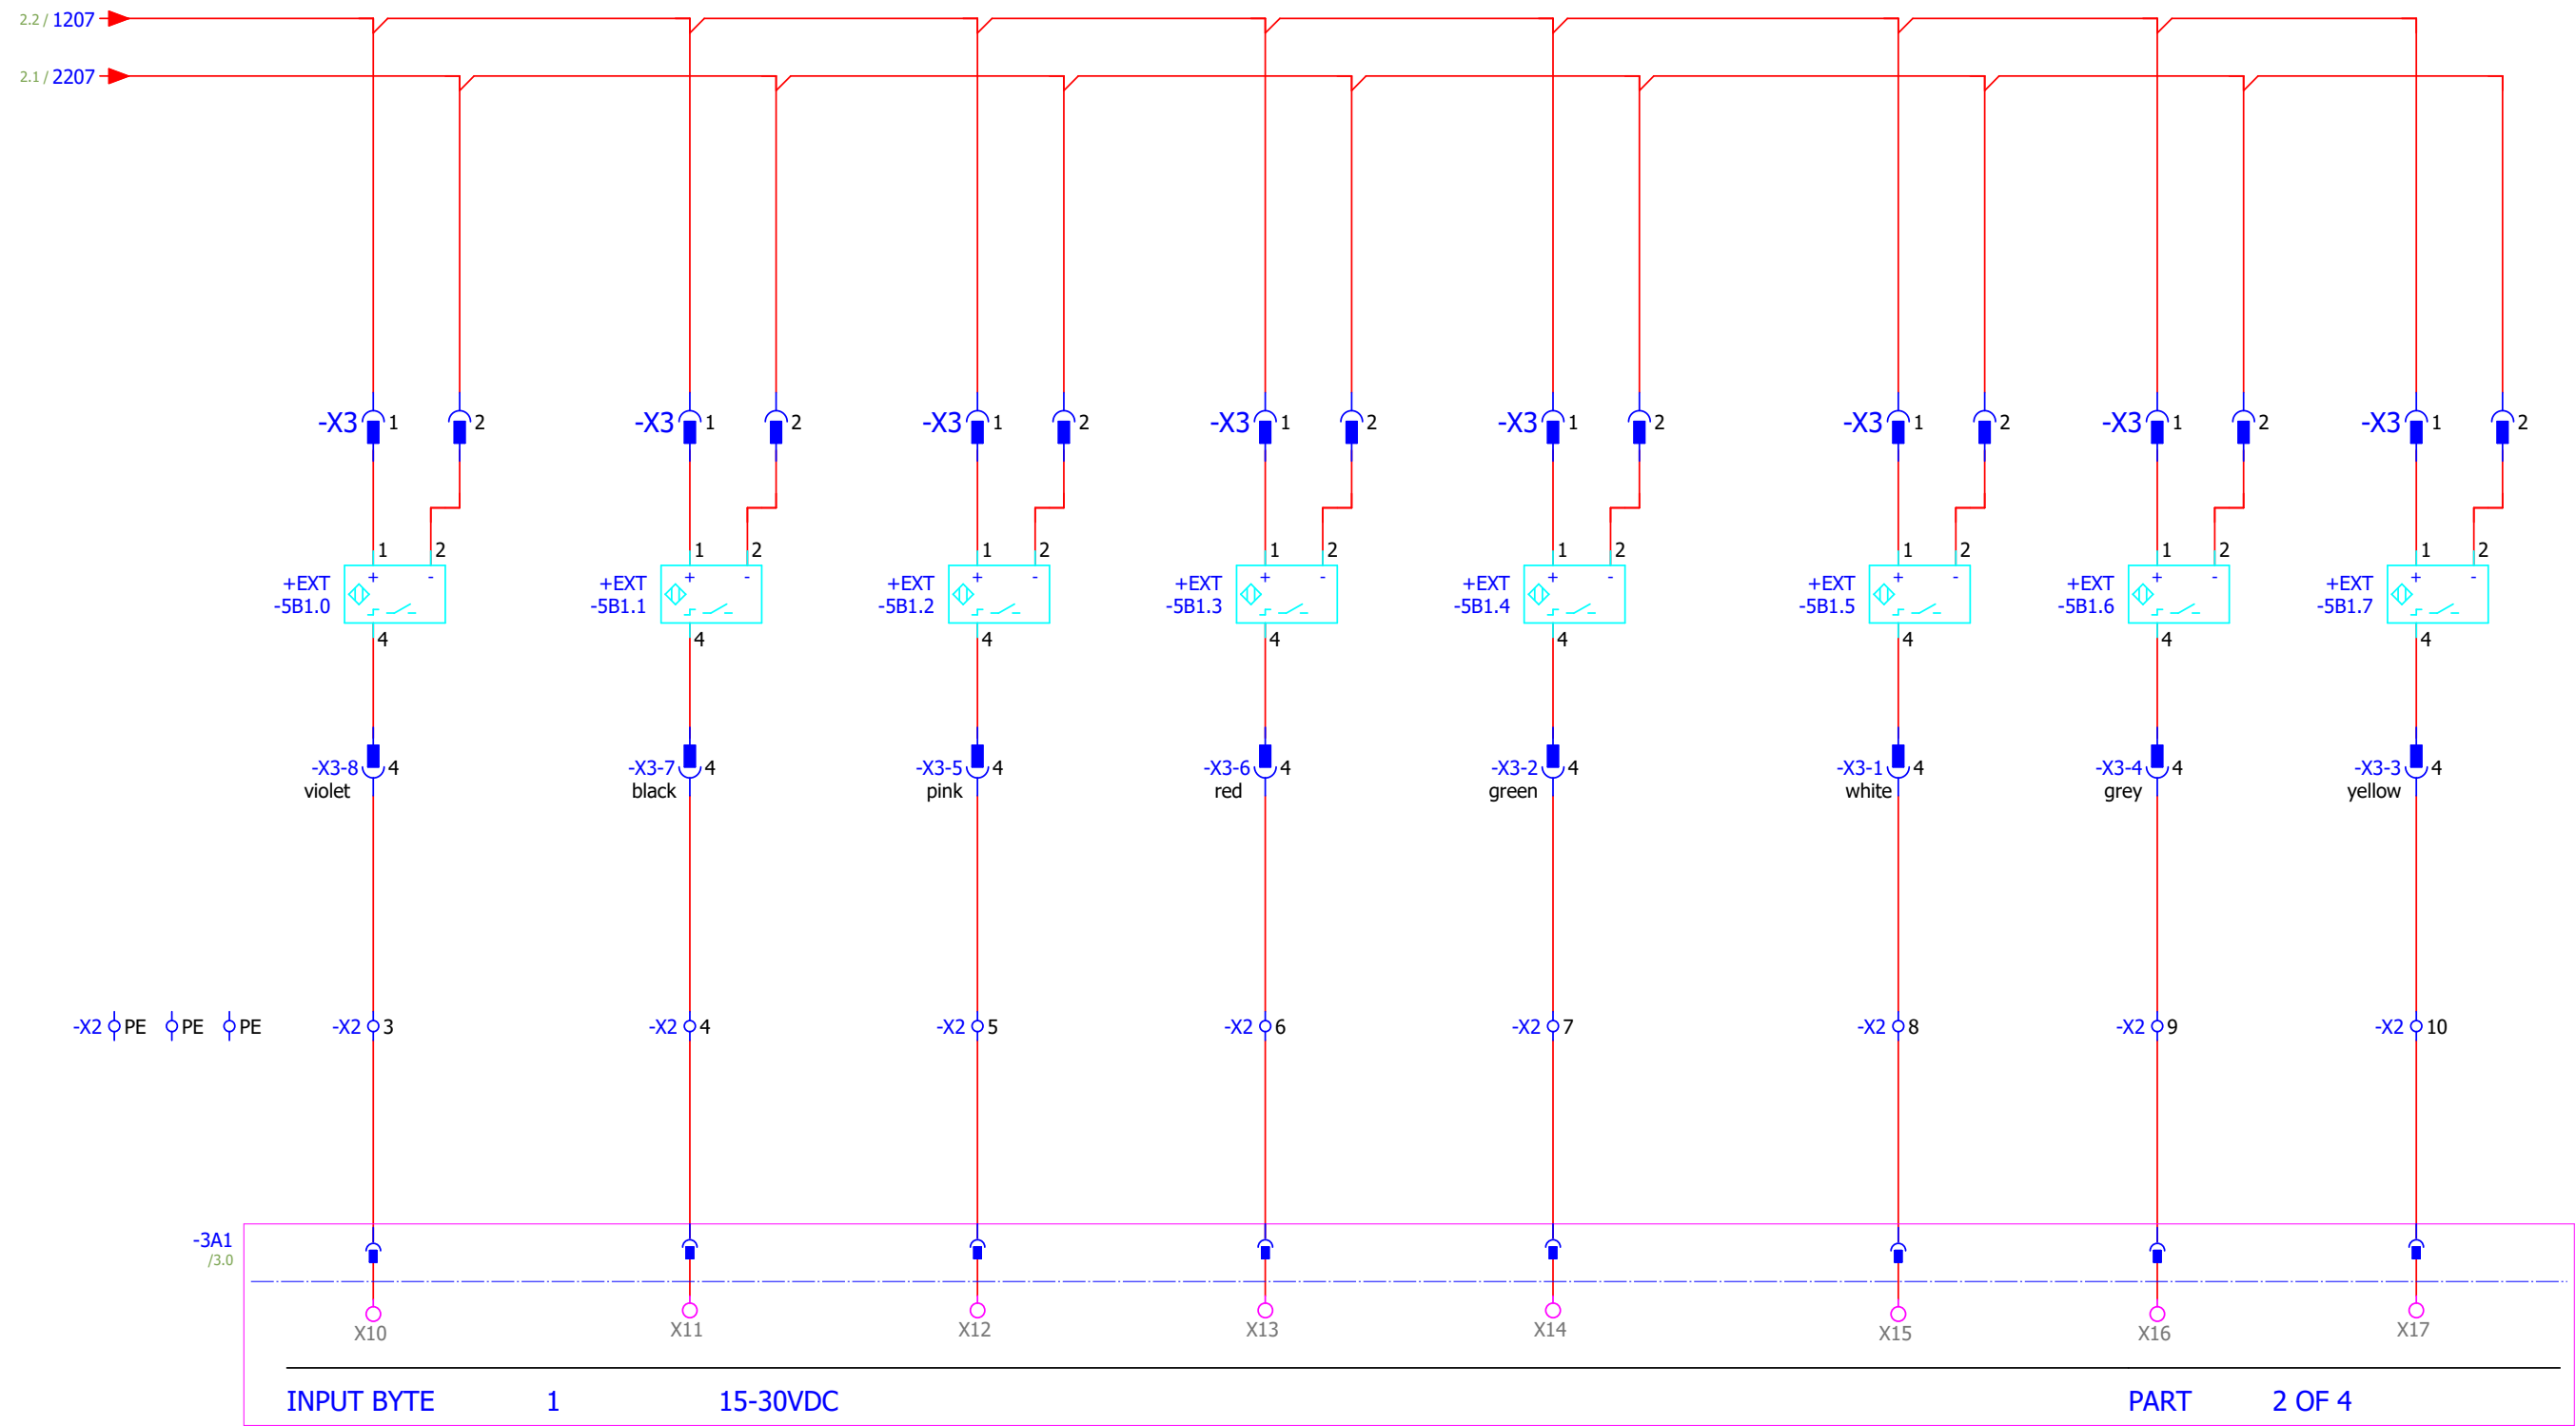

pole sleeves available	Start sequence of the firing unit	Verticle Cylinder Extended	Vertical Cylinder Retracted	Horizontal Cylinder Extended	Horizontal Cylinder Retracted	Pusher Cylinder Retracted	Pusher Cylinder Extended
------------------------	-----------------------------------	----------------------------	-----------------------------	------------------------------	-------------------------------	---------------------------	--------------------------

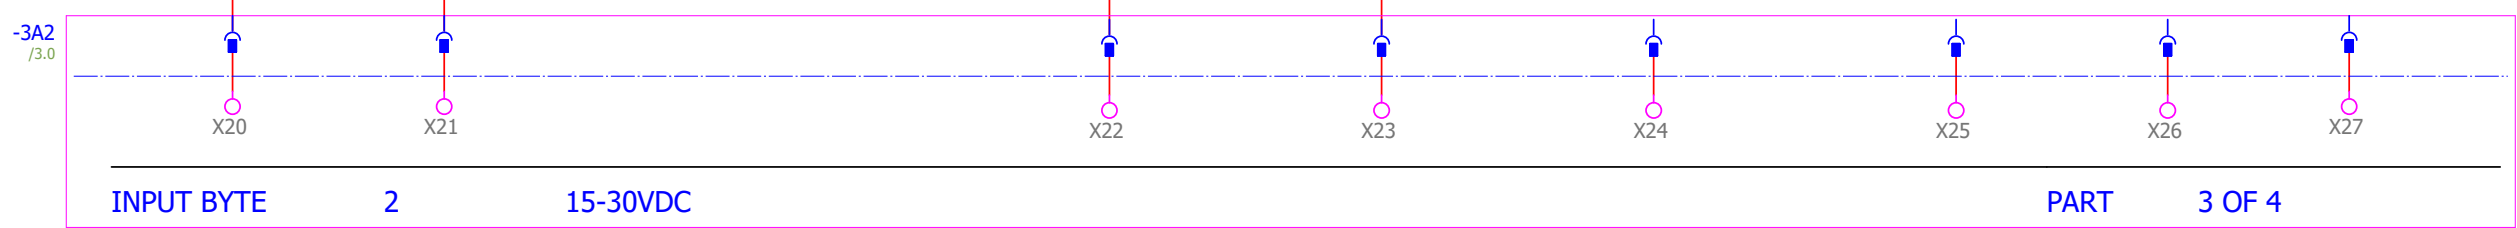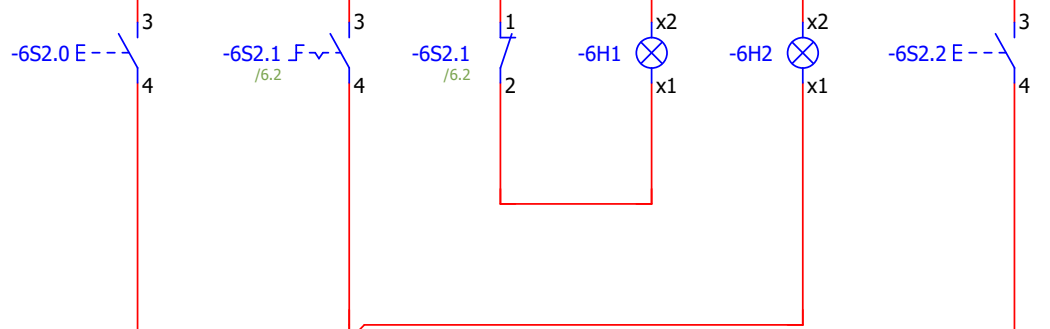

Single step	Automatic	Lamp Hand	Lamp Automatic	Initial position Home	Control On emergency stop o.k.	Reserve	Reserve	Reserve	Reserve
-------------	-----------	-----------	----------------	-----------------------	--------------------------------	---------	---------	---------	---------



