



UROVO FR7000 Series

Specifications



UROVO PTE. LIMITED

Specifications

Basic specifications	Model	UROVO FR7000 Series
	Dimensions	130mm×130mm×50mm(6dBi) 257mm×257mm×52mm(9dBi)
	Weight	600g(6dBi) / 1800g (9dBi)
	RFID	Based on Impinj E710 design, fully supports electronic tags compliant with ISO18000-6C (EPC C1G2) international standards
		Operating frequency 860 ~ 960MHz (can be adjusted according to the requirements of different countries or regions)
		Output power up to 33dBm (adjustable)
		Optional circularly polarized antenna 6dBi/9dBi
		Typical reading distance > 7m(6dBi)/12m(9dBi)
	Power supply	+9V power supply, optional POE power supply mode
	Interface	Support RS232, RJ45, optionalRS485, Wiegand, GPIO interface, USB2.0 and other interfaces
Environment	Operating Temp.	-10°C to 55°C
	Storage Temp.	-20°C to 75°C
	Humidity	5%RH ~ 95%RH (No condensation)
	ESD	+/-15kv Air; +/-8kv contact

Power supply

Unless otherwise noted, specifications are taken from TA = 25 ° C and VCC = +5V operating conditions.

Item	Symbol	Minimum	Typical	Maximum
Supply Voltage	VCC	9V	-	24V
Working Current	IC		1500mA	2000 mA
Operating Frequency	FREQ	902MHz		928 MHz
RF Output Power	PRF	0 dBm		33dBm
Receiving sensitivity	SR		-86dBm	

Power connector

No.	Symbol	Description
Central	PWR	9-12V Power Supply
Outer	GND	GROUND

Serial communication interface RS232 (DB9 Female)

No.	Symbol	Description
1	NC	Reservation
2	TXD	Serial communication data output
3	RXD	Serial communication data input
4	NC	Reservation
5	GND	Ground
6	NC	Reservation
7	NC	Reservation

8	NC	Reservation
9	NC	Reservation

RS485 (3*3.5mm)

No.	Symbol	Description
1	A	RS485 Port A
2	B	RS485 Port B
3	EGND	Ground

Wiegand (3*3.5mm)

No.	Symbol	Description
1	GND	Ground
2	DATA1	Wiegand data cable 1
3	DATA0	Wiegand data cable 0

Output (4*3.5mm)


No.	Symbol	Description
1	NC0	Relay 0 normally open terminal (can be customized for supply voltage output)
2	COM0	Relay 0 Common
3	NC1	Relay 1 normally open terminal (can be customized for supply voltage output)
4	COM1	Relay 1 Common

Input (3*3.5mm)

No.	Symbol	Description
1	GND	Ground
2	INPUT1	Input 1, low level 0~4V high level 5~12V (voltage threshold can be customized)
3	INPUT2	Input 2, low level 0~4V high level 5~12V (voltage threshold can be customized)



Physical

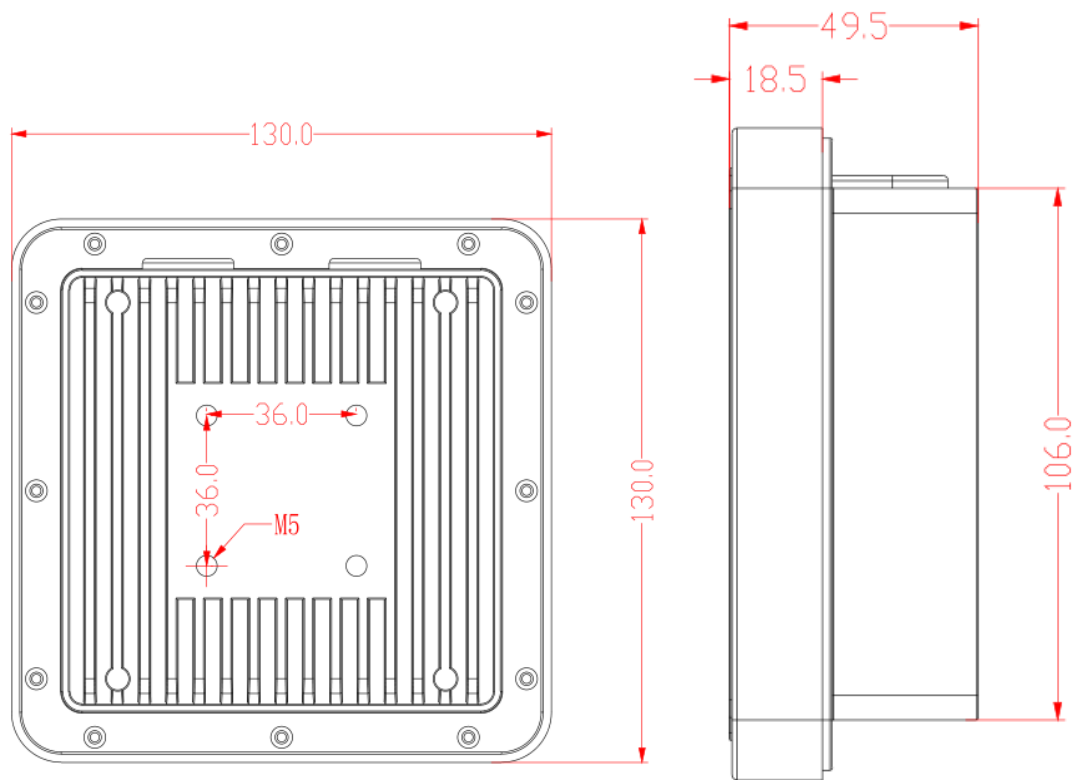

Accessories

	Type
Standard accessories	Adapter *1、 Mounting Stand*1