

201 Dual Attenuverters User Manual

05-2026 Rev. 1

1 Introduction

The *201 Dual Attenuverters* are 2 utility attenuverters in an *Intellijel* 1U format. Each attenuverter is capable of attenuating, inverting, and attenuverting the input signal with a single knob.

2 Installation & Power

This module requires 14hp of free space in a rack. When installing, always turn off the power supply before plugging anything in. When plugging in the 10-16 pin ribbon power cable, ensure that the red stripe lines up with the **RED LINE** mark (refer to fig. 2.1) on the module and the marking that indicates **-12v** on the bus board.

This module **is not** reverse polarity protected. This means that the module will get heavily damaged if the power cable is plugged in backwards. Additionally, a reversed power cable may also cause damage to the components in the module, as well as other modules connected to the same power supply.

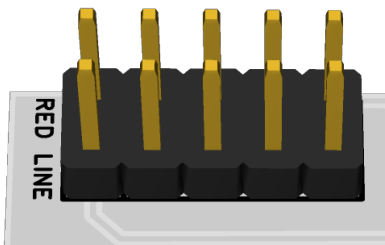


fig. 2.1 Power Connector

3 Front Panel Overview

4 Technical Specifications

4.1 Dimensions & Power

Width	Height	Depth	+12v Current	-12v Current
<i>14hp</i>	<i>1U Intellijel</i>	<i>~25mm max.</i>		

4.2 Inputs & Outputs

Inputs		Outputs	
IN 1, 2	<i>Any modular levels</i>	OUT 1, 2	<i>Any modular levels</i>