

305 Analogue Stochastic Signal Generators User Manual

06-2020 Rev. 1

1 Introduction


Beep boop

2 Installation & Power

This module requires 10hp of free space in a rack. When installing, always turn off the power supply before plugging anything in. When plugging in the 10-16 pin ribbon power cable, ensure that the red stripe lines up with the **RED LINE** mark (refer to fig. 2.1) on the module and the marking that indicates **-12v** on the bus board.

This module **is not** reverse polarity protected. This means that the module will get heavily damaged if the power cable is plugged in backwards. Additionally, a reversed power cable may also cause damage to the components in the module, as well as other modules connected to the same power supply.

3 Front Panel Overview

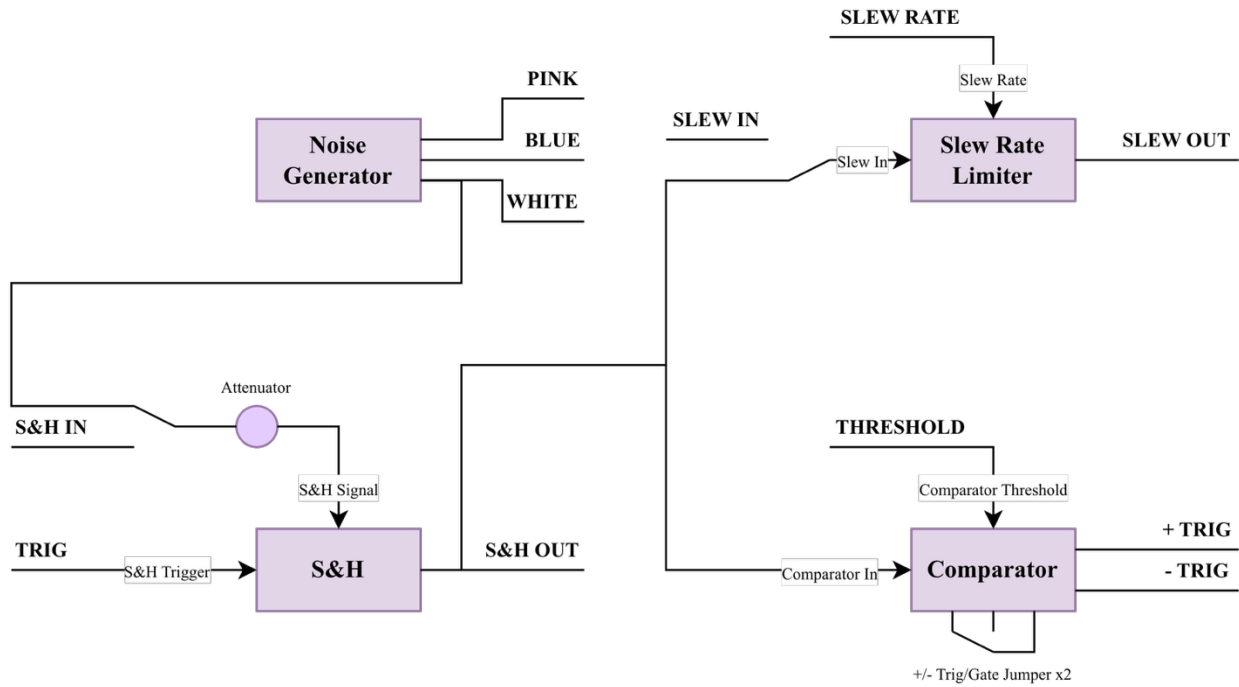

4 Additional Information (Optional)

5 Patch Ideas

6 Technical Specifications

6.1 Dimensions & Power

Width	Depth	+12v Current	-12v Current

6.2 Inputs & Outputs

Inputs		Outputs	
Input name	Additional info	output name	Additional info

6.3 Other Specifications (Optional)