
-DRAFT-

DATUMS DESCRIPTION

ZONE	REV.	DESCRIPTION	ECN	APPROVED	DATE
2-B7, 2-C7, 2-D1, 3-A8, 3-B4, 3-B5, 3-B6, 3-C3, 3-C4, 3-C6, 3-E5, 3-F5, 4-C7, 4-D4, 4-E4, 4-E6, 4-F6	4	T1 update - tolerance corrections, manufacture corrections, Longer laser pin, self tappng chamfers, vent area correction, M2.5 and M6 thread addition (+mask), added geometrical tolerance, released material			
2-C1	5	fdsfds		YAIRGR	08/10/24

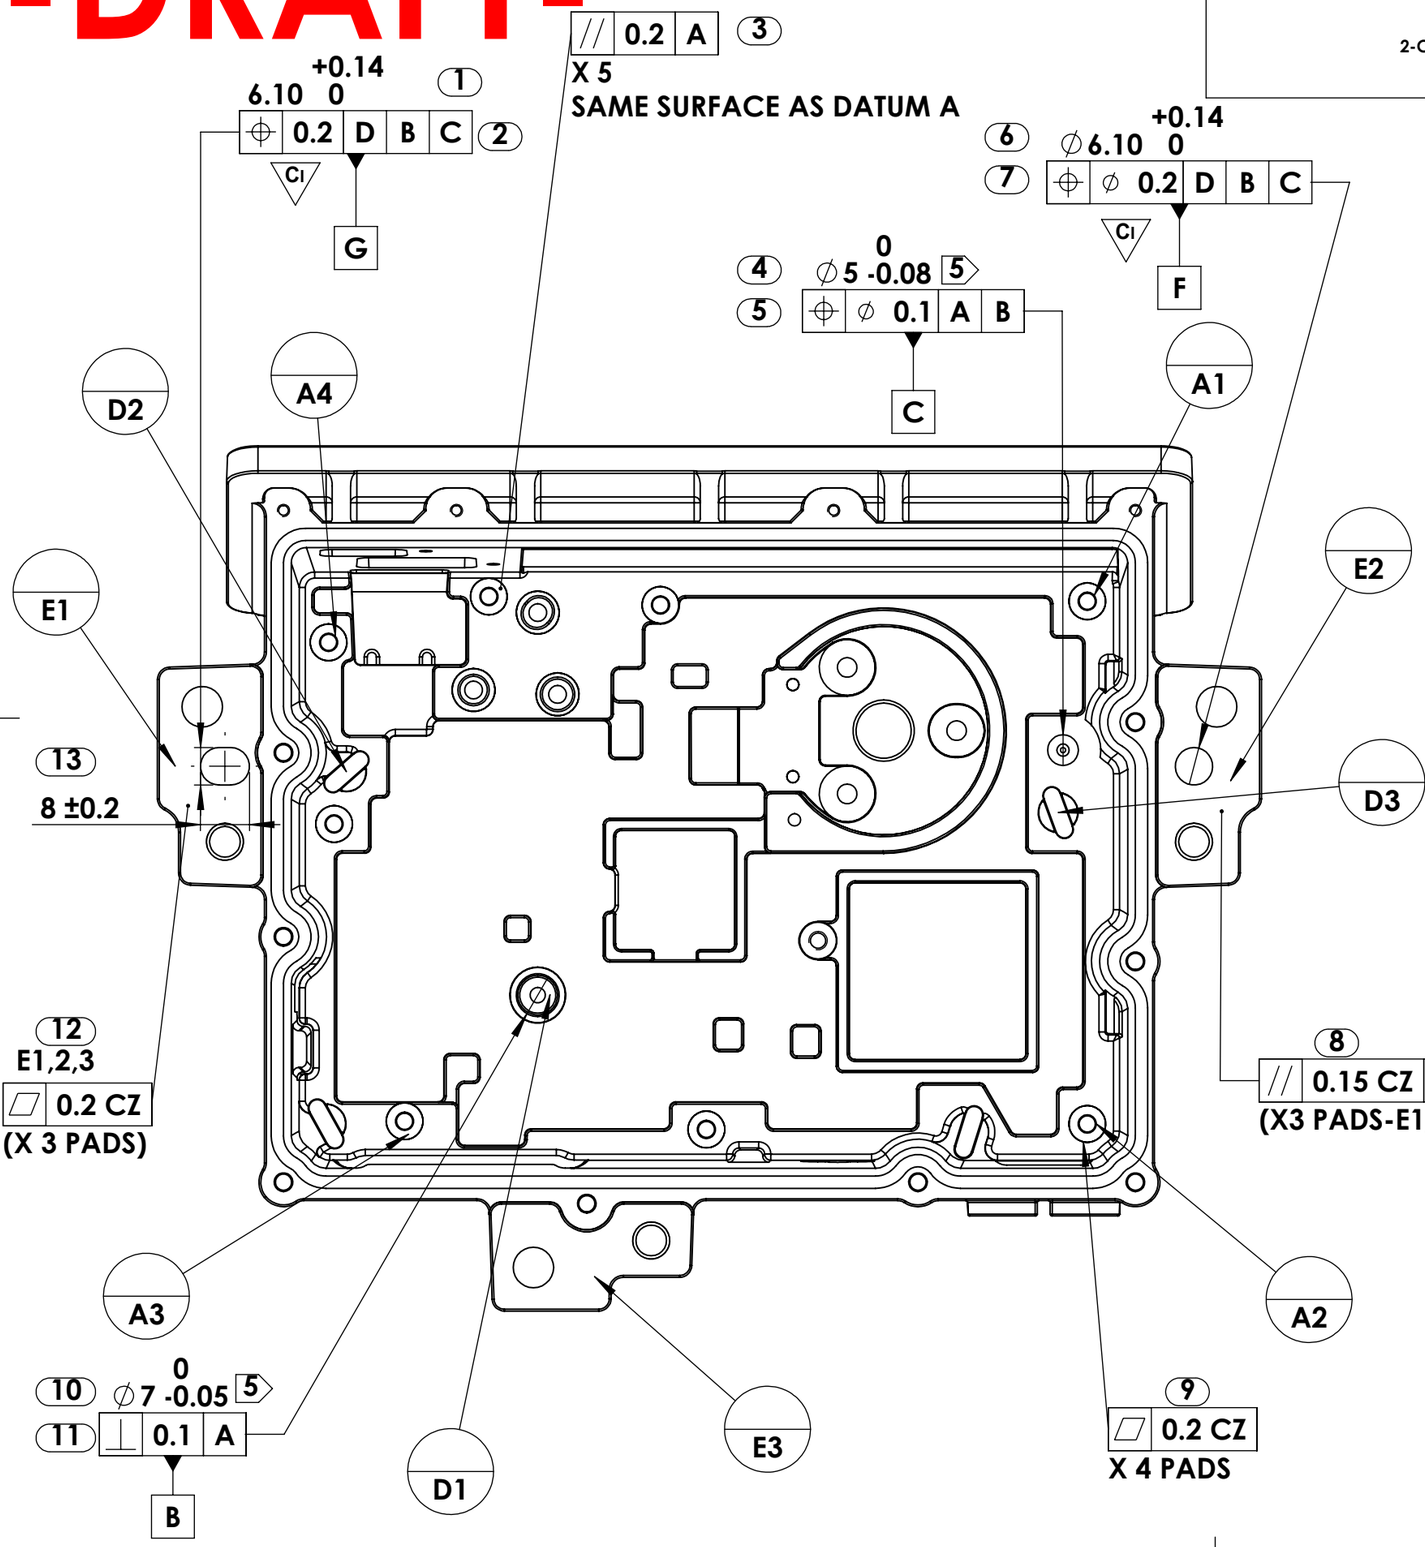

NOTES:

1. ~~**TECHNICAL SPECIFICATION** TO TSD00042, EXTERNAL COMPONENT~~
2. **THIS DRAWING SHALL BE USED WITH STEP FILE MEP02395 REV.5 FOR COMPLETE PRODUCT DEFINITION.**
3. **UNTOLARANCED DIMENSIONS ARE BASIC.**
4. **VALUE QUERIED FROM 3D DATA FILE ARE :**
   - **BASIC SURFACES :** ⌓ 0.3 A B C
   - **HOLES LOCATION:** ⌖ ∅ 0.3 A B C
   - **THREADS LOCATION :** ⌖ ∅ 0.3 A B C
5. **AREA TO BE MASKED BEFORE COATING. INCLUDING ALL THREADS**
6. GREASE, OIL AND DIRT MUST BE REMOVED
7. BURRS, FLASHES AND SHARP EDGES SHALL BE REMOVED
8. THIS DOCUMENT IS IN ACCORDANCE WITH ISO STANDARDS:
   - 8.1 TOLERANCING: 8015:2011
   - 8.2 LINEAR SIZE: ISO 14405-1
   - 8.3 ANGULAR SIZE: ISO 14405-3
9. FINISH:
   - 9.1 CHROMATE CONVERSION PER ASTM B921 CLASS 2
   - 9.2 **BLACK SULFURIC ANODIZE COATING PER MIL-A-8625, TYPE II, CLASS 2, 15±5µ (RoHS COMPLIANCE)**
10. COATINGS / MATERIALS / AUXILIARY MATERIALS MUST CONFORM TO:
    - 10.1 ROHS: DIRECTIVE 2011/65/EU.
    - 10.2 (EU)2015/863
    - 10.3 ELV: DIRECTIVE 2000/53/EC.
    - 10.4 (EU)2016/774
    - 10.5 CHINA ROHS: SJ/T 11363-2006
    - 10.6 REACH: (EU) 1907/2006
11. ALL DIMENSIONS ARE AFTER COATING
12. EJECTOR MARKS SHALL BE SUNK UP TO 0.4 BELOW THE SURFACE AND NOT PROTRUDE FROM THE SURFACE
13. GATES SHALL BE TRIMMED TO BELOW THE SURFACE
14. PARTING LINE MAX MISMATCH SHALL BE 0.15 mm
15. PART MARKING SHALL INCLUDE:
    - 15.1 PART NUMBER
    - 15.2 REVISION - IMPLEMENTED WITH A REPLACEABLE PIN FOR REVISION CHANGE.
    - 15.3 DIE CAST DATE - YEAR, MONTH, DAY
    - 15.4 MANUFACTURER CODE - TWO LETTERS
16. TRACEABILITY MARKING ACCORDING TO DOC00068 COMPONENT
17. **TECHNICAL CLEANLINESS MUST CONFORM TO VDA 19: SURFACE AREA : 915.438 cm² .**

COATINGS / MATERIALS/AUXILIARY MATERIALS MUST CONFORM TO:		INNOVIZ TECHNOLOGIES LTD.CONFIDENTIAL
a. ROHS: DIRECTIVE 2011/65/EU. b. ELV: DIRECTIVE 2000 /53/ EC. c. CHINA ROHS: SJ/T 11363-2006	d.(EU)2015/863 e.(EU)2016/774 f. REACH: (EU) 1907/2006	THIS DOCUMENT SHALL NOT BE REPRODUCED, NOR SHALL THE INFORMATION CONTAINED HEREIN BE USED BY OR DISCLOSED TO OTHERS EXCEPT ASEXPRESSLY AUTHORIZED IN WRITING BY INNOVIZ TECHNOLOGIES LTD.

MATERIAL:	MASS:
Aluminum EN AC-44300	502.49 gram
FINISH:	

ISO 13715 | SURFACE ISO 1302 VER.2002 Ra6.3

	NAME	DATE
DESIGNED:	Omer K.	10/10/2024
APPROVED:		10/10/2024

UNLESS OTHERWISE SPECIFIED

MACHINING REQUIREMENTS:
1. THIS DOCUMENT IS IN ACCORDANCE WITH ISO STANDARDS:
   a. TOLERANCING: 8015:2011
   b. LINEAR SIZE: ISO 14405-1
   c. ANGULAR SIZE: ISO 14405-3
2. ALL DIMENSIONS IN MM & INCLUDE CHEM.APPLIED/PLATED FINISH
3. REMOVE BURRS & SHARP EDGES
4. FILLET RADIUS 0.4 MAX
5. THREAD CHAMFERS MALE 45° TO MINOR DIA FEMALE 90° TO MAJOR DIA
6. DO NOT SCALE DRAWING


INNOVIZ™ TECHNOLOGIES


DRW TITLE: **B2.1 TOP COVER - ANODIZE + SURFACE MASKING**


DRW No.	REV.
MEP02395	5


SCALE: 1:1 | SHEET 1 OF 5 | SIZE. A3

FEATURES RELATIVE TO E-F-G DATUM SYSTEM

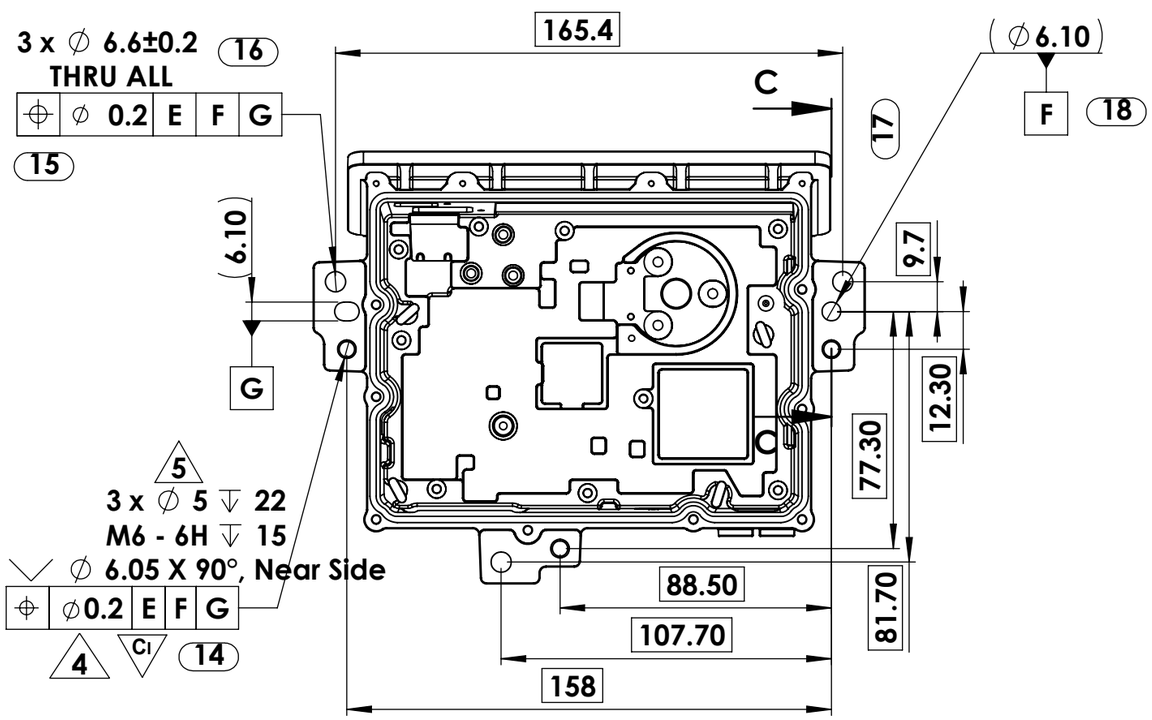


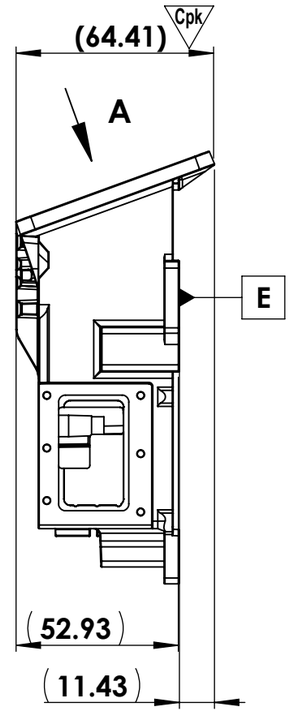

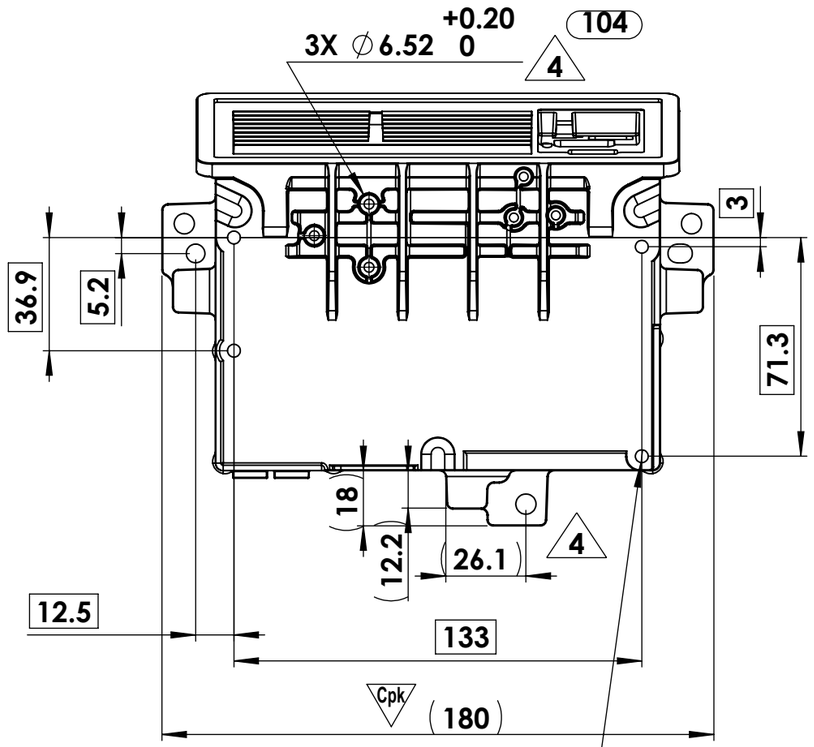


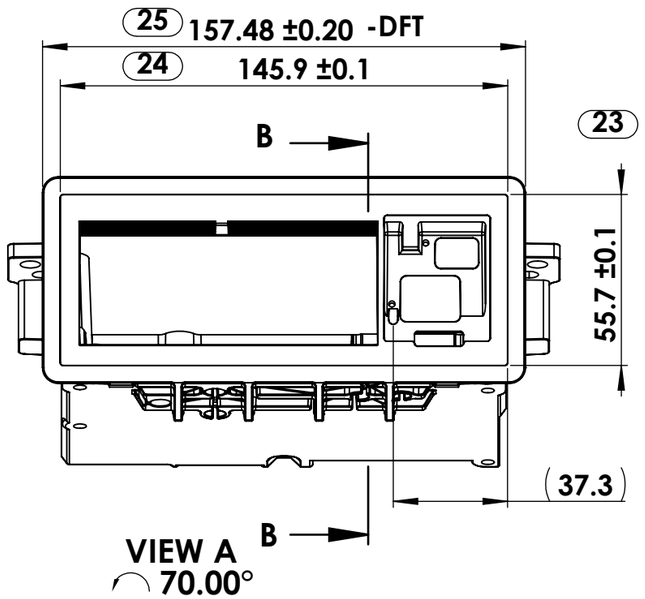

VIEW A
70.00°

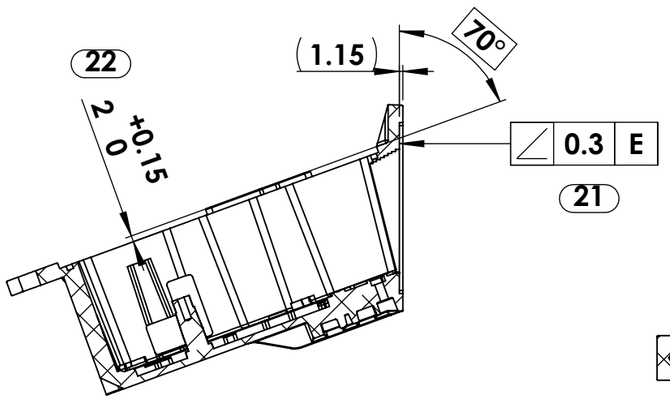

SECTION B-B




SECTION C-C
x3

INNOVIZ™ TECHNOLOGIES


DRW TITLE: B2.1 TOP COVER - ANODIZE + SURFACE MASKING			
DRW No. MEP02395			REV. 5
SCALE: 1:2	SHEET 2 OF 5	SIZE.	A3

INNER FEATURES RELATIVE TO A-B-C-E DATUM SYSTEM

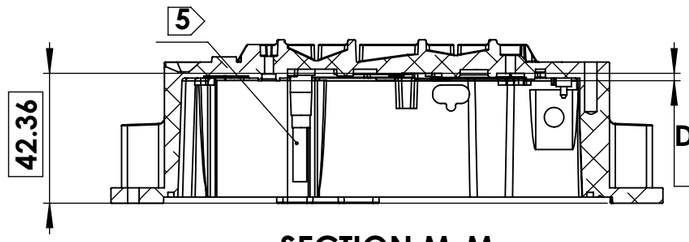

SECTION M-M

26
2.40 ±0.10
DISTANCE BETWEEN H PADS AND VPADS

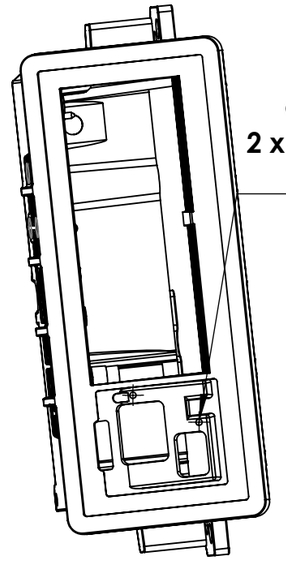

104 4
2 x ⌀2.05 ↧ THRU
M2.5 THRU

VIEW BD

38 ⌀5 ±0.15
39 ⌖ ⌀ 0.2 E B C

40 ⌀4.500 4 H8 +0.018 0
41 ⌖ ⌀0.15 E B C 4

42 4.500 4 H8 +0.018 0
43 ⌖ 0.15 E B C

3x 5 V PADS 4

3x 5 H PADS
3x ⌀3.20
⌖ 0.1
101

44 4 ⌀9 +0.020 0
⌖ ⌀0.15 E B C 45 4

4
4 0.05 CZ 46
0.2 E 47


4 R6.15

50.34°

K
L
56.4

37 19.19 ±0.05

36
15.39 ±0.10
DISTANCE FROM DATUM A

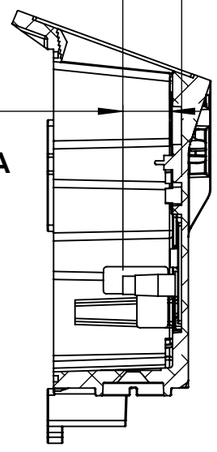

SECTION L-L


CI 54 0.1 CZ
53 0.2 E

M
N
49.73
43.11
⌀2.97 X 30°
1
5
3x 5
25°

5 ⌀2.65 52
⌖ ⌀ 0.15 A B C
8x

50 27.6 +0.2 0
51 ⊥ 0.2 A

10.46
K
4 46 102
94.50
11.96
L
⌀ 2.50 ↧ 5 5
M3 - 6H ↧ 4.25 48
5 ⌀ 2.50 ↧ 8 103
49 M3 - 6H ↧ 6.50
O 4

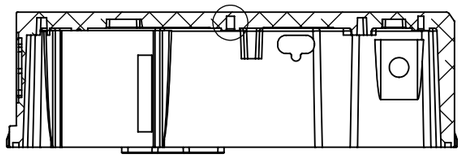

SECTION N-N

BD
4 3.70 ±0.05
⌀5
C
⌀7
B
5

0
⌀2 -0.05 27
29 ⌖ 0.1 A B C
2.7 ±0.1 28
4 ±0.3 30
0
⌀5.90 -0.05 31
⌖ 0.1 A B C 32
19.19 ±0.05 33

SECTION K-K

35 ⌀2.65 ±0.04
34 4.7 ±0.1
4 0.60 X 15°
4 0.80
(0.60)
30°

DETAIL O
SCALE 2 : 1


INNOVIZ™ TECHNOLOGIES

DRW TITLE:
B2.1 TOP COVER - ANODIZE + SURFACE MASKING


DRW No.	REV.
MEP02395	5
SCALE: 1:2	SHEET 3 OF 5
SIZE. A3	


OUTER FEATURES RELATIVE TO A-B-C-D DATUM SYSTEM

SAME PROFILE TOLERACE

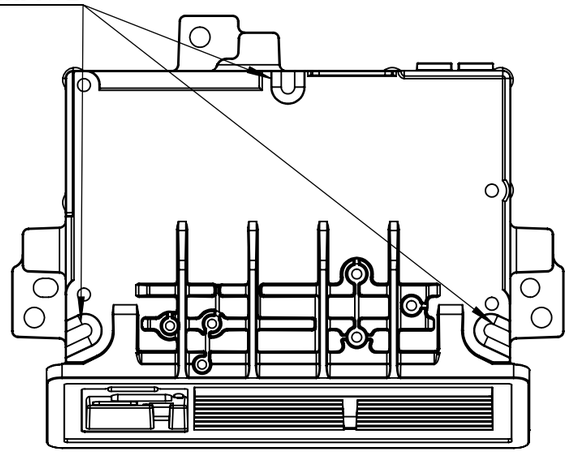

DETAIL I
SCALE 2 : 1




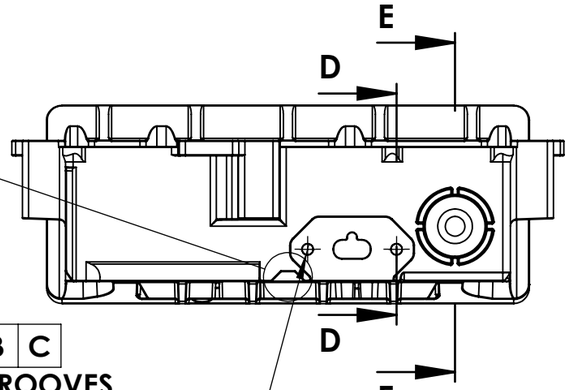

76 | 0.2 | D | B | C
FOR ALL 3 GROOVES

E
D
D
E

55 5.5 ±0.1
30°
∅3.55 ±0.05
56




BEFORE COATING
Rz6.3

DETAIL F
SCALE 1 : 1

⊥	0.2	A
∠	0.2	B-C

58 57


Q

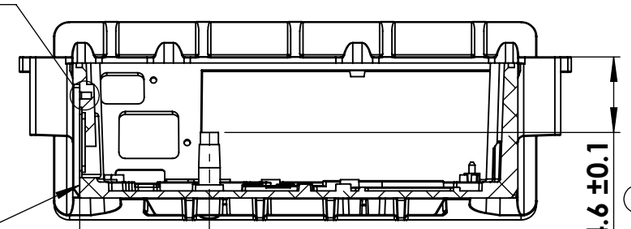

42.3 ±0.1
59
SECTION P-P
24.6 ±0.1
60


// 0.2 | A

A

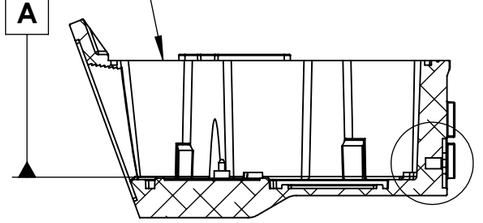


F
SECTION D-D

∅2.52 X 30°
61 5 ⌖ ∅0.2 | A | B | C
6x
4
5

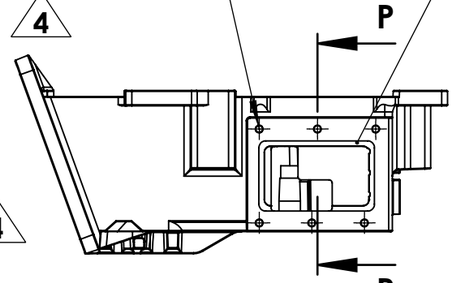

P
P

62
3.8 ±0.1
30°
0.60
0.60 X 15°
4




∅2.20 ±0.04
63
DETAIL Q
SCALE 2 : 1

73
74 6 +0.20 0
∅2.65 ±0.04
0.75
30°
DETAIL T
SCALE 1 : 1


∅3.55 5 75
⌖ ∅0.2 | A | B | C
4
2x

4 x ∅ 1.60 ↧ 3.60
71 5 M2 - 6H ↧ 3.50
70 ⌖ ∅ 0.15 | A | B | C

B-C PLANE

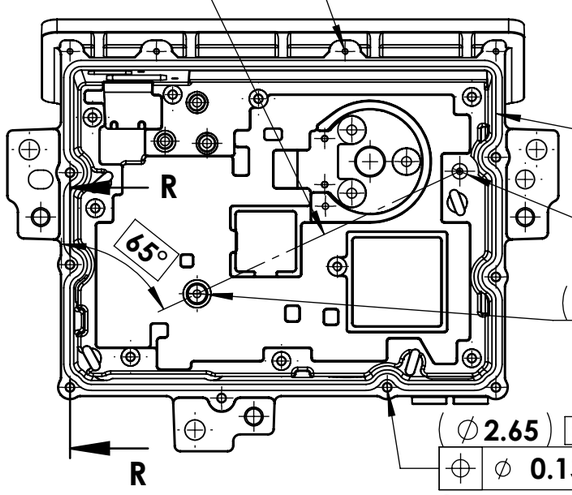

R
65°
R

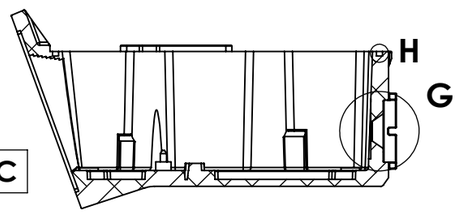


H
G
SECTION E-E

69
0.15 | A | B | C
4

∅5
C

∅7
B


∅2.65 5
⌖ ∅ 0.15 | A | B | C
8x
72



T
SECTION R-R

67
1.50 ±0.15
2 ±0.15
68
DETAIL H
SCALE 5 : 1


64
0.50 ±0.10
65
4 ±0.15
66
∅6.4 ±0.1
4
70° ±1°
BEFORE COATING
Rz15
4
DETAIL G
SCALE 1 : 1

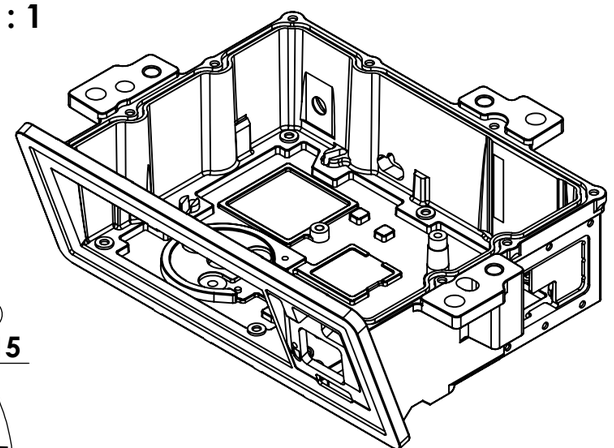



INNOVIZ™ TECHNOLOGIES


DRW TITLE: B2.1 TOP COVER - ANODIZE + SURFACE MASKING		
DRW No. MEP02395		REV. 5
SCALE: 1:2	SHEET 4 OF 5	SIZE. A3

MASKED AREAS

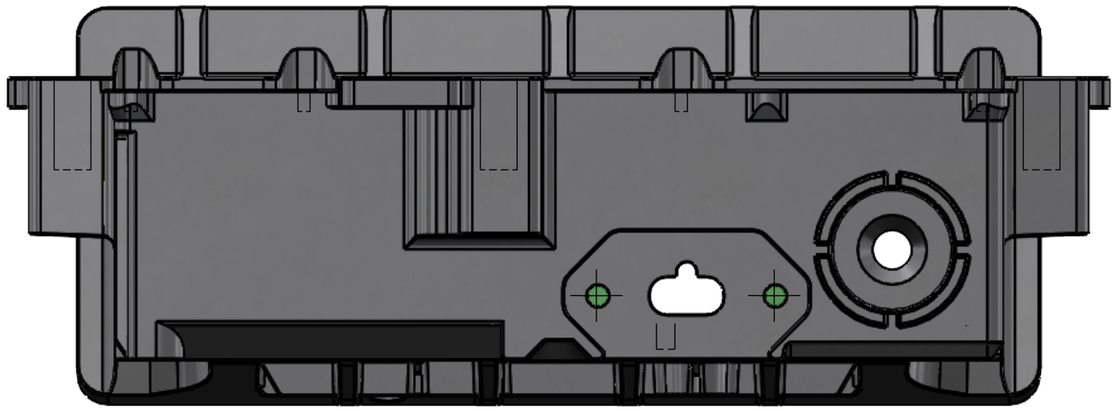

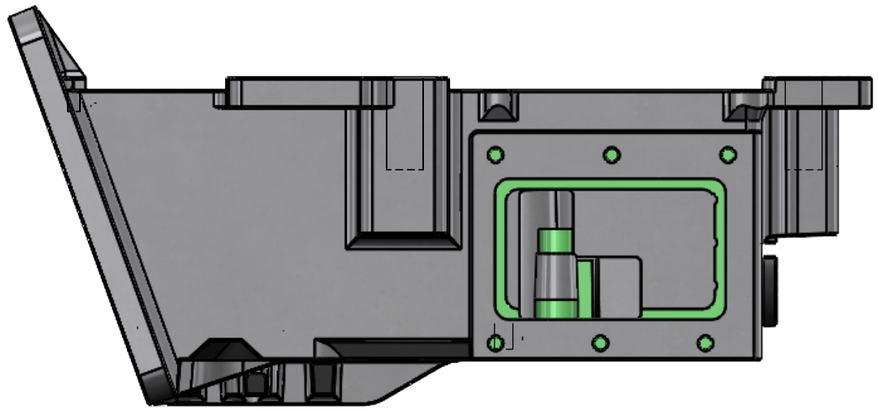

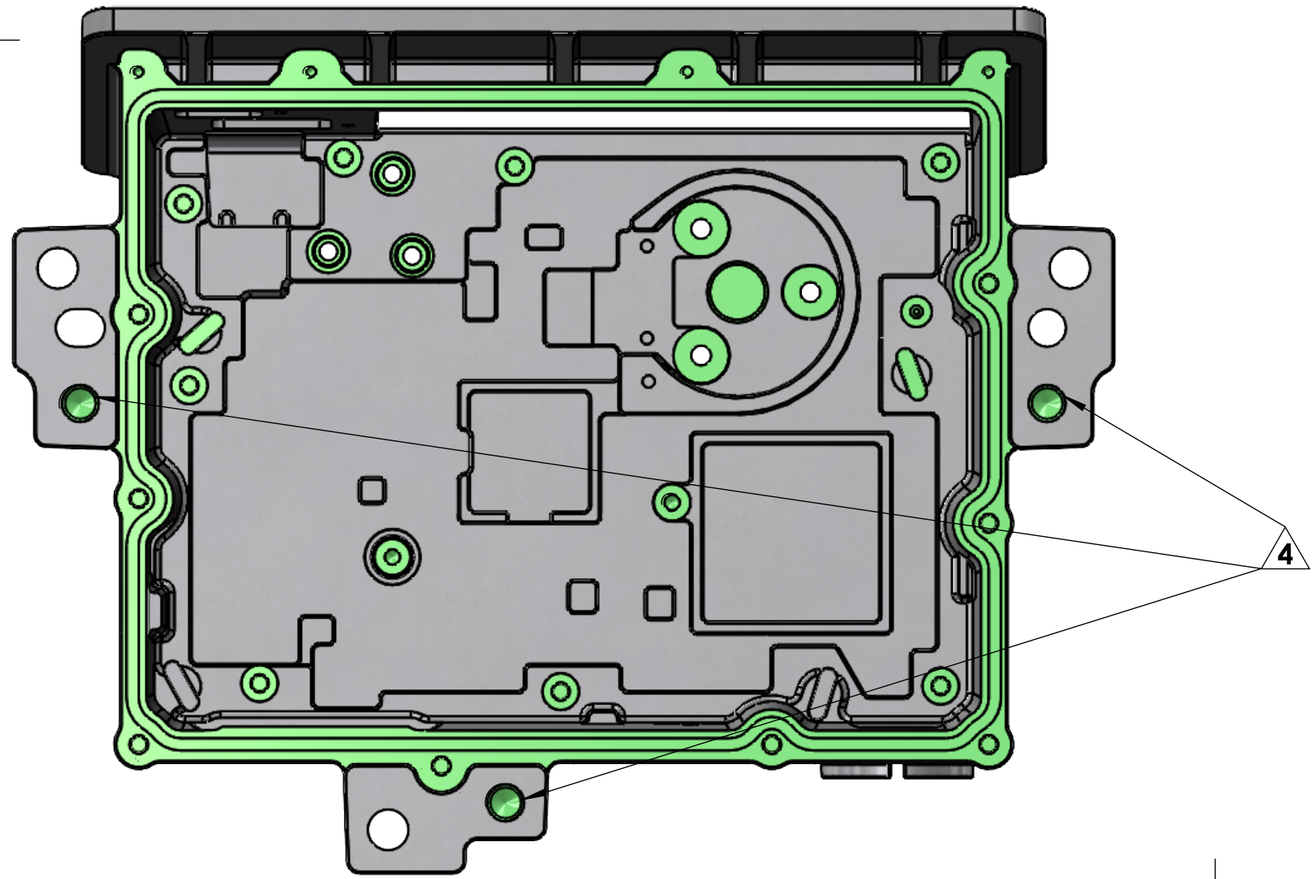

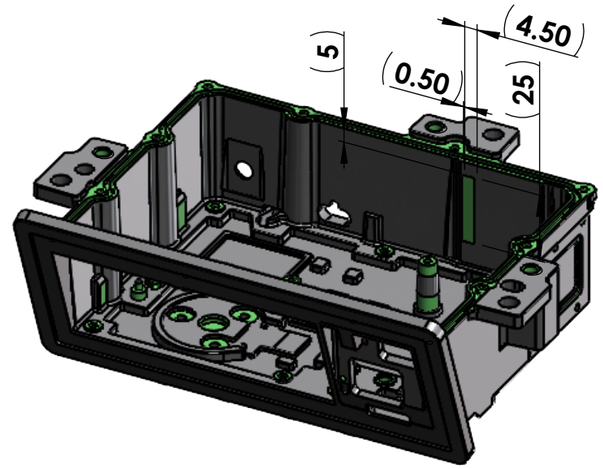

INNOVIZ™ TECHNOLOGIES

DRW TITLE: B2.1 TOP COVER - ANODIZE + SURFACE MASKING			
DRW No. MEP02395			REV. 5
SCALE: 1:1	SHEET 5 OF 5		SIZE. A3