



ZONE	REV.	DESCRIPTION	ECN	APPROVED	DATE
	1	INITIAL RELEASE		MOSHE S.	04/06/2024

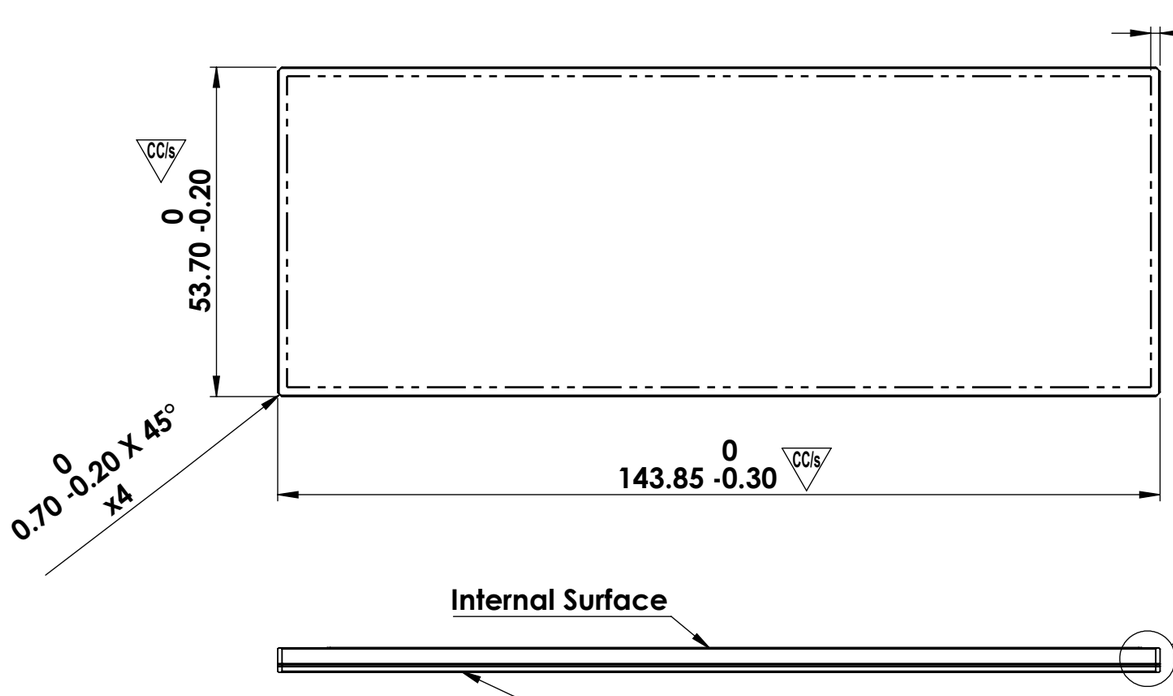

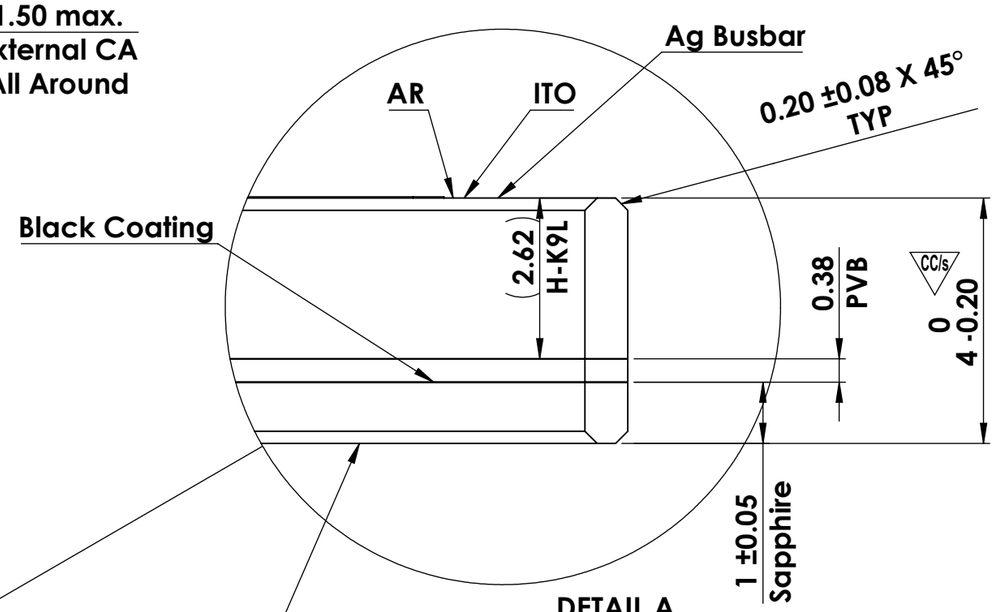

DETAIL A
SCALE 10 : 1

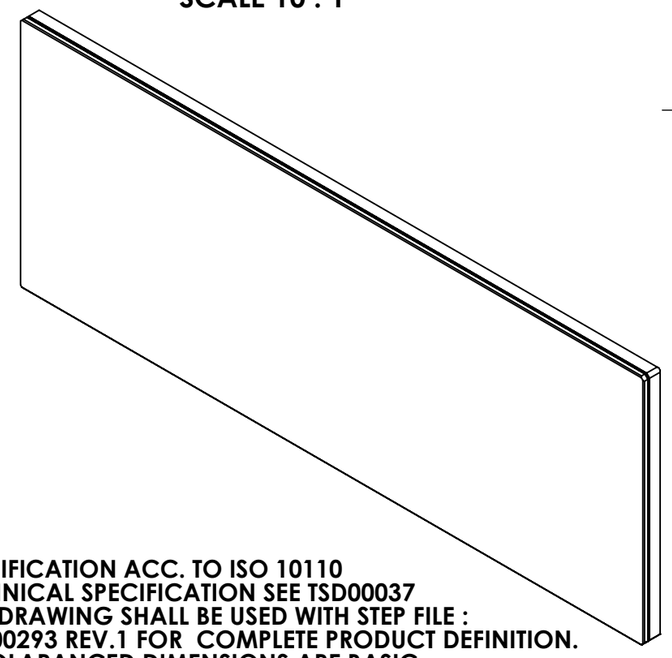

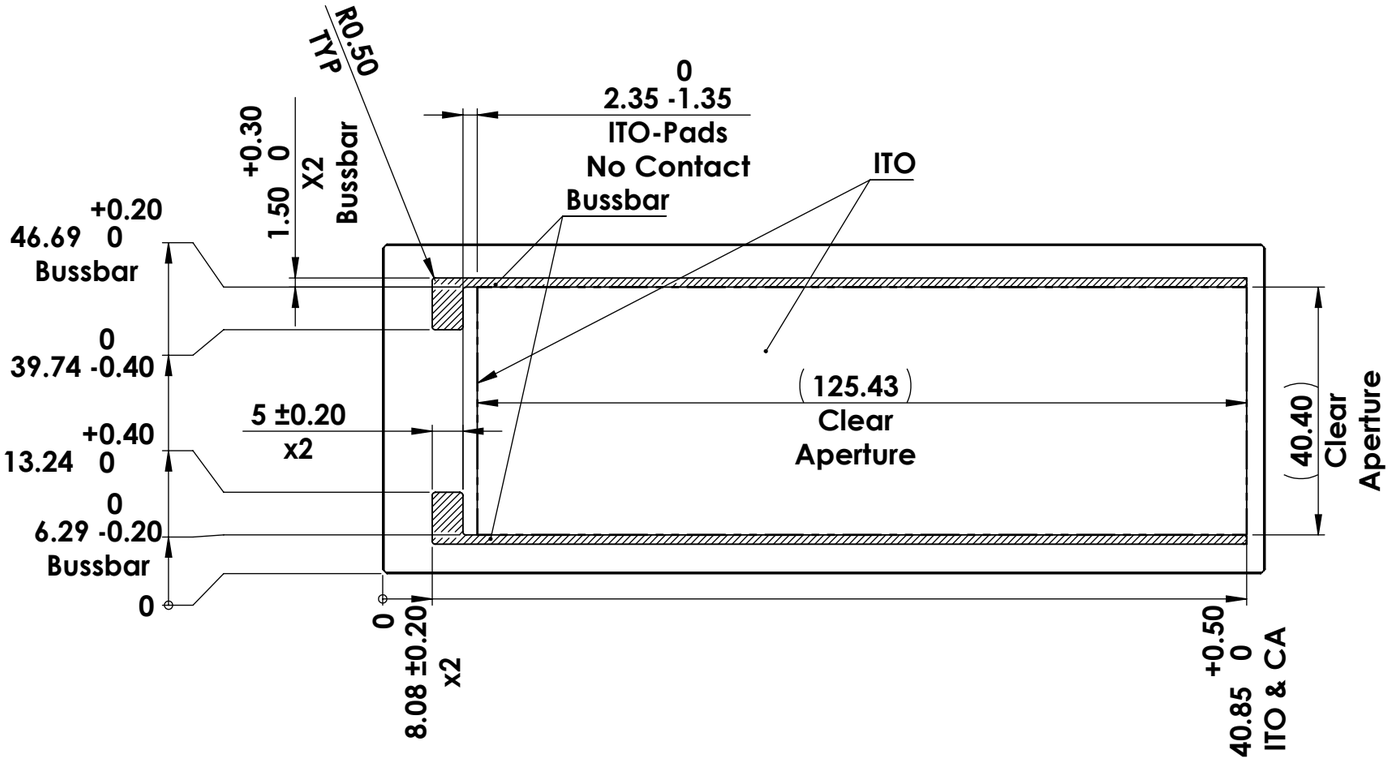

NOTES:

1. SPECIFICATION ACC. TO ISO 10110
2. TECHNICAL SPECIFICATION SEE TSD00037
3. THIS DRAWING SHALL BE USED WITH STEP FILE : OPT00293 REV.1 FOR COMPLETE PRODUCT DEFINITION.
4. UNTOLARANCED DIMENSIONS ARE BASIC.

COATINGS/MATERIALS/AUXILIARY
MATERIALS MUST CONFORM TO:
a. ROHS: DIRECTIVE 2011/65/EU. (EU) 2015/863
b. ELV: DIRECTIVE 2000/53/EU. (EU) 2016/774
c. CHINA ROHS: DIRECTIVE SJ/T 11363-2006
d. REACH: (EC) 1907/2006

MATERIAL:

WEIGHT: gram

INNOVIZ TECHNOLOGIES LTD.CONFIDENTIAL
THIS DOCUMENT SHALL NOT BE REPRODUCED, NOR SHALL THE INFORMATION CONTAINED HEREIN BE USED BY OR DISCLOSED TO OTHERS EXCEPT ASEXPRESSLY AUTHORIZED IN WRITING BY INNOVIZ TECHNOLOGIES LTD.

UNLESS OTHERWISE SPECIFIED
1. THIS DOCUMENT IS IN ACCORDANCE WITH ISO STANDARDS:
   a. SPECIFICATION ACC. TO ISO 10110
   b.GENERAL TOLERANCES ISO 10110-11
   c.SIZE ISO14405 (E)
   d. SURFACE ISO 10110 - 8
2. ALL DIMENSIONS IN MM
3. DO NOT SCALE DRAWING

	NAME	DATE
DESIGNED:	Rami B.	10/10/2024
APPROVED:	MOSHE S.	10/10/2024

Rq 1.2 G P3

INNOVIZ™ TECHNOLOGIES

DRW TITLE:
B2.1, Extended Front Window, Sapphire & ITO, 20 Deg


DRW No.	REV.
OPT00293	1

SCALE: 1:1 | SHEET 1 OF 2 | SIZE. A3

OPT00289 & OPT00293

External surface	Material	Internal surface	Notes
R ∞	External: Sapphire (1 mm thick) Internal: H-K9L (2.6 mm thick)	R ∞	
3/ 2.1(6.8) *See measurement note	1/ 2x0.16	3/ 2.1(6.8) *See measurement note	Measurement at 1064 nm in transmission for a single pass at a rectangular aperture of HXV 18X27 mm. Valid in the central horizontal 50 mm of the window.
4/ 5'	2/ 1:3	4/ 0'	
5/ MIL-PRF-13830B 60x40, E0.2		5/ MIL-PRF-13830B 60x40, E0.2	
6/ 1 J/cm^2; Tested at: 905 nm, 1 ns or 1064nm, 10ns, 10 Hz		6/ 1 J/cm^2; Tested at: 905 nm, 1 ns or 1064nm, 10ns, 10 Hz	

Category	Type	Specification	Notes
Optics	External surface total reflection Wavelength range 885-940 nm (valid for full assembly, coated on both sides)	Rmax < 1%, Ravg < 0.5% for AOI=0°	Valid for full component coated on both sides and with heater element
		Rmax < 2%, Ravg < 1.5% for AOI=30°	
		Rmax < 4.5%, Ravg < 3% for AOI=45°	
		Rmax < 9%, Ravg < 8% for AOI=60°	
		Rmax < 38%, Ravg < 30% for AOI=70°	
	Internal surface total reflection Wavelength range 885-940 nm (valid for full assembly, coated on both sides)	Rmax < 1%, Ravg < 0.5% for AOI=0°	
		Rmax < 2%, Ravg < 1.5% for AOI=30°	
		Rmax < 4.5%, Ravg < 3% for AOI=45°	
		Rmax < 9%, Ravg < 8% for AOI=60°	
		Rmax < 38%, Ravg < 30% for AOI=70°	
	External surface total reflection Wavelength range 450-660 nm (valid for full assembly, coated on both sides)	Rmax < 3%, Ravg < 2% for AOI=0°	
		Rmax < 4%, Ravg< 3% for AOI=45°	
		Rmax < 7%, Ravg< 5.5% for AOI=60°	
	Total transmission Wavelength range 885-940 nm (valid for full assembly, coated on both sides)	T > 94% for AOI=0°	
		T > 86% for AOI=60°	
	Total transmission Wavelength range 450-660 nm (valid for full assembly, coated on both sides)	T < 5% for AOI=0°	
		T < 5% for AOI=60°	
	Haze	Haze < 0.5%	ASTM D1003
	Diffusive reflection spectrum (color)	My(value)>350 (acc. To L*A*B color space)	My=100*log(Yn/Y). where Yn=100, and Y is the reflectance value measured according to the XYZ CIE color space coordinates
Electrical CC/s	Total heater resistance	55±5 Ω	Measure electrical resistance between +\- heater pins (on FPC) at 25° C ambient temperature (see drawing)
	Single busbar resistance	2±0.5 Ω	Measure electrical resistance two edges of busbar at 25° C ambient temperature (see drawing)
Regulatory	Coatings/ materials/ auxiliary materials must conform to	RoHS: Directive 2011/65/EU. (EU)2015/863	
		ELV: Directive 2000/53/EC. (EU)2016/774	
		China RoHS: SJ/T 11363-2006	
		REACH: (EC) 1907/2006	
Other	Hydrophobic and Oleophobic (Easy-to-clean)	Contact angle 110°	External surface

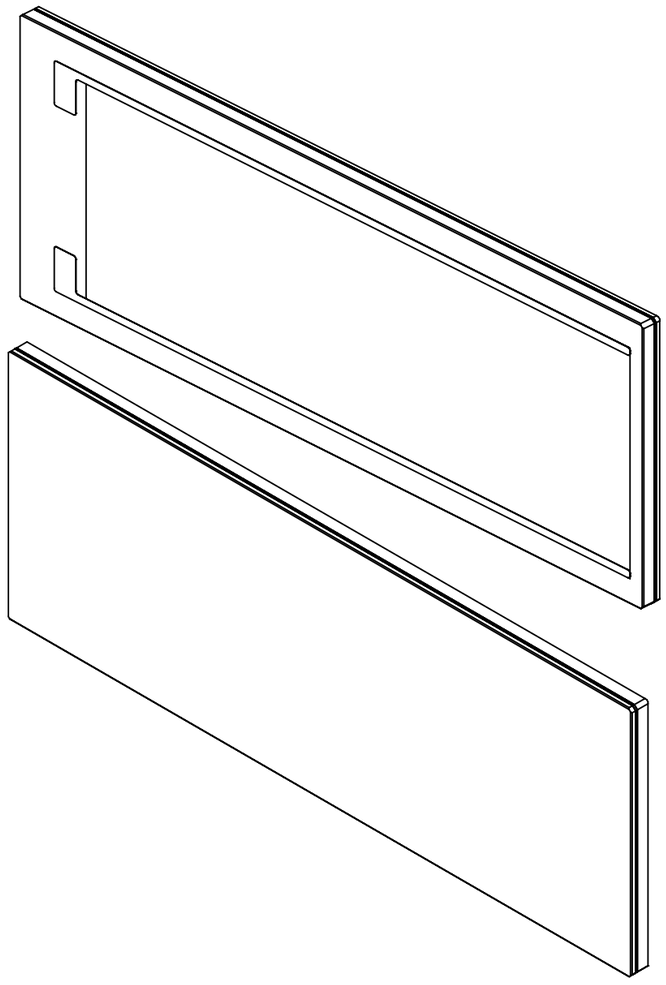

INNOVIZ™ TECHNOLOGIES

DRW TITLE:
B2.1, Extended Front Window, Sapphire & ITO, 20 Deg

DRW No.	REV.
OPT00293	1

SCALE: 1:1 | SHEET 2 OF 2 | SIZE: A3