

Product Number:
W1090617AS5P1

Stacking Information

Finished Board Thickness 1.60 (mm)	GTL L2 L3 GBL	Type	Material Name	Material Parameters	Residual Copper Rate	Finished Thickness (mm)
		OZ		0.5_PT_1 OZ	100	0.0457
		PP	S1000HB	7628(46)	/	0.1867
		Core	S1000H	1OZ	76	0.0351
				1.1(With Copper)	/	1.029
				1OZ	36	0.0351
		PP	S1000HB	7628(46)	/	0.1726
		OZ		0.5_PT_1 OZ	100	0.0457

Theoretical thickness after pressing: 1.49mm


Impedance information

Index	Type	Control Layer	Reference Layer	Original Line Width	Original Line Spacing	Original Copper	Adjusted Line Width	Adjusted Line Spacing	Adjusted Copper	Required Resistance	Actual Resistance and Tolerance
1	O_S(SM)	L1	L2	11			11			50	51.11 ±5
2	O_D(SM)	L1	L2	10.5	8.4		10.5	8.4		90	88.55±9

O_S(SM)

Coated Microstrip 1B

Original Line Width	11	Mil
Adjusted Line Width	11	Mil
Original Line Spacing		Mil
Adjusted Line Spacing		Mil
Original Ground	/	Mil
Adjusted Coplanarity	/	Mil
Required Resistance	50	Ω

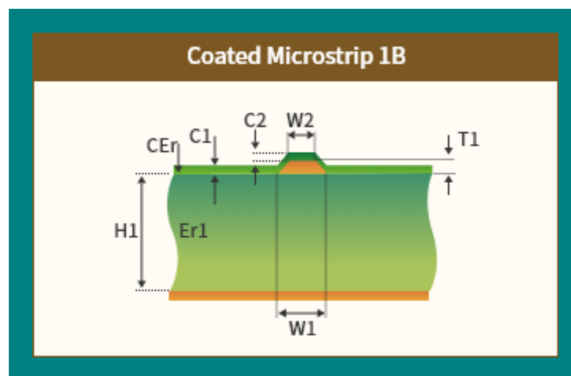

H1	7.349	Mil
Er1	4.74	Mil
W1	11	Mil
W2	10.5	Mil
S1	0	Mil
T1	1.4	Mil
C1	0.8	Mil
C2	0.6	Mil
C3	0.8	Mil
CEr	4.2	Mil
Imp	51.11	Ω

Control Layer: L1;


Reference Above: /;

Next Reference: L2;

O_D(SM)

Edge-Coupled Coated Microstrip 1B

Original Line Width	10.5	Mil
Adjusted Line Width	10.5	Mil
Original Line Spacing	8.4	Mil
Adjusted Line Spacing	8.4	Mil
Original Ground	/	Mil
Adjusted Coplanarity	/	Mil
Required Resistance	90	Ω

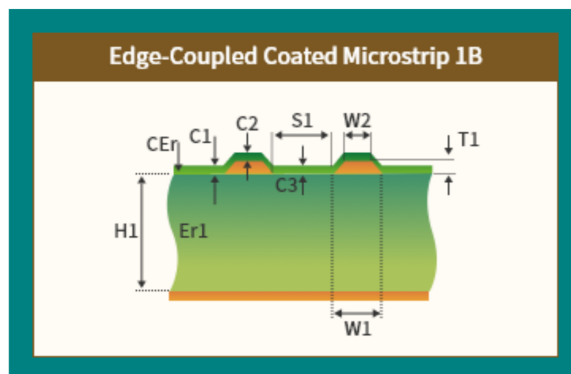

H1	7.349	Mil
Er1	4.74	Mil
W1	10.5	Mil
W2	10	Mil
S1	8.4	Mil
T1	1.4	Mil
C1	0.8	Mil
C2	0.6	Mil
C3	0.8	Mil
CEr	4.2	Mil
Imp	88.55	Ω

Control Layer: L1;

Reference Above: /;

Next Reference: L2;