

Product Number:
W1090617AS5P1

Stacking Information

Finished Board Thickness 1.60 (mm)	GTL		Type	Material Name	Material Parameters	Residual Copper Rate	Finished Thickness (mm)
	L2		OZ		0.5_PT_1 OZ	100	0.0457
	L3		PP	S1000HB	7628(46)	/	0.1867
	GBL		Core	S1000H	1OZ 1.1(With Copper) 1OZ	76 / 36	0.0351 1.029 0.0351
			PP	S1000HB	7628(46)	/	0.1726
			OZ		0.5_PT_1 OZ	100	0.0457

Theoretical thickness after pressing: 1.49mm


Impedance information

Index	Type	Control Layer	Reference Layer	Original Line Width	Original Line Spacing	Original Copper	Adjusted Line Width	Adjusted Line Spacing	Adjusted Copper	Required Resistance	Actual Resistance and Tolerance
1	O_S(SM)	L1	L2	11.4			11			50	51.11 ±5
2	O_D(SM)	L1	L2	9.04	9.843		10.5	8.4		90	88.55±9

O_S(SM)

Coated Microstrip 1B

Original Line Width	11.4	Mil
Adjusted Line Width	11	Mil
Original Line Spacing		Mil
Adjusted Line Spacing		Mil
Original Ground	/	Mil
Adjusted Coplanarity	/	Mil
Required Resistance	50	Ω

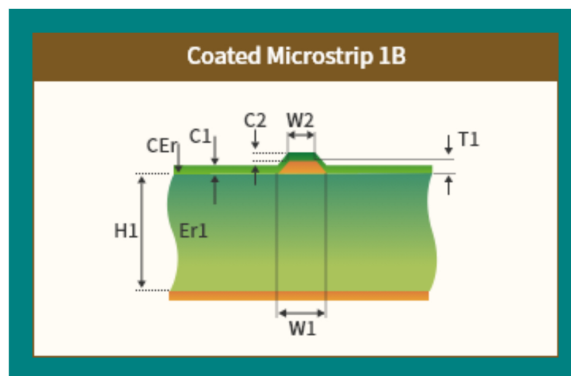

H1	7.349	Mil
Er1	4.74	Mil
W1	11	Mil
W2	10.5	Mil
S1	/	Mil
T1	1.4	Mil
C1	0.8	Mil
C2	0.6	Mil
C3	0.8	Mil
CEr	4.2	Mil
Imp	51.11	Ω

Control Layer: L1;


Reference Above: /;

Next Reference: L2;

O_D(SM)

Edge-Coupled Coated Microstrip 1B

Original Line Width	9.04	Mil
Adjusted Line Width	10.5	Mil
Original Line Spacing	9.843	Mil
Adjusted Line Spacing	8.4	Mil
Original Ground	/	Mil
Adjusted Coplanarity	/	Mil
Required Resistance	90	Ω

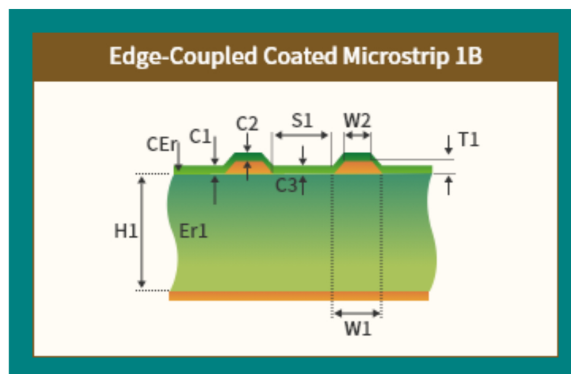

H1	7.349	Mil
Er1	4.74	Mil
W1	10.5	Mil
W2	10	Mil
S1	8.4	Mil
T1	1.4	Mil
C1	0.8	Mil
C2	0.6	Mil
C3	0.8	Mil
CEr	4.2	Mil
Imp	88.55	Ω

Control Layer: L1;

Reference Above: /;

Next Reference: L2;