


1.2 **-YL-*-5/6S/6SP/7 设备参考下列说明

将设备底部三个螺丝拧下，取外筒，将固定翻斗的橡胶圈摘除，不然设备无法测量采集数据。然后将外筒装上，准备工作完成。

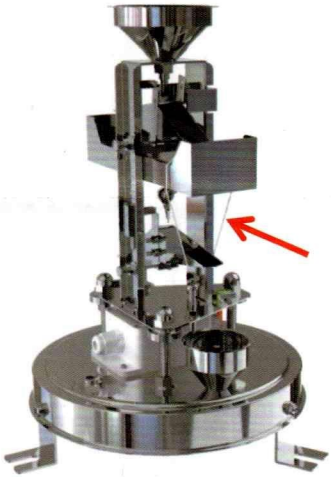

2.485 设备接线说明

线序：棕色-电源正；黑色-电源负；黄色-485A；蓝色-485B


雨量计现场安装说明

1.设备安装说明


室外地面和屋顶安装时，应按下图尺寸（单位 mm）及要求制作水泥安装基础，水泥基础上平面应为水平状态。水泥安装基础的尺寸一般为高度不小于30cm 的 40cm×40cm 的方形基座或直径为 40cm 的圆形基座。要求仪器的承雨口高度距地平面的距离为 70cm，并且保证仪器器口周围 3～5 米之内不允许有高于仪器承雨口的遮蔽物。

将仪器从包装箱内取出，对照使用说明书的装箱单仔细清点、检查设备附件是否齐全。认真阅读产品使用说明书，产品合格证。检查仪器外观是否损伤。

按照下图尺寸（单位 mm）在水泥基础上打 3 个 Φ 10 深 8～10cm 的安装孔，将膨胀螺栓置于安装孔内，用锁紧螺母锁紧，注意区分型号。

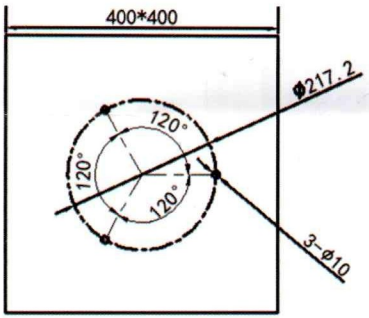

-2/4/6

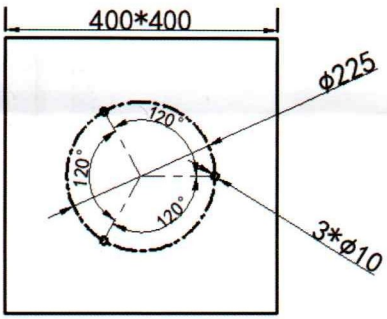

-5/6S/6SP/7

1.1 **-YL-*-2/4/6 设备参考下列说明

务必将仪器底部的珍珠棉块取出，否则设备无法测量采集数据，然后将配套的挡块安装到仪器底部。设备安装后，将仪器底座安装在 3 个调高支撑螺母上，通过调整支撑螺母的高度查看水平泡是否处于水平状态，最后锁紧将仪器固定。然后将外筒装上，准备工作完成。

SEM404 High quality ABS shell tipping bucket rain gauge

MAIN FEATURES



- Small size, easy to install; high precision and good stability;
- Good linearity, long transmission distance and strong anti-interference ability;
- The mesh is designed at the funnel to prevent debris and other debris from blocking the downstream flow;
- The instrument casing is made of ABS engineering plastic, which can not be rusted and has good appearance quality;
- The rain inlet is made of ABS engineering plastic, which has high finish and small error caused by water retention.
- The tipping member support system is well-made, and the friction torque is small, so the tipping member is turned over sensitively, the performance is stable, and the work is reliable.

OVERVIEW

SEM404 is a precipitation measurement instrument, and its performance meets the requirements of the national standard GB/T 21978.2-2014 "Precipitation Observation Requirements".

The core component of the instrument, the tipping bucket, adopts a three-dimensional streamlined design, which makes the tipping bucket turn water more smoothly, and has the functions of self-cleaning dust and easy cleaning. The rainfall can be directly read, without the need for secondary calculation, which is simple and convenient.

The tipping bucket of the instrument is equipped with a constant magnet steel, and the reed switch bracket is equipped with a reed switch. When the instrument leaves the factory, the magnetic steel and the reed switch have been adjusted to a suitable coupling distance, so that the output signal of the instrument is proportional to the number of times the tipping bucket is turned over relation.


SPECIFICATION


Rain gauge cylinder diameter	Φ200mm
Resolution	default 0.2mm, optional 0.5mm
Cutting edge acute angle	40°～45°
Measurement error	≤±3% (indoor artificial precipitation, subject to the discharge of the instrument itself)
Rain intensity range	0mm～4mm/min (maximum rain intensity allowed to pass 8mm/min)
Output model	4~20mA/0~2V/0~5V/0~10V, pulse type, 485 communication (standard MODBUS-RTU protocol)
Power supply range	4.5~30V
Maximum power consumption	0.24W
Working environment	0～50°C, <95%(40°C)
Storage environment	-40～125°C, <80% (non-condensing)
Withstand voltage	≤100V (pulse type)
Withstand current	≤0.5A (pulse type)

E-mail: info@cdsentec.com www.cdsentec.com

© ChengDu SenTec Technology Co., Ltd.
Information is deemed correct at issue and subject to change without prior notice.

CONSTRUCTURE & DIMENSION

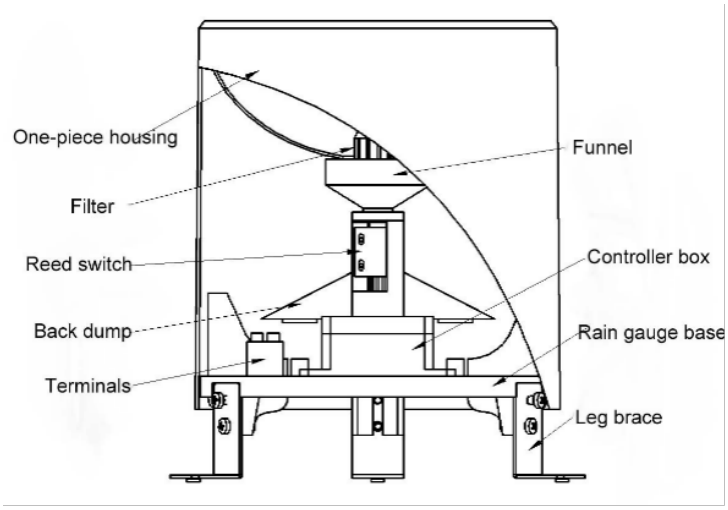

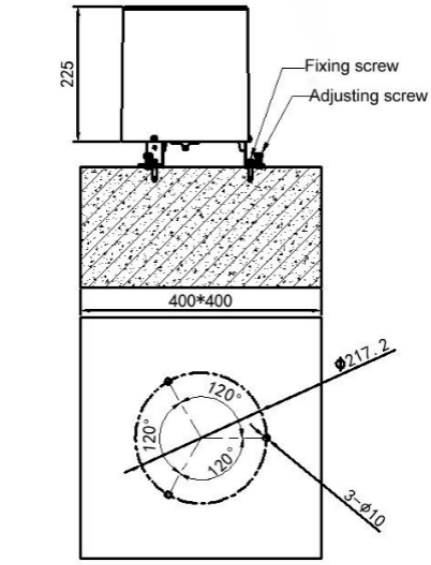

ORDER CODE

Code:	A	–	B	–	C
SEM	404	–	ABS	–	R

Model	Code A
Rain gauge	404
Material	**Code B**
High quality ABS shell	ABS

Signal output	Code C
485 signal output (Standard MODBUS-RTU protocol)	R
Pulsed output	P
Analog output	A

© ChengDu SenTec Technology Co., Ltd.
Information is deemed correct at issue and subject to change without prior notice.