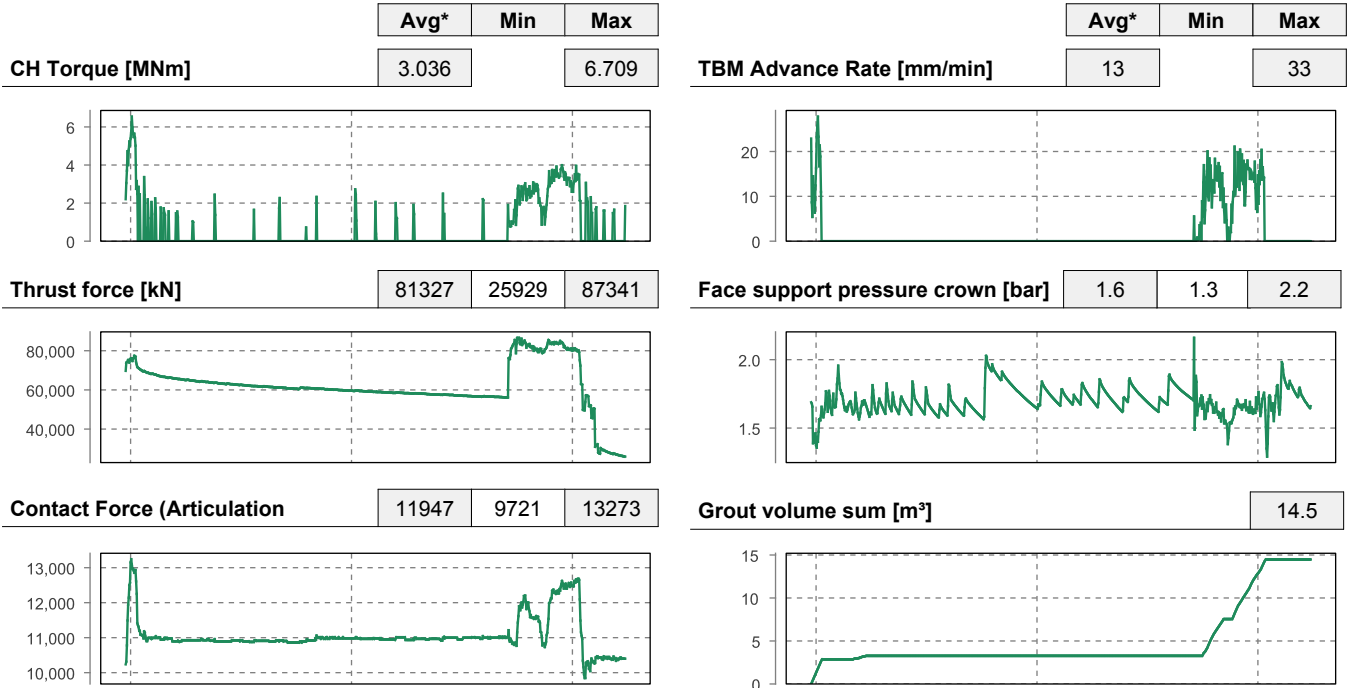



Install. Pos. (Leading Edge)	1714.429 m	Chainage Start	1706.519 m	Start Date	27/08/2024 11:51
Ring Type	U10	Chainage End	1704.916 m	Finish Date	28/08/2024 01:26

1) Operation Data

Advance Time	131 [min]	Ring Build Time	36 [min]	Downtime	646 [min]
--------------	-----------	-----------------	----------	----------	-----------

2) Operation Data Diagrams
**Average Advance*

3) Muck Weight / Volume and Ground Conditioning

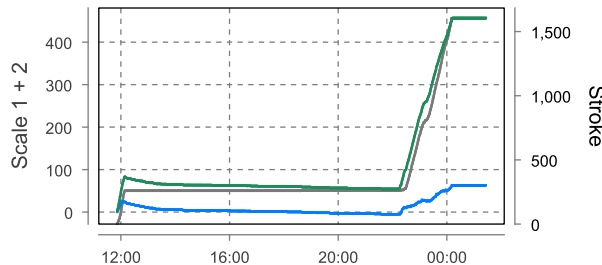
Excavated Weight	
Belt scale 1	457.7 [t]
Belt scale 2	63.0 [t]
Deviation (BS1/BS2)	727 [%]
Muck Volume	
Theoretical	215.5 [m³]
Net Stroke	1604 [mm]



Ground Conditioning Volume	
Total Foam	100 [L]
Polymer P002	479 [L]
Polymer P003	0 [L]
Water Foam Unit	24,117 [L]
HD Polymer	348 [L]
Bentonite (1+2)	92,895 [L]

4) TBM Guidance System

H	V
Deviation Front	
4	4 [mm]
Deviation Center	
-11	-10 [mm]
Deviation Rear	
-11	-10 [mm]




Roll	-0 mm/m	0.1 °
Nick	7 mm/m	-1.0 °

Note: Value before Ring Build

5) Grouting

#	[m³]	[bar]
#8		
A	2.4	4.2
B	0.1	0.02
#7		
A	1.6	4.0
B	0.1	0.01
#6		
A	2.3	2.5
B	0.2	3.4
#5		
A	0.0	0.0
B	0.0	0.0
#4		
A	0.0	0.0
B	0.0	0.0
#3		
A	2.1	3.5
B	0.1	4.7
#2		
A	2.2	2.8
B	0.2	4.6
#1		
A	2.7	3.7
B	0.2	5.2



Max. Volume [m³]
avg. Pressure [bar]

6) Segments
