

Install. Pos. (Leading Edge)

1696.803 m

Chainage Start

1687.291 m

Start Date

29/08/2024 20:06

Ring Type

U04

Chainage End

1685.684 m

Finish Date

29/08/2024 22:22

1) Operation Data

Advance Time

107 [min]

Ring Build Time

27 [min]

Downtime

0 [min]

2) Operation Data Diagrams

*Average Advance

CH Torque [MNm]


Avg*

Min

Max

7.079

10.736



TBM Advance Rate [mm/min]


Avg*

Min

Max

16

30




Thrust force [kN]

61676

21457

65401

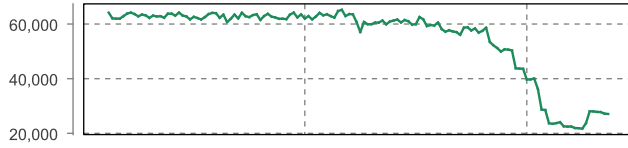


Face support pressure crown [bar]

1.8

1.5

1.9

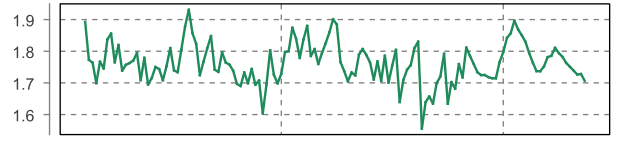


Contact Force (Articulation)

14880


11197

17552

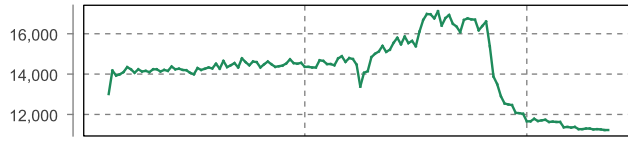

Grout volume sum [m³]

13.0

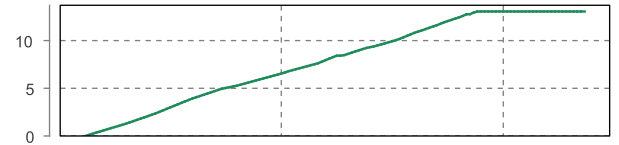

3) Muck Weight / Volume and Ground Conditioning

Excavated Weight

Belt scale 1 478.9 [t]


Belt scale 2 113.5 [t]

Deviation (BS1/BS2) 422 [%]

Muck Volume

Theoretical 216.1 [m³]

Net Stroke 1608 [mm]

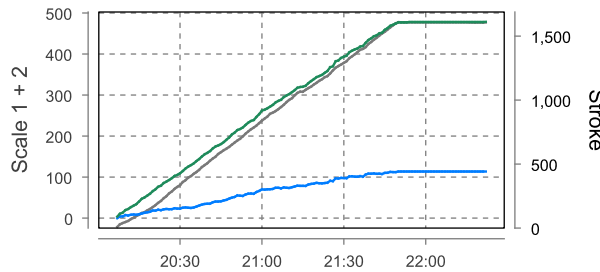

Ground Conditioning Volume

Total Foam 100 [L]

Polymer P002 285 [L]

Polymer P003 0 [L]


Water Foam Unit 14,299 [L]

HD Polymer 125 [L]

Bentonite (1+2) 58,484 [L]

4) TBM Guidance System

H	V
Deviation Front	
0	-0 [mm]
Deviation Center	
1	-1 [mm]
Deviation Rear	
1	-1 [mm]



Roll	-1 mm/m	0.1 °
Nick	5 mm/m	-1.1 °

Note: Value before Ring Build


5) Grouting

#8	[m³]	[bar]
A	2.3	4.3
B	0.1	0.37

#7	[m³]	[bar]
A	1.4	4.0
B	0.1	2.55

#6	[m³]	[bar]
A	2.2	3.1
B	0.2	3.7

#5	[m³]	[bar]
A	0.0	0.0
B	0.0	0.0



Max. Volume [m³]
avg. Pressure [bar]

#1	[m³]	[bar]
A	2.2	4.0
B	0.2	4.6

#2	[m³]	[bar]
A	1.6	3.5
B	0.1	4.3

#3	[m³]	[bar]
A	2.1	3.9
B	0.1	5.2

#4	[m³]	[bar]
A	0.0	0.0
B	0.0	0.0

6) Segments

