


Install. Pos. (Leading Edge)	1691.993 m	Chainage Start	1684.087 m	Start Date	30/08/2024 00:36
Ring Type	U06	Chainage End	1682.489 m	Finish Date	30/08/2024 03:58

1) Operation Data

Advance Time	162 [min]	Ring Build Time	39 [min]	Downtime	0 [min]
--------------	-----------	-----------------	----------	----------	---------


2) Operation Data Diagrams

*Average Advance

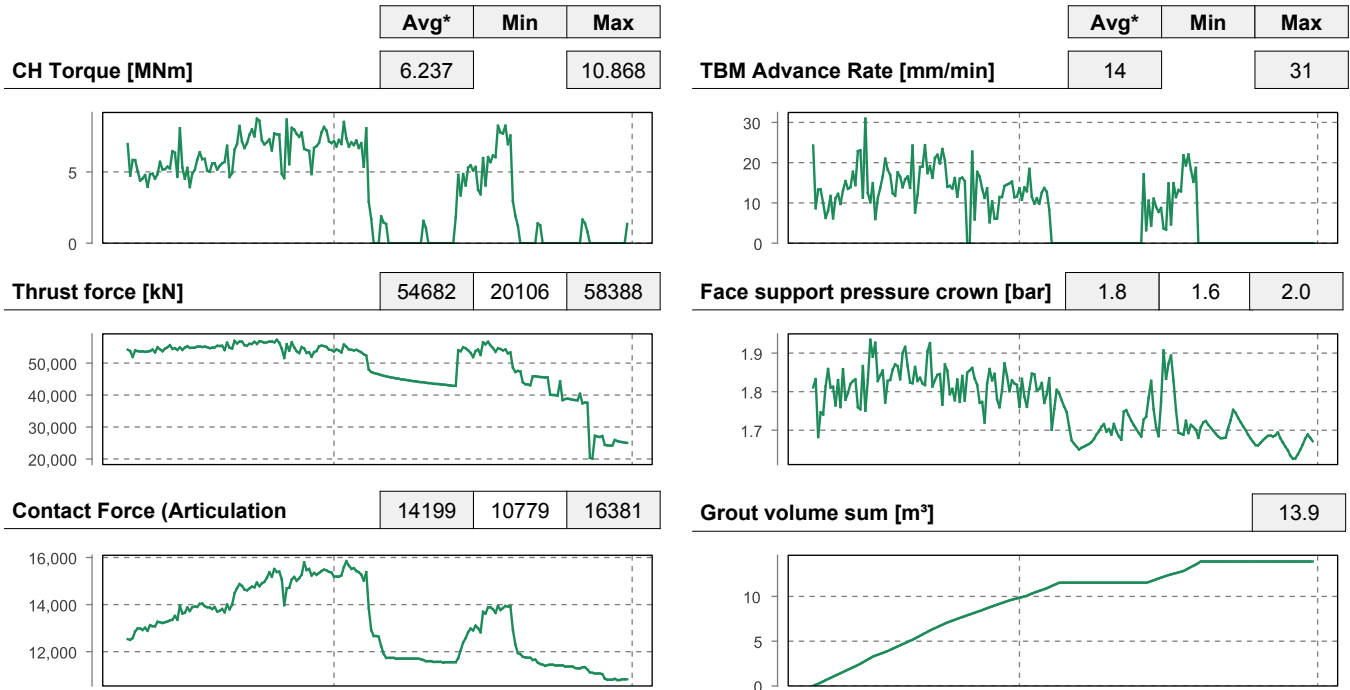

3) Muck Weight / Volume and Ground Conditioning


Excavated Weight	
Belt scale 1	562.8 [t]
Belt scale 2	70.7 [t]
Deviation (BS1/BS2)	796 [%]
Muck Volume	
Theoretical	215.3 [m³]
Net Stroke	1602 [mm]

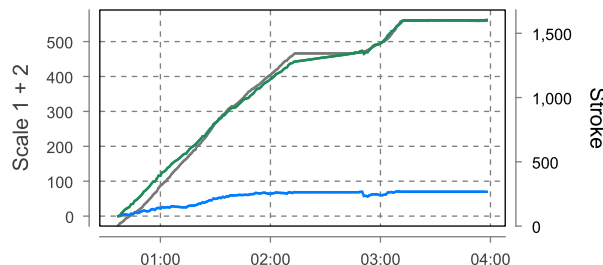

Ground Conditioning Volume	
Total Foam	100 [L]
Polymer P002	331 [L]
Polymer P003	0 [L]
Water Foam Unit	16,616 [L]
HD Polymer	262 [L]
Bentonite (1+2)	79,406 [L]

4) TBM Guidance System

H	V
Deviation Front	
-1	-1 [mm]
Deviation Center	
2	-3 [mm]
Deviation Rear	
2	-3 [mm]



Roll	-2 mm/m	0.0 °
Nick	6 mm/m	-1.1 °

Note: Value before Ring Build


5) Grouting

#8	[m³]	[bar]
A	2.5	4.3
B	0.1	0.45

#7	[m³]	[bar]
A	1.6	4.3
B	0.1	2.89

#6	[m³]	[bar]
A	2.7	3.5
B	0.2	4.3

#5	[m³]	[bar]
A	0.0	0.0
B	0.0	0.0



Max. Volume [m³]	
avg. Pressure [bar]	

#1	[m³]	[bar]
A	2.4	4.4
B	0.2	4.8

#2	[m³]	[bar]
A	1.4	3.4
B	0.1	3.5

#3	[m³]	[bar]
A	2.1	3.7
B	0.1	5.0

#4	[m³]	[bar]
A	0.0	0.0
B	0.0	0.0

6) Segments

