

Install. Pos. (Leading Edge)

1687.188 m

Chainage Start

1679.284 m

Start Date

30/08/2024 10:23

Ring Type

U07

Chainage End

1677.667 m

Finish Date

30/08/2024 13:47

1) Operation Data

Advance Time

89 [min]

Ring Build Time

63 [min]

Downtime

50 [min]

2) Operation Data Diagrams

*Average Advance

CH Torque [MNm]


Avg*

Min

Max

7.189

11.482


TBM Advance Rate [mm/min]


Avg*

Min

Max

19


28


Thrust force [kN]

54897

18240


60158


Face support pressure crown [bar]

1.8

1.6

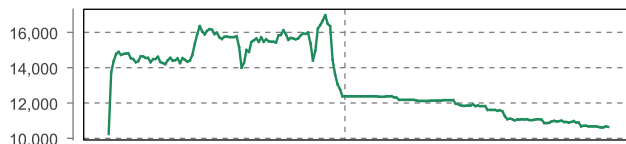
2.0


Contact Force (Articulation)

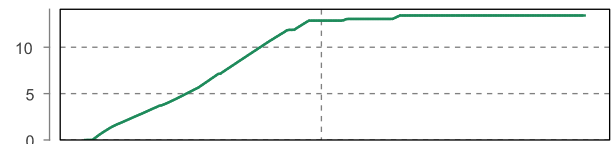
15211

10182

17032


Grout volume sum [m³]

13.4


3) Muck Weight / Volume and Ground Conditioning

Excavated Weight

Belt scale 1 450.7 [t]

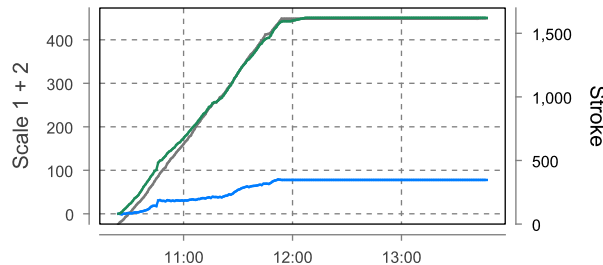
Belt scale 2 78.9 [t]

Deviation (BS1/BS2) 571 [%]

Muck Volume

Theoretical 217.4 [m³]

Net Stroke 1618 [mm]



Ground Conditioning Volume

Total Foam 100 [L]

Polymer P002 274 [L]

Polymer P003 0 [L]


Water Foam Unit 13,823 [L]

HD Polymer 110 [L]

Bentonite (1+2) 54,967 [L]

4) TBM Guidance System

H	V
Deviation Front	
-15	18 [mm]
Deviation Center	
-5	3 [mm]
Deviation Rear	
-5	3 [mm]



Roll	-3 mm/m	-0.1 °
Nick	7 mm/m	-1.0 °

Note: Value before Ring Build

5) Grouting

#8	[m³]	[bar]
A	2.0	4.7
B	0.1	0.24

#7	[m³]	[bar]
A	2.0	5.5
B	0.1	2.17

#6	[m³]	[bar]
A	2.1	3.6
B	0.1	4.4


#5	[m³]	[bar]
A	0.0	0.0
B	0.0	0.0

#1	[m³]	[bar]
A	2.0	4.3
B	0.1	4.6

#2	[m³]	[bar]
A	1.8	5.0
B	0.1	5.8

#3	[m³]	[bar]
A	2.1	5.6
B	0.1	6.1

#4	[m³]	[bar]
A	0.0	0.0
B	0.0	0.0



Max. Volume [m³]

avg. Pressure [bar]

6) Segments
