

Install. Pos. (Leading Edge)

1683.985 m

Chainage Start

1676.054 m

Start Date

30/08/2024 21:37

Ring Type

U07

Chainage End

1674.474 m

Finish Date

30/08/2024 23:54

1) Operation Data

Advance Time

107 [min]

Ring Build Time

28 [min]

Downtime

0 [min]


2) Operation Data Diagrams

*Average Advance

CH Torque [MNm]
Avg*
Min
Max


6.502

10.713


TBM Advance Rate [mm/min]
Avg*
Min
Max

15


29


Thrust force [kN]

68069

20685


71996


Face support pressure crown [bar]

1.8

1.4


2.0


Contact Force (Articulation)


14632

10365

16686


Grout volume sum [m³]

13.2


3) Muck Weight / Volume and Ground Conditioning
Excavated Weight

Belt scale 1 475.2 [t]

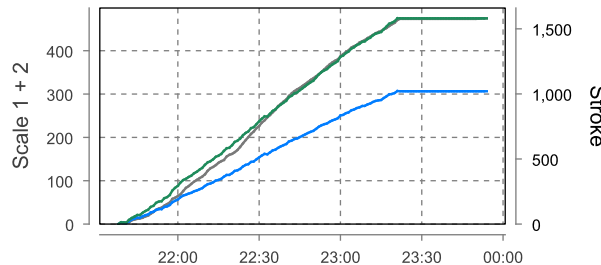
Belt scale 2 307.1 [t]

Deviation (BS1/BS2) 155 [%]

Muck Volume

Theoretical 212.4 [m³]

Net Stroke 1581 [mm]


Ground Conditioning Volume

Total Foam 100 [L]

Polymer P002 284 [L]

Polymer P003 0 [L]


Water Foam Unit 14,265 [L]

HD Polymer 184 [L]

Bentonite (1+2) 48,797 [L]

4) TBM Guidance System

H	V
Deviation Front	
-15	11 [mm]
Deviation Center	
-6	8 [mm]
Deviation Rear	
-6	8 [mm]



Roll	-1 mm/m	0.1 °
Nick	5 mm/m	-1.1 °

Note: Value before Ring Build


5) Grouting

#8	[m³]	[bar]
A	2.1	4.2
B	0.1	0.22

#7	[m³]	[bar]
A	1.8	4.3
B	0.1	3.01

#6	[m³]	[bar]
A	2.0	3.9
B	0.1	4.5

#5	[m³]	[bar]
A	0.0	0.0
B	0.0	0.0


A Total: 12.4 m³
B Total: 0.9 m³
Total: 13.2 m³

Max. Volume [m³]

avg. Pressure [bar]

#1	[m³]	[bar]
A	2.3	4.3
B	0.2	4.9

#2	[m³]	[bar]
A	1.7	4.3
B	0.1	4.8

#3	[m³]	[bar]
A	2.2	4.3
B	0.2	5.4

#4	[m³]	[bar]
A	0.0	0.0
B	0.0	0.0

6) Segments
