

Install. Pos. (Leading Edge)

1669.571 m

Chainage Start

1661.646 m

Start Date

01/09/2024 18:23

Ring Type

U08

Chainage End

1660.072 m

Finish Date

01/09/2024 22:30

1) Operation Data

Advance Time

168 [min]

Ring Build Time

47 [min]

Downtime

32 [min]

2) Operation Data Diagrams

*Average Advance

CH Torque [MNm]


Avg*

Min

Max

8.941

13.878


TBM Advance Rate [mm/min]


Avg*

Min

Max

10

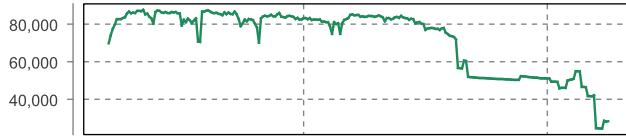
33


Thrust force [kN]

83216

24320

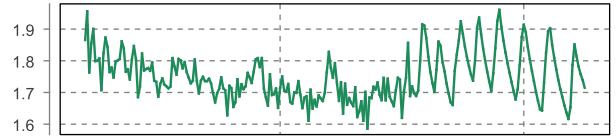
88403


Face support pressure crown [bar]

1.7

1.6

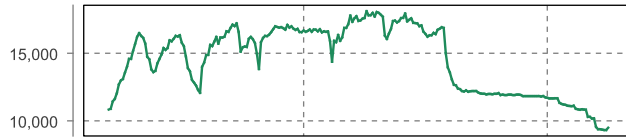
2.0


Contact Force (Articulation)

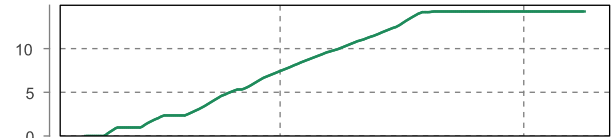
16125

9225

18172


Grout volume sum [m³]

14.2


3) Muck Weight / Volume and Ground Conditioning
Excavated Weight

Belt scale 1 546.9 [t]

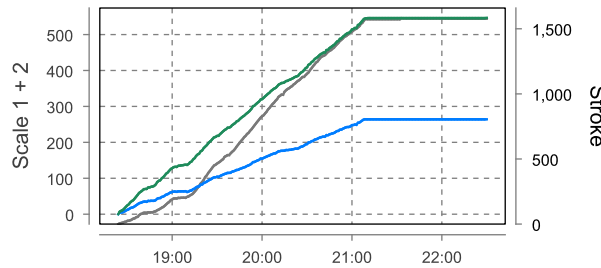
Belt scale 2 264.1 [t]

Deviation (BS1/BS2) 207 [%]

Muck Volume

Theoretical 212.4 [m³]

Net Stroke 1581 [mm]


Ground Conditioning Volume

Total Foam 100 [L]

Polymer P002 443 [L]

Polymer P003 0 [L]


Water Foam Unit 22,965 [L]

HD Polymer 673 [L]

Bentonite (1+2) 76,256 [L]

4) TBM Guidance System

H	V
Deviation Front	
-40	-12 [mm]
Deviation Center	
-11	3 [mm]
Deviation Rear	
-11	3 [mm]



Roll	-3 mm/m	-0.1 °
Nick	3 mm/m	-1.3 °

Note: Value before Ring Build

5) Grouting

#8	[m³]	[bar]
A	2.5	3.1
B	0.1	0.04

#7	[m³]	[bar]
A	1.6	3.2
B	0.1	0.02

#6	[m³]	[bar]
A	2.3	2.4
B	0.2	3.0


#5	[m³]	[bar]
A	0.0	0.0
B	0.0	0.0

#1	[m³]	[bar]
A	2.8	2.8
B	0.2	3.6

#2	[m³]	[bar]
A	1.9	3.1
B	0.1	3.4

#3	[m³]	[bar]
A	2.1	3.1
B	0.1	5.4

#4	[m³]	[bar]
A	0.0	0.0
B	0.0	0.0



Max. Volume [m³]

avg. Pressure [bar]

6) Segments
