

Install. Pos. (Leading Edge)

1640.738 m

Chainage Start

1632.825 m

Start Date

06/09/2024 16:05

Ring Type

U06

Chainage End

1631.216 m

Finish Date

06/09/2024 19:58

1) Operation Data

Advance Time

115 [min]

Ring Build Time

53 [min]

Downtime

62 [min]

2) Operation Data Diagrams

*Average Advance

CH Torque [NMm]


Avg*

Min

Max

8.249

14.987



TBM Advance Rate [mm/min]


Avg*

Min

Max

13

33




Thrust force [kN]

66180

19913

71063




Face support pressure crown [bar]

1.7

1.4

1.9




Contact Force (Articulation)

15722


10430

17826



Grout volume sum [m³]

13.6



3) Muck Weight / Volume and Ground Conditioning

Excavated Weight

Belt scale 1 508.8 [t]


Belt scale 2 429.2 [t]

Deviation (BS1/BS2) 119 [%]

Muck Volume

Theoretical 216.2 [m³]

Net Stroke 1609 [mm]

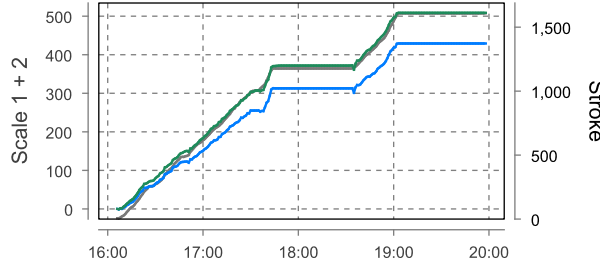

Ground Conditioning Volume

Total Foam 100 [L]

Polymer P002 455 [L]

Polymer P003 0 [L]


Water Foam Unit 20,258 [L]

HD Polymer 423 [L]

Bentonite (1+2) 60,047 [L]

4) TBM Guidance System

H	V
Deviation Front	
-21	-20 [mm]
Deviation Center	
-10	-16 [mm]
Deviation Rear	
-10	-16 [mm]



Roll	-2 mm/m	0.0 °
Nick	5 mm/m	-1.2 °

Note: Value before Ring Build


5) Grouting

#8	[m³]	[bar]
A	2.2	3.7
B	0.1	1.63

#7	[m³]	[bar]
A	1.8	5.6
B	0.1	1.17

#6	[m³]	[bar]
A	2.4	3.5
B	0.2	4.4

#5	[m³]	[bar]
A	0.0	0.0
B	0.0	0.0



Max. Volume [m³]

avg. Pressure [bar]

#1	[m³]	[bar]
A	2.5	3.7
B	0.2	6.1

#2	[m³]	[bar]
A	2.1	3.3
B	0.1	4.4

#3	[m³]	[bar]
A	1.8	3.7
B	0.1	6.0

#4	[m³]	[bar]
A	0.0	0.0
B	0.0	0.0

6) Segments

