



USB-C Advanced Power Supply 5 / 9 / 12 / 20 / 28V

USB-C Connector

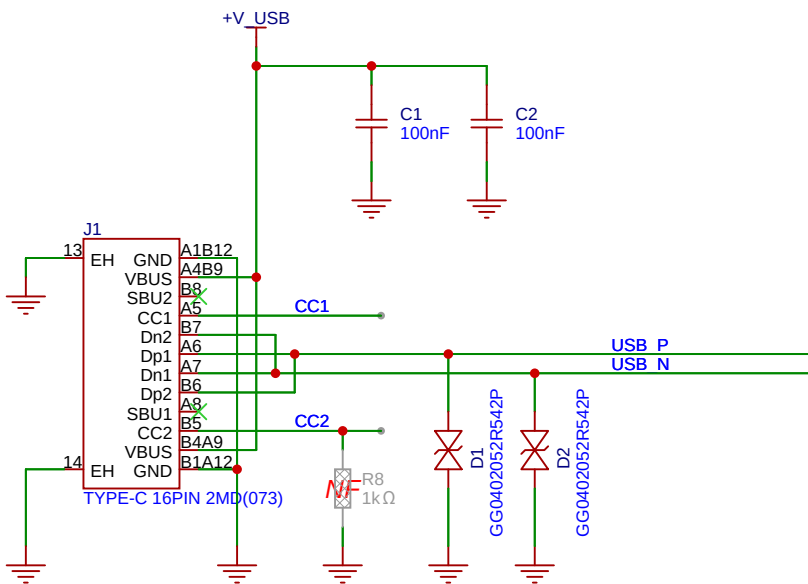


Design note:
CC2 pull down resistor should not be needed if the right cable is used.
Before fitting this resistor, be sure you know what you are doing.

USB PD Controller

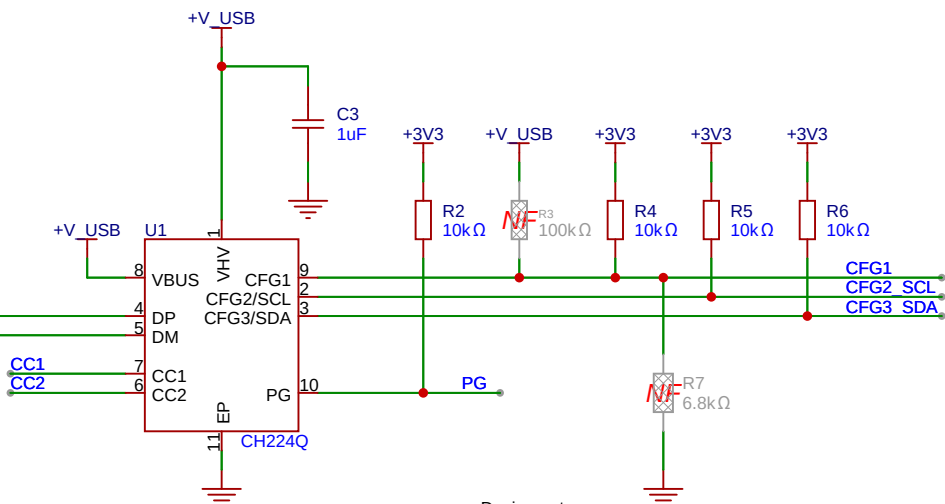


Design note:
The unfitted resistors on CFG1 are for experimenting

Error LED

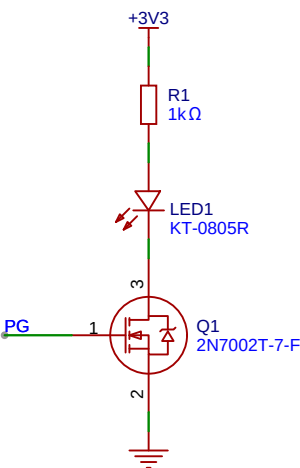


Output Connector

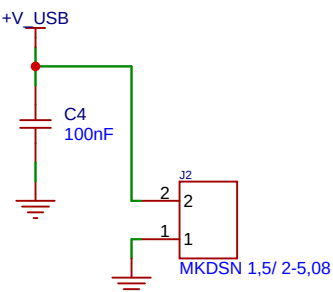


IMPORTANT!
The maximum output current and voltage depend on the power adapter, cable and selected voltage.

+3V3 Power

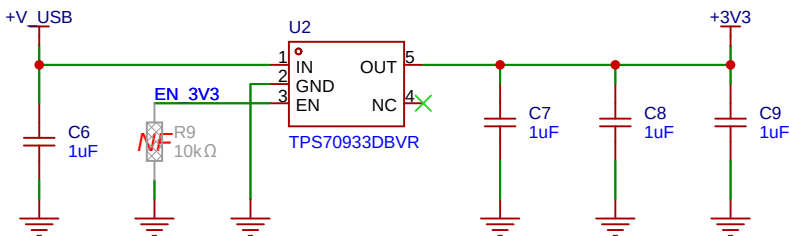


Output Voltage Selection Switches

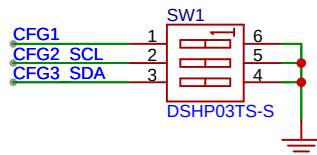


CFG1	CFG2	CFG3	Output Voltage
1	X	X	5V
0	0	0	9V
0	0	1	12V
0	1	1	20V
0	1	0	28V

Voltage LED Indicators

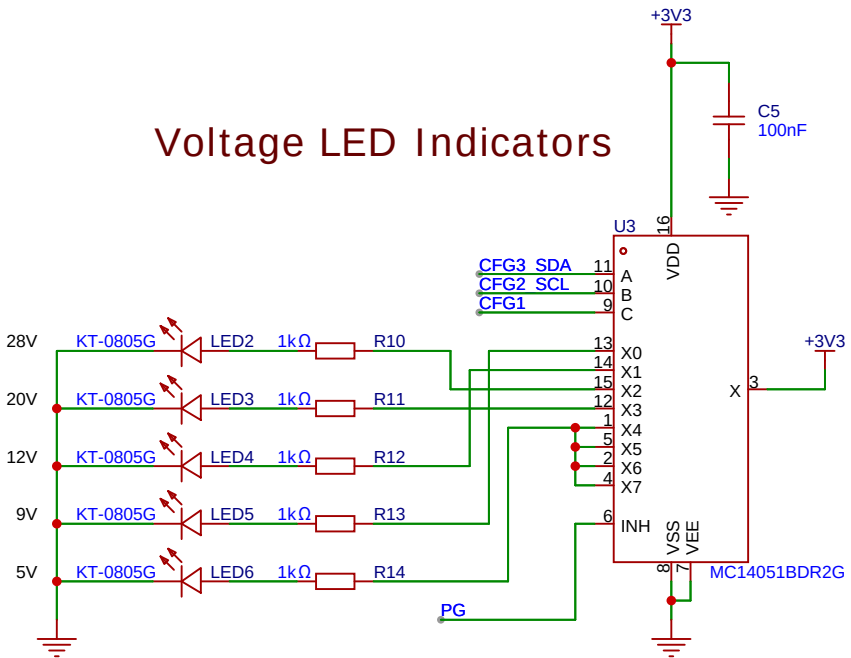


I2C Header

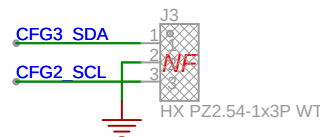

Design note:
For experimenting

Mounting Holes

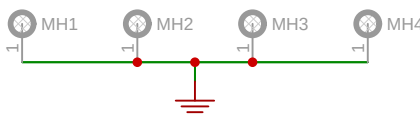

USB-C Advanced Power Supply © 2026 by FEDEVEL
is licensed under Creative Commons
Attribution-NonCommercial-ShareAlike 4.0 International
<https://creativecommons.org/licenses/by-nc-sa/4.0/>

Schematic	Schematic		Create at	2026-04-28
Board	USB-C Advanced Power Supply		Update at	2026-05-06
Drawn	Robert Feranec	USB-C Advanced Power Supply	Page	USB-C Advanced Power Supply
Reviewed				
		Version	Size	Page 1 Total 1
EasyEDA		V1I0	A3	FEDEVEL