



**Università  
degli Studi  
di Ferrara**

**Università degli Studi di Ferrara**

---

DEPARTMENT OF ENGINEERING

Bachelor's degree in Electronic and Computer Science Engineering

COMMUNICATION NETWORKS

# **On the Design of Quantum Communication Systems with non-Gaussian States**

Candidate:  
**Federico Forzano**

Supervisor:  
**Chiar.mo Prof. Andrea Conti**

Co-Supervisor:  
**Dott. Ing. Stefano Guerrini**

---

**Academic Year 2020-2021**



# Sommario

La meccanica quantistica sta aprendo le porte a nuove tecnologie per l'elaborazione e la trasmissione delle informazioni. La capacità di comprendere a fondo l'essenza della materia potrà portare, in un futuro molto vicino, a realizzare e progettare tecnologie di prossima generazione con prestazioni notevolmente migliori, in grado di soddisfare le esigenze di un mondo sempre più informatizzato e connesso. Le comunicazioni in tutto ciò rivestiranno un ruolo chiave; studiare ed ottimizzare un sistema di comunicazione efficiente e affidabile risulterà essenziale.

L'obiettivo di questa tesi è quello di analizzare le prestazioni di un discriminatore quantistico ottimo in presenza di informazioni codificate con stati quantistici di tipo Photon Added. Verranno presentati innanzitutto i principi cardine della meccanica quantistica (capitolo 2), seguiti da una breve rassegna di alcuni strumenti utili ai fini di caratterizzare un sistema di comunicazione basato sull'utilizzo di stati quantistici. Il terzo capitolo riguarderà una rapida presentazione delle modalità comunicazione quantistiche (quantum modulation) e degli aspetti chiave nel riconoscimento dell'informazione (quantum state discrimination). In questo contesto verrà presentato il discriminatore ottimo per binary systems; ovvero quello che minimizza la distribution error probability (DEP) nel riconoscimento del simbolo trasmesso. Verrà infine analizzato il comportamento di quest'ultimo in presenza di non-Gaussian states di tipo photon added coherent states (PACs) e photon added squeezed states (PASSs), col fine di ricercare la configurazione ottima di parametri che minimizzi la probabilità d'errore.



# Abstract

Quantum mechanics is opening doors to new ways of information processing and transmitting. The ability to deeply understand the essence of matter will lead, in the foreseeable future, to design and implement innovative technologies with a remarkable increase in performance. That is a very significant fact if we consider the increasingly computerization and necessity to be connected in our society. Communication will play a key role in this scenario, so it is essential to study and optimize an efficient and reliable communication system.

The aim of this thesis is analyzing the performance of an optimal binary quantum discriminator, in presence of information encoded with photon added quantum states. Firstly, the cardinal principles of the quantum mechanics will be introduced (Chapter 2), followed by a brief review of some useful tools aimed at characterizing a quantum state-based communication system. The third chapter will concern a brief presentation of the quantum communication modalities (quantum modulation) and some key aspects in the recognition of information (quantum state discriminator). In this context, the optimal discriminator for binary systems will be introduced, that is the one which minimizes the distribution error probability (DEP) in the recognition of the transmitted symbol. Finally, the behaviour of the latter will be analyzed in the presence of non-Gaussian states of photon added coherent states (PACSs) and photon added squeezed states (PASSs) typologies, with the goal of researching the optimal parameters configuration that minimizes the error probability.



# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Quantum Communication . . . . .	1
1.2	Objectives . . . . .	2
<b>2</b>	<b>Continuous Variables States</b>	<b>3</b>
2.1	Preliminaries on quantum mechanics . . . . .	3
2.1.1	Postulates . . . . .	3
2.1.2	The density operator . . . . .	5
2.2	Continuous-Variables Quantum Systems . . . . .	6
2.2.1	Hilbert space . . . . .	6
2.2.2	Phase space . . . . .	6
2.3	Gaussian States . . . . .	7
2.3.1	Coherent state . . . . .	8
2.3.2	Squeezed state . . . . .	9
2.4	Non-Gaussian States . . . . .	10
2.4.1	Photon added states . . . . .	10
2.4.2	Photon subtracted states . . . . .	13
<b>3</b>	<b>Quantum Communication Systems</b>	<b>15</b>
3.1	Quantum Communication System . . . . .	15
3.2	Quantum Modulations . . . . .	16
3.2.1	OOK modulations . . . . .	16
3.2.2	BPSK modulations . . . . .	17
3.3	Quantum Receiver . . . . .	17
3.3.1	Binary case . . . . .	18
3.3.2	Optimal binary receiver . . . . .	18
<b>4</b>	<b>Performance Analysis</b>	<b>21</b>
4.1	Quantum communication systems with PACSs . . . . .	21
4.1.1	Quantum OOK . . . . .	21
4.1.2	Quantum BPSK . . . . .	23
4.2	Quantum communication systems with PASSs . . . . .	24

4.2.1	Squeezed states discrimination . . . . .	24
4.2.2	PASS discrimination . . . . .	25
<b>5</b>	<b>Conclusion</b>	<b>29</b>



# Chapter 1

## Introduction

The information theory, born from the publications of Claude Shannon in the last fifty years of the XX century, has allowed us to study the communication world. The technological evolution of the last years has as its basis the concept of communication. Quantum mechanics can be the key enabler for the next generation communication systems. The possibility to engineer the properties of quantum systems is essential for the design of an optimized quantum communication systems.

Quantum technologies can be classified into two categories ([1]): discrete variables systems (DVs) and continuous variables systems (CVs). DV technologies are based on discrete quantum states, such as qubits, and are the quantum equivalents of digital signals. CV technologies are based on continuous values quantum states, such as coherent states, and are the equivalents of analog signals. The use of CVs offers the possibility to use the existing classical network infrastructure by just adapting the apparatuses in the network nodes; and, on the other side, CVs states are more easy to generate and manage [1]. For this reasons, in this thesis we will describe and analyze the second category of quantum communication system.

### 1.1 Quantum Communication

With quantum communication we mean the task of transferring classical or quantum information ([2, 3, 4, 5]) from one place to another one, using quantum technologies. The use of quantum states for the representation of informations allows us to overcome the limits of classical communication systems. In particular, the use of non-Gaussian photon-added states, as it will be shown in this thesis, can improves significantly the performance of communication systems. The use of photon-added states like photon-added coherent states (PACSs) and photon-added squeezed states (PASSs) is importat too for the possibility to

easily generate these states by using linear and non-linear optical devices. The main objective of this thesis is therefore to analyze the performance of quantum communication systems using PACSs [?, 2, 3, 4] and PASSs.

## 1.2 Objectives

The goal of this thesis, as mentioned before, is to analyze the performance of quantum communication systems using PACSs and PASS. The main content of this thesis are:

**Chapter 2:** A brief introduction of the quantum theory for CVs with particular emphasis on the characterization of non-Gaussian photon-added states;

**Chapter 3:** The description of a quantum communication system;

**Chapter 4:** The performance analysis of quantum systems using PACSs and PASSs.

## Chapter 2

# Elements of quantum information with continuous variables

This chapter gives a brief overview of quantum mechanics postulates, of the notation and of the essential concept used in this thesis. The target of that is to explain to the reader the essential concept of quantum mechanics and of quantum continuous-variable states, in order to give him the possibility to understand the obtained result.

### 2.1 Preliminaries on quantum mechanics

For understand the important results about the communication with continuous states, it is essential to give a brief introduction about the main aspects of quantum mechanics theory. This theory is based on a solid mathematic framework presented in this section. It is impossible to discuss about quantum mechanics without its mathematical formalism.

#### 2.1.1 Postulates

Like every physics theory, quantum mechanics is builded from few essential postulates. In this section are briefly introduced the six Dirac-Von Newman postulates of Quantum Mechanics [6, 7].

**Postulate 1 (State Representation)** *The state of an isolated quantum system is represented by a complex unitary vector  $|\psi\rangle$  in an Hilbert space  $\mathcal{H}$ . The space of possible states of the system is called state space and it is a separable complex Hilbert space.*

Every ket-vector  $|\psi\rangle \in \mathcal{H}$  can be represented as a column vector  $|\psi\rangle = [a_1, a_2, \dots, a_N]$ , where  $N$  is the dimension of the state space  $\mathcal{H}$ . The bra-vector  $\langle\psi|$  is the correspondent vector of  $|\psi\rangle$  in the dual-space of  $\mathcal{H}$  and can be represented as the transposed conjugate of  $|\psi\rangle$ .

Differently from the classical physics, in quantum mechanics the concept of state of system is introduced. In classical mechanics a system is described by his observables, like position or four-wheeled.

**Postulate 2 (Observables)** *Every observables of the system is represented by an Hermitian operator  $\mathbf{M} : \mathcal{H} \rightarrow \mathcal{H}$  acting on the state space. The outcomes of the measurement can only be one of the eigenvalue of the operator  $\mathbf{M}$ .*

The possible outcomes of the measurement are real number because  $\mathbf{M}$  is self-adjoint.

**Postulate 3 (Born's Rule)** *The probability to get the measurement  $\lambda_i$  from the observable  $\mathbf{M}$  in the system in state  $|\psi\rangle$  is:*

$$\mathbb{P}(\lambda_i) = \langle\psi| \mathbf{P}_i |\psi\rangle$$

where  $\langle\psi|$  is the correspondent vector of  $|\psi\rangle$  in the dual space of  $\mathcal{H}$  and where  $\mathbf{P}_i$  is the projection operator of  $\lambda_i$  in the correspondent space.

**Postulate 4 (Wavefunction Collapse)** *The state  $|\psi'\rangle$  after measurement of  $\lambda_i$  is  $\mathbf{P}_i |\psi\rangle$  (with the necessary normalization):*

$$|\psi'\rangle = \frac{\mathbf{P}_i |\psi\rangle}{\langle\psi| \mathbf{P}_i |\psi\rangle}.$$

**Postulate 5 (Time Evolution)** *The time evolution  $|\psi(t)\rangle$  of an isolated quantum system is given by an unitary operator  $\mathbf{U}$ :*

$$|\psi(t)\rangle = \mathbf{U}(t_0, t) |\psi(t_0)\rangle.$$

From postulate 5, it is possible to obtain the *time dependent Shrodinger Equation*:

$$i\hbar \frac{\partial}{\partial t} |\psi(t)\rangle = \mathbf{H}(t) |\psi(t)\rangle \quad (2.1)$$

where  $\mathbf{H}(t)$  is the Hamiltonian matrix,  $\hbar$  is the reduced Planck's constant and  $i = \sqrt{-1}$  is the imaginary unit.

**Postulate 6 (Composite System)** *The state space  $\mathcal{H}$  of a system composed of  $\mathcal{H}_1$  and  $\mathcal{H}_2$  is given by*

$$\mathcal{H} = \mathcal{H}_1 \otimes \mathcal{H}_2.$$

### 2.1.2 The density operator

The last postulate 6 has very important consequences for composite system. It is possible to describe two types of combined systems:

**Definition 1 (Product states)** *A state  $|\psi\rangle \in \mathcal{H}$  with  $\mathcal{H} = \mathcal{H}_1 \otimes \mathcal{H}_2$  is a pure state if exists  $|\psi_1\rangle \in \mathcal{H}_1$  and  $|\psi_2\rangle \in \mathcal{H}_2$  such that:*

$$|\psi\rangle = |\psi_1\rangle \otimes |\psi_2\rangle.$$

A product state represents two systems which do not interact; an operation on one of them does not perturb the other.

**Definition 2 (Entangled states)** *A system that is not in a product state (1), is in an entangled state.*

When a system is in an entangled state it is not possible to characterize the two subsystems with the states vector, although the state vector of the composite system is known.

#### Density operator

For a more general treatment, the following representation of states is given:

**Definition 3** *The state of quantum system is described by a linear operator  $\Xi : \mathcal{H} \rightarrow \mathcal{H}$ , called density operator such that  $\Xi^\dagger = \Xi$  and  $\text{tr}\{\Xi\} = 1$ .*

According to the definition 3, the postulates 3, 4, 5 can be reformulate as following.

The probability to get the measurement  $\lambda_i$  from the observable  $\mathbf{M}$  in the system in state  $\Xi$  is:

$$\mathbb{P}(\lambda_i) = \text{tr}\{\Xi \mathbf{P}_i\}. \quad (2.2)$$

The state  $\Xi'$  after measurement of  $\lambda_i$  is give by:

$$\Xi' = \frac{\mathbf{P}_i \Xi \mathbf{P}_i^\dagger}{\text{tr}\{\mathbf{P}_i \Xi \mathbf{P}_i^\dagger\}}. \quad (2.3)$$

The time evolution  $\Xi(t)$  of an isolated quantum system is given by an unitary operator  $\mathbf{U}$  as:

$$\Xi(t) = \mathbf{U} \Xi(t_0) \mathbf{U}^\dagger. \quad (2.4)$$

## 2.2 Continuous-Variables Quantum Systems

A quantum system is called a continuous-variable system when it has an infinite-dimensional Hilbert space described by observables with continuous eigenspectra [8]. Continuous-variables systems play a very important role in communications. this section presents the key aspects for the representation of this systems.

### 2.2.1 Hilbert space

Let consider a single-mode bosonic continuous-variable system, corresponding to a single mode radiation of electromagnetic field, i.e. a single mode quantum harmonic oscillator. Its space of states is an infinite dimensional Hilbert space  $\mathcal{H}$  in which it is possible to define a pair of bosonic field operators  $\{\mathbf{A}, \mathbf{A}^\dagger\}$  called annihilation and creation operators [8] satisfying the canonical commutation relation  $[\mathbf{A}, \mathbf{A}^\dagger] = \mathbf{I}$ .

In this space  $\mathcal{H}$  it is possible to define a number operator  $\mathbf{N}$ , defined as

$$\mathbf{N} = \mathbf{A}^\dagger \mathbf{A}. \quad (2.5)$$

The eigenstates of  $\mathbf{N}$ , i.e. the vector  $|n\rangle$  for which  $\mathbf{N}|n\rangle = n|n\rangle$ , are countable and form a countable basis of  $\mathcal{H}$  called Fock basis:  $\{|n\rangle\}_{n=0}^\infty$ .

The action over this states of the bosonic operators is determined by [8]

$$\mathbf{A}|0\rangle = 0; \quad \mathbf{A}|n\rangle = \sqrt{n}|n-1\rangle \quad (for \ n \geq 1), \quad (2.6)$$

and

$$\mathbf{A}^\dagger|n\rangle = \sqrt{n+1}|n+1\rangle \quad (for \ n \geq 0).$$

Every quantum state  $\Xi : \mathcal{H} \rightarrow \mathcal{H}$  can be represented as:

$$\Xi = \sum_{n,m} c_{n,m} |n\rangle \langle m| \quad (2.7)$$

where

$$c_{n,m} = \langle n | \Xi | m \rangle. \quad (2.8)$$

This representation is called Fock Representation.

### 2.2.2 Phase space

As seen before in 2.1.2, a quantum system can be completely described by a density operator  $\Xi$  defined in an infinite-dimensional Hilbert space  $\mathcal{H}$ , and this operator can be expressed by the Fock representation (2.7). Sometimes, however, it is convenient to give another representation of state  $\Xi$  by means of a complex function introduced by Wigner [9]: the quasi-probability distribution. In this thesis, this representation will be introduced and it will be used to classify the possible states.

**Definition 4 (Quantum characteristic function)** *The  $s$ -order characteristic function  $\chi(\xi, s)$ , with  $\xi, s \in \mathbb{C}$ , associated to the quantum state  $\Xi$  is defined as:*

$$\chi(\xi, s) = \exp\left\{\frac{s}{2}|\xi|^2\right\} \text{tr}\{\Xi D_\xi\} \quad (2.9)$$

where  $D_\xi$  is the displacement operator of parameter  $\xi$ , defined as:

$$D_\xi = \exp\left\{\xi A^\dagger - \xi^* A\right\}. \quad (2.10)$$

The quantum characteristic function is the Fourier-Weyl transform of the density operator associated to the state  $\Xi$ . We can notice that, in contrast to classical probability theory, there is an infinite number of quantum characteristic functions, indexed by the parameter  $s \in \mathbb{C}$ , representing the same quantum state.

The quasi-probability function is obtained as the inverse Fourier transform of the quantum characteristic function.

**Definition 5 (Quasi-probability distribution)** *The  $s$ -order quasi-probability distribution  $W(\alpha, s)$ , with  $s \in \mathbb{C}$ , associated to the quantum state  $\Xi$  is given by:*

$$W(\alpha, s) = \frac{1}{\pi^2} \int_{\mathbb{R}^2} \chi(\xi, s) e^{\alpha \xi^* - \alpha^* \xi} d\xi^2.$$

The quasi-probability distribution, for  $s = 0$  ( $W(\alpha) = W(\alpha, 0)$ ) is called Wigner W-function.

## 2.3 Gaussian States

Gaussian quantum states are an important class of quantum states of continuous-variables systems. They are defined as ([1] quoting [10, 11, 12, 13, 14]):

**Definition 6 (Gaussian state)** *A quantum state  $\Xi_G$  is a Gaussian state if its Wigner W-function  $W_G(\alpha)$  is Gaussian, i.e*

$$W_G(\alpha) = \frac{1}{\pi \sqrt{\det\{\check{C}_0\}}} \exp\left\{-\frac{1}{2}(\check{\alpha} - \check{\mu})^H \check{C}_0^{-1}(\check{\alpha} - \check{\mu})\right\}. \quad (2.11)$$

where  $\check{\mu}$  is the augmented displacement vector, and  $\check{C}_0$  is the augmented covariance matrix.

We remark that if  $\mu \in \mathbb{R}^2$  is the displacement vector and  $C_0$  is the covariance matrix, the augmented displacement vector and covariance matrix are given by the following transformation:

$$\begin{aligned} \check{\mu} &= \frac{1}{\sqrt{2}} J \mu \\ \check{C}_0 &= \frac{1}{2} J C_0 J^H \end{aligned} \quad (2.12)$$

where

$$\mathbf{J} = \begin{bmatrix} 1 & i \\ 1 & -i \end{bmatrix}.$$

Two important types of Gaussian states will be analyzed now: the coherent state and the squeezed state. For each one of these states is presented the noisy version too.

### 2.3.1 Coherent state

A coherent state is the state of a quantum harmonic oscillator of amplitude  $\mu$ . It is defined ([1] seen [15, 16]) as the eigenvector  $|\mu\rangle$  of  $\mathbf{A}$  associated to the eigenvalue  $\mu$ ; i.e

$$\mathbf{A} |\mu\rangle = \mu |\mu\rangle. \quad (2.13)$$

It is possible to obtain a coherent state of parameter  $\mu$ , applying the displacement operator to the ground state:

$$|\mu\rangle = \mathbf{D}_\mu |0\rangle. \quad (2.14)$$

As mentioned before, it is possible to characterize a state with the Fock representation and, equivalently, with the Wigner W-function. The last one is given, for a coherent state, by [17]:

$$W(\alpha) = \frac{2}{\pi} \exp\{-2|\alpha - \mu|^2\}. \quad (2.15)$$

It is easy to proof that  $W(\alpha)$  is gaussian, with  $\check{\mu} = [\mu \ \mu^*]^T$  and

$$\check{\mathbf{C}}_0 = \frac{1}{2}\mathbf{I}.$$

The Fock representation is given by [18]:

$$|\mu\rangle = e^{-\frac{|\mu|^2}{2}} \sum_{n=0}^{\infty} \frac{\mu^n}{\sqrt{n!}} |n\rangle. \quad (2.16)$$

#### Noisy coherent states

It is possible to characterize the state of a noisy harmonic oscillator introducing the thermal state, i.e the state of an electromagnetic cavity in thermal equilibrium. The Fock representation of the thermal state  $\Xi_{th}$  is given by [1]

$$\Xi_{th} = (1-v) \sum_{n=0}^{\infty} v^n |n\rangle \langle n| \quad (2.17)$$

where

$$v = \frac{\bar{n}}{\bar{n} + 1}$$



and  $\bar{n}$  is the well-known Plank distribution

$$\bar{n} = \left( \exp \left\{ \frac{\hbar\omega}{k_B T} \right\} - 1 \right)^{-1}.$$

A noisy coherent states  $\Xi_{\text{th}}(\mu)$  of parameter  $\mu$  can be obtained by applying the displacement operator  $D_\mu$  to the thermal state  $\Xi_{\text{th}}$ , as follow:

$$\Xi_{\text{th}}(\mu) = D_\mu^\dagger \Xi_{\text{th}} D_\mu. \quad (2.18)$$

The Wigner W-function is given by [17]

$$W_{th}(\alpha) = \frac{1}{\pi(\bar{n} + \frac{1}{2})} \exp \left\{ -\frac{|\alpha - \mu|^2}{\bar{n} + \frac{1}{2}} \right\} \quad (2.19)$$

and it can be proved that it is a Gaussian function with  $\check{\mu} = [\mu \ \mu^*]^T$  and

$$\check{C}_0 = \left( \bar{n} + \frac{1}{2} \right) \mathbf{I}.$$

The Fock representation is given by

$$\langle n | \Xi_{\text{th}}(\mu) | m \rangle = (1-v) e^{-(1-v)|\mu|^2} \sqrt{\frac{n!}{m!}} v^n [(1-v)\mu^*]^{m-n} L_n^{m-n} \left( \frac{-(1-v)^2 |\mu|^2}{v} \right) \quad (2.20)$$

### 2.3.2 Squeezed state

A squeezed state with amplitude  $\mu$  and squeezing parameter  $\zeta$ , is a defined as [1, 19, 20]

$$|\mu, \zeta\rangle = D_\mu S_\zeta |0\rangle \quad (2.21)$$

where  $S_\zeta$  is the squeezing operator, defined as

$$S_\zeta = \exp \left\{ \frac{1}{2} \left( \zeta \left( A^\dagger \right)^2 + \zeta^* A^2 \right) \right\}. \quad (2.22)$$

It can be proven that a squeezed state is a Gaussian state with  $\check{\mu} = [\mu \ \mu^*]^T$  and

$$\check{C}_0 = \frac{1}{2} \begin{bmatrix} \cosh(2r) & \sinh(2r)e^{-i\phi} \\ \sinh(2r)e^{-i\phi} & \cosh(2r) \end{bmatrix}$$

with  $\zeta = r e^{i\phi}$ . The Wigner W-function of a squeezed state, differently from the one of a coherent state, has not a circular symmetry.

#### Noisy squeezed states

The representation of a noisy squeezed state  $\Xi_{\text{th}}(\mu, \zeta)$  is obtained, similarly to a noisy coherent state, as:

$$\Xi_{\text{th}}(\mu, \zeta) = D_\mu S_\zeta \Xi_{\text{th}} S_\zeta^\dagger D_\mu^\dagger. \quad (2.23)$$

The Gaussian Wigner W-function is obtained with  $\check{\mu} = [\mu \ \mu^*]^T$  and

$$\check{C}_0 = \left( \bar{n} + \frac{1}{2} \right) \begin{bmatrix} \cosh(2r) & \sinh(2r)e^{-i\phi} \\ \sinh(2r)e^{-i\phi} & \cosh(2r) \end{bmatrix}. \quad (2.24)$$

The Fock representation is given by [21]

$$\begin{aligned} \langle n | \Xi_{\text{th}}(\mu, \zeta) | m \rangle &= \frac{\pi Q(0)}{(n!m!)^{1/2}} \sum_{k=0}^{\min(n,m)} k! \binom{n}{k} \binom{m}{k} \tilde{A}^k \left( \frac{1}{2} \tilde{B} \right)^{(n-k)/2} \\ &\quad \left( \frac{1}{2} \tilde{B}^* \right)^{(m-k)/2} H_{n-k}((2\tilde{B})^{-1/2} \tilde{C}) H_{m-k}((2\tilde{B}^*)^{-1/2} \tilde{C}^*) \end{aligned} \quad (2.25)$$

where  $H_n(x)$  is the Hermite polynomial with parameter  $n$ ,  $Q(0)$  is a constant defined by

$$Q(0) = \frac{1}{\pi} [(1+A)^2 - |B|^2]^{-1/2} \exp \left\{ - \frac{(1+A)|C|^2 + \frac{1}{2}[B(C^*)^2 + B^*C^2]}{(1+A)^2 - |B|^2} \right\} \quad (2.26)$$

and

$$\begin{aligned} \tilde{A} &= \frac{A(1+A) - |B|^2}{(1+A)^2 - |B|^2} \\ \tilde{B} &= \frac{B}{(1+A)^2 - |B|^2} \\ \tilde{C} &= \frac{(1+A)C + BC^*}{(1+A)^2 - |B|^2}. \end{aligned} \quad (2.27)$$

The parameter  $A, B$  and  $C$  are defined as:

$$\begin{aligned} A &= \bar{n} + (2\bar{n} + 1)(\sinh(r))^2 \\ B &= -(2\bar{n} + 1)e^{i\phi} \sinh(r) \cosh(r) \\ C &= \mu. \end{aligned} \quad (2.28)$$

## 2.4 Non-Gaussian States

A state that does not fulfill the definition 2.3 is a non-Gaussian state. An important and useful for communications class of non-Gaussian states, are the photon added states, examined in this thesis. Lastly will be mentioned another type of non-Gaussian state: the photon subtracted state.

### 2.4.1 Photon added states

The photon added state  $\Xi^{(1)}$ , obtained from the quantum state  $\Xi$ , is given by:

$$\Xi^{(1)} = \frac{A^\dagger \Xi A}{\text{tr}\{A^\dagger \Xi A\}}. \quad (2.29)$$

The name *photon addition* could lead to believe that the mean photon number of the photon added state is increased by one compared to the previous non photon added state. However, that is incorrect. In general, its mean number of photons could be the same, more or less than the starting state. Only if  $\Xi = |n\rangle\langle n|$ , i.e  $\Xi$  is the density operator corresponding to the Fock state  $|n\rangle$ , the result of the photon addition is a state with one more photon.

The photon added state  $\Xi^{(k)}$  (with  $k$  photon addition) is given by

$$\Xi^{(k)} = \frac{(\mathbf{A}^\dagger)^k \Xi \mathbf{A}^k}{\text{tr}\{(\mathbf{A}^\dagger)^k \Xi \mathbf{A}^k\}}. \quad (2.30)$$

The Fock representation of a photon added state, can be obtained as:

$$\Xi^{(k)} = \frac{\tilde{\Xi}^{(k)}}{\text{tr}\{\tilde{\Xi}^{(k)}\}} \quad (2.31)$$

and

$$\langle n | \tilde{\Xi}^{(k)} | m \rangle = \begin{cases} \sqrt{\frac{n!m!}{(n-k)!(m-k)!}} \langle n-k | \Xi | m-k \rangle & \text{if } n, m \geq k \\ 0 & \text{otherwise.} \end{cases}$$

The Wigner W-function of a photon added state is not Gaussian (2.3).

#### Photon added coherent states

Let  $\Xi$  be a coherent state of amplitude  $\mu \in \mathbb{C}$ :

$$\Xi = |\mu\rangle\langle\mu|$$

the photon added state  $|\mu^{(k)}\rangle$  is called photon added coherent state (PACS). The Wigner W-function of this state is given by [1]

$$W_+^{(k)}(\alpha) = B_+^{(k)}(\alpha) W_c(\alpha) \quad (2.32)$$

where  $W_c(\alpha)$  is the Wigner function of the coherent state 2.15 and

$$B_+^{(k)}(\alpha) = (-1)^k \frac{2L_k(|2\alpha - \mu|^2)}{\pi L_k(-|\mu|^2)}. \quad (2.33)$$

In figure 2.1 are plotted the Wigner W-function of a coherent state and of a PACS without noise, for  $k = 2$ . It is evident that the Wigner W-function of the photon added state is not Gaussian.

If  $\Xi$  is a noisy coherent state of amplitude  $\mu$  ( $\Xi = \Xi_{\text{th}}(\mu)$ ), the photon added state  $\Xi_{\text{th}}^{(k)}(\mu)$  is called noisy photon added coherent state (noisy PACS).

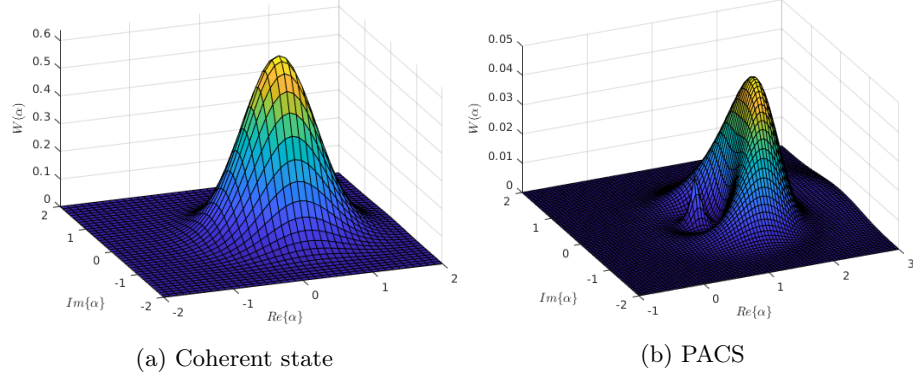


Figure 2.1: Comparison between the Wigner W-function of a coherent state and of a PACS with  $k = 2$ .

The Fock representation can be obtained by 2.31 and can be given in closed form by [22]

$$\langle n | \Xi_{th}^{(k)}(\mu) | m \rangle = \begin{cases} c_{n,m}^{(k)} & \text{for both } n, m \geq k \\ 0 & \text{otherwise} \end{cases} \quad (2.34)$$

where

$$c_{n,m}^{(k)} = \frac{(1-v)^{k+1} e^{-(1-v)|\mu|^2}}{v^k} \sqrt{n!m!} \binom{m}{k} v^n [(1-v)\mu^*]^{m-n} \frac{L_{n-k}^{m-n} \left( \frac{-(1-v)|\mu|^2}{v} \right)}{L_k \left( -|\mu|^2(1-v) \right)}.$$

The Wigner W-function is given by:

$$W(\alpha) = \frac{(-1)^k}{(2\bar{n}+1)^k} \frac{L_k \left( \frac{|2\alpha(\bar{n}+1)-\mu|^2}{(2\bar{n}+1)(\bar{n}+1)} \right)}{L_k \left( -\frac{|\mu|^2}{\bar{n}+1} \right)} W_{th}(\alpha) \quad (2.35)$$

where  $W_{th}(\alpha)$  is the Wigner W-function of a noisy coherent state 2.19.

### Photon added squeezed states

Let  $\Xi$  be a squeezed state of amplitude  $\mu$  and squeezing parameter  $\zeta$ , with  $\mu, \zeta \in \mathbb{C}$ :

$$\Xi = |\mu, \zeta\rangle \langle \mu, \zeta|.$$

The Wigner W-function of this state is given by

$$W_+^{(k)}(\alpha) = B_+^{(k)}(\alpha) W_s(\alpha), \quad (2.36)$$

where  $W_s(\alpha)$  is the Wigner function of the squeezed state, as given in 2.24, and  $B_+^{(k)}(\alpha)$  is given in 2.33. The Wigner function of the PASS, as that of PACS, is not Gaussian.

if  $\Xi$  is a noisy squeezed state with amplitude  $\mu$  and squeezing factor  $\zeta$  ( $\Xi = \Xi_{\text{th}}(\mu, \zeta)$ ), the photon added state  $\Xi_{\text{th}}^{(k)}(\mu, \zeta)$  is called noisy photon added squeezed state (PASS).

### 2.4.2 Photon subtracted states

Another class of non-Gaussian states are the photon subtracted states. Similarly to PASSs, a PSS  $|\psi_{-}\rangle$  can be obtained from a generic quantum state  $|\psi\rangle$  as

$$|\psi_{-}\rangle = \frac{\mathbf{A}^k |\psi\rangle}{\sqrt{\langle\psi|(\mathbf{A}^{\dagger})^k|\psi\rangle}}. \quad (2.37)$$

As in PASSs the name *photon subtraction* can not be interpreted in deterministic sense. It is also important to notice that if  $|\psi\rangle = |\mu\rangle$ , i.e. the state  $|\psi\rangle$  is a coherent state, the photon subtraction has not effect, that is:

$$|\psi_{-}\rangle = |\mu\rangle.$$



## Chapter 3

# Quantum Communication Systems with non-Gaussian States

Thanks to quantum mechanics, it will be possible to overcome the limits of classical communication systems. In the last decades the research in this field has led to very interesting results that could significantly improve the performance of communication systems. This chapter gives a brief overview of quantum communication tools: in the first section we give an overview of a quantum communication system, in the second we present the equivalents of classical modulation for quantum communication systems; in the last section we report the concept of quantum states discriminator (QSD), included when it can be considered optimal.

### 3.1 Quantum Communication System

A quantum communication system can be described similarly to a classical one, as we can see in figure 3.1. An information source emits a flow symbols  $a \in \mathcal{A}$ , this can be considered, without loss of generality, as a flow of bits. These bits have to be modulated with a quantum modulator that emits on the communication channel a quantum state  $\Xi \in \mathcal{A}_p$  for each bit or group of bits. The channel can distort the state and deliver the state  $\Upsilon \in \mathcal{B}_p$  that is in general different from  $\Xi$ . The receiver have to recognize the information  $\hat{a}$  as well as possible, i.e. with the minimum possible error probability.




Figure 3.1: Block-chain of a quantum communication system

## 3.2 Quantum Modulations

As in a classical system, it is possible to define the concept of modulation for a quantum communication system. The transmitted information will be associated to a quantum state of the electromagnetic field, so it can be transmitted on the communication channel.

It is possible to think about the quantum transmitter as in figure 3.2. The bit source emits a bit sequence  $a[n]$ , the serial-parallel converter parallelizes a group of  $l$ -bit (where if  $L$  is the number of quantum states,  $l = \log_2(L)$ ) and sends them to the quantum modulator. This latter associates one quantum state to every group of bit. The operation of quantum state creation, in real cases, is affected by noise.

The sequence of operations is very close to a classical transmitter: the main difference is that the modulator maps the bits into quantum states instead of classical modulation. Therefore, it is possible to achieve the quantum equivalent of classical modulation, with several states. After that, the impact on performance can be tested. This thesis only considers and assesses the binary cases, in the OOK and BPSK configuration.

### 3.2.1 OOK modulations

The OOK (on-off keying) is the most simple possible configuration for a communication system. The quantum implementation of that is realized associating the low-energy state to the ground state  $|0\rangle$  and the high-energy state to another state. It is important to consider that the physical realization of these states are not free-noise; this issue will be considered using noisy states 3.1.

$$\begin{aligned}\Xi_0 &= \Xi_{\text{th}} \\ \Xi_1 &= \Xi_{\text{th}}(\mu)\end{aligned}\tag{3.1}$$

In the equation 3.1, the high-energy state is associated to a coherent state. This configuration has been widely analyzed in [23, 24, 25, 26, 27, 28] but this is not the only possible way. The use of PACS states  $\Xi_{\text{th}}^{(k)}(\mu)$  is analyzed in [22, 1]; the use of PASS are briefly assessed in the following chapter of this thesis. The constellation of an OOK system with PACSs is given by:

$$\begin{aligned}\Xi_0 &= \Xi_{\text{th}}^{(0)}(0) \\ \Xi_1 &= \Xi_{\text{th}}^{(k)}(\mu).\end{aligned}\tag{3.2}$$



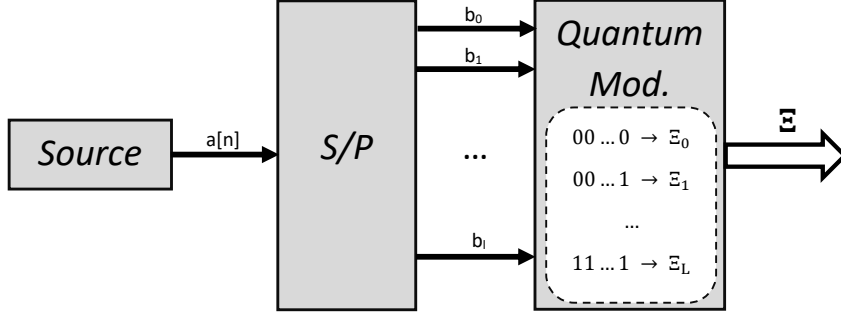


Figure 3.2: Block diagram of a quantum transmitter.

### 3.2.2 BPSK modulations

BPSK quantum systems are implemented using two states with opposite amplitude, like

$$\begin{aligned}\Xi_0 &= \Xi_{\text{th}}(-\mu) \\ \Xi_1 &= \Xi_{\text{th}}(\mu).\end{aligned}\tag{3.3}$$

There is no guarantee that the use of a BPSK solution in a quantum system will improve its performance. The effect depends on which are the used states. In the next chapter some configuration are assessed. The constellation of a BPSK system with PACSs are given by

$$\begin{aligned}\Xi_0 &= \Xi_{\text{th}}^{(k)}(-\mu) \\ \Xi_1 &= \Xi_{\text{th}}^{(k)}(\mu).\end{aligned}\tag{3.4}$$

## 3.3 Quantum Receiver

The problem of quantum receiver is one of the most important aspects of quantum communication. As in classical communication, the ability to distinguish between two or more states in presence of noise can be decisive in order to determine the performance of the communication system. The problem of the receiver can be, therefor, reformulated as a problem of discrimination between two states. However, differently from the classical situation, the discrimination can be done using a custom-designed quantum discriminator, overcoming the classical physics limits.

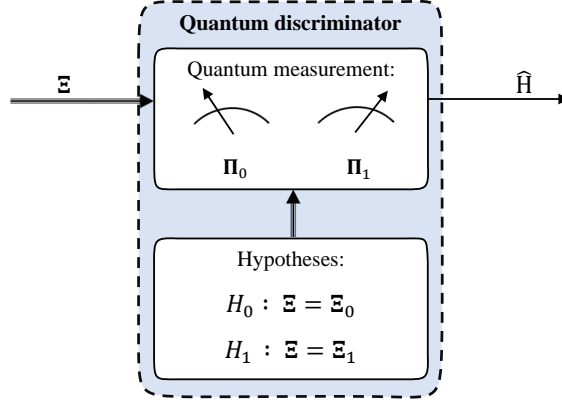


Figure 3.3: Binary quantum state discriminator.

### 3.3.1 Binary case

The problem of discrimination between two quantum states is realized, as every measurement process 2, using an operator or a set of operators. If the state of the system is unknown, as shown in figure 3.3, there are two hypotheses about the state  $\Xi$  (the problem is easily generalizable for  $M$  different states), given by:

$$\begin{aligned} H_0 : \Xi &= \Xi_0 \\ H_1 : \Xi &= \Xi_1 \end{aligned} \quad (3.5)$$

It is necessary a set of two positive-definites operator (POVM)

$$\mathcal{P} = \{\Pi_0, \Pi_1\} \quad (3.6)$$

for the discrimination process, and the probability that the hypothesis  $H_j$  is chosen if  $H_k$  is the right choose is given by [1]:

$$\mathbb{P}\{H_j|H_k\} = \text{tr}\{\Xi_k \Pi_j\}. \quad (3.7)$$

The distribution error probability (DEP) in the discrimination process, if  $p_0$  and  $p_1$  are respectively the probability of symbols 0 and 1, is so given by

$$P_e = 1 - (p_0 \text{tr}\{\Xi_0 \Pi_0\} + p_1 \text{tr}\{\Xi_1 \Pi_1\}). \quad (3.8)$$

### 3.3.2 Optimal binary receiver

The issue of finding the optimal POVM that minimizes the DEP was exhaustively discuss by Helstrom in [29, 30]. The minimum distribution error probability (MDEP) for a binary communication system is given by the well-known

Helstrom bound

$$\check{P}_e = \frac{1}{2} (1 - \|p_1 \Xi_1 - p_0 \Xi_0\|_1), \quad (3.9)$$

where  $p_0, p_1$  are the probability that the states  $\Xi_0, \Xi_1$  are transmitted and the operator  $\|\cdot\|_1$  represents the trace norm. The MDEP 3.9 is obtained with the POVM defined as

$$\check{\Pi}_0 = \sum_{\substack{i \\ \lambda_i < 0}} |\lambda_i\rangle \langle \lambda_i|, \quad (3.10)$$

$$\check{\Pi}_1 = 1 - \check{\Pi}_0 = \sum_{\substack{i \\ \lambda_i \geq 0}} |\lambda_i\rangle \langle \lambda_i|;$$

where  $|\lambda_i\rangle$  is the eigenvector of  $p_1 \Xi_1 - p_0 \Xi_0$  associated to the eigenvalue  $\lambda_i$ . For pure states, i.e  $\Xi_0 = |\psi_0\rangle \langle \psi_0|$  and  $\Xi_1 = |\psi_1\rangle \langle \psi_1|$ , the equation 3.9 begin

$$\check{P}_e = \frac{1}{2} \left( 1 - \sqrt{1 - 4p_0 p_1 |\langle \psi_0 | \psi_1 \rangle|^2} \right). \quad (3.11)$$

It is possible to observe that, for pure states, the MDEP is equal to 0 if  $\langle \psi_0 | \psi_1 \rangle$ , that is  $|\psi_0\rangle$  and  $|\psi_1\rangle$  are orthogonal states.



## Chapter 4

# Performance Analysis

This chapter characterizes two systems with different types of photon added state in term of their discrimination MDEP 3.9: a photon added coherent state system (from [22]) and a photon added squeezed state. For each system, we consider the OOK configuration and the BPSK. The use of photon added states, as it will be shown, can improve significantly the performance of the communication.

The analyzed situation does not consider the channel effect on the transmitted information: it has been supposed that the noisy states reach the discriminator as they were created. The channel effects for a PACS system are described in [22].

### 4.1 Quantum communication systems with PACSs

The effect of the use of PACS in an OOK communication system was extensively discussed in [22]. In this section the most important result will be reported and a BPSK system will be tested.

#### 4.1.1 Quantum OOK

The use of PACS in an OOK system can significantly improve the performance. The MDEP, with thermal noise, is given by the Helstrom bound 3.9, where, for an OOK PACS system,

$$\begin{aligned}\Xi_0 &= \Xi_{\text{th}} = \Xi_{\text{th}}^{(0)}(0) \\ \Xi_1 &= \Xi_{\text{th}}^{(k)}(\mu).\end{aligned}\tag{4.1}$$

It is useful, in order to evaluate the performance of the system, to introduce the mean number of photon  $n_p$  in a quantum state  $\Xi$ , which is given by:

$$n_p = \text{tr}\{\Xi A^\dagger A\}.\tag{4.2}$$

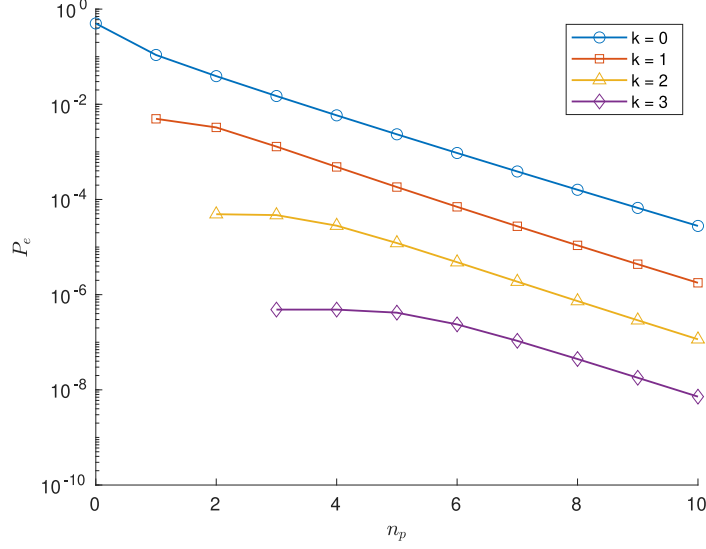


Figure 4.1: MDEP for PACS QOOK with:  $k = 0, 1, 2, 3$ ;  $\bar{n} = 10^{-2}$ ;  $p_0 = p_1 = 1/2$

For a photon added coherent state, the equation 4.2 becomes [22]:

$$n_p(\mu, \bar{n}) = \frac{N_{k+1}(\mu, \bar{n})}{N_k(\mu, \bar{n})} - 1, \quad (4.3)$$


where

$$N_k(\mu, \bar{n}) = \text{tr} \left\{ (\mathbf{A}^\dagger)^k \mathbf{\Xi}_{\text{th}}(\mu) \mathbf{A}^k \right\}. \quad (4.4)$$

It is possible to observe that the minimum of  $n_p$  is given by:

$$n_p(0, \bar{n}) = (k+1)(\bar{n}+1) - 1. \quad (4.5)$$

The MDEP of a quantum OOK system with PACS in function of  $n_p$  is represented in the figure 4.1, where in the x-axis there are the mean number of photon  $n_p$  in the state  $\mathbf{\Xi}_1$  (which corresponds to the mean number of photon in the whole system) and in the y-axis there are the MDEP ( $P_e$ ). The plot was obtained for equiprobable symbols and mean number of thermal photons  $\bar{n} = 10^{-2}$ . The argument of the trace norm  $\|\cdot\|_1$  in the Helstrom bound 3.9, is an operator in an infinite dimensional Hilbert space; for the simulation, it has been approximated in  $N = 30$  dimension. We can observe that the photon addition improves significantly the performance in terms of error probability. Increasing the value of the parameter  $k$  the MDEP of the system transate; the error probability, for the same energy-level, is lower if  $k$  is bigger. We can notice too that the graphs do not start all from 0. This is because the minimum mean

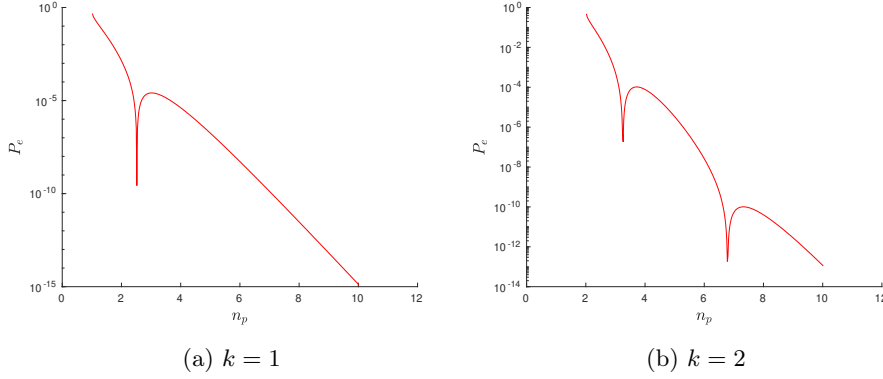Figure 4.2: MDEP of quantum BPSK in absence of noise,  $N = 30$ .

number of photons in a photon added state is not always 0 as it possible to see in equation 4.5.

#### 4.1.2 Quantum BPSK

It can be interesting to assess the effect of photon addition in a quantum BPSK system. The constellation is given, for a PACS BPSK, by:

$$\begin{aligned}\Xi_0 &= \Xi_{\text{th}} = \Xi_{\text{th}}^{(k)}(-\mu) \\ \Xi_1 &= \Xi_{\text{th}}^{(k)}(\mu).\end{aligned}\tag{4.6}$$

In absence of noise ( $\bar{n} = 0$ ), the MDEP is given by formula 3.11 where

$$\begin{aligned}|\psi_0\rangle &= |-\mu^{(k)}\rangle, \\ |\psi_1\rangle &= |\mu^{(k)}\rangle.\end{aligned}\tag{4.7}$$

The inner product is given, in closed form, by [22]:

$$\langle -\mu^{(k)} | \mu^{(k)} \rangle = \frac{L_k(|\mu|^2)}{L_k(-|\mu|^2)} e^{-2|\mu|^2},\tag{4.8}$$

where  $L_k(x)$  is the Laguerre polynomial of parameter  $k$ , evaluate in  $x$ . In figure 4.2 the MDEP in absence of noise, for QBPSK with PACS, is plotted for  $k = 1$  and for  $k = 2$ , in function of  $n_p$ , with  $N = 30$ . It can be noticed that exist  $k$  zeros in the MDEP plot, where  $k$  is the number of photon additions, that corresponds to the zeros of  $L_k(|\mu|^2)$  in equation 4.8. The existence of these zeros is not really useful for the design of a quantum communication system because their selectivity factors are too high for a phisical implementation. It is, nevertheless, possible to use that in order to evaluate the effect of the thermal noise. In figure 4.3, the sluggish performance due to the thermal noise is clear. The plot shows the trend of MDEP, for zeros value of  $\mu$ , in function of  $\bar{n}$ ; the

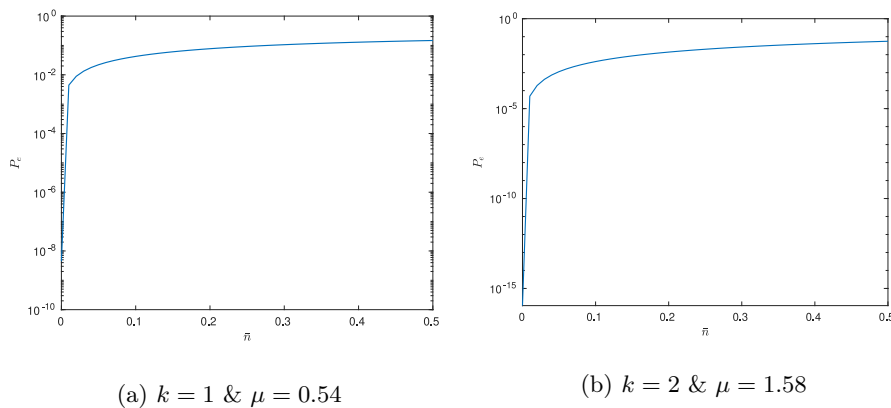


Figure 4.3: Thermal noise effect, in correspondence of MDEP zeros ( $N = 40$ ).

used approximation is  $N = 30$ . The MDEP in presence of noise is given using the expression 3.9. We can shown using the formula 2.3.1 that  $\bar{n}$  in a real cases in near to zero, the plot show the general trend of the MDEP.

The comparison between a quantum OOK system and a quantum BPSK system is given in figure 4.4, in function of the mean number of photons in the system  $\bar{E}$ :

$$\bar{E} = \frac{1}{2} (n_{p0} + n_{p1}),$$

where  $n_{pi}$  is the mean number of photons in the state  $\Xi_i$ . The parameter  $\bar{E}$  is equal to  $n_p/2$  for the OOK system and the average of the  $n_p$  for each state for the BPSK system. The plots are given with  $\bar{n} = 10^{-2}$ ,  $N = 45$  and equiprobable symbols. The obtained result is really intresting: the quantum BPSK has a sluggish performance due two the photon addition process. At an equal level of energy  $\bar{E}$ , for PACS systems, it is possible to find an OOK configuration that maximizes the performance.

## 4.2 Quantum communication systems with PASSs

The use of squeezed states instead of coherent states allows us to overcome the limits of precedent systems. The representation of a noisy squeezed state is given in 2.3.2. This section initially discusses the advantages of using squeezed states without photon addition; then it evaluates the effect of the photon addition in quantum OOK and BPSK systems.

### 4.2.1 Squeezed states discrimination

At first, we assess the effect of squeezing on the performance in absence of photon addition and thermal noise. As for PACS systems, it can be useful to



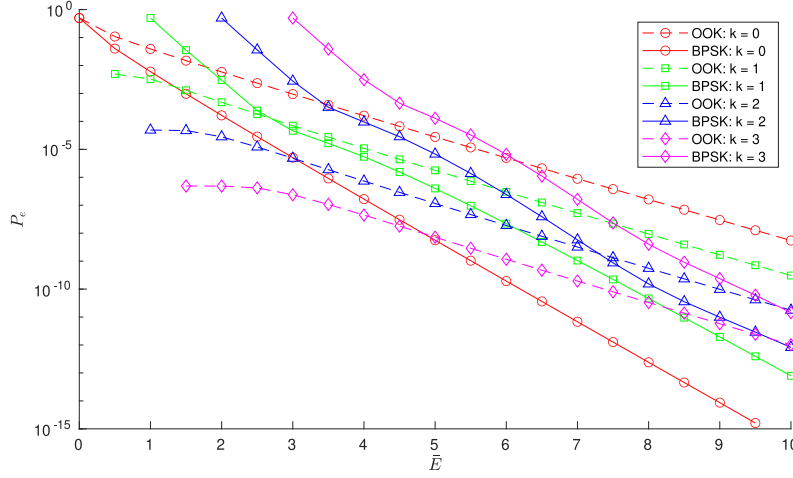


Figure 4.4: BPSK and OOK comparison.

$$N = 45, \bar{n} = 10^{-2}, p_0 = p_1 = 1/2$$

define the mean number of photon  $n_p$  in a squeezed state, which is given by

$$n_p(\mu, r) = |\mu|^2 + (\sinh r)^2; \quad (4.9)$$

where  $\mu$  is the amplitude of the starter coherent state and the squeezing factor is  $\zeta = re^{i\theta}$ . The minimum value of  $n_p$  is given by  $n_p(0, r) = \sinh^2 r$ .

For a quantum squeezed states BPSK system, the MDEP, obtained with the Helstrom bound 3.9, is plotted in figure 4.5 in function of  $\bar{E}$ , i.e the mean number of photon in the system (given by the average of  $n_p$  for each state), with:  $\theta = \pi$ ,  $N = 30$ , equiprobable symbols and  $\bar{n} = 0$ .

It can be noticed that the optimal configuration of  $r$  depends on the energy in the system. For low energy levels the squeezing has not a positive effect.

#### 4.2.2 PASS discrimination

We are analyzing now the performance of a noisy photon added squeezed state system (PASS) 2.4.1, in OOK and BPSK configuration. The MDEP is found again with the Helstrom bound 3.9. As for the other systems, it is useful to define the mean number of photons  $n_p$  for noisy photon added squeezed states, that is given by:

$$n_p(\mu, \zeta, \bar{n}) = \frac{N_{k+1}(\mu, \zeta, \bar{n})}{N_k(\mu, \zeta, \bar{n})} - 1, \quad (4.10)$$

where

$$\begin{aligned} N_k(\mu, \zeta, \bar{n}) &= \text{tr} \left\{ (\mathbf{A}^\dagger)^k \boldsymbol{\Xi}_{\text{th}}(\mu, \zeta) \mathbf{A}^k \right\} \\ &= \text{tr} \left\{ (\mathbf{A}^\dagger)^k \mathbf{D}_\mu \mathbf{S}_\zeta \boldsymbol{\Xi}_{\text{th}} \mathbf{S}_\zeta^\dagger \mathbf{D}_\mu^\dagger \mathbf{A}^k \right\}. \end{aligned} \quad (4.11)$$

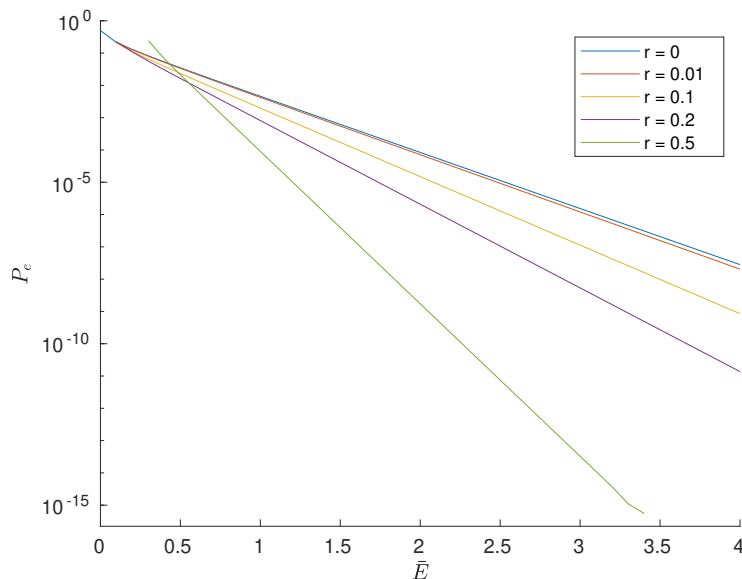


Figure 4.5: MDEP of squeezed state BPSK system.  $N = 30$ ,  $\bar{n} = 0$ ,  $\theta = \pi$ ,  $p_0 = p_1 = 1/2$

### OOK PASS system

The constellation of a quantum OOK system with noisy PASS, is given by:

$$\begin{aligned}\Xi_0 &= \Xi_{\text{th}}^{(0)}(0, 0) \\ \Xi_1 &= \Xi_{\text{th}}^{(k)}(\mu, \zeta).\end{aligned}\tag{4.12}$$

In figure 4.6, the MDEP of a quantum OOK noisy PASS system is plotted in function of the mean number of photon  $n_p$  in the PASS. For the simulation are used  $N = 30$ ,  $\bar{n} = 10^{-2}$ ,  $\theta = \pi$  and equiprobable symbols. It can be noticed that the photon addition significantly improves the performance of the system, at least for the plotted energy level.

### BPSK PASS system

Similar to the PACS BPSK, the constellation of PASS BPSK is given by:

$$\begin{aligned}\Xi_0 &= \Xi_{\text{th}}^{(k)}(-\mu, \zeta) \\ \Xi_1 &= \Xi_{\text{th}}^{(k)}(\mu, \zeta).\end{aligned}\tag{4.13}$$

The figure 4.7 shows the effects of the photon addition in a quantum BPSK system, in terms of the mean photon number in the system  $\bar{E}$ , given by the average of the mean photon number  $n_p$  of  $\Xi_0$  and  $\Xi_1$ . The parameters used for the simulation are  $N = 40$ ,  $\bar{n} = 10^{-2}$ ,  $\theta = \pi$  and equiprobable symbols. As in

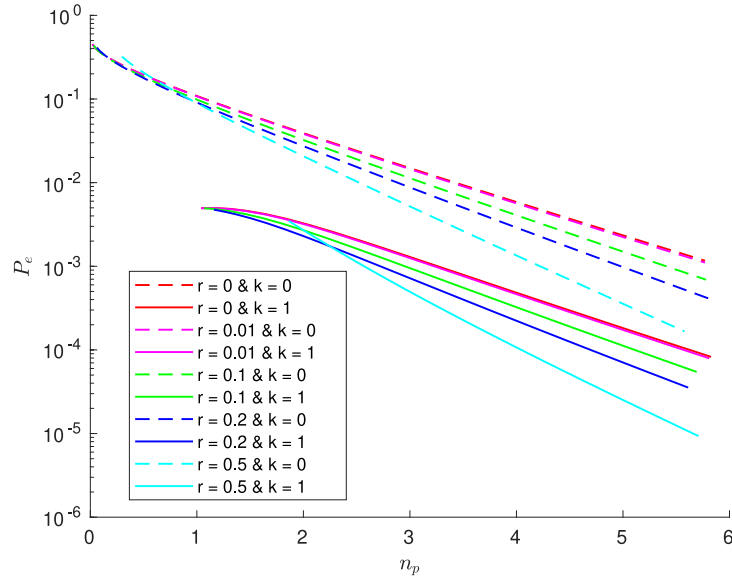


Figure 4.6: MDEP of noisy PASS quantum OOK system.

$N = 30$ ,  $\bar{n} = 10^{-2}$ ,  $\theta = \pi$  and  $p_0 = p_1 = 1/2$ .

PACS case, it is evident that the photon addition, in a BPSK system, has not the positive effect that has in an OOK system.

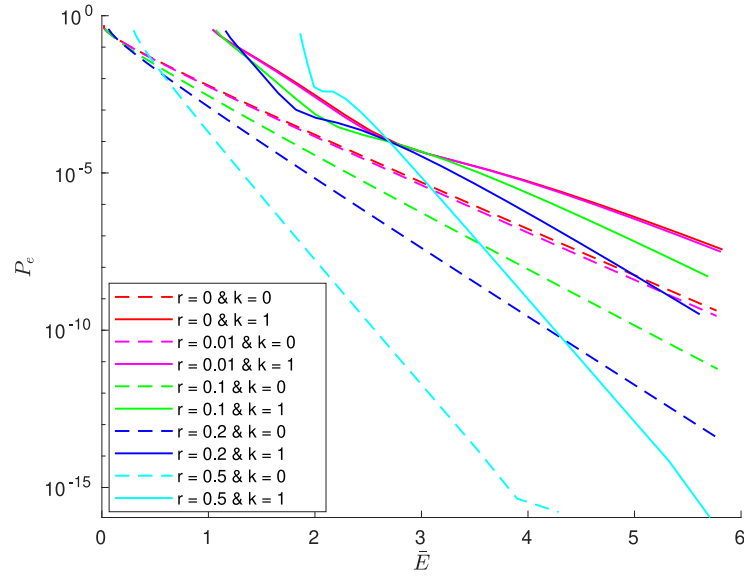


Figure 4.7: MDEP of noisy PASS quantum BPSK system.  
 $N = 40$ ,  $\bar{n} = 10^{-2}$ ,  $\theta = \pi$  and  $p_0 = p_1 = 1/2$ .

## Chapter 5

# Conclusion

The aim of this thesis is analyzing the performance of a quantum optimal discriminator in the presence of non-gaussian states. This performance was evaluated in terms of error probability relating to symbol recognition. In the first place, we have presented the quantum mechanics postulates, formulated by Dirac and Von Neumann and generalized with the use of density operators. Then, we have described the quantum modulation and quantum states discrimination concepts. Finally, we have analyzed some systems performance in terms of minimum distribution error probability (MDEP). All evaluations were made assuming the absence of effects associated to the communication channel, then supposing that the received state does not present any difference compared to the emitted one.

This thesis highlights the fact that the use of non-gaussian photon added states instead of gaussian states in OOK systems can ameliorate the QSD. In particular, the combination of squeezing and photon addition (PASSs) turns out extremely effective. Instead, in BPSK quantum systems, the photon addition effect manifests itself as negative.

The obtained results can be significantly important in a quantum communication system design, allowing us to make the best of this physics theory potential.



# Bibliography

- [1] S. Guerrini, “Quantum communications: State characterization and system design,” 2021.
- [2] S. Guerrini, M. Chiani, M. Z. Win, and A. Conti, “Quantum pulse position modulation with photon-added squeezed states,” in *Proc. IEEE Workshop on Quantum Commun. and Inf. Technol. (QCIT), Global Telecomm. Conf.*, Taipei, Taiwan, Dec. 2020, pp. 1–5.
- [3] —, “Quantum pulse position modulation with photon-added coherent states,” in *Proc. IEEE Workshop on Quantum Commun. and Inf. Technol. (QCIT), Global Telecomm. Conf.*, Waikoloa, HI, USA, Dec. 2019, pp. 1–5.
- [4] S. Guerrini, M. Chiani, and A. Conti, “Secure key throughput of intermittent trusted-relay QKD protocols,” in *Proc. IEEE Workshop on Quantum Commun. and Inf. Technol. (QCIT), Global Telecomm. Conf.*, Abu Dhabi, UAE, Dec. 2018, pp. 1–5.
- [5] M. Chiani, A. Conti, and M. Z. Win, “Piggybacking on quantum streams,” *Phys. Rev. A*, vol. 102, p. 012410, Jul. 2020.
- [6] P. Dirac, *The Principles of Quantum Mechanics*. Oxford University Press, 1981.
- [7] J. V. Neumann, *Mathematical foundations of quantum mechanics*. Princeton University Press, 1995.
- [8] C. Weedbrook, S. Pirandola, R. García-Patrón, N. J. Cerf, T. C. Ralph, J. H. Shapiro, and S. Lloyd, “Gaussian quantum information,” *Reviews of modern physics*, vol. 84, Apr.-Jun. 2012.
- [9] E. Wigner, “On the quantum correction for thermodynamic equilibrium,” *Phys. Rev.*, vol. 40, no. 5, p. 749, 1932.
- [10] S. L. Braunstein and P. van Loock, “Quantum information with continuous variables,” *Rev. Mod. Phys.*, vol. 77, p. 513–577, Jun. 2005.

- [11] S. O. A. Ferraro and M. G. A. Paris, *Gaussian States in Continuous Variable Quantum Information*. Napoli, Italy: Biliopolis, 2005.
- [12] C. Weedbrook, S. Pirandola, R. Garcia-Patrón, N. J. Cerf, T. C. Ralph, J. H. Shapiro, and S. Lloyd, “Gaussian quantum information,” *Rev. Mod. Phys.*, vol. 84, p. 621–669, May 2012.
- [13] S. R. G. Adesso and A. R. Lee, “Continuous variable quantum information: Gaussian states and beyond,” *Open Syst. Inf. Dyn.*, vol. 21, 2014.
- [14] A. Serafini, *Quantum Continuous Variables: A Primer of Theoretical Methods*. Boca Raton, FL: CRC Press, 2017.
- [15] R. J. Glauber, “The quantum theory of optical coherence,” *Phys. Rev.*, vol. 130, p. 2529–2539, Jun. 1963.
- [16] —, “Coherent and incoherent states of the radiation field,” *Phys. Rev.*, vol. 131, p. 2766–2788, Sep. 1963.
- [17] C. W. Gardiner and P. Zoller, *Quantum noise*, 3rd ed. Berlin: Springer-Verlag, 2004.
- [18] J. P. Dowling, *Schrödinger’s Killer App: Race to Build the World’s First Quantum Computer*. Boca Raton, FL: CRC Press, 2013.
- [19] H. P. Yuen, “Two-photon coherent states of the radiation field,” *Phys. Rev. A*, vol. 13, p. 2226–2243, Jun. 1976.
- [20] C. M. Caves, “Quantum-mechanical noise in an interferometer,” *Phys. Rev. D*, vol. 23, p. 1693–1708, Apr. 1981.
- [21] P. Marian and T. A. Marian, “Squeezed states with thermal noise. i. photon number statistics,” *Phys. Rev. A*, vol. 47, no. 5, May 1993.
- [22] S. Guerrini, M. Z. Win, M. Chiani, and A. Conti, “Quantum discrimination of noisy photon-added coherent states,” *IEEE J. Sel. Areas Inf. Theory*, vol. 1, no. 2, pp. 469–479, Aug. 2020, special issue on *Quantum Information Science*.
- [23] C. W. Helstrom, “Detection theory and quantum mechanics,” *Inf. Control*, vol. 10, no. 3, p. 254–291, 1967.
- [24] —, “Fundamental limitations on the detectability of electromagnetic signals,” *Int. J. Theor. Phys.*, vol. 1, no. 1, pp. 37–50, May 1968.
- [25] R. Yoshitani, “On the detectability limit of coherent optical signals in thermal radiation,” *J. Stat. Phys.*, vol. 2, no. 4, pp. 347–378, Dec. 1970.



- [26] M. Takeoka and M. Sasaki, “Discrimination of the binary coherent signal,” *Phys. Rev. A*, vol. 78, no. 022320, Aug. 2008.
- [27] N. D. Pozza and G. Pierobon, “Optimality of square-root measurements in quantum state discrimination,” *Phys. Rev. A*, vol. 91, no. 042334, Apr. 2015.
- [28] R. Yuan, M. Zhao, S. Han, and J. Cheng, “Kennedy receiver using threshold detection and optimized displacement under thermal noise,” *IEEE Commun. Lett.*, vol. 24, no. 6, pp. 1313–1317, Jun. 2020.
- [29] C. W. Helstrom, *Quantum Detection and Estimation Theory*. Academic Press, New York, 1976.
- [30] —, *Probabilistic and Statistical Aspects of Quantum Theory*. North-Holland, Amsterdam, 1979.