



A321

AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

AC

The content of this document is the property of Airbus.
It is supplied in confidence and commercial security on its contents must be maintained.
It must not be used for any purpose other than that for which it is supplied, nor may
information contained in it be disclosed to unauthorized persons.
It must not be reproduced in whole or in part without permission in writing from the owners of
the copyright. Requests for reproduction of any data in this document and the media authorized
for it must be addressed to Airbus.

© AIRBUS S.A.S. 2005. All rights reserved.

*AIRBUS S.A.S.
Customer Services
Technical Data Support and Services
31707 Blagnac Cedex
FRANCE*

HIGHLIGHTS

Revision No. 15 - May 01/11

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
<u>CHAPTER 2</u>		
Section 2-2		
Subject 2-2-0		
FIGURE General Airplane Dimensions - General Airplane Dimensions	R	ILLUSTRATION REVISED ILLUSTRATION REVISED
Section 2-3		
Subject 2-3-0		
Ground Clearances	R	NOTE AMENDED
FIGURE Ground Clearances - Ground Clearances	R	ILLUSTRATION REVISED AND COMPLETED
<u>CHAPTER 4</u>		
Section 4-5	R	
Subject 04-05-04	D	
Subject 04-05-05	D	
<u>CHAPTER 6</u>		
Section 6-1	R	
Subject 06-01-03	D	
Subject 06-01-04	D	
<u>CHAPTER 7</u>		
Section 7-1		
Subject 7-1-0		
General Information	R	PART EFFECTIVITY ADDED/REVISED/DELETED
FIGURE Aircraft Codes - Aircraft Codes	N	NEW ILLUSTRATION ADDED ILLUSTRATION ADDED
Section 7-2		
Subject 7-2-0		

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
Landing Gear Footprint	R	NOTE AMENDED CROSS REFERENCED DOCUMENTARY UNIT ADDED/REVISED/DELETED
FIGURE Landing Gear Footprint - Landing Gear Footprint	N	ILLUSTRATION ADDED
FIGURE Landing Gear Footprint - Landing Gear Footprint	N	ILLUSTRATION ADDED
FIGURE Landing Gear Footprint - Landing Gear Footprint	N	ILLUSTRATION ADDED
FIGURE Landing Gear Footprint - Landing Gear Footprint	N	ILLUSTRATION ADDED
FIGURE Landing Gear Footprint - Landing Gear Footprint	N	ILLUSTRATION ADDED
Section 7-3 Subject 7-3-0 Maximum Pavement Loads	R	NOTE AMENDED CROSS REFERENCED DOCUMENTARY UNIT ADDED/REVISED/DELETED
FIGURE Maximum Pavement Loads - Maximum Pavement Loads	N	ILLUSTRATION ADDED
FIGURE Maximum Pavement Loads - Maximum Pavement Loads	N	ILLUSTRATION ADDED
FIGURE Maximum Pavement Loads - Maximum Pavement Loads	N	ILLUSTRATION ADDED
FIGURE Maximum Pavement Loads - Maximum Pavement Loads	N	ILLUSTRATION ADDED
FIGURE Maximum Pavement Loads - Maximum Pavement Loads	N	ILLUSTRATION ADDED
FIGURE Maximum Pavement Loads - Maximum Pavement Loads	N	ILLUSTRATION ADDED
FIGURE Maximum Pavement Loads - Maximum Pavement Loads	N	ILLUSTRATION ADDED
Section 7-4 Subject 7-4-0		

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
Landing Gear Loading on Pavement	R	PART EFFECTIVITY ADDED/REVISED/DELETED
Subject 7-4-1		
Landing Gear Loading on Pavement	R	NOTE AMENDED CROSS REFERENCED DOCUMENTARY UNIT ADDED/REVISED/DELETED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	ILLUSTRATION ADDED
Section 7-5 Subject 7-5-0 Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method Subject 7-5-1	R	

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method	R	NOTE AMENDED CROSS REFERENCED DOCUMENTARY UNIT ADDED/REVISED/DELETED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirement - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
FIGURE Flexible Pavement Requirement - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	ILLUSTRATION ADDED
Section 7-6		
Subject 7-6-0		
Flexible Pavement Requirements - LCN Conversion	R	
Subject 7-6-1		
Flexible Pavement Requirements - LCN Conversion	R	NOTE AMENDED CROSS REFERENCED DOCUMENTARY UNIT ADDED/REVISED/DELETED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
Section 7-7 Subject 7-7-0 Rigid Pavement Requirements - Portland Cement Association Design Method	R	
Subject 7-7-1 Rigid Pavement Requirements - Portland Cement Association Design Method	R	NOTE AMENDED CROSS REFERENCED DOCUMENTARY UNIT ADDED/REVISED/DELETED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	ILLUSTRATION ADDED

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA) Section 7-8 Subject 7-8-0 Rigid Pavement Requirements - LCN Conversion Subject 7-8-2 Rigid Pavement Requirements - LCN Conversion	N R R	ILLUSTRATION ADDED NOTE AMENDED CROSS REFERENCED DOCUMENTARY UNIT ADDED/REVISED/DELETED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	ILLUSTRATION ADDED

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
Subject 7-8-3 Radius of Relative Stiffness (Other values of "E" and "L")	R	
Subject 7-8-4 FIGURE Radius of Relative Stiffness - (Effect E and μ on "L" values)	R	ILLUSTRATION REVISED
Section 7-9 Subject 7-9-0 ACN/PCN Reporting System	R	PART EFFECTIVITY ADDED/REVISED/DELETED
Subject 7-9-1 Aircraft Classification Number - Flexible Pavement	R	NOTE AMENDED CROSS REFERENCED DOCUMENTARY UNIT ADDED/REVISED/DELETED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	ILLUSTRATION ADDED

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement Subject 7-9-2	N	ILLUSTRATION ADDED
Aircraft Classification Number - Rigid Pavement	R	NOTE AMENDED CROSS REFERENCED DOCUMENTARY UNIT ADDED/REVISED/DELETED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	ILLUSTRATION ADDED

LIST OF EFFECTIVE CONTENT

Revision No. 15 - May 01/11

CONTENT	CHG CODE	LAST REVISION DATE
<u>CHAPTER 1</u>		
Subject 1-1-0		
Purpose		Dec 01/07
Subject 1-2-0		
Introduction		Dec 01/07
<u>CHAPTER 2</u>		
Subject 2-1-0		
General Airplane Characteristics		Dec 01/07
Subject 2-1-1		
General Airplane Characteristics Data		Sep 01/10
Subject 2-2-0		
General Airplane Dimensions		Dec 01/07
FIGURE General Airplane Dimensions - General Airplane Dimensions	R	May 01/11
Subject 2-3-0		
Ground Clearances	R	May 01/11
FIGURE Ground Clearances - Ground Clearances	R	May 01/11
Subject 2-4-0		
Interior Arrangements		Dec 01/07
Subject 2-4-1		
Typical Configuration		Sep 01/10
FIGURE Typical Configuration - Typical Configuration Single-Class, High Density		Sep 01/10
FIGURE Typical Configuration - Typical Configuration Two-Class		Sep 01/10
Subject 2-5-0		
Passenger Compartment Cross-section		Sep 01/10
FIGURE Passenger Compartment Cross-section - Passenger Compartment Cross-section		Sep 01/10

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Passenger Compartment Cross-section - Economy Class, 6 Abreast - Wider Aisle		Sep 01/10
FIGURE Passenger Compartment Cross-section - Passenger Compartment Cross-section, First-class		Sep 01/10
Subject 2-6-0		
Cargo Compartments		Dec 01/07
Subject 2-6-1		
Lower Deck Cargo Compartments		Dec 01/07
FIGURE Lower Deck Cargo Compartments - Lower Deck Cargo Compartments Dimensions		Dec 01/07
FIGURE Lower Deck Cargo Compartments - Lower Deck Cargo Compartments Containers		Dec 01/07
Subject 2-7-0		
Doors Clearances		Dec 01/07
Subject 2-7-1		
Forward Passenger / Crew Doors		Dec 01/07
FIGURE Doors Clearances - Forward Passenger / Crew Doors		Dec 01/07
Subject 2-7-2		
Emergency Exits		Dec 01/07
FIGURE Doors Clearances - Emergency Exits		Dec 01/07
Subject 2-7-3		
Aft Passenger / Crew Doors		Dec 01/07
FIGURE Doors Clearances - Aft Passenger / Crew Doors		Dec 01/07
Subject 2-7-4		
Forward Cargo Compartment Door		Dec 01/07
FIGURE Doors Clearances - Forward Cargo Compartment Door		Dec 01/07
Subject 2-7-5		
Aft Cargo Compartment Door		Dec 01/07
FIGURE Doors Clearances - Aft Cargo Compartment Door		Dec 01/07
Subject 2-7-6		

CONTENT	CHG CODE	LAST REVISION DATE
Bulk Cargo Compartment Door		Dec 01/07
FIGURE Doors Clearances - Bulk Cargo Compartment Door		Dec 01/07
Subject 2-7-7		
Main Landing Gear Doors		Dec 01/07
FIGURE Doors Clearances - Main Landing Gear Doors		Dec 01/07
Subject 2-7-8		
Radome		Dec 01/07
FIGURE Doors Clearances - Radome		Dec 01/07
Subject 2-7-9		
APU and Nose Landing Gear Doors		Dec 01/07
FIGURE Doors Clearances - APU and Nose Landing Gear Doors		Dec 01/07
<u>CHAPTER 3</u>		
Subject 3-1-0		
General Information		Dec 01/07
Subject 3-2-0		
Payload / Range		Dec 01/07
Subject 3-2-1		
ISA Conditions		Dec 01/07
FIGURE Payload / Range - CFM56-5B series engine		Dec 01/07
FIGURE Payload / Range - IAE V2500-A5 series engine		Dec 01/07
Subject 3-3-0		
FAR / JAR Take-off Weight Limitation		Dec 01/07
Subject 3-3-1		
ISA Conditions		Dec 01/07
FIGURE FAR / JAR Take-off Weight Limitation - ISA Conditions – CFM56 series engine		Dec 01/07
FIGURE FAR / JAR Take-off Weight Limitation - ISA Conditions – IAE V2500 series engine		Dec 01/07
Subject 3-3-2		

CONTENT	CHG CODE	LAST REVISION DATE
ISA +15 ° C (+59 ° F) Conditions		Dec 01/07
FIGURE FAR / JAR Take-off Weight Limitation - ISA +15 ° C (+59 ° F) Conditions – CFM56 series engine		Dec 01/07
FIGURE FAR / JAR Take-off Weight Limitation - ISA +15 ° C (+59 ° F) Conditions – IAE V2500 series engine		Dec 01/07
Subject 3-4-0		
FAR / JAR Landing Field Length		Dec 01/07
Subject 3-4-1		
ISA Conditions		Dec 01/07
FIGURE FAR / JAR Landing Field Length - CFM56 series engine		Dec 01/07
FIGURE FAR / JAR Landing Field Length - IAE V2500 series engine		Dec 01/07
Subject 3-5-0		
Final Approach Speed		Dec 01/07
FIGURE Final Approach Speed - CFM56 series engine		Dec 01/07
FIGURE Final Approach Speed - IAE V2500 series engine		Dec 01/07
CHAPTER 4		
Subject 4-1-0		
General Information		Dec 01/07
Subject 4-2-0		
Turning Radii		Dec 01/07
FIGURE Turning Radii, no Slip Angle - Turning Radii, no Slip Angle		Dec 01/07
FIGURE Turning Radii, no Slip Angle - Turning Radii, no Slip Angle		Dec 01/07
Subject 4-3-0		
Minimum Turning Radii		Dec 01/07
FIGURE Minimum Turning Radii - Minimum Turning Radii		Dec 01/07
Subject 4-4-0		
Visibility from Cockpit in Static Position		Dec 01/07
FIGURE Visibility from Cockpit in Static Position - Visibility from Cockpit in Static Position		Dec 01/07
Subject 4-5-0		

CONTENT	CHG CODE	LAST REVISION DATE
Runway and Taxiway Turn Paths		Dec 01/07
Subject 4-5-1		
135 ° Turn - Runway to Taxiway		Dec 01/07
FIGURE 135 ° Turn - Runway to Taxiway - CG on Centerline Method		Dec 01/07
FIGURE 135 ° Turn - Runway to Taxiway - NLG on Centerline Method		Dec 01/07
Subject 4-5-2		
90 ° Turn - Runway to Taxiway		Dec 01/07
FIGURE 90 ° Turn - Runway to Taxiway - CG on Centerline Method		Dec 01/07
FIGURE 90 ° Turn - Runway to Taxiway - NLG on Centerline Method		Dec 01/07
Subject 4-5-3		
180 ° Turn on a Runway		Dec 01/07
FIGURE 180 ° Turn on a 150 ft Runway - NLG on Centerline Method		Dec 01/07
Subject 4-5-6		
180 ° Turn on a Wide Runway		Dec 01/07
FIGURE 180 ° Turn on a 150 ft Wide Runway - Edge of Runway Method		Dec 01/07
Subject 4-6-0		
Runway Holding Bay (Apron)		Dec 01/07
FIGURE Runway Holding Bay (Apron) - Runway Holding Bay (Apron)		Dec 01/07
Subject 4-7-0		
Airplane Parking		Dec 01/07
FIGURE Runway Length Alterations - Line Up Distances – 90 ° Turn		Dec 01/07
FIGURE Runway Length Alterations - Line Up Distances – 180 ° Turn		Dec 01/07
CHAPTER 5		
Subject 5-0-0		
Terminal Servicing		Sep 01/10
Subject 5-1-0		
Airplane Servicing Arrangements		Sep 01/10

CONTENT	CHG CODE	LAST REVISION DATE
Subject 5-1-1 Symbols Used on Servicing Diagrams		Sep 01/10
Subject 5-1-2 Aircraft at the Gate		Sep 01/10
FIGURE Aircraft at the Gate - Aircraft at the Gate		Sep 01/10
Subject 5-1-3 Aircraft at an Open Apron		Sep 01/10
FIGURE Aircraft at an Open Apron - Aircraft at an Open Apron (Bulk Loading)		Sep 01/10
FIGURE Aircraft at an Open Apron - Aircraft at an Open Apron (ULD Loading)		Sep 01/10
Subject 5-2-0 Terminal Operations - Full Servicing Turnaround		Sep 01/10
Subject 5-2-1 Full Servicing Turnaround Charts		Sep 01/10
FIGURE Turnaround Stations - Full Servicing (56 Min.)		Sep 01/10
Subject 5-3-0 Terminal Operation		Sep 01/10
Subject 5-3-1 Minimum Servicing Turnaround Chart		Sep 01/10
FIGURE Turnaround Stations - Minimum Servicing (25 Min.)		Sep 01/10
Subject 5-4-0 Ground Service Connections		Dec 01/07
Subject 5-4-1 Ground Service Connections Layout		Dec 01/07
FIGURE Ground Service Connections - Ground Service Connections Layout		Dec 01/07
Subject 5-4-2 Grounding Points		Dec 01/07
FIGURE Ground Service Connections - Grounding Points		Dec 01/07

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Ground Service Connections - Grounding Points		Dec 01/07
Subject 5-4-3		
Hydraulic System		Sep 01/10
FIGURE Hydraulic System - Green System Ground Service Panel		Sep 01/10
FIGURE Hydraulic System - Blue System Ground Service Panel		Sep 01/10
FIGURE Hydraulic System - Yellow System Ground Service Panel		Sep 01/10
Subject 5-4-4		
Electrical System		Sep 01/10
FIGURE Ground Service Connections - External Power Receptacles		Sep 01/10
Subject 5-4-5		
Oxygen System		Dec 01/07
Subject 5-4-6		
Fuel System		Sep 01/10
FIGURE Ground Service Connections - Refuel/Defuel Panel		Sep 01/10
FIGURE Ground Service Connections - Refuel/Defuel Couplings		Sep 01/10
FIGURE Ground Service Connections - Gravity Refuel Couplings		Sep 01/10
Subject 5-4-7		
Pneumatic System		Sep 01/10
Subject 5-4-8		
Potable Water System		Sep 01/10
FIGURE Ground Service Connections - Potable Water Ground Service Panel		Sep 01/10
Subject 5-4-9		
Oil System		Sep 01/10
FIGURE Ground Service Connections - Engine Oil Tank – CFM56 Series Engine		Sep 01/10
FIGURE Ground Service Connections - IDG Oil Tank – CFM56 Series Engine		Sep 01/10
FIGURE Ground Service Connections - Starter Oil Tank – CFM56 Series Engine		Sep 01/10

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Ground Service Connections - Engine Oil Tank – IAE V2500 Series Engine		Sep 01/10
FIGURE Ground Service Connections - IDG Oil Tank – IAE V2500 Series Engine		Sep 01/10
FIGURE Ground Service Connections - Starter Oil Tank – IAE V2500 Series Engine		Sep 01/10
FIGURE Ground Service Connections - APU Oil Tank		Sep 01/10
Subject 5-4-10		
Vacuum Toilet System		Sep 01/10
FIGURE Ground Service Connections - Waste Water Ground Service Panel		Sep 01/10
Subject 5-5-0		
Engine Starting Pneumatic Requirements		Dec 01/07
Subject 5-5-1		
Low Temperature -40 °C (-40 °F)		Dec 01/07
FIGURE Engine Starting Pneumatic Requirements - Temperature -40 °C (-40 °F) – CFM56 series engine		Dec 01/07
FIGURE Engine Starting Pneumatic Requirements - Temperature -40 °C (-40 °F) – IAE V2500 series engine		Dec 01/07
Subject 5-5-2		
Ambient Temperature +15 °C (+59 °F)		Dec 01/07
FIGURE Engine Starting Pneumatic Requirements - Temperature +15 °C (+59 °F) – CFM56 series engine		Dec 01/07
FIGURE Engine Starting Pneumatic Requirements - Temperature +15 °C (+59 °F) – IAE V2500 series engine		Dec 01/07
Subject 5-5-3		
High Temperature +50 °C (+122 °F) and +55 °C (+131 °F)		Dec 01/07
FIGURE Engine Starting Pneumatic Requirements - Temperature +55 °C (+131 °F) – CFM56 series engine		Dec 01/07
FIGURE Engine Starting Pneumatic Requirements - Temperature +50 °C (+122 °F) – IAE V2500 series engine		Dec 01/07
Subject 5-6-0		

CONTENT	CHG CODE	LAST REVISION DATE
Ground Pneumatic Power Requirements		Dec 01/07
Subject 5-6-1		
Heating		Dec 01/07
FIGURE Ground Pneumatic Power Requirements - Heating		Dec 01/07
Subject 5-6-2		
Cooling		Dec 01/07
FIGURE Ground Pneumatic Power Requirements - Cooling		Dec 01/07
Subject 5-7-0		
Preconditioned Airflow Requirements		Dec 01/07
FIGURE Preconditioned Airflow Requirements - Preconditioned Airflow Requirements		Dec 01/07
Subject 5-8-0		
Ground Towing Requirements		Sep 01/10
FIGURE Ground Towing Requirements - Ground Towing Requirements		Sep 01/10
FIGURE Ground Towing Requirements - Typical Tow Bar Configuration 1		Sep 01/10
FIGURE Ground Towing Requirements - Typical Tow Bar Configuration 2		Sep 01/10
CHAPTER 6		
Subject 6-1-0		
Engine Exhaust Velocities and Temperatures		Dec 01/07
Subject 6-1-1		
Engine Exhaust Velocities Contours - Ground Idle Power		Dec 01/07
FIGURE Engine Exhaust Velocities - Ground Idle Power – CFM56-5B series engine		Dec 01/07
FIGURE Engine Exhaust Velocities - Ground Idle Power – IAE V2500 series engine		Dec 01/07
Subject 6-1-2		
Engine Exhaust Temperatures Contours - Ground Idle Power		Dec 01/07

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Engine Exhaust Temperatures - Ground Idle Power – CFM56-5B series engine		Dec 01/07
FIGURE Engine Exhaust Temperatures - Ground Idle Power – IAE V2500 series engine		Dec 01/07
Subject 6-1-5		
Engine Exhaust Velocities Contours - Takeoff Power		Dec 01/07
FIGURE Engine Exhaust Velocities - Takeoff Power – CFM56-5B series engine		Dec 01/07
FIGURE Engine Exhaust Velocities - Takeoff Power – IAE V2500 series engine		Dec 01/07
Subject 6-1-6		
Engine Exhaust Temperatures Contours - Takeoff Power		Dec 01/07
FIGURE Engine Exhaust Temperatures - Takeoff Power – CFM56-5B series engine		Dec 01/07
FIGURE Engine Exhaust Temperatures - Takeoff Power – IAE V2500 series engine		Dec 01/07
Subject 6-2-0		
Airport and Community Noise		Dec 01/07
Subject 6-2-1		
Noise Data		Dec 01/07
FIGURE Airport and Community Noise - CFM56-5B series engine		Dec 01/07
FIGURE Airport and Community Noise - IAE V2500 series engine		Dec 01/07
Subject 6-3-0		
Danger Areas of Engines		Dec 01/07
Subject 6-3-1		
Ground Idle Power		Dec 01/07
FIGURE Danger Areas of Engines - CFM56-5B series engine		Dec 01/07
FIGURE Danger Areas of Engines - IAE V2500 series engine		Dec 01/07
Subject 6-3-2		
Takeoff Power		Dec 01/07
FIGURE Danger Areas of Engines - CFM56-5B series engine		Dec 01/07

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Danger Areas of Engines - IAE V2500 series engine		Dec 01/07
Subject 6-4-0		
APU Exhaust Velocities and Temperatures		Dec 01/07
Subject 6-4-1		
APU - APIC & GARRETT		Dec 01/07
FIGURE Exhaust Velocities and Temperatures - APU – APIC & GARRETT		Dec 01/07
<u>CHAPTER 7</u>		
Subject 7-1-0		
General Information	R	May 01/11
FIGURE Aircraft Codes - Aircraft Codes	N	May 01/11
Subject 7-2-0		
Landing Gear Footprint	R	May 01/11
FIGURE Landing Gear Footprint - Landing Gear Footprint	N	May 01/11
FIGURE Landing Gear Footprint - Landing Gear Footprint	N	May 01/11
FIGURE Landing Gear Footprint - Landing Gear Footprint	N	May 01/11
FIGURE Landing Gear Footprint - Landing Gear Footprint	N	May 01/11
FIGURE Landing Gear Footprint - Landing Gear Footprint	N	May 01/11
Subject 7-3-0		
Maximum Pavement Loads	R	May 01/11
FIGURE Maximum Pavement Loads - Maximum Pavement Loads	N	May 01/11
FIGURE Maximum Pavement Loads - Maximum Pavement Loads	N	May 01/11
FIGURE Maximum Pavement Loads - Maximum Pavement Loads	N	May 01/11
FIGURE Maximum Pavement Loads - Maximum Pavement Loads	N	May 01/11
FIGURE Maximum Pavement Loads - Maximum Pavement Loads	N	May 01/11
FIGURE Maximum Pavement Loads - Maximum Pavement Loads	N	May 01/11
FIGURE Maximum Pavement Loads - Maximum Pavement Loads	N	May 01/11
Subject 7-4-0		
Landing Gear Loading on Pavement	R	May 01/11

CONTENT	CHG CODE	LAST REVISION DATE
Subject 7-4-1		
Landing Gear Loading on Pavement	R	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
FIGURE Landing Gear Loading on Pavement - Landing Gear Loading on Pavement	N	May 01/11
Subject 7-5-0		
Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method	R	May 01/11
Subject 7-5-1		
Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method	R	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirement - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirement - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
FIGURE Flexible Pavement Requirements - Flexible Pavement Requirements	N	May 01/11
Subject 7-6-0		
Flexible Pavement Requirements - LCN Conversion	R	May 01/11
Subject 7-6-1		
Flexible Pavement Requirements - LCN Conversion	R	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Flexible Pavement Requirements - LCN Conversion - Flexible Pavement Requirements - LCN Conversion	N	May 01/11
Subject 7-7-0		
Rigid Pavement Requirements - Portland Cement Association Design Method	R	May 01/11
Subject 7-7-1		

CONTENT	CHG CODE	LAST REVISION DATE
Rigid Pavement Requirements - Portland Cement Association Design Method	R	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
FIGURE Rigid Pavement Requirements (PCA) - Rigid Pavement Requirements (PCA)	N	May 01/11
Subject 7-8-0		
Rigid Pavement Requirements - LCN Conversion	R	May 01/11
Subject 7-8-1		
Radius of Relative Stiffness		Dec 01/07
FIGURE Radius of Relative Stiffness - (Reference: Portland Cement Association)		Dec 01/07
Subject 7-8-2		
Rigid Pavement Requirements - LCN Conversion	R	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
FIGURE Rigid Pavement Requirements - LCN Conversion - Rigid Pavement Requirements - LCN Conversion	N	May 01/11
Subject 7-8-3 Radius of Relative Stiffness (Other values of "E" and "L")	R	May 01/11
Subject 7-8-4 Radius of Relative Stiffness		Dec 01/07
FIGURE Radius of Relative Stiffness - (Effect E and μ on "L" values)	R	May 01/11
Subject 7-9-0 ACN/PCN Reporting System	R	May 01/11

CONTENT	CHG CODE	LAST REVISION DATE
Subject 7-9-1		
Aircraft Classification Number - Flexible Pavement	R	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Flexible Pavement - Aircraft Classification Number – Flexible Pavement	N	May 01/11
Subject 7-9-2		
Aircraft Classification Number - Rigid Pavement	R	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
FIGURE Aircraft Classification Number – Rigid Pavement - Aircraft Classification Number – Rigid Pavement	N	May 01/11
<u>CHAPTER 8</u>		
Subject 8-1-0		
Possible Future Derivative Airplane		Dec 01/07
<u>CHAPTER 9</u>		
Subject 9-1-0		
Scaled Drawings		Sep 01/10
FIGURE Scaled Drawing - Scaled Drawing		Sep 01/10
FIGURE Scaled Drawing - Scaled Drawing		Sep 01/10

TABLE OF CONTENTS

1	SCOPE
1-1-0	Purpose
1-2-0	Introduction
2	AIRPLANE DESCRIPTION
2-1-0	General Airplane Characteristics
2-1-1	General Airplane Characteristics Data
2-2-0	General Airplane Dimensions
2-3-0	Ground Clearances
2-4-0	Interior Arrangements
2-4-1	Passenger Compartment Layout
2-5-0	Passenger Compartment Cross Section
2-6-0	Cargo Compartments
2-6-1	Lower Deck Cargo Compartments
2-7-0	Door Clearances
2-7-1	Forward Passenger / Crew Doors
2-7-2	Emergency Exits
2-7-3	Aft Passenger / Crew Doors
2-7-4	Forward Cargo Compartment Doors
2-7-5	Aft Cargo Compartment Doors
2-7-6	Bulk Cargo Compartment Doors
2-7-7	Main Landing Gear Doors
2-7-8	Radome
2-7-9	APU and Nose Landing Gear Doors
3	AIRPLANE PERFORMANCE
3-1-0	General Information
3-2-0	Payload / Range
3-2-1	ISA Conditions
3-3-0	FAR / JAR Takeoff Weight Limitation
3-3-1	ISA Conditions
3-3-2	ISA +15 ° C (+59 ° F) Conditions
3-4-0	FAR / JAR Landing Field Length
3-4-1	ISA Conditions
3-5-0	Final Approach Speed

4 GROUND MANEUVERING

- 4-1-0 General Information
- 4-2-0 Turning Radii
- 4-3-0 Minimum Turning Radii
- 4-4-0 Visibility from Cockpit in Static Position
- 4-5-0 Runway and Taxiway Turn Paths
- 4-5-1 135 ° Turn - Runway to Taxiway
- 4-5-2 90 ° Turn - Runway to Taxiway
- 4-5-3 180 ° Turn on a Runway
- 4-5-6 180 ° Turn on a Wide Runway
- 4-6-0 Runway Holding Bay (Apron)
- 4-7-0 Airplane Parking

5 TERMINAL SERVICING

- 5-0-0 TERMINAL SERVICING
- 5-1-0 Airplane Servicing Arrangements
 - 5-1-1 Symbols Used on Servicing Diagrams
 - 5-1-2 Typical Ramp Layout - Aircraft at the Gate
 - 5-1-3 Typical Ramp Layout - Aircraft at an Open Apron
- 5-2-0 Terminal Operations - Full Servicing Turnaround
 - 5-2-1 Full Servicing Turnaround Charts
- 5-3-0 Terminal Operation - Minimum Servicing Turnaround
 - 5-3-1 Minimum Servicing Turnaround Chart
- 5-4-0 Ground Service Connections
 - 5-4-1 Ground Service Connections Layout
 - 5-4-2 Grounding Points
 - 5-4-3 Hydraulic System
 - 5-4-4 Electrical System
 - 5-4-5 Oxygen System
 - 5-4-6 Fuel System
 - 5-4-7 Pneumatic System
 - 5-4-8 Potable Water System
 - 5-4-9 Oil System
 - 5-4-10 Vacuum Toilet System
- 5-5-0 Engine Starting Pneumatic Requirements
 - 5-5-1 Low Temperatures
 - 5-5-2 Ambient Temperatures

- 5-5-3 High Temperatures
- 5-6-0 Ground Pneumatic Power Requirements
- 5-6-1 Heating
- 5-6-2 Cooling
- 5-7-0 Preconditioned Airflow Requirements
- 5-8-0 Ground Towing Requirements

6 OPERATING CONDITIONS

- 6-1-0 Engine Exhaust Velocities and Temperatures
- 6-1-1 Engine Exhaust Velocities Contours - Ground Idle Power
- 6-1-2 Engine Exhaust Temperatures Contours - Ground Idle Power
- 6-1-5 Engine Exhaust Velocities Contours - Takeoff Power
- 6-1-6 Engine Exhaust Temperatures Contours - Takeoff Power
- 6-2-0 Airport and Community Noise
- 6-2-1 Noise Data
- 6-3-0 Danger Areas of Engines
- 6-3-1 Ground Idle Power
- 6-3-2 Takeoff Power
- 6-4-0 APU Exhaust Velocities and Temperatures
- 6-4-1 APU

7 PAVEMENT DATA

- 7-1-0 General Information
- 7-2-0 Landing Gear Footprint
- 7-3-0 Maximum Pavement Loads
- 7-4-0 Landing Gear Loading on Pavement
- 7-4-1 Landing Gear Loading on Pavement
- 7-5-0 Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method
- 7-5-1 Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method
- 7-6-0 Flexible Pavement Requirements - LCN Conversion
- 7-6-1 Flexible Pavement Requirements - LCN Conversion
- 7-7-0 Rigid Pavement Requirements - Portland Cement Association Design Method
- 7-7-1 Rigid Pavement Requirements - Portland Cement Association Design Method
- 7-8-0 Rigid Pavement Requirements - LCN Conversion
- 7-8-1 Radius of Relative Stiffness
- 7-8-2 Rigid Pavement Requirements - LCN Conversion
- 7-8-3 Radius of Relative Stiffness (Other values of E and L)
- 7-8-4 Radius of Relative Stiffness



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

- 7-9-0 ACN/PCN Reporting System
- 7-9-1 Aircraft Classification Number - Flexible Pavement
- 7-9-2 Aircraft Classification Number - Rigid Pavement

8 DERIVATIVE AIRPLANES

- 8-1-0 Possible Future Derivative Airplane

9 SCALED DRAWINGS

- 9-1-0 Scaled Drawings

SCOPE**1-1-0 Purpose******ON A/C A321-100 A321-200**Purpose**1. General**

The A321 AIRPLANE CHARACTERISTICS (AC) manual is issued for the A321-100 and A321-200 basic versions to provide the necessary data needed by airport operators and airlines for the planning of airport facilities.

This document conforms to NAS 3601.

CORRESPONDENCE

Correspondence concerning this publication should be directed to:

AIRBUS S.A.S.
Customer Services
Technical Data Support and Services
1, Rond Point Maurice BELLONTE
31707 BLAGNAC CEDEX
FRANCE

1-2-0 Introduction

****ON A/C A321-100 A321-200**

Introduction

1. General

This manual comprises 9 chapters with a List of Effective Pages (LEP) at the beginning of the manual and a Table Of Content (TOC) at the beginning of each chapter.

Chapter 1: SCOPE

Chapter 2: AIRPLANE DESCRIPTION

This chapter contains general dimensional and other basic aircraft data.

It covers:

- aircraft dimensions and ground clearances,
- passenger and cargo compartment arrangement.

Chapter 3: AIRPLANE PERFORMANCE

This chapter indicates the aircraft performance.

It covers:

- payload range,
- takeoff and landing runway requirements,
- landing approach speed.

Chapter 4: GROUND MANEUVERING

This chapter provides the aircraft turning capability and maneuvering characteristics on the ground.

It includes:

- turning radii and visibility from the cockpit,
- runway and taxiway turn path.

Chapter 5: TERMINAL SERVICING

This chapter provides information for the arrangement of ground handling and servicing equipments.

It covers:

- location and connections of ground servicing equipments,

- engine starting pneumatic and preconditioned airflow requirements.

Chapter 6: OPERATING CONDITIONS

This chapter contains data and safety/environmental precautions related to engine and APU operation on the ground.

It covers:

- contour size and shape of the jet engine exhaust velocities and temperature,
- noise data.

Chapter 7: PAVEMENT DATA

This chapter contains the pavement data helpful for airport planning.

It gives:

- landing gear foot print and static load,
- charts for flexible pavements with Load Classification Number (LCN),
- charts for rigid pavements with LCN,
- Aircraft Classification Number (ACN), Pavement Classification Number (PCN), reporting system for flexible and rigid pavements.

Chapter 8: DERIVATIVE AIRPLANES

This chapter gives relevant data of possible A321 new version with the associated size change.

Chapter 9: SCALED DRAWING

This chapter contains different A321 scaled drawings.

AIRPLANE DESCRIPTION

2-1-0 General Airplane Characteristics

****ON A/C A321-100 A321-200**

General Airplane Characteristics

1. General Airplane Characteristics

The weight terms used throughout this manual are given below together with their respective definitions.

Maximum Taxi Weight (MTW):

Maximum weight for ground maneuver as limited by aircraft strength and airworthiness requirements. (It includes weight of run-up and taxi fuel). It is also called Maximum Ramp Weight (MRW).

Maximum Landing Weight (MLW):

Maximum weight for landing as limited by aircraft strength and airworthiness requirements.

Maximum Takeoff Weight (MTOW):

Maximum weight for takeoff as limited by aircraft strength and airworthiness requirements. (This is the maximum weight at start of the takeoff run).

Maximum Zero Fuel Weight (MZFW):

Maximum operational weight of the aircraft without usable fuel.

Operational Empty Weight (OEW):

Weight of structure, powerplant, furnishings, systems, and other items of equipment that are an integral part of a particular aircraft configuration plus the operator's items. The operator's items are the flight and cabin crew and their baggage, unusable fuel, engine oil, emergency equipment, toilet chemical and fluids, galley structure, catering equipment, passenger seats and life vests, documents, etc.

Maximum Payload:

Maximum Zero Fuel Weight (MZFW) minus Operational Empty Weight (OEW).

Maximum Seating Capacity:

Maximum number of passengers specifically certified or anticipated for certification.

Maximum Cargo Volume:

Maximum usable volume available for cargo.

Usable Fuel:

Fuel available for aircraft propulsion.

2-1-1 General Airplane Characteristics Data

****ON A/C A321-100 A321-200**

General Airplane Characteristics Data

****ON A/C A321-100**

- The following table provides characteristics of A321-100 Models, these data are specific to each Weight Variant:

Aircraft Characteristics						
		WV000	WV002	WV003	WV004	WV005
Maximum Ramp Weight (MRW)	Kilograms	83 400	83 400	85 400	78 400	83 400
	Pounds					
Maximum Taxi Weight (MTW)	Kilograms	183 865	183 865	188 275	172 842	183 865
	Pounds					
Maximum Takeoff Weight (MTOW)	Kilograms	83 000	83 000	85 000	78 000	83 000
	Pounds	182 984	182 984	187 393	171 961	182 984
Maximum Landing Weight (MLW)	Kilograms	73 500	74 500	74 500	73 500	75 000
	Pounds	162 040	164 244	164 244	162 040	165 347
Maximum Zero Fuel Weight (MZFW)	Kilograms	69 500	70 500	70 500	69 500	71 000
	Pounds	153 221	155 426	155 426	153 221	156 528
Estimated Operational Empty Weight (OEW)	CFM Engines	46 856 kg (103 300 lb)				
	IAE Engines	46 959 kg (103 527 lb)				
Estimated Maximum Payload CFM 56	Kilograms	22 644	23 644		22 644	24 144
	Pounds	49 921	52 126		49 921	53 228
Estimated Maximum Payload IAE V2500	Kilograms	22 541	23 541		22 541	24 041
	Pounds	49 694	51 899		49 694	53 001

Aircraft Characteristics				
		WV006	WV007	WV008
Maximum Ramp Weight (MRW)	Kilograms	78 400	80 400	89 400
	Pounds			
Maximum Taxi Weight (MTW)	Kilograms	172 842	177 252	197 093
	Pounds			
Maximum Takeoff Weight (MTOW)	Kilograms	78 000	80 000	89 000
	Pounds	171 961	176 370	196 211
Maximum Landing Weight (MLW)	Kilograms	74 500	73 500	75 500
	Pounds	164 244	162 040	166 449
Maximum Zero Fuel Weight (MZFW)	Kilograms	70 500	69 500	71 500
	Pounds	155 426	153 221	157 630
Estimated Operational Empty Weight (OEW)	CFM Engines	46 856 kg (103 300 lb)		
	IAE Engines	46 959 kg (103 527 lb)		

Aircraft Characteristics				
		WV006	WV007	WV008
Estimated Maximum Payload CFM 56	Kilograms	23 644	22 644	24 644
	Pounds	52 126	49 921	54 331
Estimated Maximum Payload IAE V2500	Kilograms	23 541	22 541	24 541
	Pounds	51 899	49 694	54 104

****ON A/C A321-200**

2. The following table provides characteristics of A321-200 Models, these data are specific to each Weight Variant:

Aircraft Characteristics						
		WV000	WV001	WV002	WV003	WV004
Maximum Ramp Weight (MRW)	Kilograms	89 400	93 400	89 400	91 400	87 400
	Pounds					
Maximum Taxi Weight (MTW)		197 093	205 912	197 093	201 502	192 684
Maximum Takeoff Weight (MTOW)	Kilograms	89 000	93 000	89 000	91 000	87 000
	Pounds	196 211	205 030	196 211	200 621	191 802
Maximum Landing Weight (MLW)	Kilograms	75 500	77 800	77 800	77 800	75 500
	Pounds	166 449	171 520	171 520	171 520	166 449
Maximum Zero Fuel Weight (MZFW)	Kilograms	71 500	73 800	73 800	73 800	71 500
	Pounds	157 630	162 701	162 701	162 701	157 630
Estimated Operational Empty Weight (OEW)	CFM Engines	46 856 kg (103 300 lb)				
	IAE Engines	46 959 kg (103 527 lb)				
Estimated Maximum Payload CFM 56	Kilograms	24 644	26 944			24 644
	Pounds	54 331	59 401			54 331
Estimated Maximum Payload IAE V2500	Kilograms	24 541	26 841			24 541
	Pounds	54 104	59 174			54 104

Aircraft Characteristics						
		WV005	WV006	WV007	WV008	WV009
Maximum Ramp Weight (MRW)	Kilograms	85 400	83 400	83 400	80 400	78 400
	Pounds					
Maximum Taxi Weight (MTW)		188 275	183 865	183 865	177 252	172 842
Maximum Takeoff Weight (MTOW)	Kilograms	85 000	83 000	83 000	80 000	78 000
	Pounds	187 393	182 984	182 984	176 370	171 961

Aircraft Characteristics						
		WV005	WV006	WV007	WV008	WV009
Maximum Landing Weight (MLW)	Kilograms	75 500	75 500	73 500	73 500	73 500
	Pounds	166 449	166 449	162 040	162 040	162 040
Maximum Zero Fuel Weight (MZFW)	Kilograms	71 500	71 500	69 500	69 500	69 500
	Pounds	157 630	157 630	153 221	153 221	153 221
Estimated Operational Empty Weight (OEW)	CFM Engines	46 856 kg (103 300 lb)				
	IAE Engines	46 959 kg (103 527 lb)				
Estimated Maximum Payload CFM 56	Kilograms	24 644		22 644		
	Pounds	54 331		49 921		
Estimated Maximum Payload IAE V2500	Kilograms	24 541		22 541		
	Pounds	54 104		49 694		

Aircraft Characteristics			
		WV010	WV011
Maximum Ramp Weight (MRW)	Kilograms	85 400	93 900
	Pounds	188 275	207 014
Maximum Taxi Weight (MTW)	Kilograms	85 000	93 500
	Pounds	187 393	206 132
Maximum Landing Weight (MLW)	Kilograms	77 800	77 800
	Pounds	171 520	171 520
Maximum Zero Fuel Weight (MZFW)	Kilograms	73 800	73 800
	Pounds	162 701	162 701
Estimated Operational Empty Weight (OEW)	CFM Engines	46 856 kg (103 300 lb)	
	IAE Engines	46 959 kg (103 527 lb)	
Estimated Maximum Payload CFM 56	Kilograms	26 944	
	Pounds	59 401	
Estimated Maximum Payload IAE V2500	Kilograms	26 841	
	Pounds	59 174	

****ON A/C A321-100**

3. The following table provides characteristics of A321-100 Models, these data are common to each Weight Variant:

Aircraft Characteristics		
Standard Seating Capacity	Single-class	220

Aircraft Characteristics		
Usable Fuel Capacity	Liters	23 700 - 26 692* - 29 684**
	US gallons	6 261 - 7 051* - 7 842**
	Kilograms (density = 0.785 kg/l)	18 604 - 20 953* - 23 301**
	Pounds	41 015 - 46 193* - 51 370**
Pressurized Fuselage Volume (A/C non equipped)	Cubic meters	418
	Cubic feet	14 762
Passenger Compartment Volume	Cubic meters	155
	Cubic feet	5 474
Cockpit Volume	Cubic meters	9
	Cubic feet	318
Usable Volume, FWD CC	Cubic meters	22.81
	Cubic feet	806
Usable Volume, AFT CC	Cubic meters	23.03
	Cubic feet	814
Usable Volume, Bulk CC	Cubic meters	5.88
	Cubic feet	208
Water Volume, FWD CC	Cubic meters	25.42
	Cubic feet	897.7
Water Volume, AFT CC	Cubic meters	25.69
	Cubic feet	907.2
Water Volume, Bulk CC	Cubic meters	7.76
	Cubic feet	274

* OPTION: 1 ACT

** OPTION: 2 ACT

**ON A/C A321-200

4. The following table provides characteristics of A321-200 Models, these data are common to each Weight Variant:

Aircraft Characteristics		
Standard Seating Capacity	Single-class	220

Aircraft Characteristics		
Usable Fuel Capacity	Liters	23 700 - 26 692* - 29 684**
	US gallons	6 261 - 7 051* - 7 842**
	Kilograms (density = 0.785 kg/l)	18 604 - 20 953* - 23 301**
	Pounds	41 015 - 46 193* - 51 370**
Pressurized Fuselage Volume (A/C non equipped)	Cubic meters	418
	Cubic feet	14 762
Passenger Compartment Volume	Cubic meters	155
	Cubic feet	5 474
Cockpit Volume	Cubic meters	9
	Cubic feet	318
Usable Volume, FWD CC	Cubic meters	22.81
	Cubic feet	806
Usable Volume, AFT CC	Cubic meters	23.03
	Cubic feet	814
Usable Volume, Bulk CC	Cubic meters	5.88
	Cubic feet	208
Water Volume, FWD CC	Cubic meters	25.42
	Cubic feet	897.7
Water Volume, AFT CC	Cubic meters	25.69
	Cubic feet	907.2
Water Volume, Bulk CC	Cubic meters	7.76
	Cubic feet	274

* OPTION: 1 ACT

** OPTION: 2 ACT



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

2-2-0 General Airplane Dimensions

****ON A/C A321-100 A321-200**

General Airplane Dimensions

1. This section provides General Airplane Dimensions.

SCALE METERS
0 3 6 9

SCALE FEET
0 10 20 30

44.50 m (146 ft)

5.75 m (18.86 ft)

3.95 m (12.96 ft)

CFM56 15.46 m (50.72 ft)

V2500 15.39 m (50.49 ft)

NOTE: FOR DOOR SIZES SEE CHAPTER 2-7

4.14 m (13.58 ft)

5.07 m (16.63 ft)

16.90 m (55.45 ft)

34.15 m (111.88 ft)

12.45 m (40.85 ft)


7.59 m (24.9 ft)

SEE CHAPTER 2-3

N_AC_020200_1_0050101_01_02

General Airplane Dimensions
(Sheet 1 of 2)
FIGURE 1

**ON A/C A321-100 A321-200

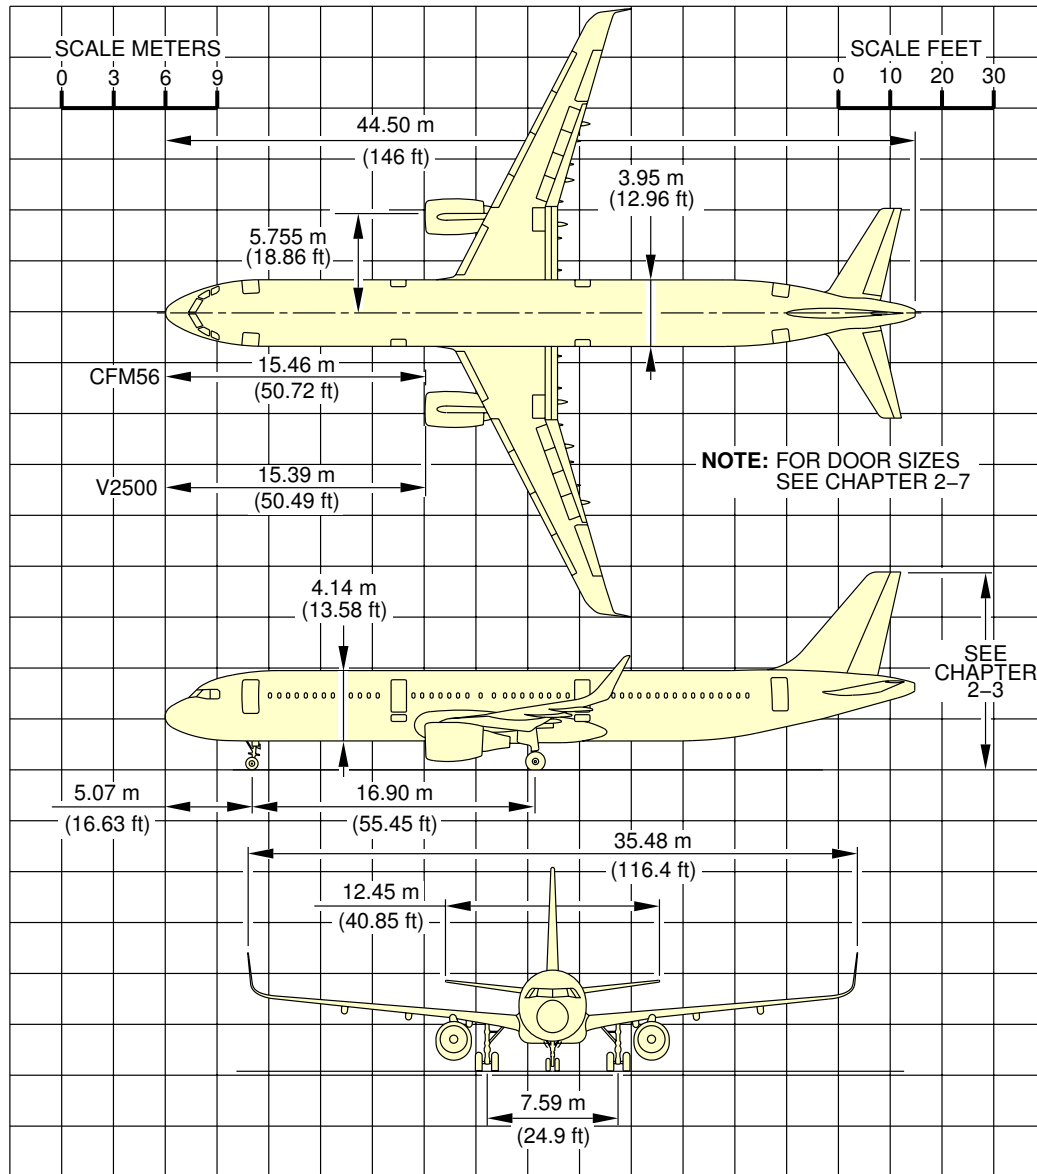

N_AC_020200_1_0050103_01_00

General Airplane Dimensions
Sharklet Option (Sheet 2 of 2)
FIGURE 2

2-3-0 Ground Clearances****ON A/C A321-100 A321-200**Ground Clearances

1. This section gives the height of various points of the aircraft, above the ground, for different aircraft configurations.


Dimensions in the tables are approximate and will vary with tire type, W&B and others special conditions.

The dimensions are given for:

- The basic aircraft OWE with a mid CG,
- the MRW for the lightest weight variant with a FWD CG and a AFT CG,
- the MRW for the heaviest weight variant with a FWD CG and a AFT CG,
- aircraft on jacks, FDL at 4.6m (15.09ft).

NOTE : Passenger and cargo door clearances are measured from the center of the door sill and from floor level.

****ON A/C A321-100 A321-200**

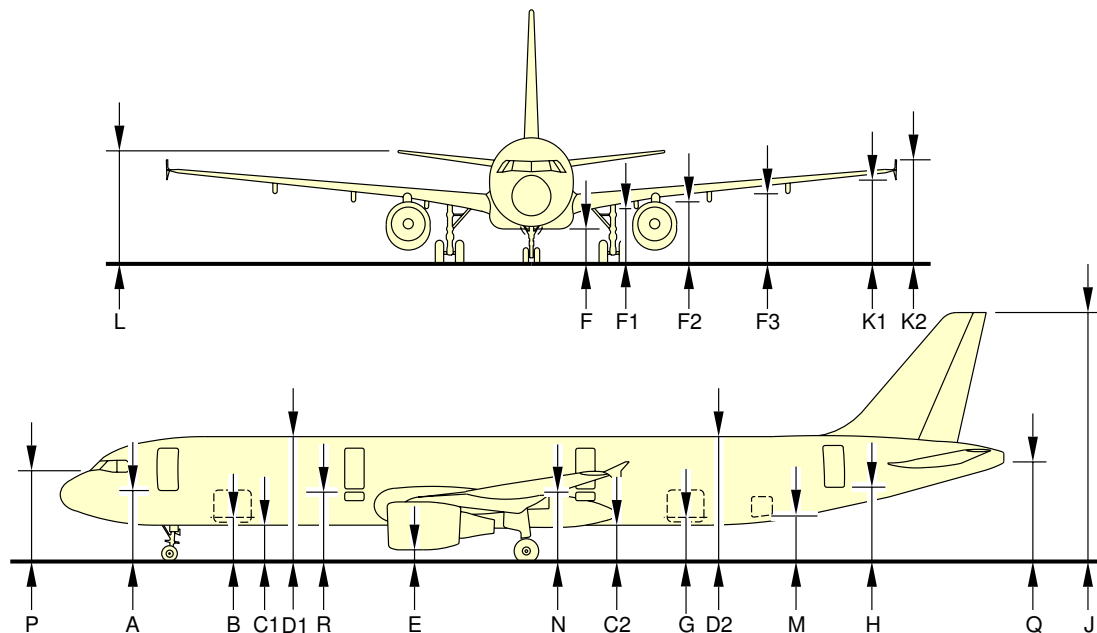

	OWE 46 856 kg		MRW (WV0) 89 400 kg				MRW (WV8) 93 900 kg				AC JACKED FDL = 4.60 m	
	CG 25%		FWD CG 17.5%		AFT CG 38%		FWD CG 19%		AFT CG 36.9%			
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
A	3.50	11.48	3.39	11.12	3.48	11.42	3.39	11.12	3.47	11.38	4.13	13.55
B	2.10	6.89	2.00	6.56	2.07	6.79	1.99	6.53	2.05	6.73	2.71	8.89
C1	1.84	6.04	1.73	5.68	1.79	5.87	1.73	5.68	1.78	5.84	2.43	7.97
C2	1.99	6.53	1.88	6.17	1.82	5.97	1.87	6.14	1.82	5.97	2.43	7.97
D1	5.98	19.62	5.87	19.26	5.93	19.46	5.87	19.26	5.92	19.42	6.58	21.59
D2	6.13	20.11	6.03	19.78	5.96	19.55	6.01	19.72	5.96	19.55	6.58	21.59
E (CFM)	0.71	2.33	0.60	1.97	0.61	2.00	0.59	1.94	0.60	1.97	1.24	4.07
E (IAE)	0.89	2.92	0.78	2.56	0.79	2.59	0.77	2.53	0.78	2.56	1.42	4.66
F	1.76	5.77	1.65	5.41	1.63	5.35	1.64	5.38	1.62	5.31	2.26	7.41
F1	2.75	9.02	2.64	8.66	2.63	8.63	2.63	8.63	2.62	8.60	3.25	10.66
F2	3.18	10.43	3.07	10.07	3.05	10.01	3.06	10.04	3.05	10.01	3.68	12.07
F3	3.52	11.55	3.41	11.19	3.38	11.09	3.40	11.15	3.38	11.09	4.01	13.16
G	2.26	7.41	2.16	7.09	2.10	6.89	2.14	7.02	2.09	6.86	2.71	8.89
H	3.73	12.24	3.63	11.91	3.53	11.58	3.61	11.84	3.53	11.58	4.13	13.55
J	12.10	39.70	11.99	39.34	11.86	38.91	11.97	39.27	11.85	38.88	12.45	40.85
K1	3.91	12.83	3.80	12.47	3.77	12.37	3.79	12.43	3.76	12.34	4.38	14.37
K2	4.88	16.01	4.77	15.65	4.74	15.55	4.76	15.62	4.73	15.52	5.35	17.55
L	5.58	18.31	5.47	17.95	5.34	17.52	5.45	17.88	5.34	17.52	5.93	19.46
M	2.33	7.64	2.22	7.28	2.14	7.02	2.20	7.22	2.14	7.02	2.75	9.02
N	4.01	13.16	3.90	12.80	3.91	12.83	3.89	12.76	3.90	12.80	4.54	14.89
P	4.30	14.11	4.19	13.75	4.30	14.11	4.19	13.75	4.29	14.07	4.96	16.27
Q	4.86	15.94	4.76	15.62	4.61	15.12	4.73	15.52	4.61	15.12	5.20	17.06
R	3.57	11.71	3.46	11.35	3.49	11.45	3.45	11.32	3.48	11.42	4.13	13.55

NOTE: PASSENGER AND CARGO DOOR GROUND CLEARANCES ARE MEASURED FROM THE CENTER OF THE DOOR SILL AND FROM FLOOR LEVEL

N_AC_020300_1_0050101_01_03

Ground Clearances
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

2-4-0 Interior Arrangements

****ON A/C A321-100 A321-200**

Interior Arrangements

1. This section gives the standard interior arrangements configuration.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-4-1 Passenger Compartment Layout

****ON A/C A321-100 A321-200**

Typical Configuration

1. This section gives the typical interior configuration.


****ON A/C A321-100 A321-200**

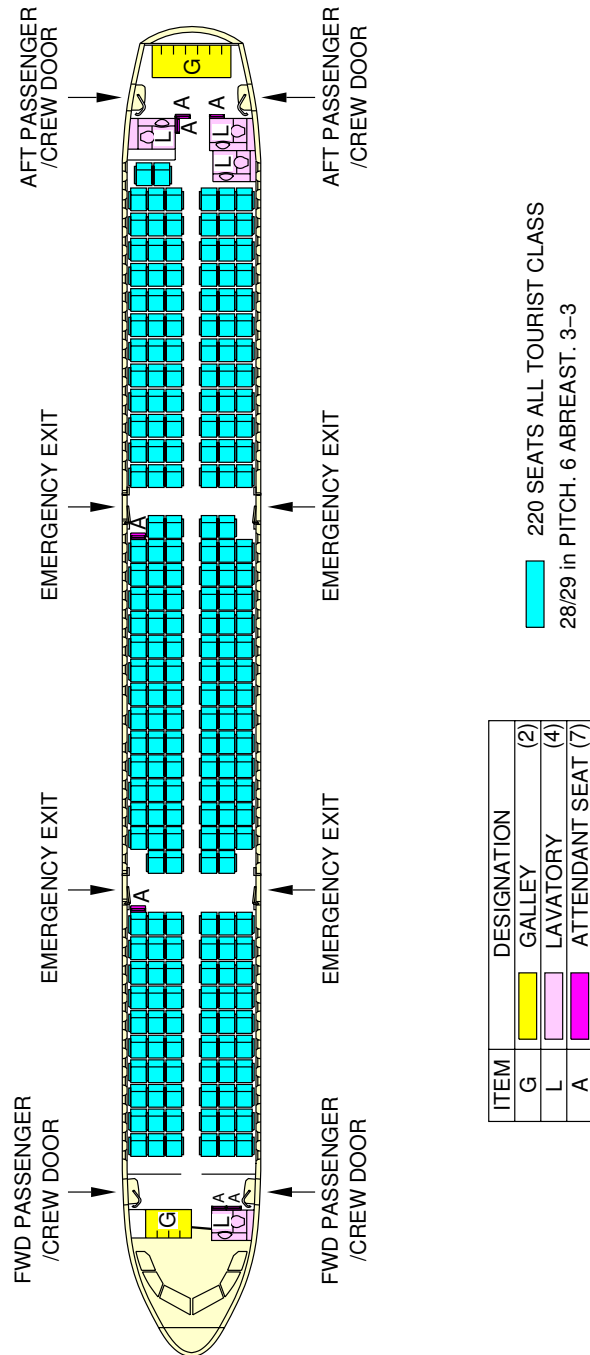

N_AC_020401_1_0040101_01_01

Typical Configuration
Typical Configuration Single-Class, High Density
FIGURE 1

****ON A/C A321-100 A321-200**

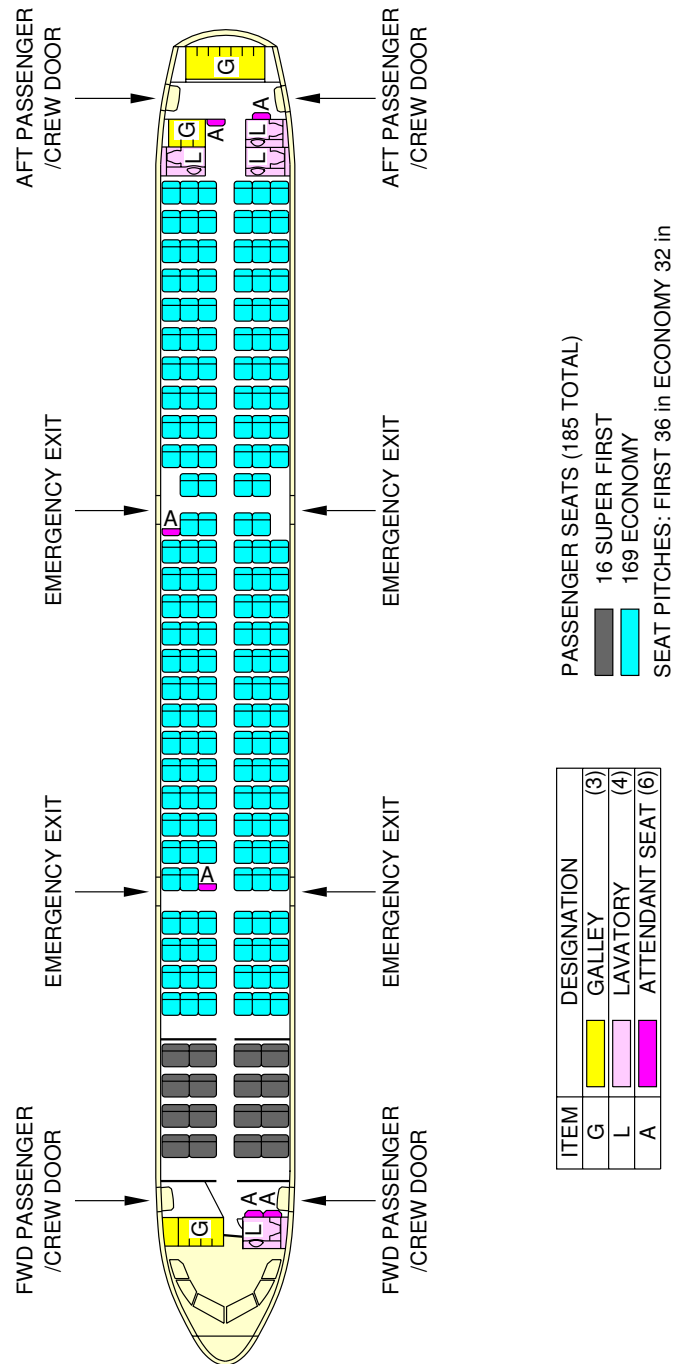

N_AC_020401_1_0060101_01_05

Typical Configuration
 Typical Configuration Two-Class
 FIGURE 2



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-5-0 Passenger Compartment Cross Section

****ON A/C A321-100 A321-200**

Passenger Compartment Cross-section

1. This section gives the typical passenger compartment cross-section configuration.

****ON A/C A321-100 A321-200**

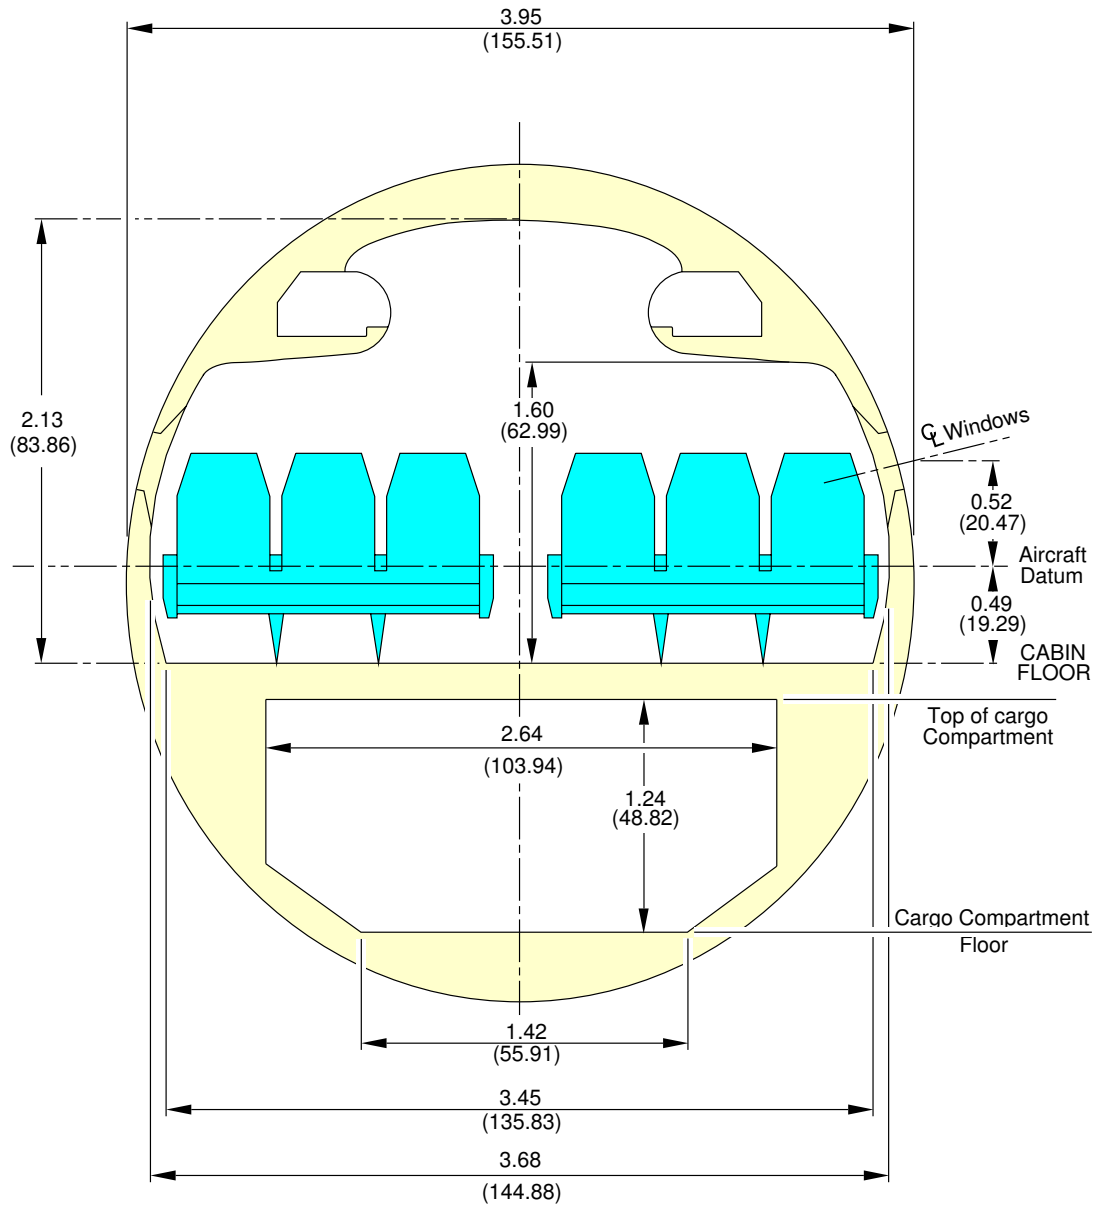


NOTE: DIMENSIONS m (in)

N_AC_020500_1_0010101_01_01

Passenger Compartment Cross-section
FIGURE 1

****ON A/C A321-100 A321-200**

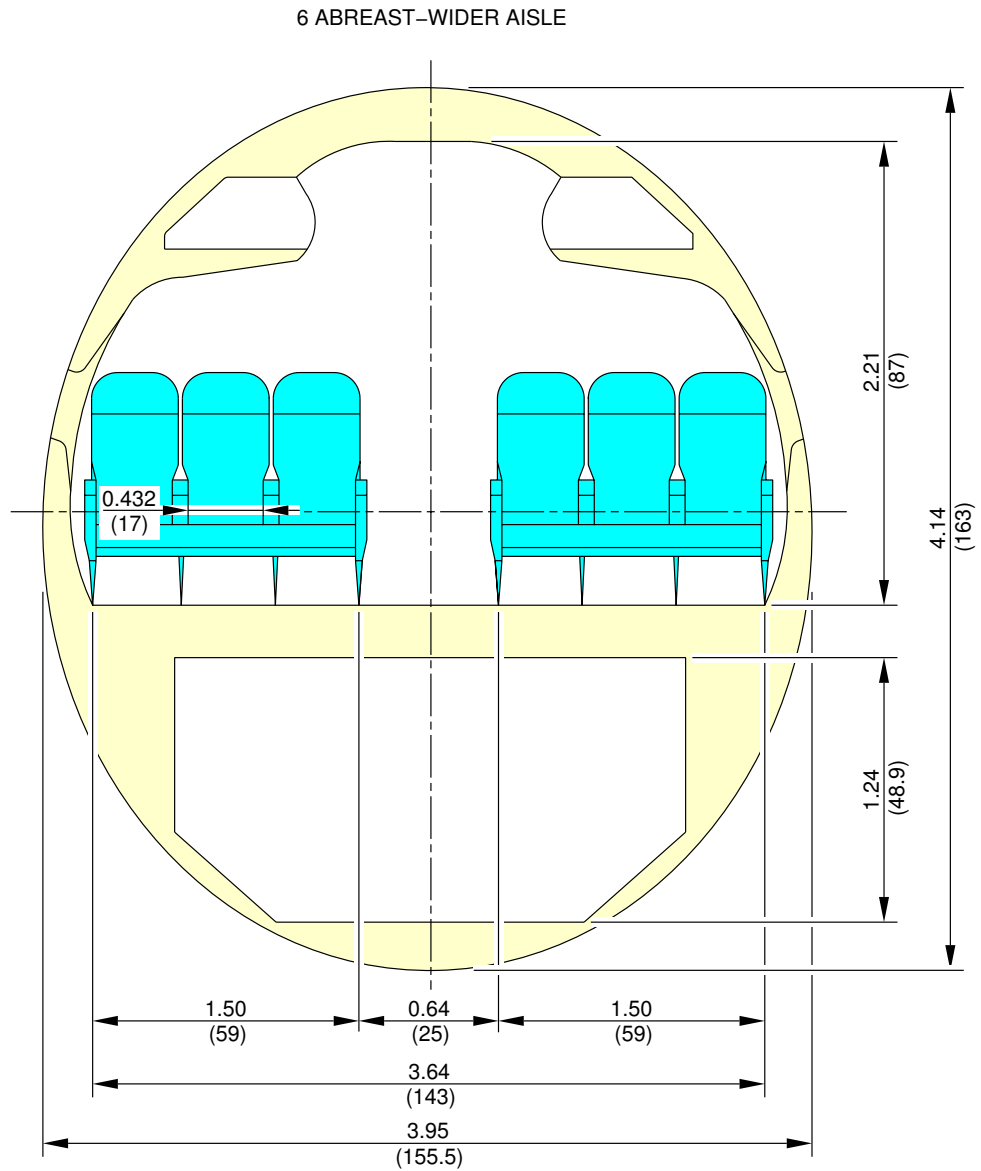


NOTE: DIMENSIONS m (in)

N_AC_020500_1_0050101_01_00

Passenger Compartment Cross-section
Economy Class, 6 Abreast - Wider Aisle (Sheet 1 of 2)
FIGURE 2

****ON A/C A321-100 A321-200**

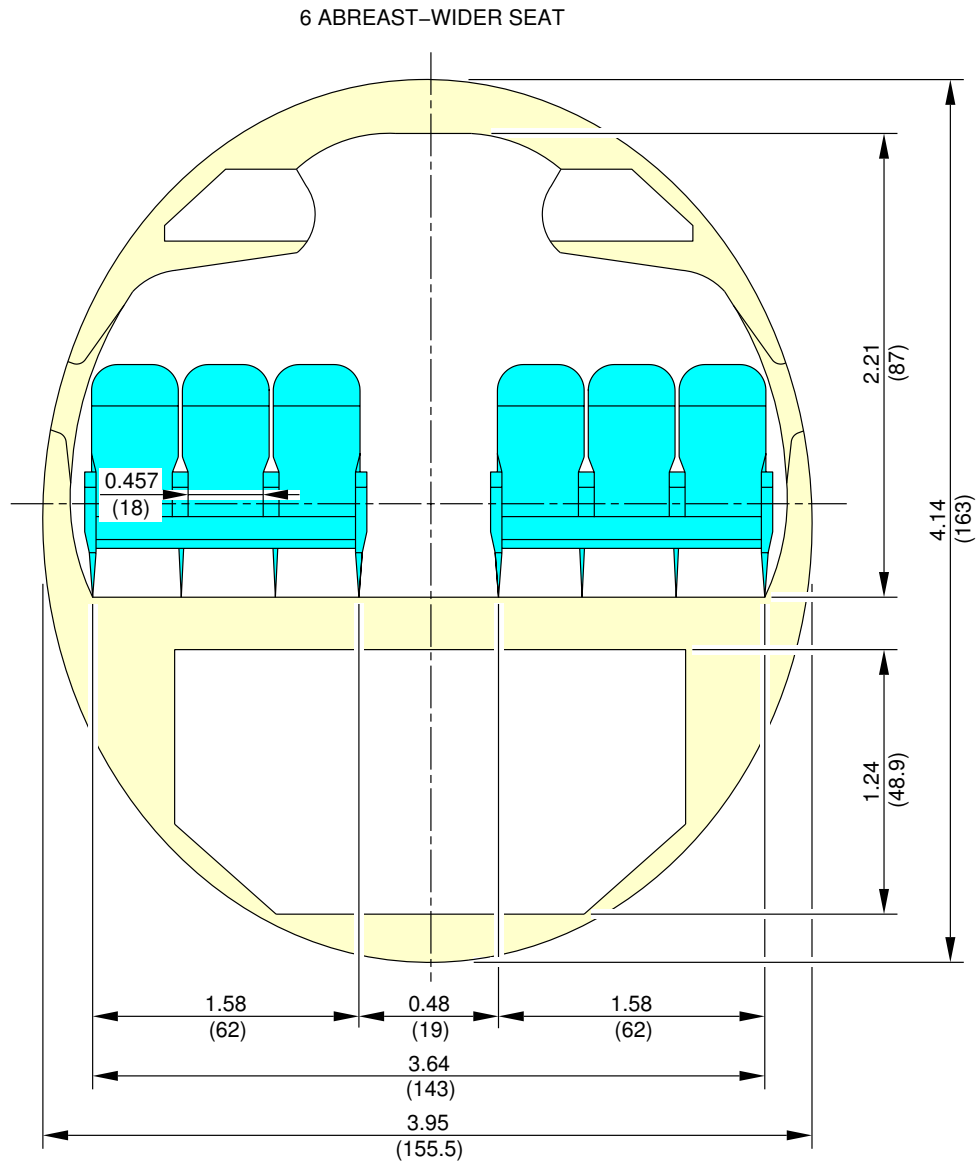


NOTE: DIMENSIONS m (in)

N_AC_020500_1_0050102_01_02

Passenger Compartment Cross-section
Economy Class, 6 Abreast - Wider Seat (Sheet 2 of 2)
FIGURE 3

****ON A/C A321-100 A321-200**

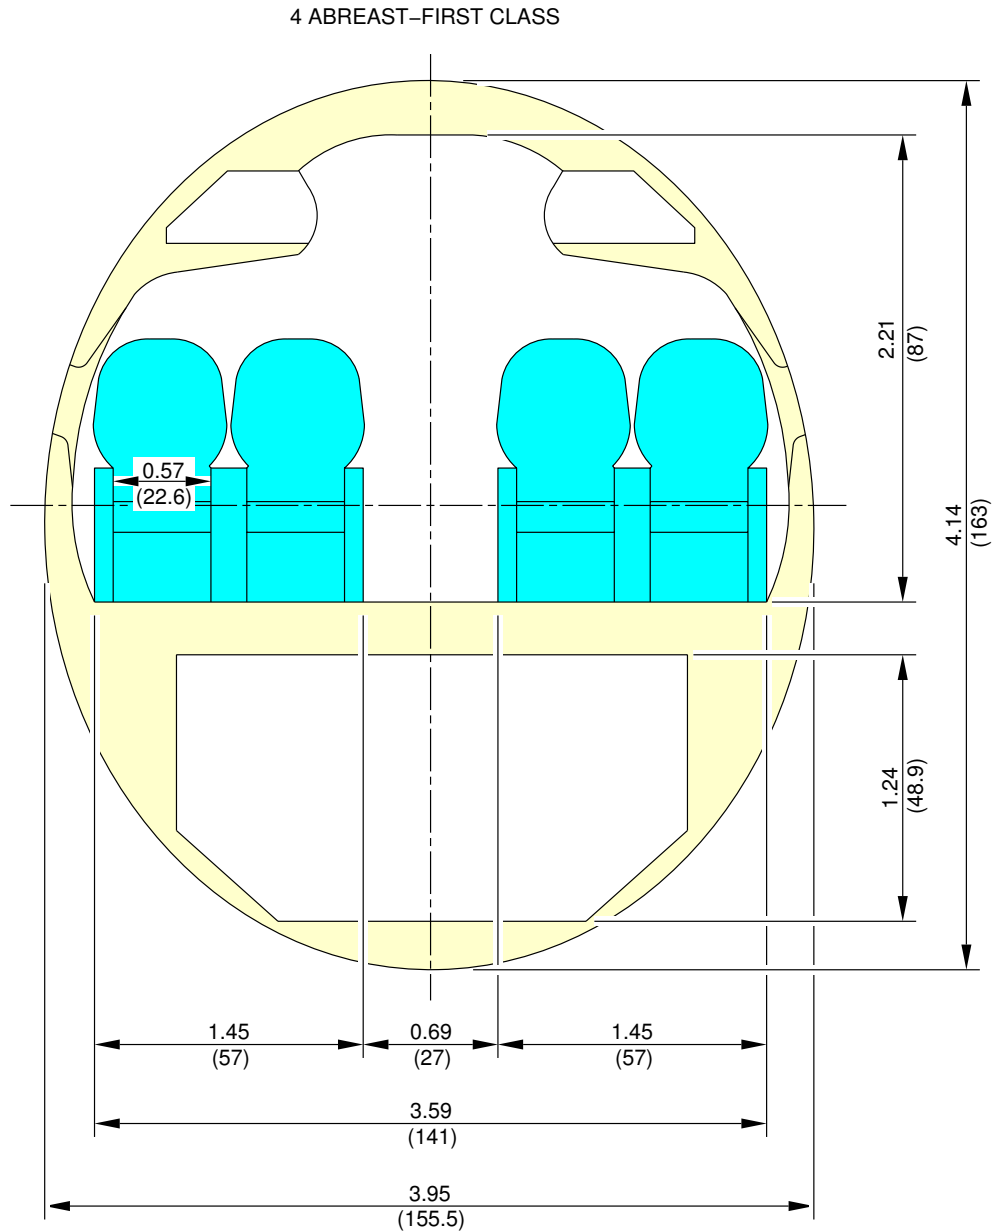

NOTE: DIMENSIONS m (in)

N_AC_020500_1_0060101_01_00

Passenger Compartment Cross-section
Passenger Compartment Cross-section, First-class
FIGURE 4



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

2-6-0 Cargo Compartments

****ON A/C A321-100 A321-200**

Cargo Compartments

1. This section gives the cargo compartments location and dimensions.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-6-1 Lower Deck Cargo Compartments

****ON A/C A321-100 A321-200**

Lower Deck Cargo Compartments



1. This section gives the lower deck cargo compartments.

****ON A/C A321-100 A321-200**

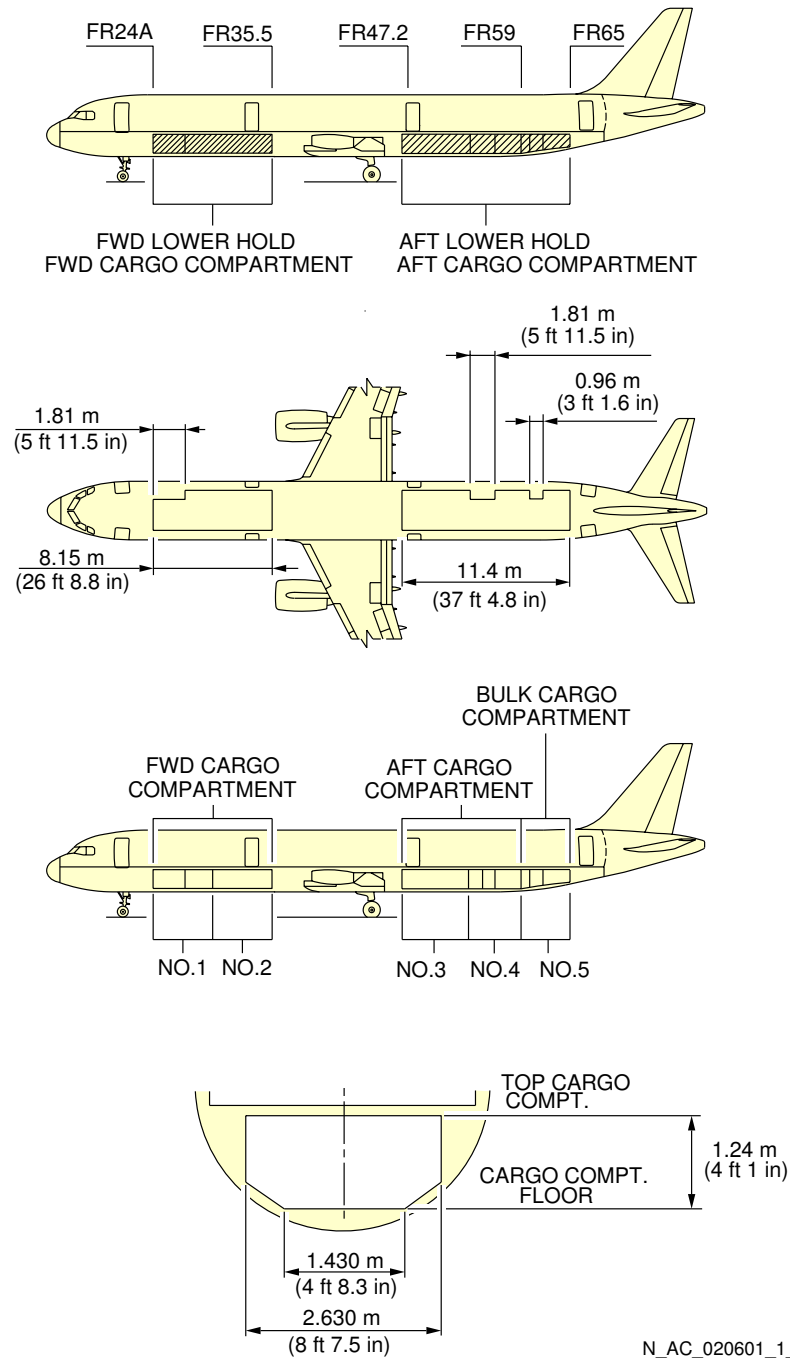

Lower Deck Cargo Compartments
Lower Deck Cargo Compartments Dimensions
FIGURE 1

****ON A/C A321-100 A321-200**

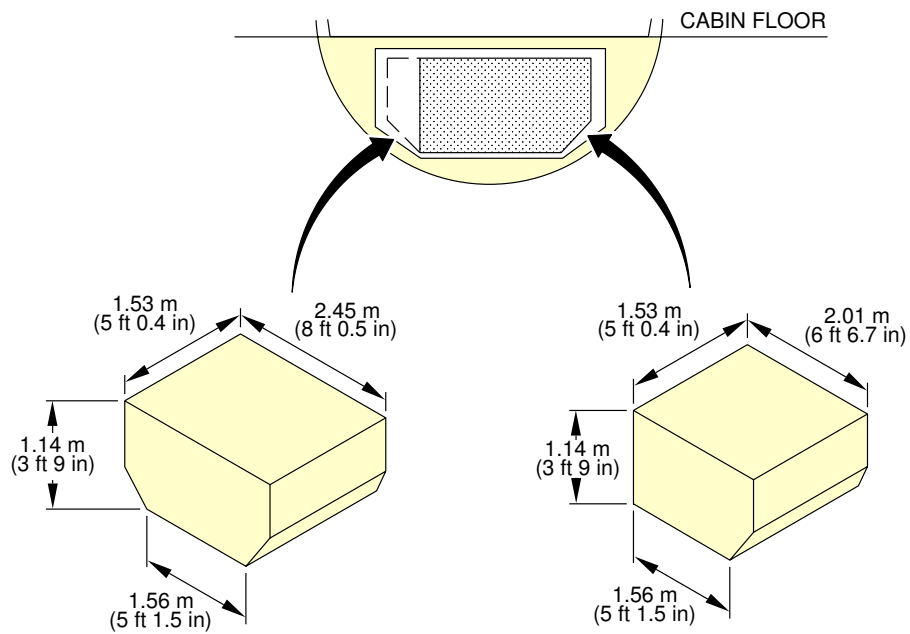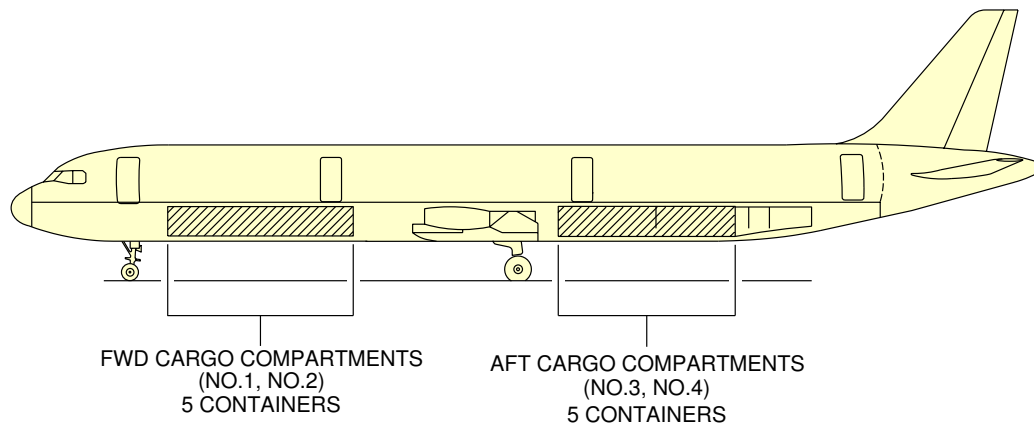

N_AC_020601_1_0070101_01_00

Lower Deck Cargo Compartments
Lower Deck Cargo Compartments Containers
FIGURE 2



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

2-7-0 Door Clearances

****ON A/C A321-100 A321-200**

Doors Clearances

1. This section gives doors clearances.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-7-1 Forward Passenger / Crew Doors

****ON A/C A321-100 A321-200**

Forward Passenger / Crew Doors

1. This section gives forward passenger / crew doors clearances.

****ON A/C A321-100 A321-200**

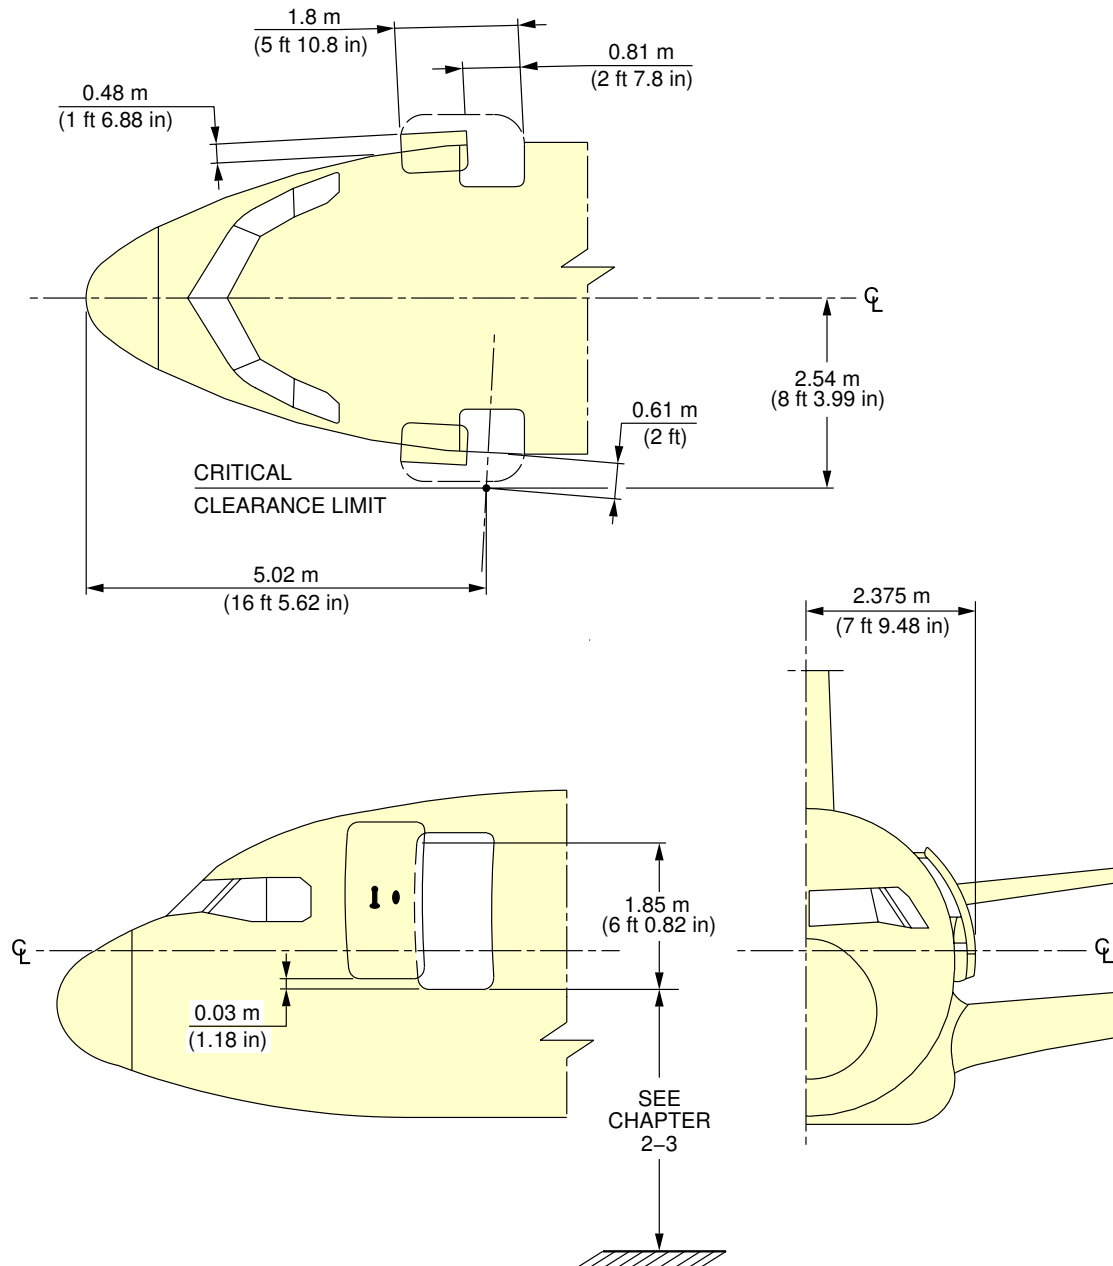

N_AC_020701_1_0040101_01_00

Doors Clearances
Forward Passenger / Crew Doors
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-7-2 Emergency Exits

****ON A/C A321-100 A321-200**

Emergency Exits

1. This section gives emergency exits doors clearances.

****ON A/C A321-100 A321-200**

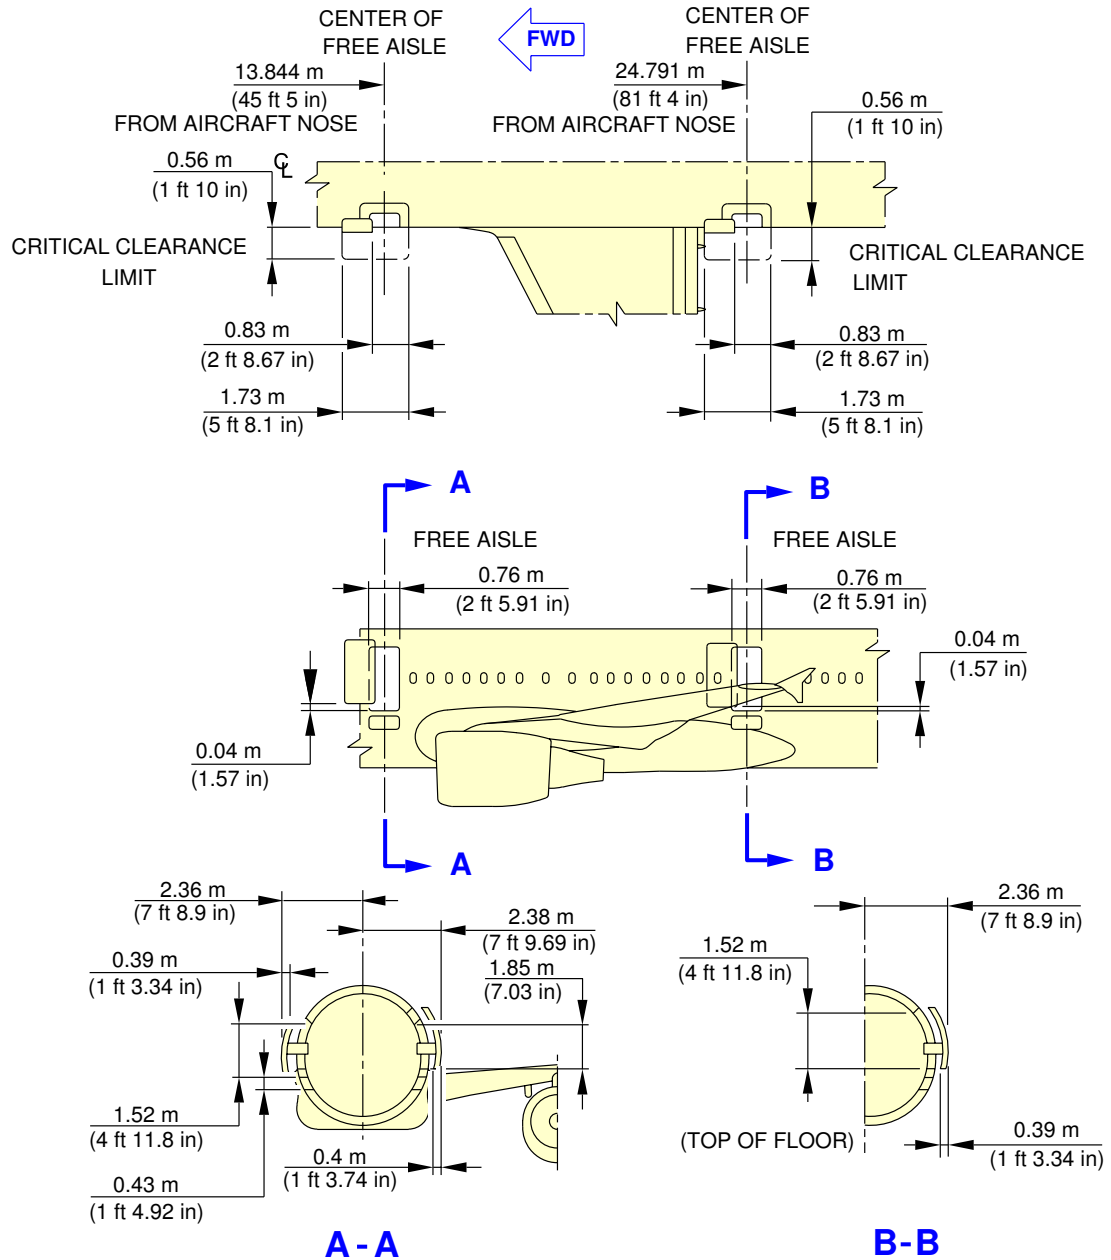

N_AC_020702_1_0050101_01_00

Doors Clearances
Emergency Exits
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-7-3 Aft Passenger / Crew Doors

****ON A/C A321-100 A321-200**

Aft Passenger / Crew Doors

1. This section gives Aft passenger / crew doors clearances.

****ON A/C A321-100 A321-200**

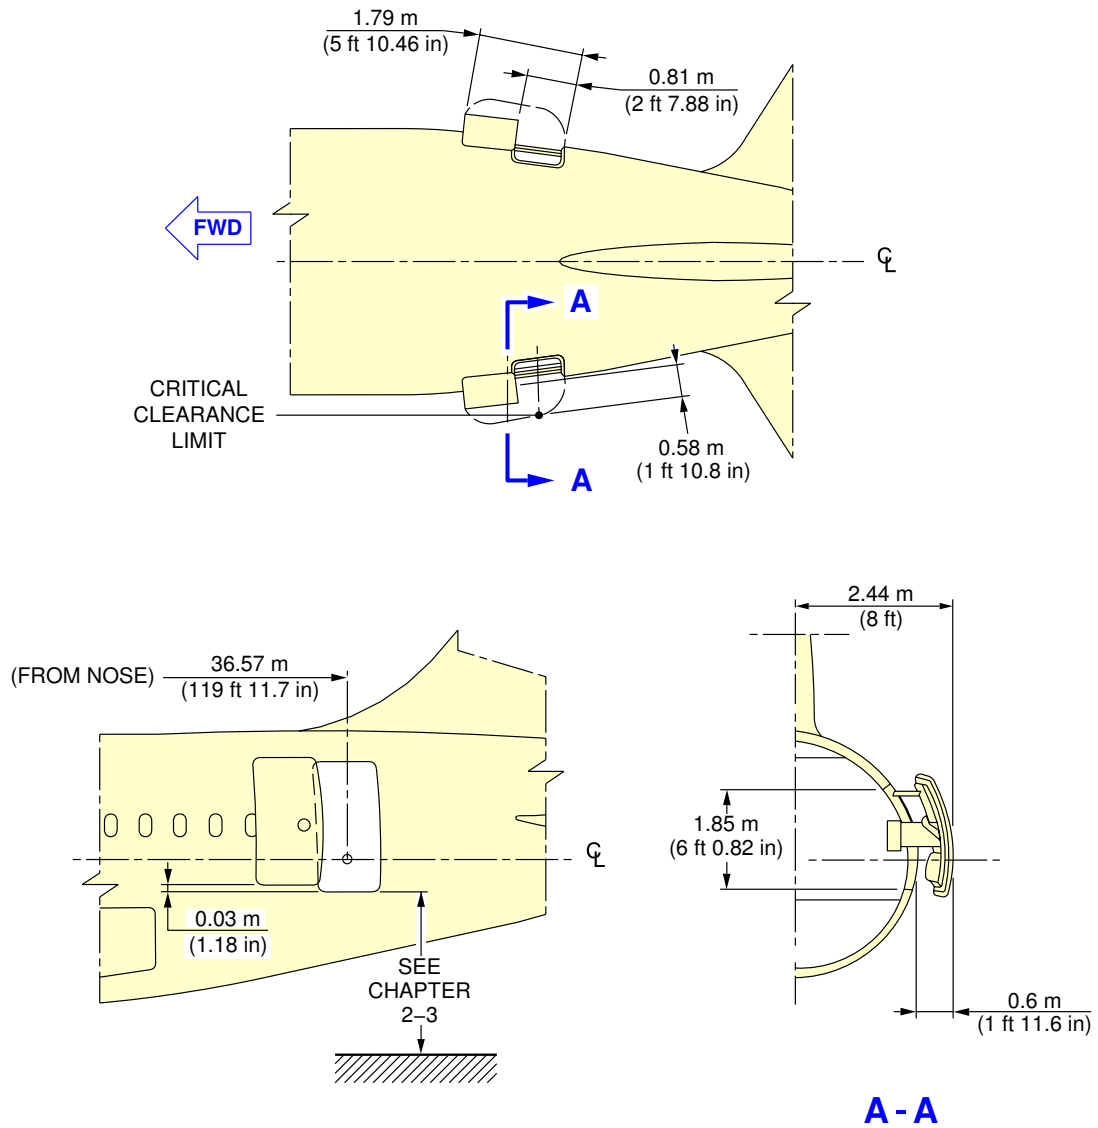

N_AC_020703_1_0040101_01_00

Doors Clearances
Aft Passenger / Crew Doors
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING



2-7-4 Forward Cargo Compartment Doors

****ON A/C A321-100 A321-200**

Forward Cargo Compartment Door

1. This section gives forward cargo compartment door clearances.

****ON A/C A321-100 A321-200**

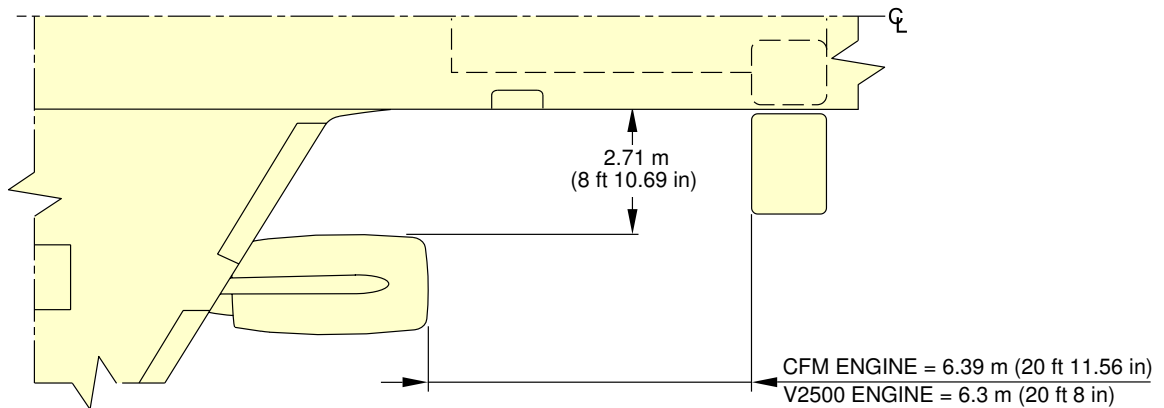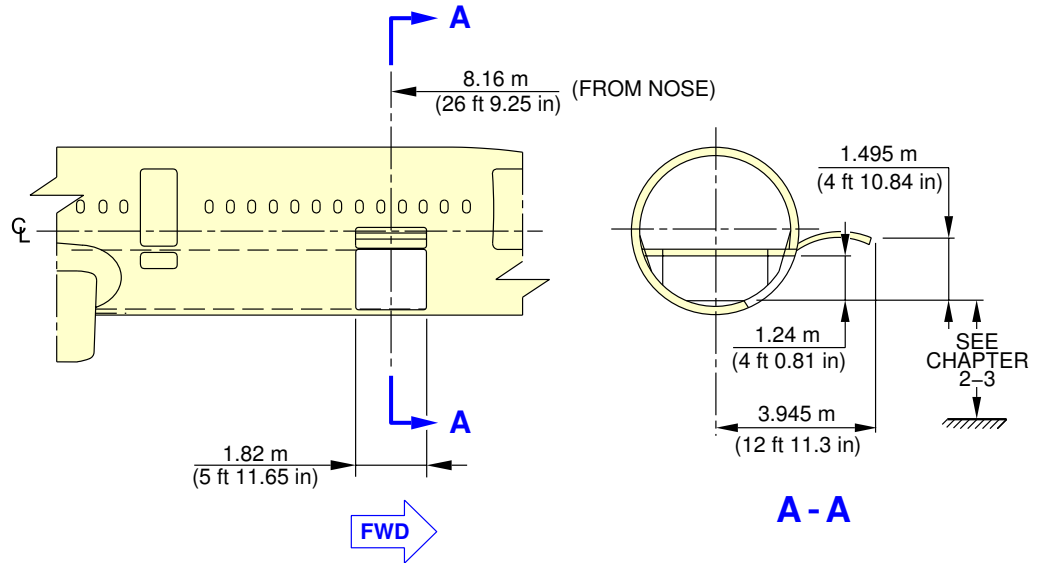

N_AC_020704_1_0040101_01_01

Doors Clearances
Forward Cargo Compartment Door
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING



2-7-5 Aft Cargo Compartment Doors

****ON A/C A321-100 A321-200**

Aft Cargo Compartment Door

1. This section gives Aft cargo compartment door clearances.

****ON A/C A321-100 A321-200**

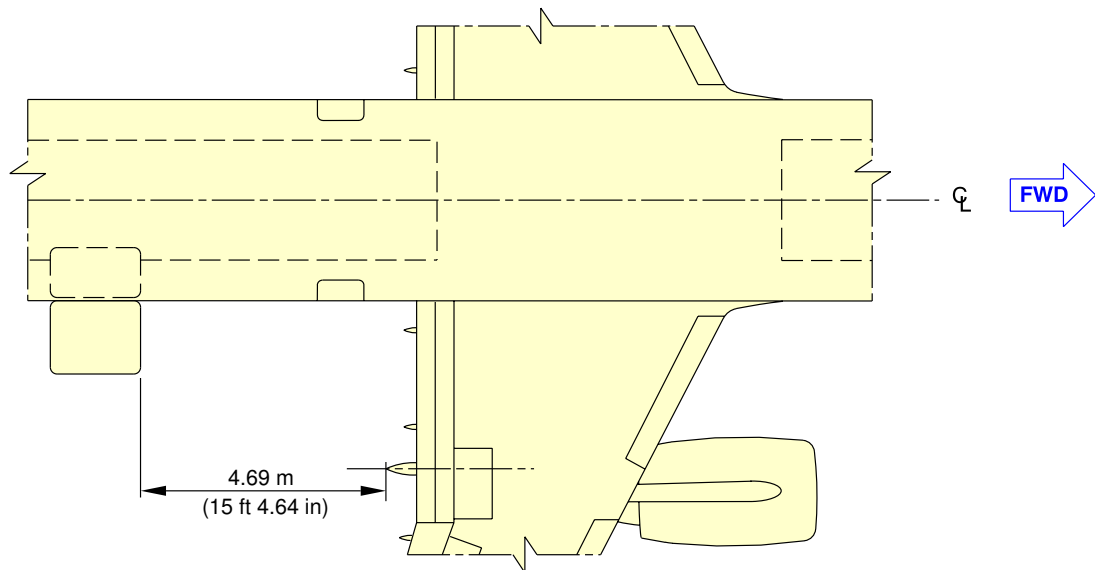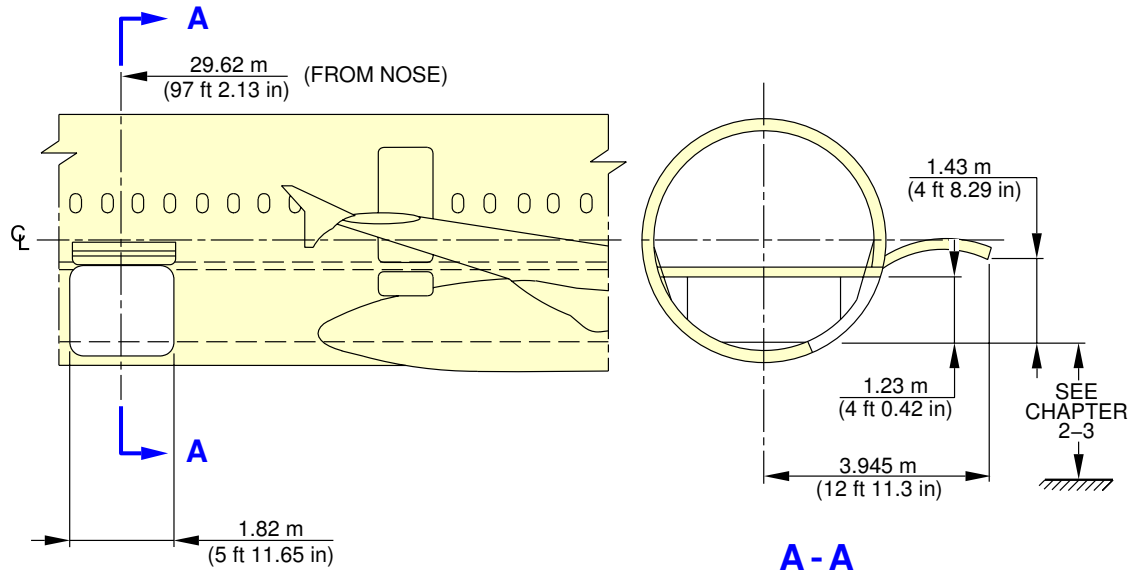

N_AC_020705_1_0040101_01_00

Doors Clearances
Aft Cargo Compartment Door
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-7-6 Bulk Cargo Compartment Doors

****ON A/C A321-100 A321-200**

Bulk Cargo Compartment Door

1. This section gives the bulk cargo compartment door clearances.

****ON A/C A321-100 A321-200**

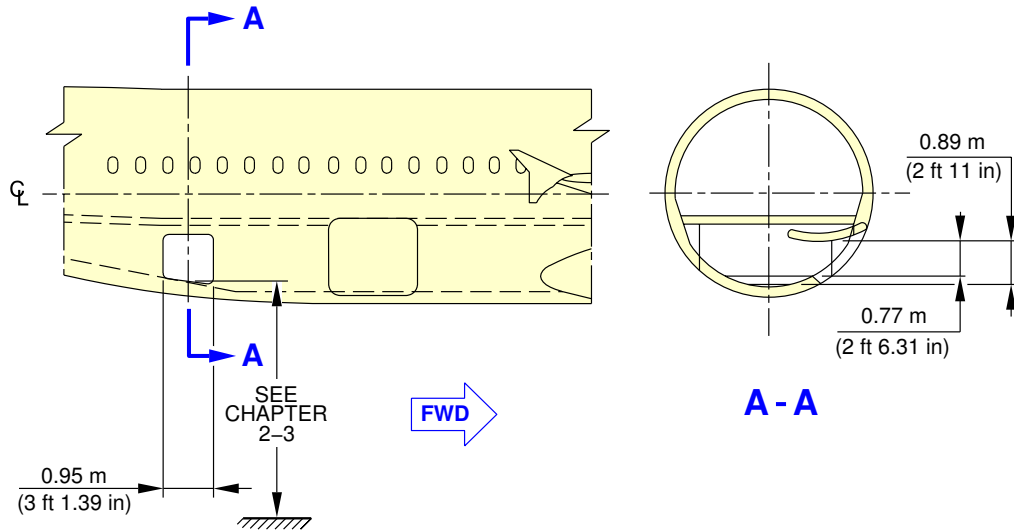

N_AC_020706_1_0020101_01_01

Doors Clearances
Bulk Cargo Compartment Door
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING



2-7-7 Main Landing Gear Doors

****ON A/C A321-100 A321-200**

Main Landing Gear Doors

1. This section gives the main landing gear doors clearances.

****ON A/C A321-100 A321-200**

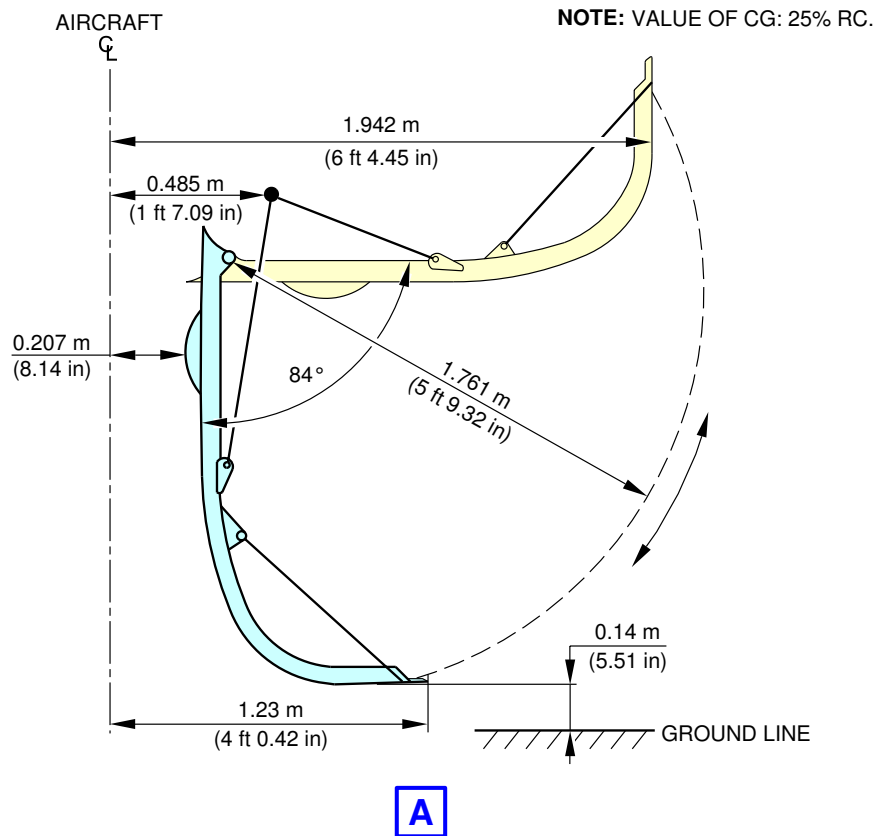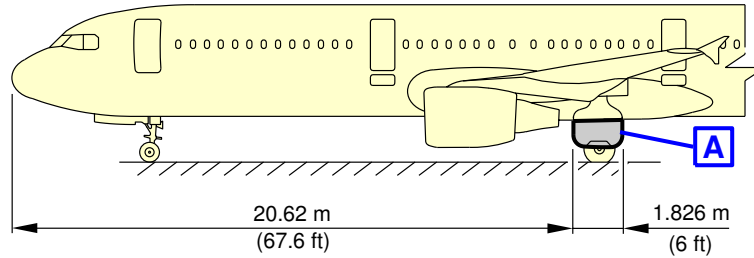

N_AC_020707_1_0050101_01_02

Doors Clearances
Main Landing Gear Doors
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


2-7-8 Radome

****ON A/C A321-100 A321-200**

Radome

1. This section gives the radome clearances.

****ON A/C A321-100 A321-200**

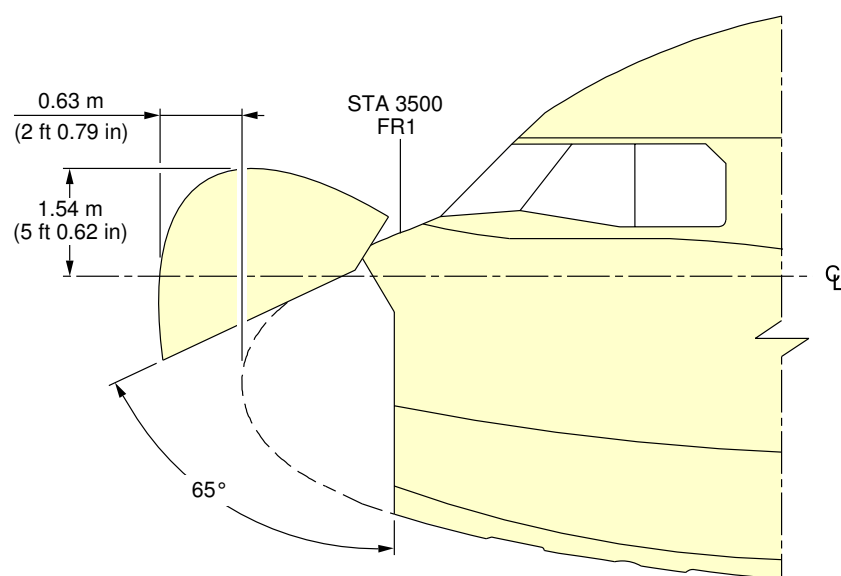

N_AC_020708_1_0040101_01_00

Doors Clearances
Radome
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

2-7-9 APU and Nose Landing Gear Doors


****ON A/C A321-100 A321-200**

APU and Nose Landing Gear Doors

1. This section gives APU and Nose Landing Gear doors clearances.

****ON A/C A321-100 A321-200**

NOTE: VALUE OF CG: 25% RC.

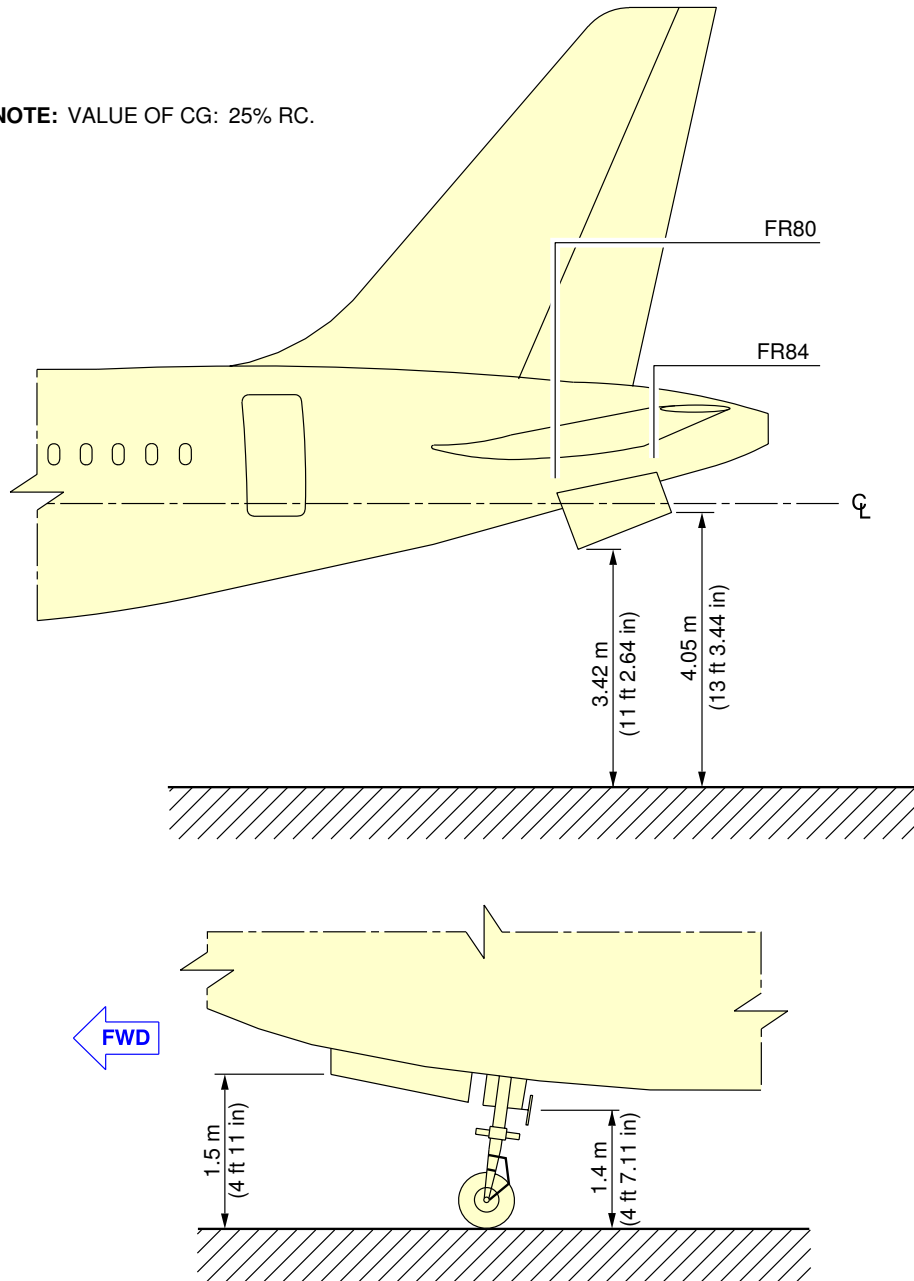

N_AC_020709_1_0040101_01_00

Doors Clearances
APU and Nose Landing Gear Doors
FIGURE 1

AIRPLANE PERFORMANCE**3-1-0 General Information******ON A/C A321-100 A321-200**General Information

1. This section gives standard day temperatures.

Section 3-2 indicates payload range information at specific altitudes recommended for long range cruise with a given fuel reserve condition.

Section 3-3 represents FAR take-off runway length requirements at ISA and ISA +15 °C (+59 °F) for CFM56 and IAE V2500 series engine conditions for FAA certification.

Section 3-4 represents FAR landing runway length requirements for FAA certification.

Section 3-5 indicates final approach speeds.

Standard day temperatures for the altitudes shown are tabulated below:

Standard day temperatures for the altitude			
Altitude		Standard Day Temperature	
FEET	METERS	°F	°C
0	0	59.0	15.0
2000	610	51.9	11.1
4000	1219	44.7	7.1
6000	1829	37.6	3.1
8000	2438	30.5	-0.8



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

3-2-0 Payload / Range

****ON A/C A321-100 A321-200**

Payload / Range

1. Payload / Range



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

3-2-1 ISA Conditions

****ON A/C A321-100 A321-200**

ISA Conditions


1. This section gives the payload / range at ISA conditions.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

****ON A/C A321-100 A321-200**

NOTE: THESE CURVES ARE GIVEN FOR INFORMATION ONLY
THE APPROVED VALUES ARE STATED IN THE "OPERATING
MANUALS" SPECIFIC TO THE AIRLINE OPERATING THE AIRCRAFT.

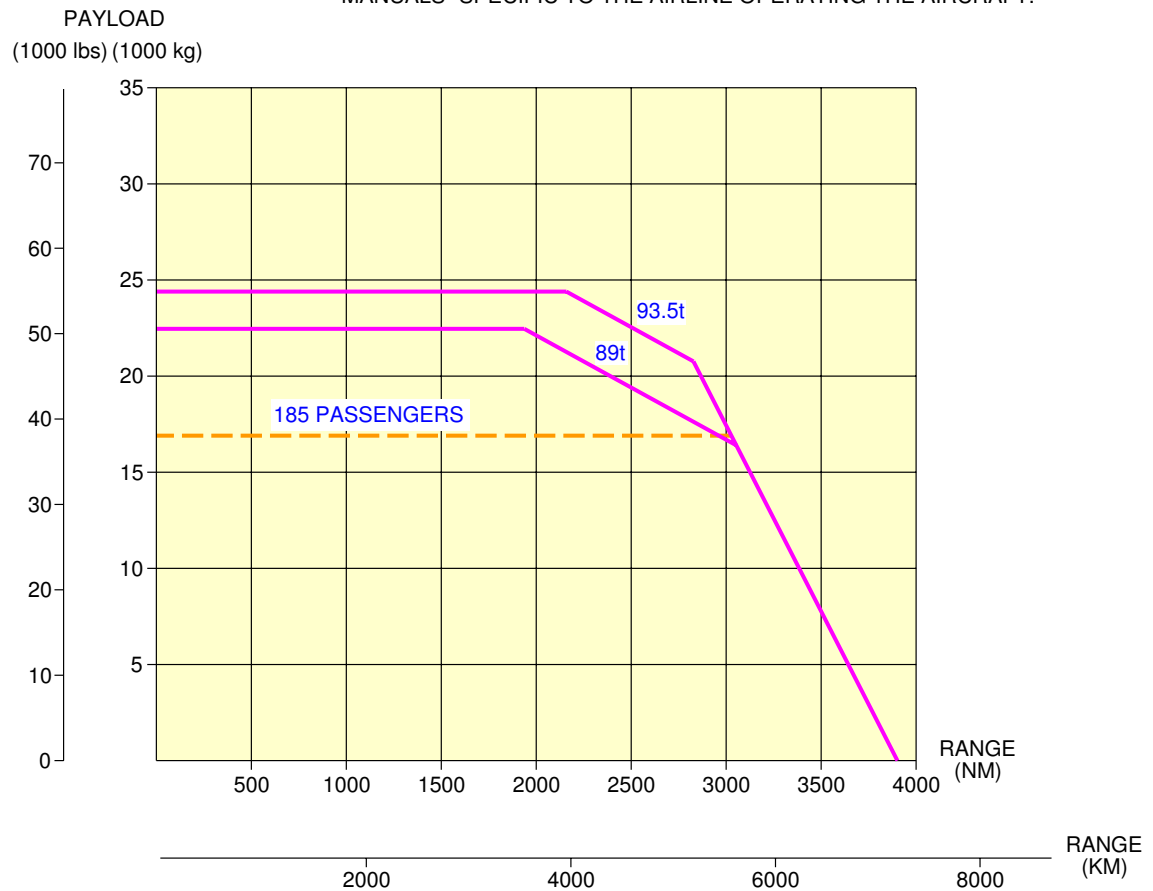


N_AC_030201_1_0100101_01_00

Payload / Range
CFM56-5B series engine
FIGURE 1

****ON A/C A321-100 A321-200**

NOTE: THESE CURVES ARE GIVEN FOR INFORMATION ONLY
THE APPROVED VALUES ARE STATED IN THE "OPERATING
MANUALS" SPECIFIC TO THE AIRLINE OPERATING THE AIRCRAFT.

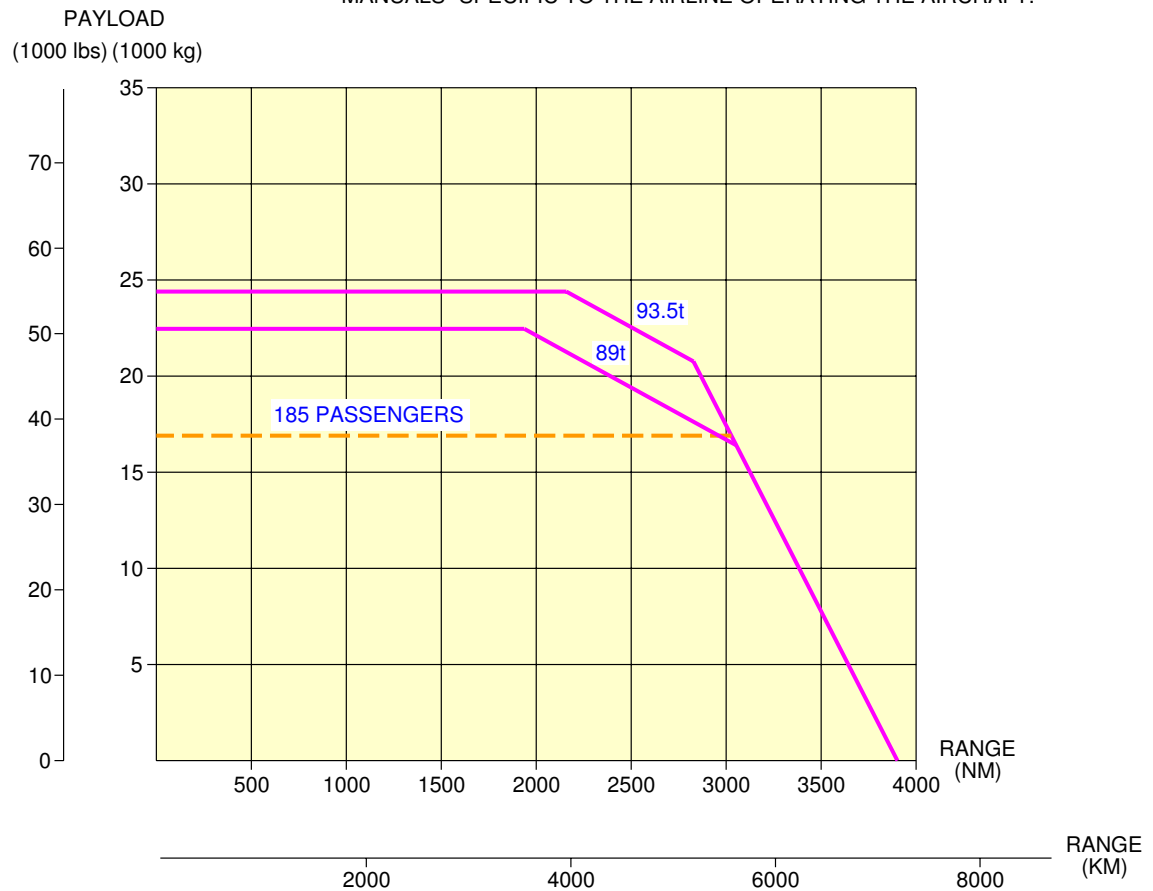

N_AC_030201_1_0110101_01_00

Payload / Range
IAE V2500-A5 series engine
FIGURE 2



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

3-3-0 FAR / JAR Takeoff Weight Limitation

****ON A/C A321-100 A321-200**

FAR / JAR Take-off Weight Limitation

1. FAR / JAR Take-off Weight Limitation



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

3-3-1 ISA Conditions


****ON A/C A321-100 A321-200**

ISA Conditions

1. This section gives the take-off weight limitation at ISA conditions.

****ON A/C A321-100 A321-200**

NOTE: THESE CURVES ARE GIVEN FOR INFORMATION ONLY
THE APPROVED VALUES ARE STATED IN THE "OPERATING
MANUALS" SPECIFIC TO THE AIRLINE OPERATING THE AIRCRAFT.

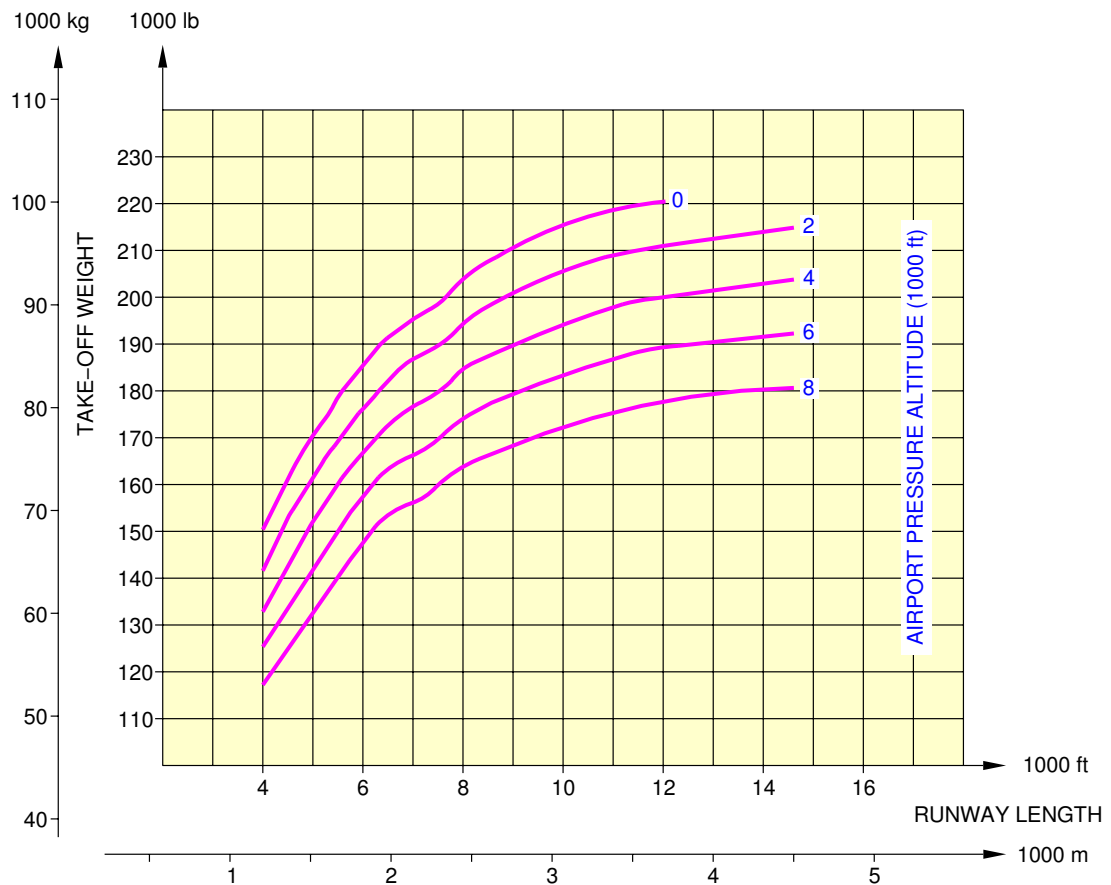


N_AC_030301_1_0070101_01_00

FAR / JAR Take-off Weight Limitation
ISA Conditions – CFM56 series engine
FIGURE 1

****ON A/C A321-100 A321-200**

NOTE: THESE CURVES ARE GIVEN FOR INFORMATION ONLY
THE APPROVED VALUES ARE STATED IN THE "OPERATING
MANUALS" SPECIFIC TO THE AIRLINE OPERATING THE AIRCRAFT.

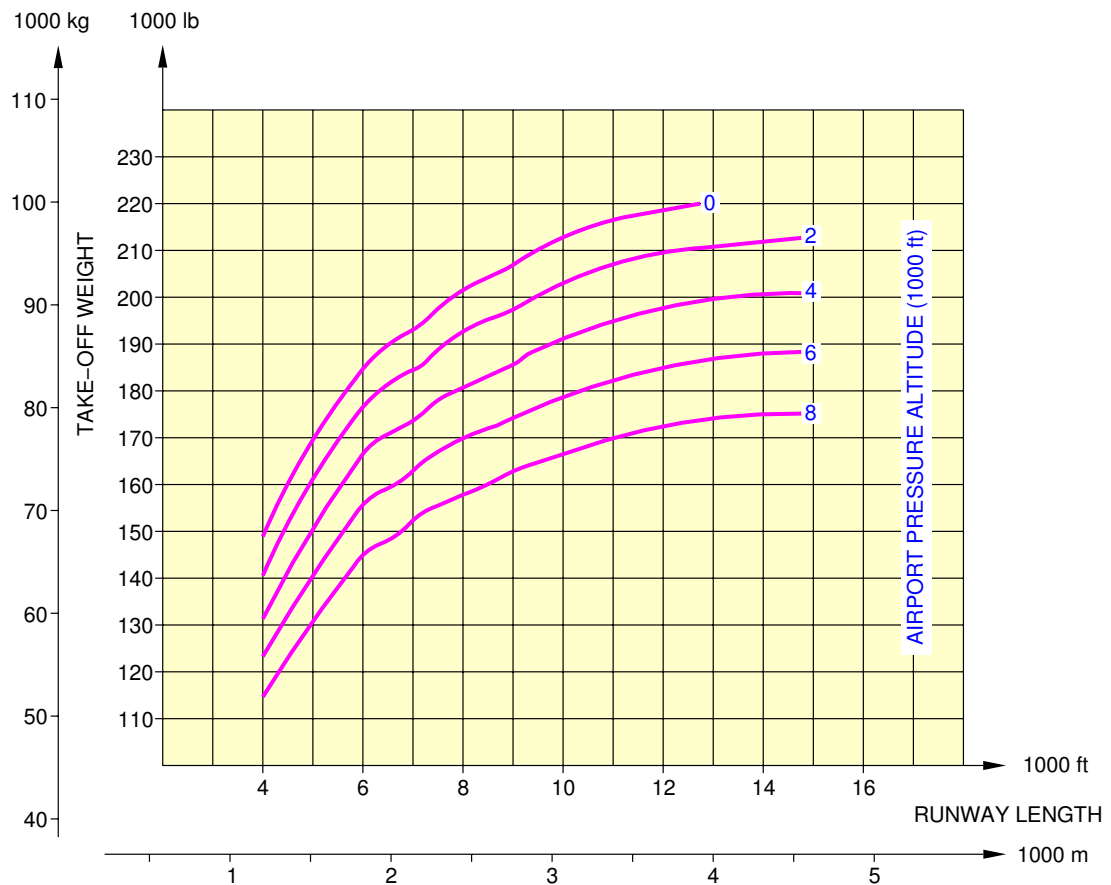

N_AC_030301_1_0080101_01_00

FAR / JAR Take-off Weight Limitation
ISA Conditions – IAE V2500 series engine
FIGURE 2



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

3-3-2 ISA +15 ° C (+59 ° F) Conditions


****ON A/C A321-100 A321-200**

ISA +15 ° C (+59 ° F) Conditions

1. This section gives the take-off weight limitation at ISA +15 ° C (+59 ° F) conditions.

****ON A/C A321-100 A321-200**

NOTE: THESE CURVES ARE GIVEN FOR INFORMATION ONLY
THE APPROVED VALUES ARE STATED IN THE "OPERATING
MANUALS" SPECIFIC TO THE AIRLINE OPERATING THE AIRCRAFT.

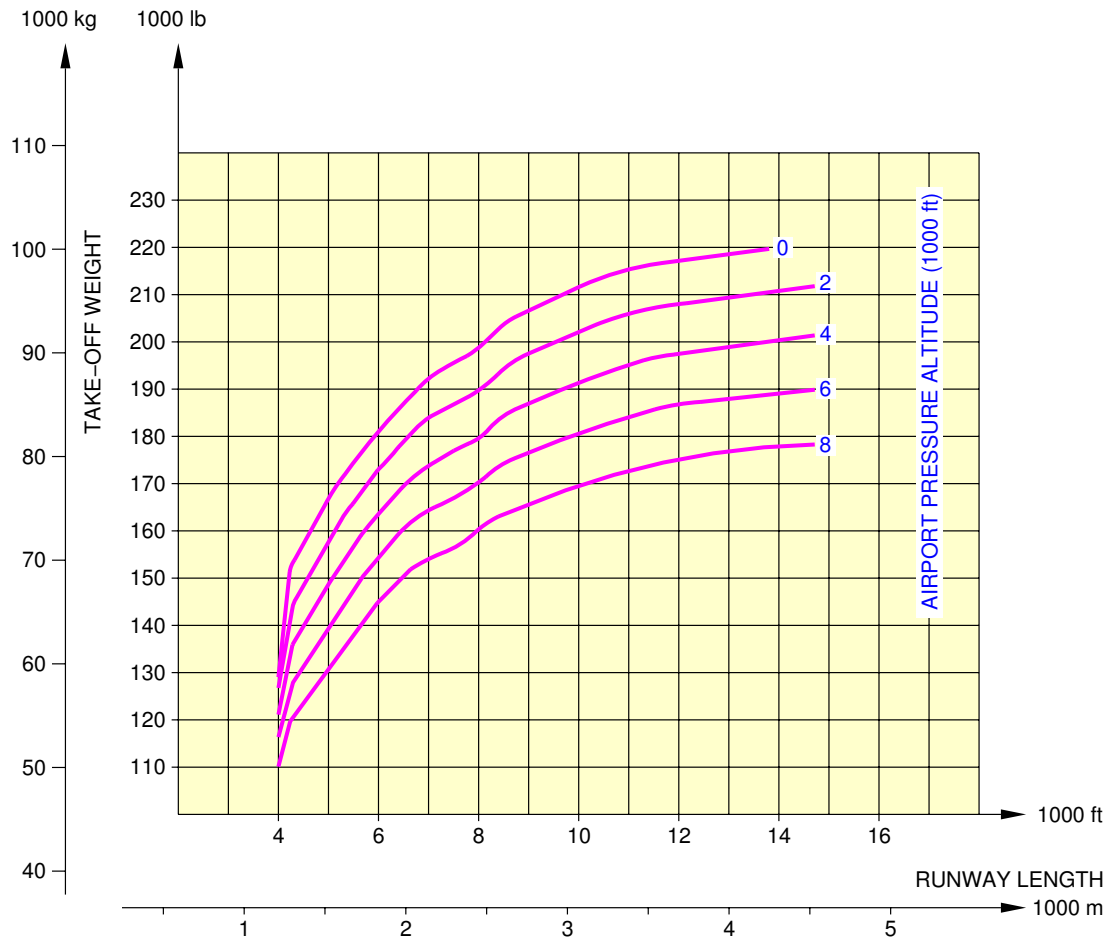


N_AC_030302_1_0070101_01_00

FAR / JAR Take-off Weight Limitation
ISA +15 °C (+59 °F) Conditions – CFM56 series engine
FIGURE 1

****ON A/C A321-100 A321-200**

NOTE: THESE CURVES ARE GIVEN FOR INFORMATION ONLY
THE APPROVED VALUES ARE STATED IN THE "OPERATING
MANUALS" SPECIFIC TO THE AIRLINE OPERATING THE AIRCRAFT.

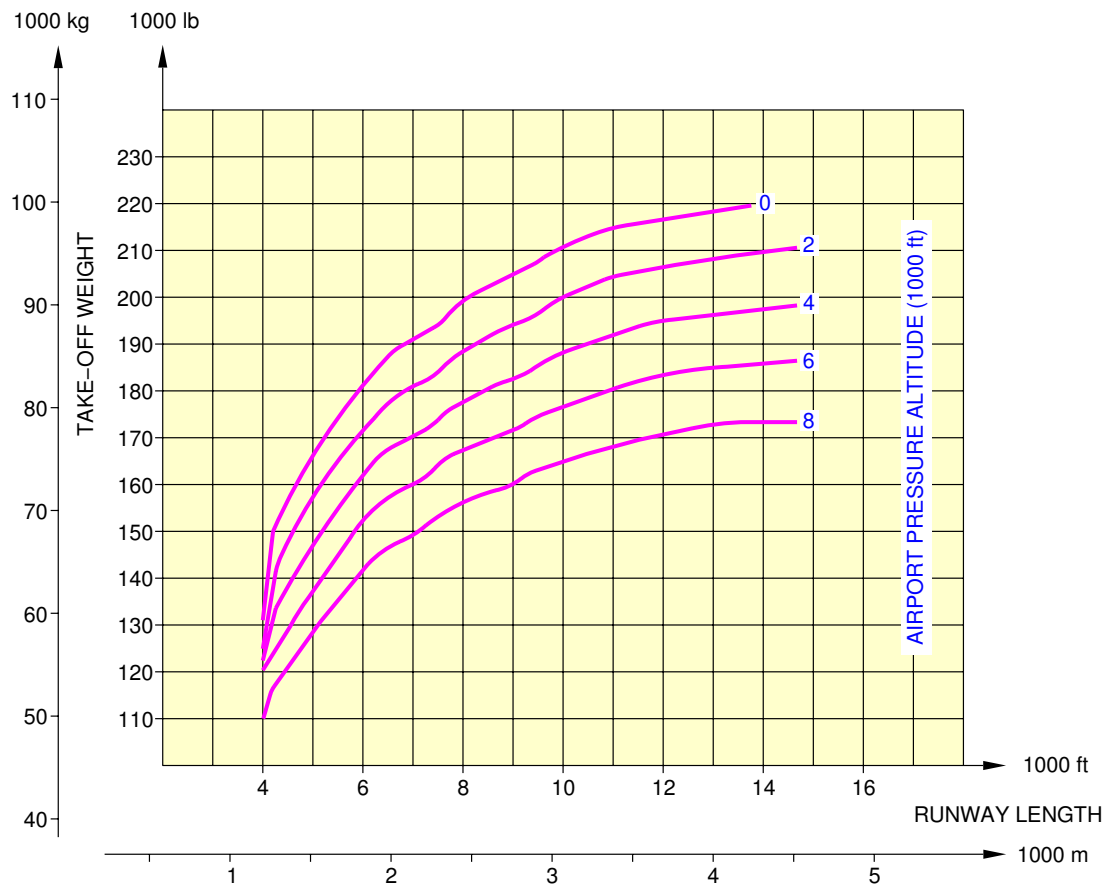

N_AC_030302_1_0080101_01_00

FAR / JAR Take-off Weight Limitation
ISA +15 °C (+59 °F) Conditions – IAE V2500 series engine
FIGURE 2



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

3-4-0 FAR / JAR Landing Field Length

****ON A/C A321-100 A321-200**

FAR / JAR Landing Field Length

1. FAR / JAR Landing Field Length



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

3-4-1 ISA Conditions


****ON A/C A321-100 A321-200**

ISA Conditions

1. This section gives the landing field length.

****ON A/C A321-100 A321-200**

NOTE: THESE CURVES ARE GIVEN FOR INFORMATION ONLY
THE APPROVED VALUES ARE STATED IN THE "OPERATING
MANUALS" SPECIFIC TO THE AIRLINE OPERATING THE AIRCRAFT.

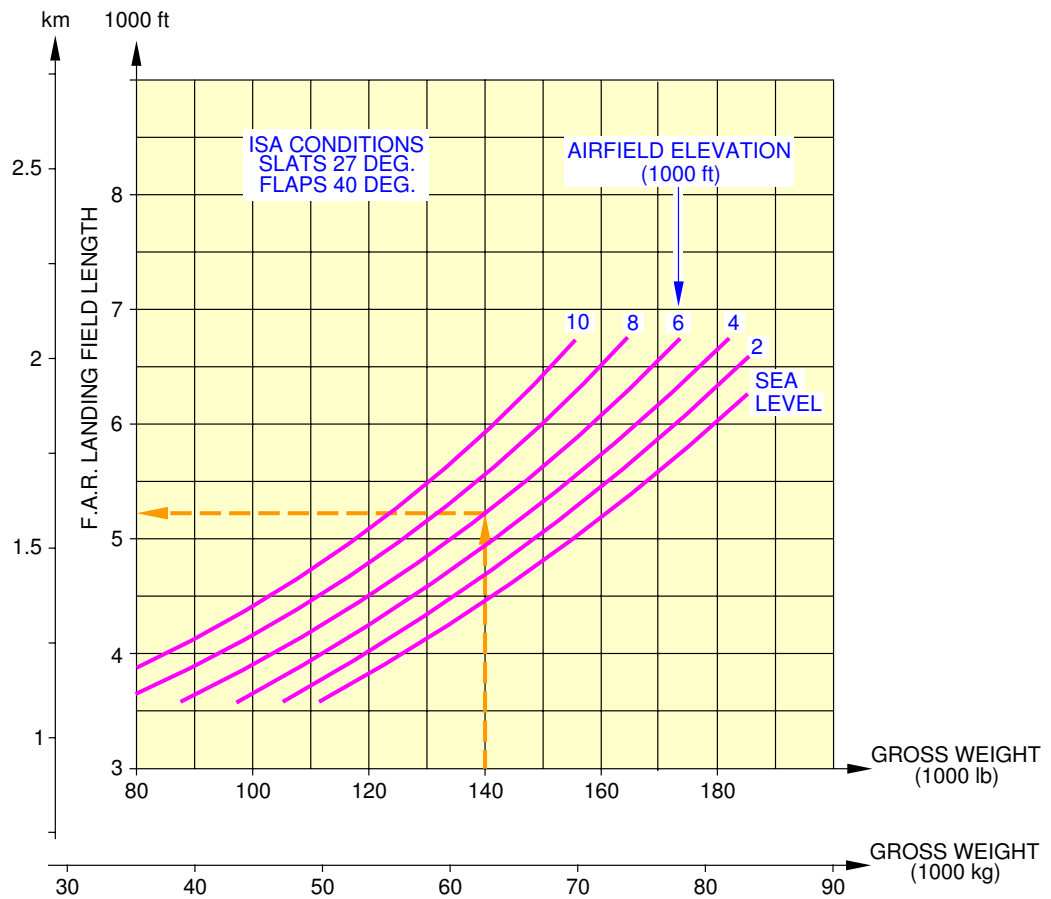


N_AC_030401_1_0070101_01_00

FAR / JAR Landing Field Length
CFM56 series engine
FIGURE 1

****ON A/C A321-100 A321-200**

NOTE: THESE CURVES ARE GIVEN FOR INFORMATION ONLY
THE APPROVED VALUES ARE STATED IN THE "OPERATING
MANUALS" SPECIFIC TO THE AIRLINE OPERATING THE AIRCRAFT.

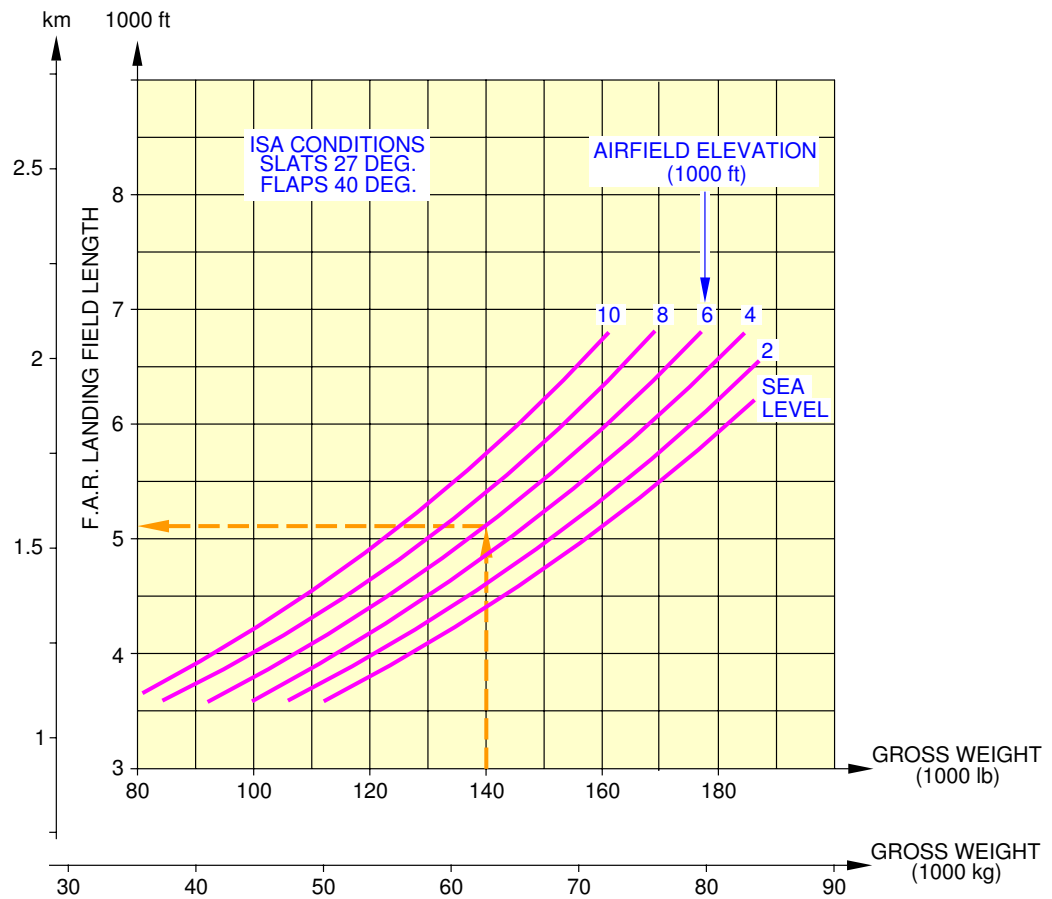

N_AC_030401_1_0080101_01_00

FAR / JAR Landing Field Length
IAE V2500 series engine
FIGURE 2



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

3-5-0 Final Approach Speed

****ON A/C A321-100 A321-200**

Final Approach Speed


1. This section gives the final approach speed.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

****ON A/C A321-100 A321-200**

NOTE: THESE CURVES ARE GIVEN FOR INFORMATION ONLY
THE APPROVED VALUES ARE STATED IN THE "OPERATING
MANUALS" SPECIFIC TO THE AIRLINE OPERATING THE AIRCRAFT.

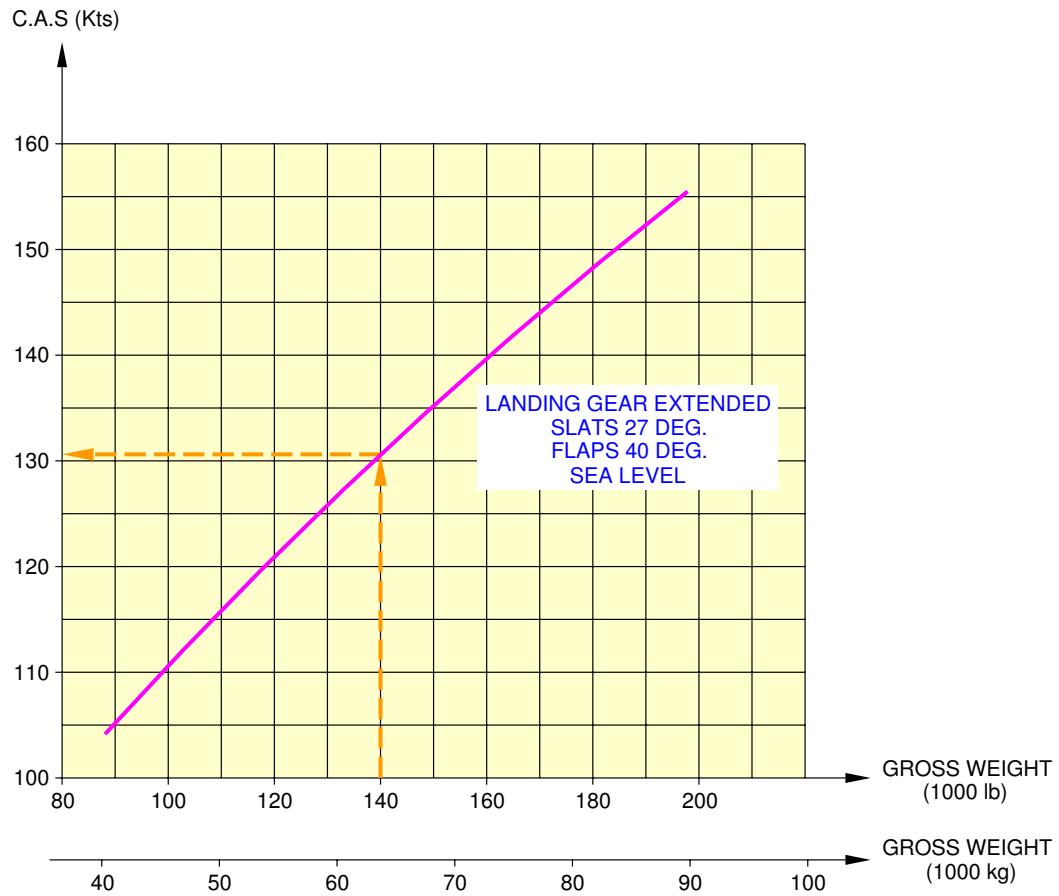

N_AC_030500_1_0070101_01_00


Final Approach Speed
CFM56 series engine
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

****ON A/C A321-100 A321-200**

NOTE: THESE CURVES ARE GIVEN FOR INFORMATION ONLY
THE APPROVED VALUES ARE STATED IN THE "OPERATING
MANUALS" SPECIFIC TO THE AIRLINE OPERATING THE AIRCRAFT.

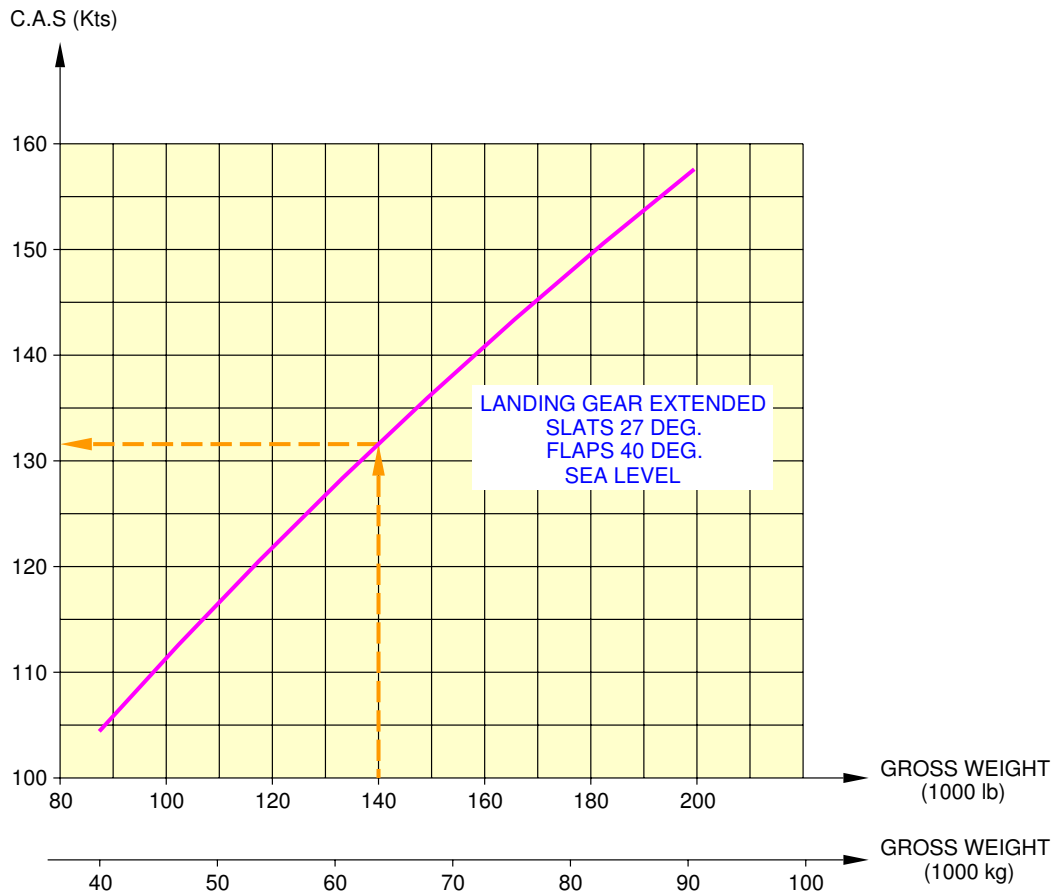

N_AC_030500_1_0080101_01_00

Final Approach Speed
IAE V2500 series engine
FIGURE 2

GROUND MANEUVERING**4-1-0 General Information******ON A/C A321-100 A321-200****General Information**

1. This section provides airplane turning capability and maneuvering characteristics.

For ease of presentation, this data has been determined from the theoretical limits imposed by the geometry of the aircraft, and where noted, provides for a normal allowance for tire slippage. As such, it reflects the turning capability of the aircraft in favorable operating circumstances. This data should only be used as guidelines for the method of determination of such parameters and for the maneuvering characteristics of this aircraft type.

In the ground operating mode, varying airline practices may demand that more conservative turning procedures be adopted to avoid excessive tire wear and reduce possible maintenance problems. Airline operating techniques will vary in the level of performance, over a wide range of operating circumstances throughout the world. Variations from standard aircraft operating patterns may be necessary to satisfy physical constraints within the maneuvering area, such as adverse grades, limited area or high risk of jet blast damage. For these reasons, ground maneuvering requirements should be coordinated with the using airlines prior to layout planning.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


4-2-0 Turning Radii

****ON A/C A321-100 A321-200**

Turning Radii

1. This section gives the turning radii.

****ON A/C A321-100 A321-200**

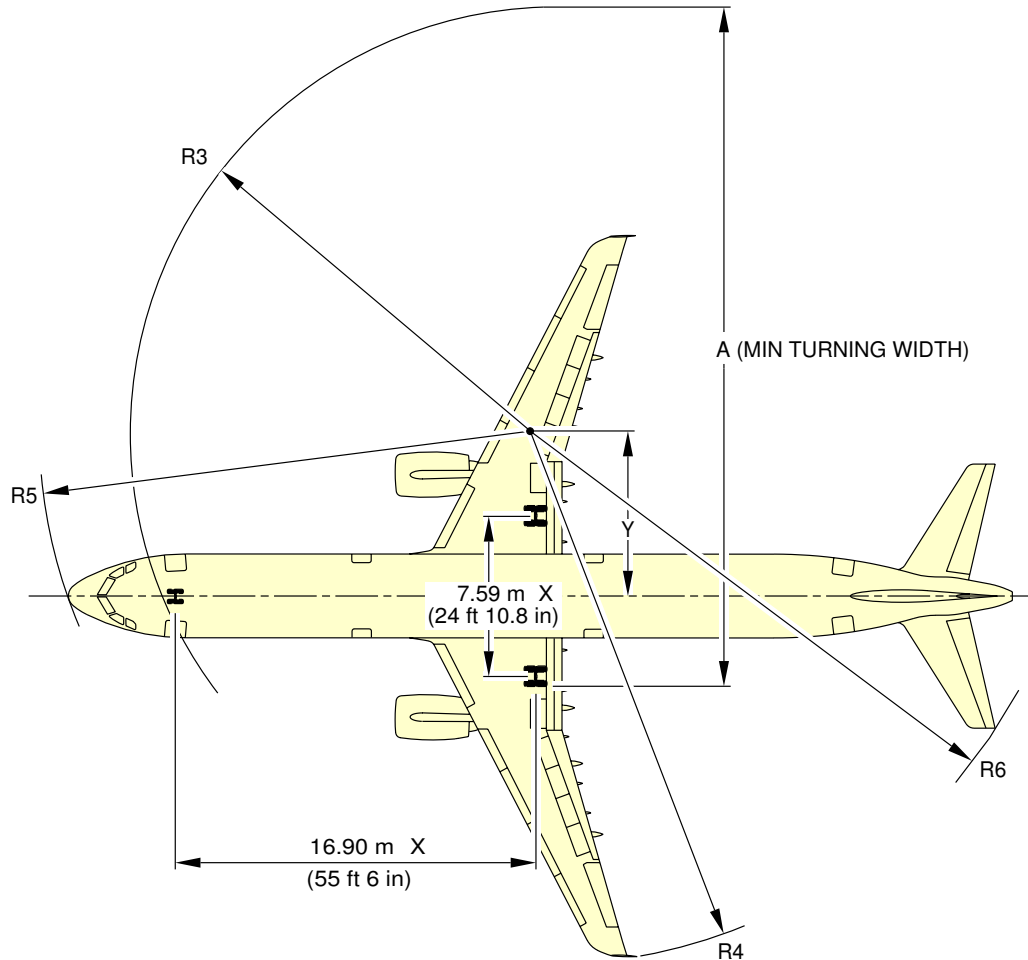

NOTE: FOR STEERING DIMENSION TABLE SEE SHEET 2.
APPLICABLE FOR A321-100 AND A321-200.

TURN TYPE

1. ASYMMETRIC THRUST DIFFERENTIAL BRAKING (PIVOTTING ON ONE MAIN GEAR).
2. SYMMETRIC THRUST NO BRAKING

N_AC_040200_1_0070101_01_01

Turning Radii, no Slip Angle
FIGURE 1

**ON A/C A321-100 A321-200

TURN TYPE	A321-100 MAXIMUM RAMP WEIGHT CG 30%		A321-200 MAXIMUM RAMP WEIGHT CG 28%		Y		R3		R4		R5		R6		A	
	STEERING ANGLE (°)	EFFECTIVE STEERING ANGLE WITH SLIP ON NLG TYRES (°)	STEERING ANGLE (°)	EFFECTIVE STEERING ANGLE WITH SLIP ON NLG TYRES (°)	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
1	75.00	77.35	75.00	77.35	3.795	12.451	17.694	58.052	21.402	70.216	22.304	73.177	23.913	78.455	25.986	85.256
2	75.00	73.30			5.072	16.640	18.018	59.114	22.647	74.301	22.557	74.004	24.475	80.300	27.586	90.506
2			75.00		5.053	16.578	18.013	59.096	22.629	74.241	22.552	73.991	24.467	80.272	27.562	90.428
2	71.16	70	71.12	70	6.153	20.188	18.359	60.231	23.705	77.771	22.824	74.882	24.993	81.998	29.009	95.172
2	65.53	65	65.53	65	7.883	25.864	19.021	62.406	25.401	83.335	23.350	76.608	25.894	84.953	31.401	103.023
2	60.44	60	60.44	60	9.761	32.023	19.889	65.252	27.246	89.389	24.049	78.900	26.962	88.460	34.146	112.029
2	55.38	55	55.37	55	11.838	38.838	21.006	68.917	29.292	96.102	24.964	81.903	28.243	92.662	37.340	122.508
2	50.31	50	50.31	50	14.186	46.541	22.437	73.611	31.610	103.707	26.159	85.825	29.800	97.769	41.119	134.906
2	45.25	45	45.25	45	16.906	55.466	24.276	79.646	34.301	112.535	27.729	90.974	31.725	104.085	45.679	149.865
2	40.21	40	40.20	40	20.148	66.102	26.669	87.495	37.513	123.073	29.816	97.822	34.161	112.076	51.313	168.350
2	35.17	35	35.17	35	24.144	79.213	29.842	97.908	41.479	136.085	32.65	107.119	37.333	122.482	58.483	191.874
2	30.13	30	30.13	30	29.282	96.070	34.180	112.138	46.585	152.838	36.613	120.122	41.620	136.547	67.958	222.960
2	25.10	25	25.10	25	36.255	118.947	40.371	132.449	53.525	175.608	42.397	139.098	47.707	156.520	81.122	266.149
2	20.08	20	20.08	20	46.449	152.391	49.797	163.377	63.684	208.936	51.387	168.591	56.973	186.921	100.743	330.521
2	15.06	15	15.06	15	63.094	207.001	65.687	215.510	80.291	263.421	66.813	219.202	72.640	238.320	133.278	437.264

TURN TYPES:

1. ASYMMETRIC THRUST DIFFERENTIAL BRAKING (PIVOTING ON ONE MAIN GEAR)
2. SYMMETRIC THRUST NO BRAKING.

N_AC_040200_1_0080101_01_00

Turning Radii, no Slip Angle
FIGURE 2



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


4-3-0 Minimum Turning Radii

****ON A/C A321-100 A321-200**

Minimum Turning Radii

1. This section gives the minimum turning radii.

****ON A/C A321-100 A321-200**

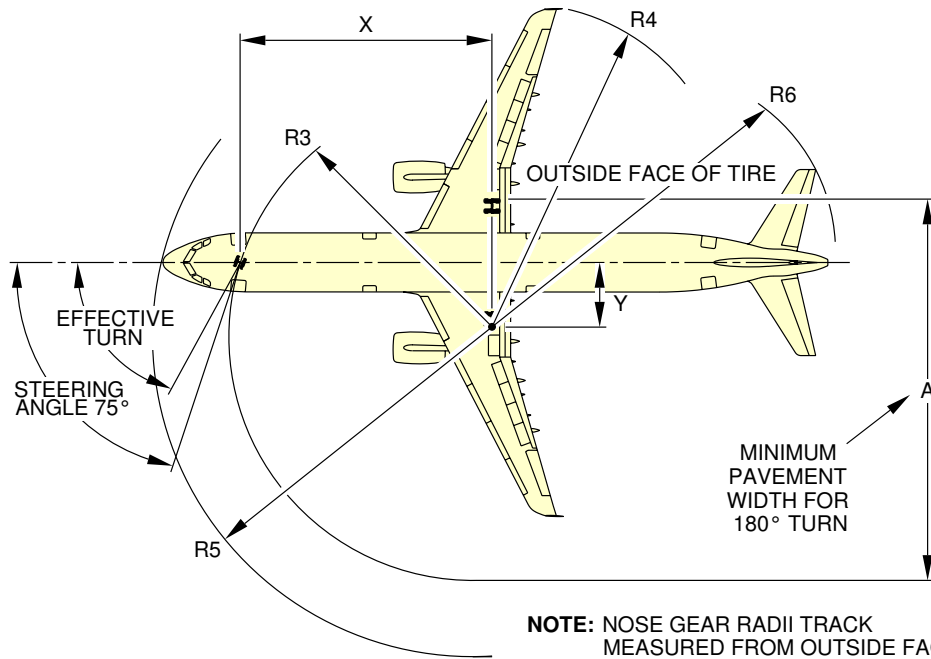

NOTE: NOSE GEAR RADII TRACK MEASURED FROM OUTSIDE FACE OF TIRE. THEORETICAL CENTER OF TURN FOR MINIMUM TURNING RADIUS. SLOW CONTINUOUS TURNING, APPROXIMATELY IDLE THRUST ON ALL ENGINES. NO DIFFERENTIAL BRAKING.

EFFECTIVE TURN ANGLE		X	Y	A	R3	R4	R5	R6
73° EFF.	m	16.91	5.1	27.6	18.0	22.7	22.6	24.5
75° STEERED	(ft)	55.4	16.6	90.5	59.1	74.3	74.0	80.3

N_AC_040300_1_0040101_01_01

Minimum Turning Radii
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

4-4-0 Visibility from Cockpit in Static Position


****ON A/C A321-100 A321-200**

Visibility from Cockpit in Static Position

1. This section gives the visibility from cockpit in static position.

****ON A/C A321-100 A321-200**

NOTE:
● PILOT'S EYE POSITION

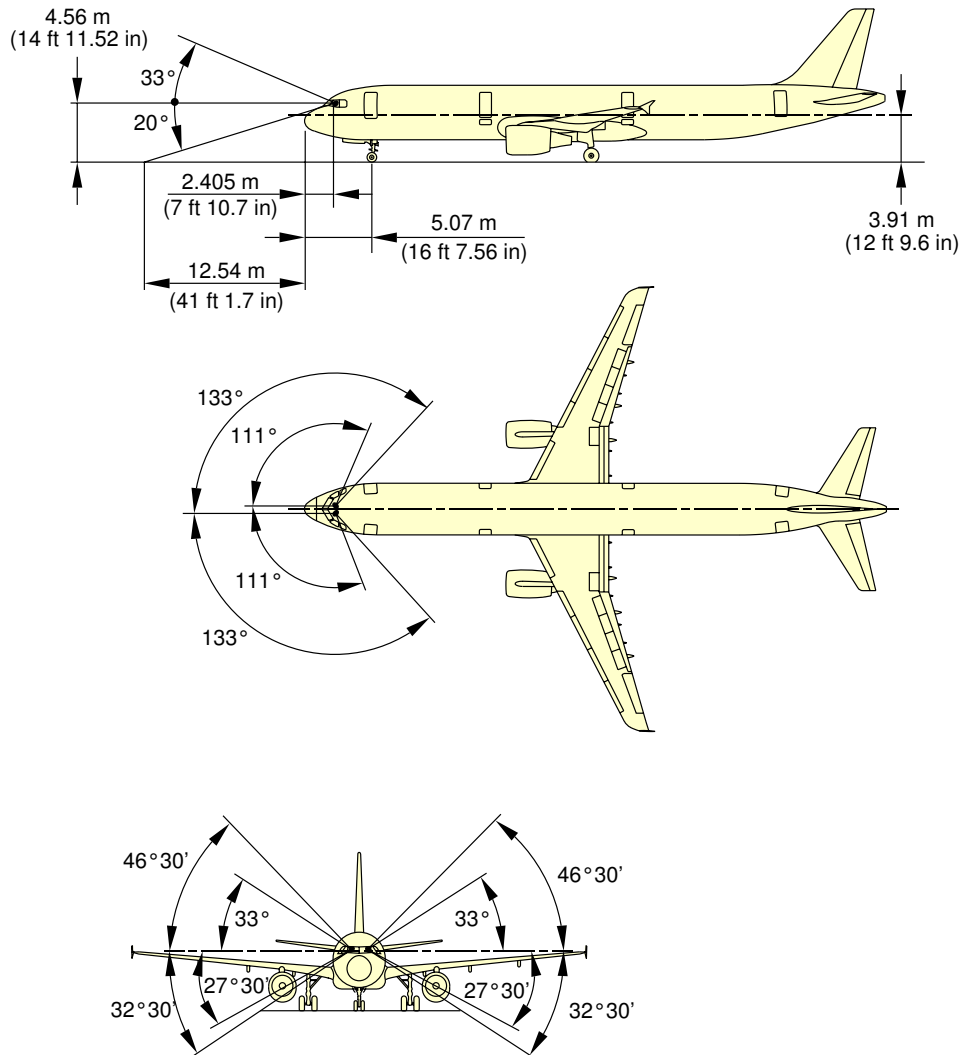

N_AC_040400_1_0040101_01_00

Visibility from Cockpit in Static Position
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

4-5-0 Runway and Taxiway Turn Paths

****ON A/C A321-100 A321-200**

Runway and Taxiway Turn Paths

1. Runway and Taxiway Turn Paths.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


4-5-1 135° Turn - Runway to Taxiway

****ON A/C A321-100 A321-200**

135° Turn - Runway to Taxiway

1. This section gives the 135° turn - runway to taxiway.

****ON A/C A321-100 A321-200**

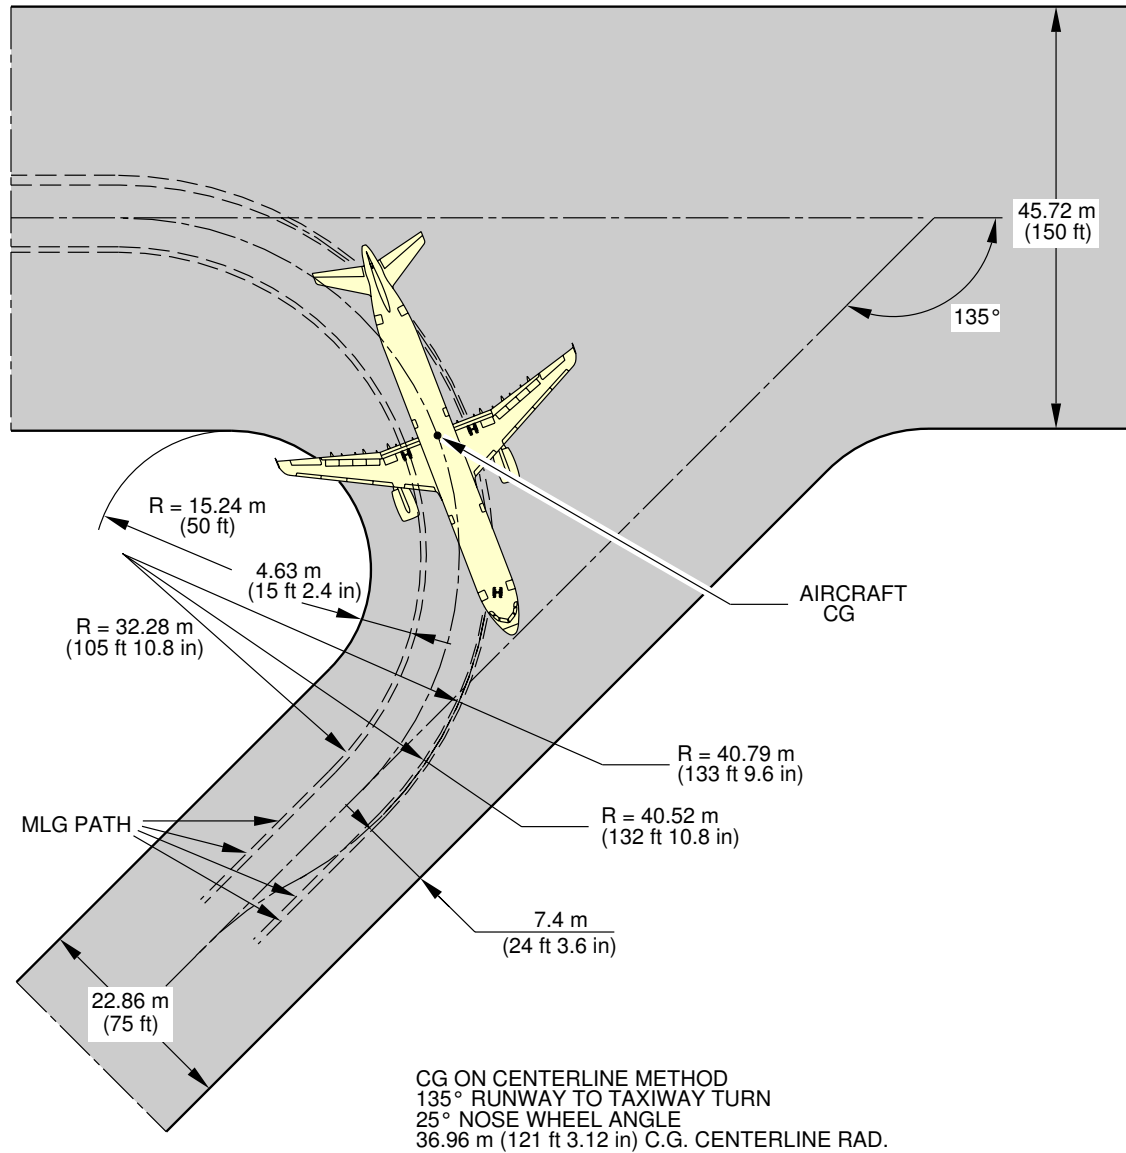


NOTE: APPLICABLE FOR A321-100 AND A321-200.

N_AC_040501_1_0060101_01_01

135° Turn - Runway to Taxiway
 CG on Centerline Method
 FIGURE 1

****ON A/C A321-100 A321-200**

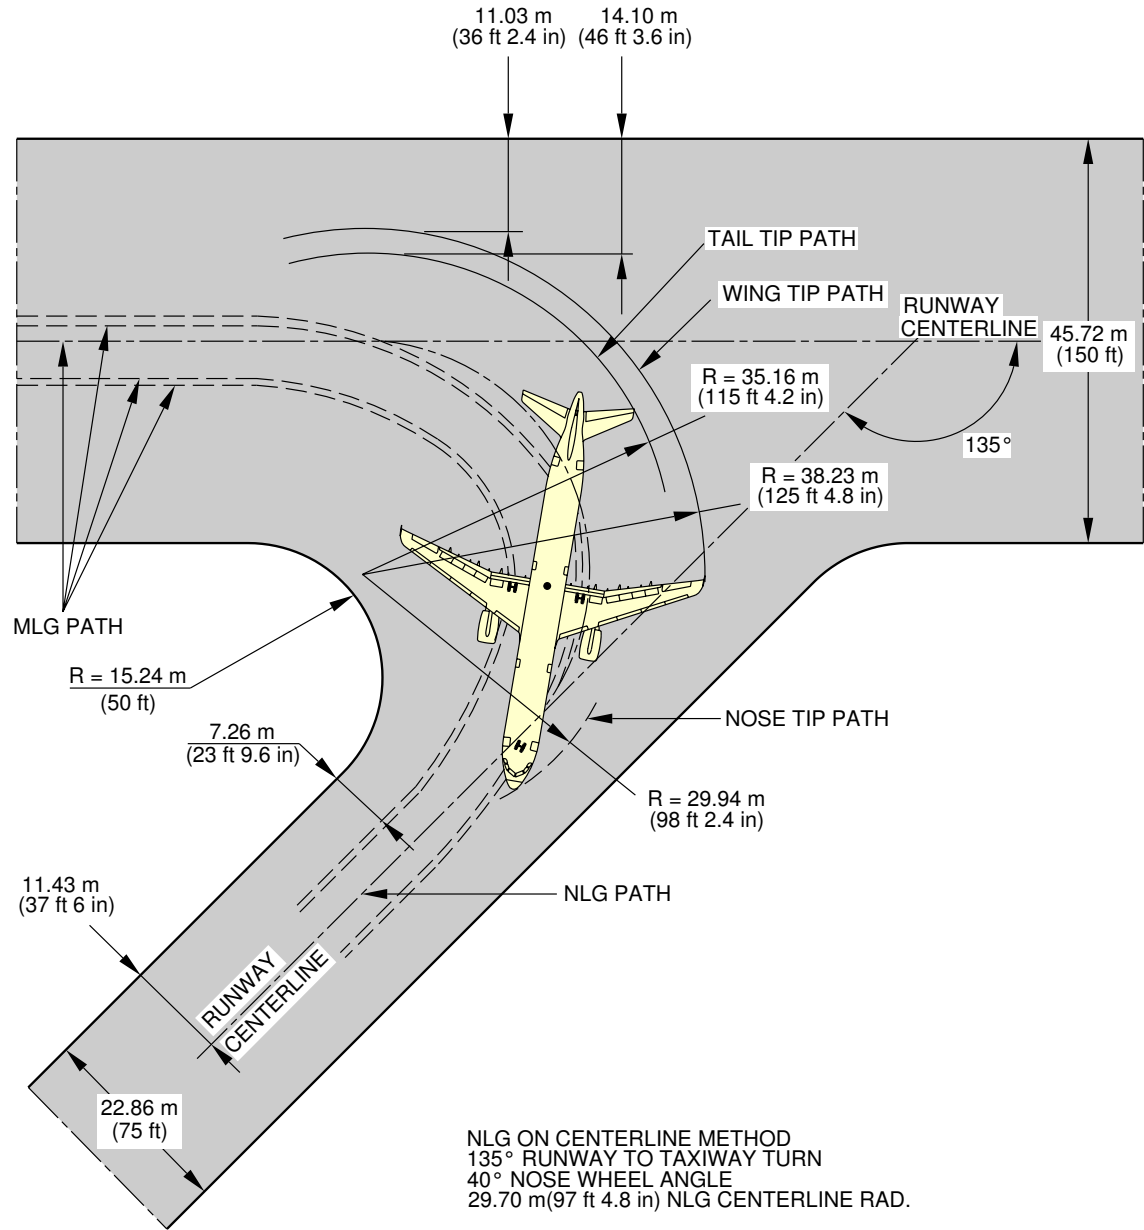

NOTE: APPLICABLE FOR A321-100 AND A321-200.

N_AC_040501_1_0070101_01_01

135° Turn - Runway to Taxiway
NLG on Centerline Method
FIGURE 2



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


4-5-2 90 ° Turn - Runway to Taxiway

****ON A/C A321-100 A321-200**

90 ° Turn - Runway to Taxiway

1. This section gives the 90 ° turn - runway to taxiway.

****ON A/C A321-100 A321-200**

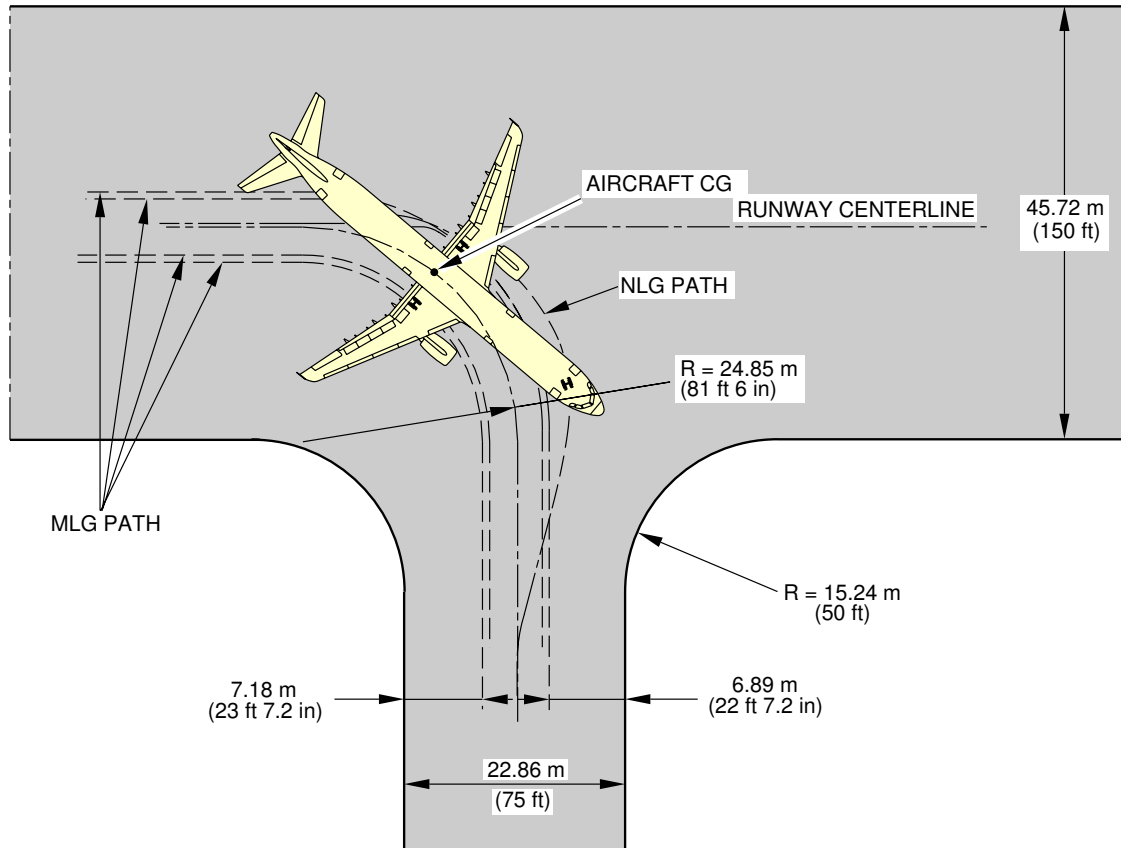


CG ON CENTERLINE METHOD
90° TURN ON A 150 ft RUNWAY
35° NOSE WHEEL ANGLE

NOTE: APPLICABLE FOR A321-100 AND A321-200.

N_AC_040502_1_0060101_01_01

90° Turn - Runway to Taxiway
CG on Centerline Method
FIGURE 1

****ON A/C A321-100 A321-200**

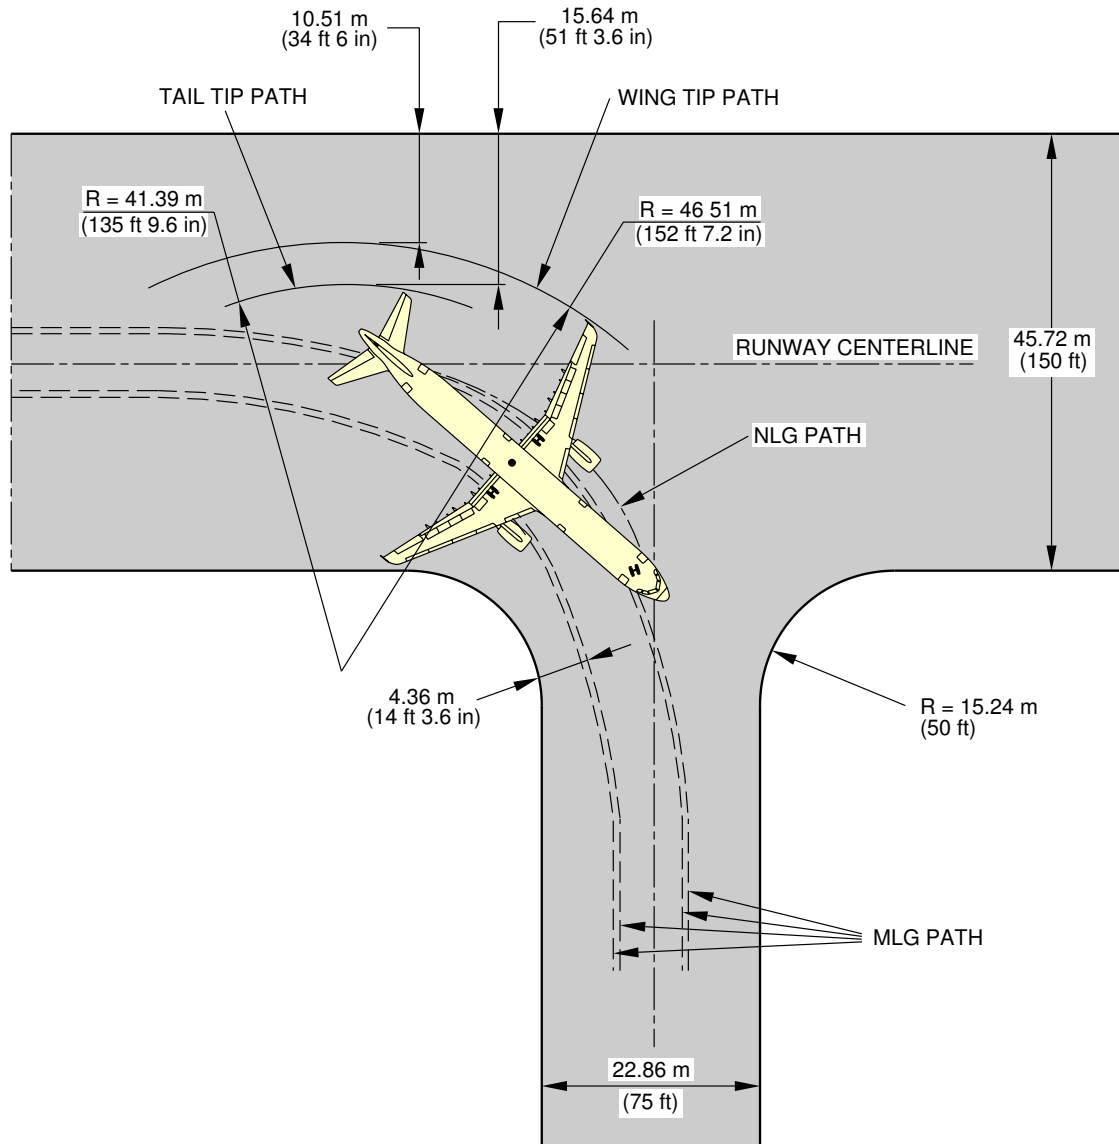

NLG ON CENTERLINE METHOD
 90° RUNWAY TO TAXIWAY TURN
 30° NOSE WHEEL STEERING ANGLE
 34.16 m (112 ft 0.96 in) NLG RAD.

NOTE: APPLICABLE FOR A321-100 AND A321-200.

N_AC_040502_1_0070101_01_01

90° Turn - Runway to Taxiway
 NLG on Centerline Method
 FIGURE 2



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


4-5-3 180° Turn on a Runway

****ON A/C A321-100 A321-200**

180° Turn on a Runway

1. This section gives the 180° turn on a runway.

****ON A/C A321-100 A321-200**

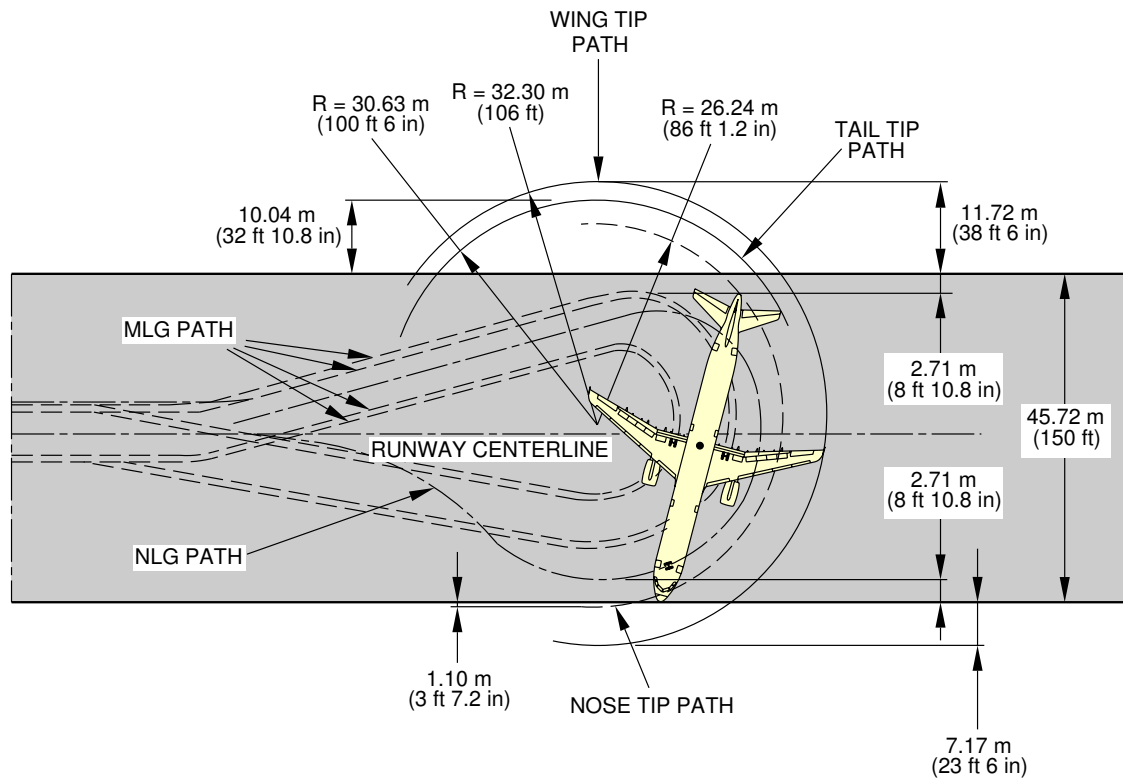

NLG ON CENTERLINE METHOD
180° TURN ON A 150 ft RUNWAY
50° NOSE WHEEL ANGLE
22.43 m (73.58 ft) NLG CENTERLINE RAD.

NOTE: APPLICABLE FOR A321-100 AND A321-200.

N_AC_040503_1_0020101_01_01

180° Turn on a 150 ft Runway
NLG on Centerline Method
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


4-5-6 180° Turn on a Wide Runway

****ON A/C A321-100 A321-200**

180° Turn on a Wide Runway

1. This section gives the 180° turn on a wide runway.

****ON A/C A321-100 A321-200**

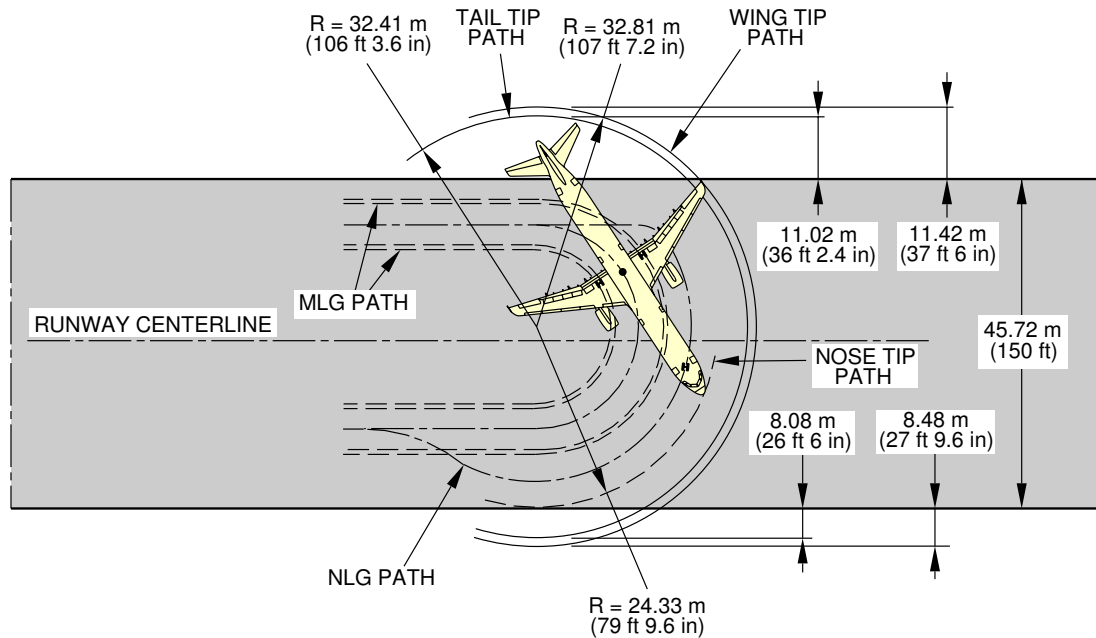

EDGE OF RUNWAY METHOD
180° TURN ON A 150 ft RUNWAY
60° NOSE WHEEL ANGLE
19.87 m (65 ft 2.4 in) NLG RAD.

NOTE: APPLICABLE FOR A321-100 AND A321-200.

N_AC_040506_1_0030101_01_01

180° Turn on a 150 ft Wide Runway
Edge of Runway Method
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


4-6-0 Runway Holding Bay (Apron)

****ON A/C A321-100 A321-200**

Runway Holding Bay (Apron)

1. This section gives the runway holding bay (Apron).

****ON A/C A321-100 A321-200**

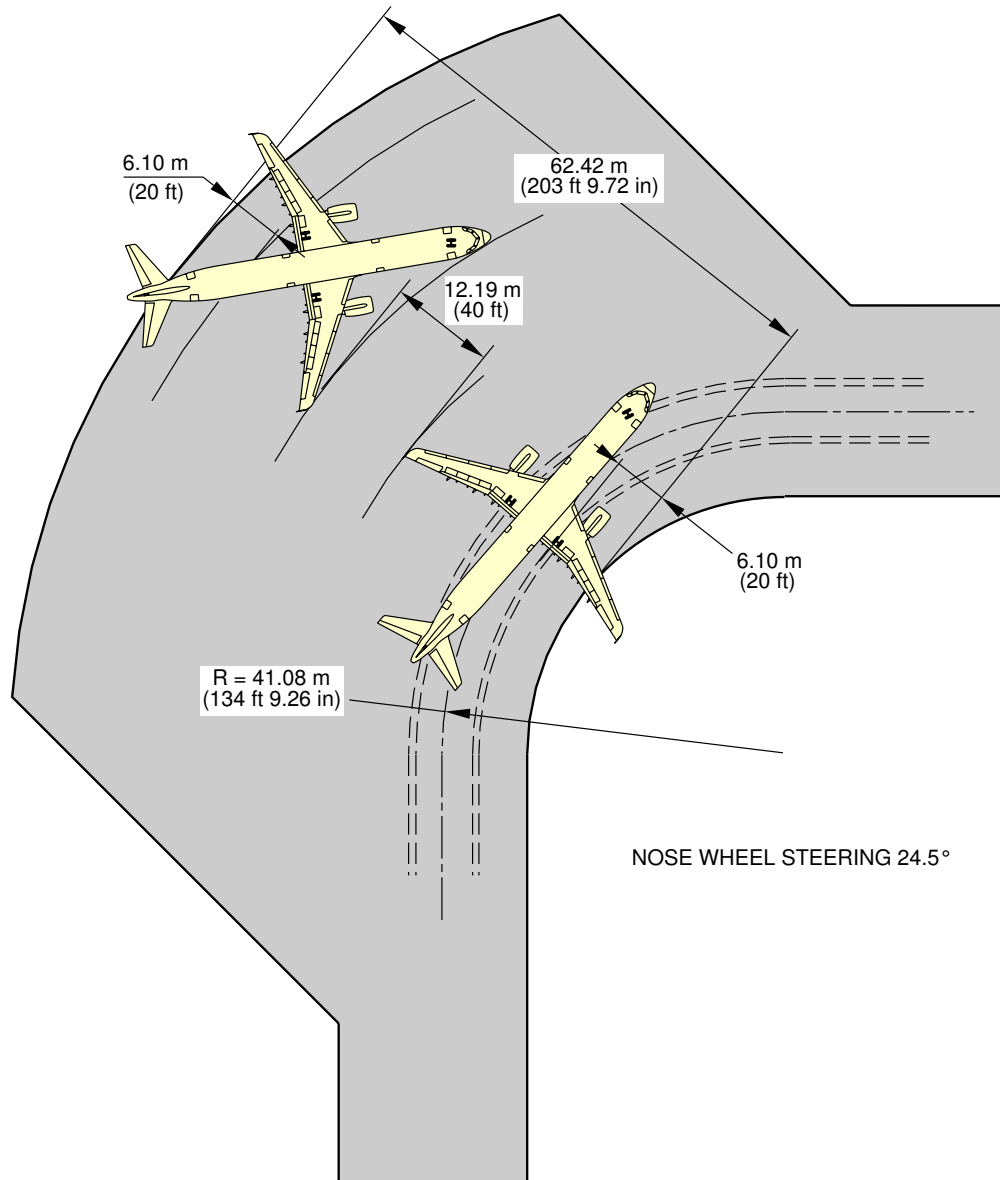

NOTE: APPLICABLE FOR A321-100 AND A321-200.

N_AC_040600_1_0040101_01_01

Runway Holding Bay (Apron)
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

4-7-0 Airplane Parking

****ON A/C A321-100 A321-200**

Airplane Parking

1. The following figures and charts show the rectangular space required for parking against the terminal building.

Diagram illustrating the layout of a runway and taxiway, showing dimensions in meters (m) and feet (ft).

Key dimensions and labels:

- Runway Width: 60 m (196 ft 10.8 in)
- Runway Length: 36.83 m (121 ft 2.4 in)
- Runway Width (Left Side): 19.92 m (65 ft 4.8 in)
- Runway Width (Right Side): 3.05 m (10 ft) (REF)
- Runway Width (Bottom): 3.05 m (10 ft) (REF)


The diagram shows a yellow aircraft on a runway, with dimensions indicating the width and length of the runway and taxiway. The runway width is 60 m (196 ft 10.8 in). The runway length is 36.83 m (121 ft 2.4 in). The runway width (left side) is 19.92 m (65 ft 4.8 in). The runway width (right side) is 3.05 m (10 ft) (REF). The runway width (bottom) is 3.05 m (10 ft) (REF).

AIRPLANE MODEL	MAX. EFF. STEERING ANGLE DEGREES	MIN LINEUP DISTANCE	
90°		TODA m (ft)	ASDA m (ft)
A321-100 AND A321-200	75°	19.9 (65.4)	36.8 (121.2)

N_AC_040700_1_0110101_01_01

4-7-0

****ON A/C A321-100 A321-200**

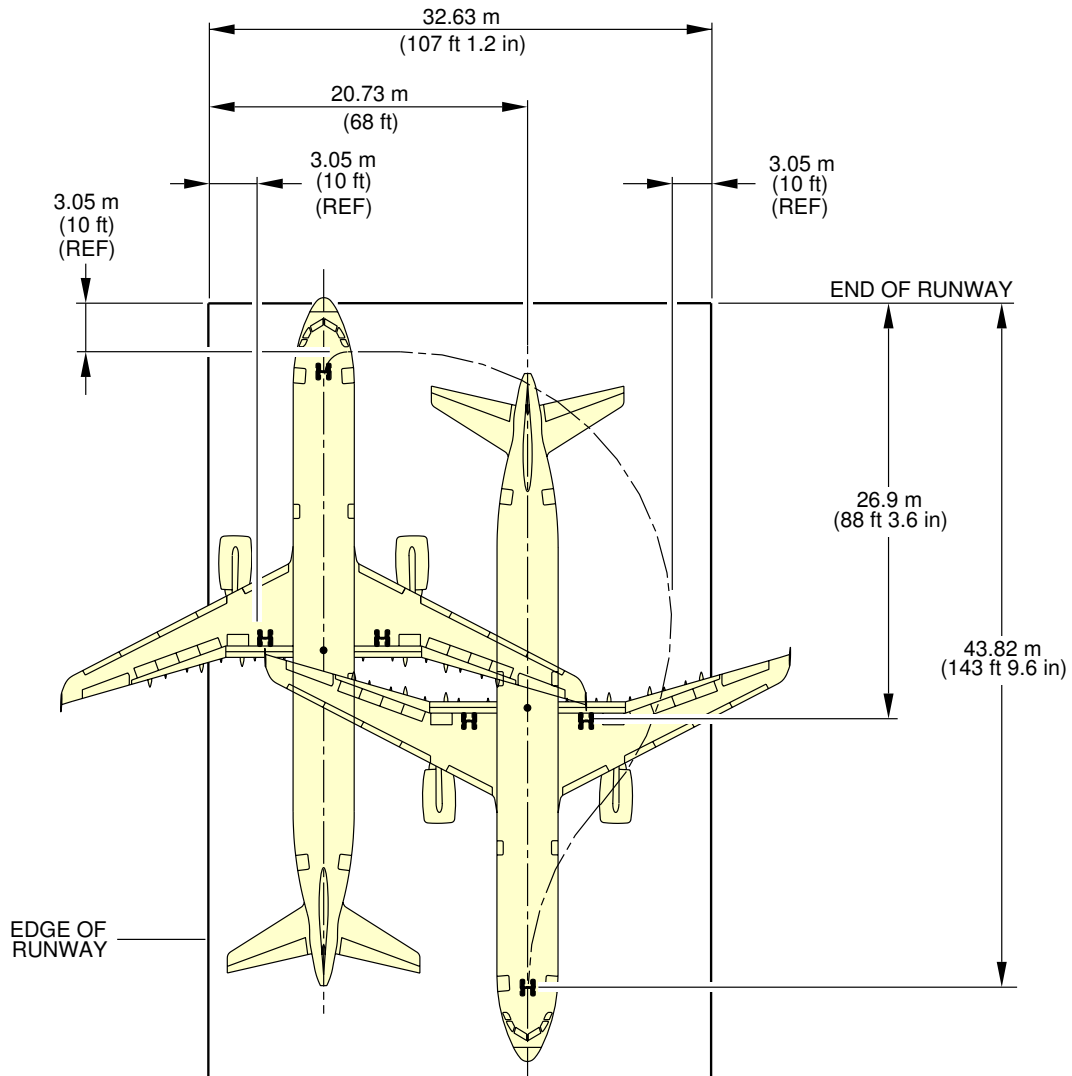

LINEUP DISTANCES FOR A321-100 AND A321-200
USING 75° STEERING AND NO SLIP ON NOSE TIRES

AIRPLANE MODEL	MIN LINEUP DISTANCE		REQ'D MIN PAVEMENT WIDTH	NOMINAL LINEUP DISTANCE	
	TODA m (ft)	ASDA m (ft)		TODA m (ft)	ASDA m (ft)
180°			m (ft)		
A321-100 AND A321-200	26.9 (88.3)	43.8 (143.8)	32.6 (107.1)	AS MINIMUM	AS MINIMUM

ABBREVIATIONS TODA (TAKEOFF DISTANCE ADJUSTMENT)
ASDA (ACCELERATE-STOP DISTANCE ADJUSTMENT)

N_AC_040700_1_0120101_01_01

Runway Length Alterations
Line Up Distances – 180° Turn
FIGURE 2

TERMINAL SERVICING**5-0-0 TERMINAL SERVICING******ON A/C A321-100 A321-200****Terminal Servicing****1. General**

This chapter provides typical ramp layouts, corresponding minimum turnaround time estimations, locations of ground service points and service requirements.

The information given in this chapter reflects ideal conditions. Actual ramp layouts and service requirements may vary according to local regulations, airline procedures and the airplane condition.

- Section 5.1 shows typical ramp layouts for passenger aircraft at the gate or on an open apron.
- Section 5.2 shows the minimum turnaround schedules for full servicing arrangements.
- Section 5.3 shows the minimum turnaround schedule for reduced servicing arrangements.
- Section 5.4 gives the locations of ground service connections, the standard of connections used and typical capacities and requirements.
- Section 5.5 provides the engine starting pneumatic requirements for different engine types and different ambient temperatures.
- Section 5.6 provides the air conditioning requirements for heating and cooling (pull-down and pull-up) using ground conditioned air for different ambient temperatures.
- Section 5.7 provides the air conditioning requirements for heating and cooling to maintain a constant cabin air temperature using low pressure conditioned air.
- Section 5.8 shows the ground towing requirements taking into account different ground surface and aircraft conditions.

5-1-0 Airplane Servicing Arrangements

****ON A/C A321-100 A321-200**

Airplane Servicing Arrangements

1. General

This chapter provides typical ramp layouts, showing the various GSE items in position during typical turnaround scenarios for the passenger aircraft.

These ramp layouts show typical arrangements only. Each operator will have its own specific requirements/regulations for the positioning and operation on the ramp.

The associated turnaround chart for full servicing is given in section 5.2.

The associated turnaround chart for minimum servicing arrangement is given in section 5.3.

5-1-1 Symbols Used on Servicing Diagrams****ON A/C A321-100 A321-200**Symbols Used on Servicing Diagrams

1. This table gives the symbols used on servicing diagrams.

Ground Support Equipment	
AC	AIR CONDITIONING UNIT
AS	AIR STARTING UNIT
BULK	BULK TRAIN
CAT	CATERING TRUCK
CB	CONVEYOR BELT
CLEAN	CLEANING TRUCK
FUEL	FUEL HYDRANT DISPENSER or TANKER
GPU	GROUND POWER UNIT
LD CL	LOWER DECK CARGO LOADER
LV	LAVATORY VEHICLE
PBB	PASSENGER BOARDING BRIDGE
PS	PASSENGER STAIRS
TOW	TOW TRACTOR
ULD	ULD TRAIN
WV	POTABLE WATER VEHICLE



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


5-1-2 Typical Ramp Layout - Aircraft at the Gate

****ON A/C A321-100 A321-200**

Aircraft at the Gate

1. This section gives the typical servicing arrangement for pax version (Passenger Bridge).

****ON A/C A321-100 A321-200**

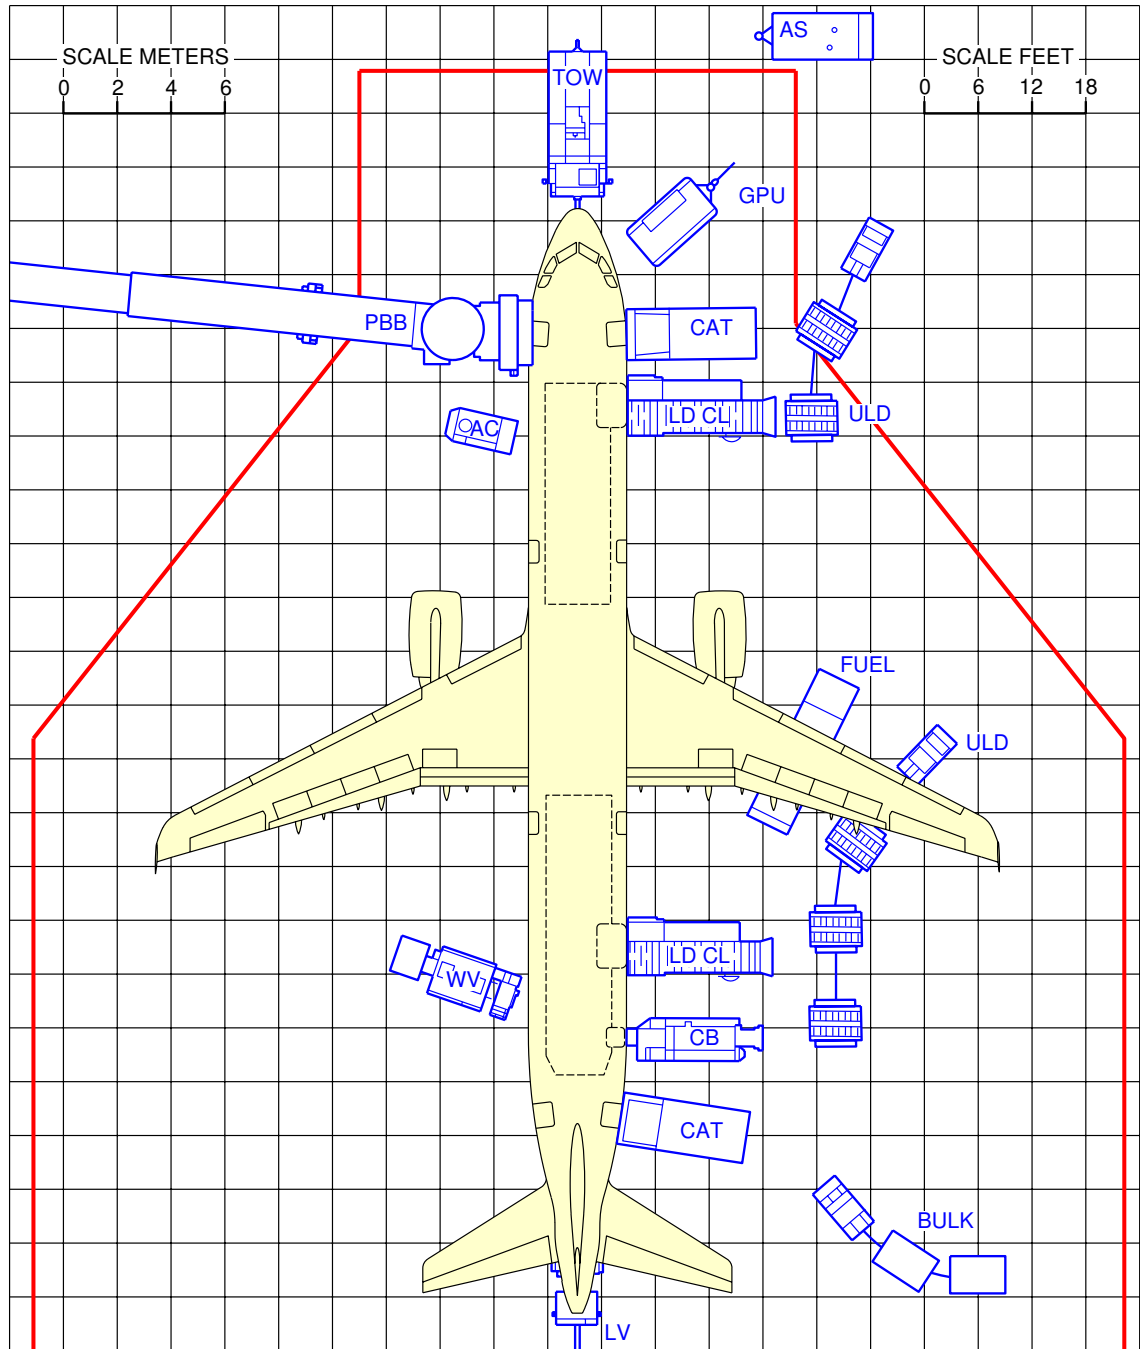

N_AC_050102_1_0050101_01_02

Aircraft at the Gate
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


5-1-3 Typical Ramp Layout - Aircraft at an Open Apron

****ON A/C A321-100 A321-200**

Aircraft at an Open Apron

1. This section gives the typical servicing arrangement for pax version (Open Apron).


****ON A/C A321-100 A321-200**

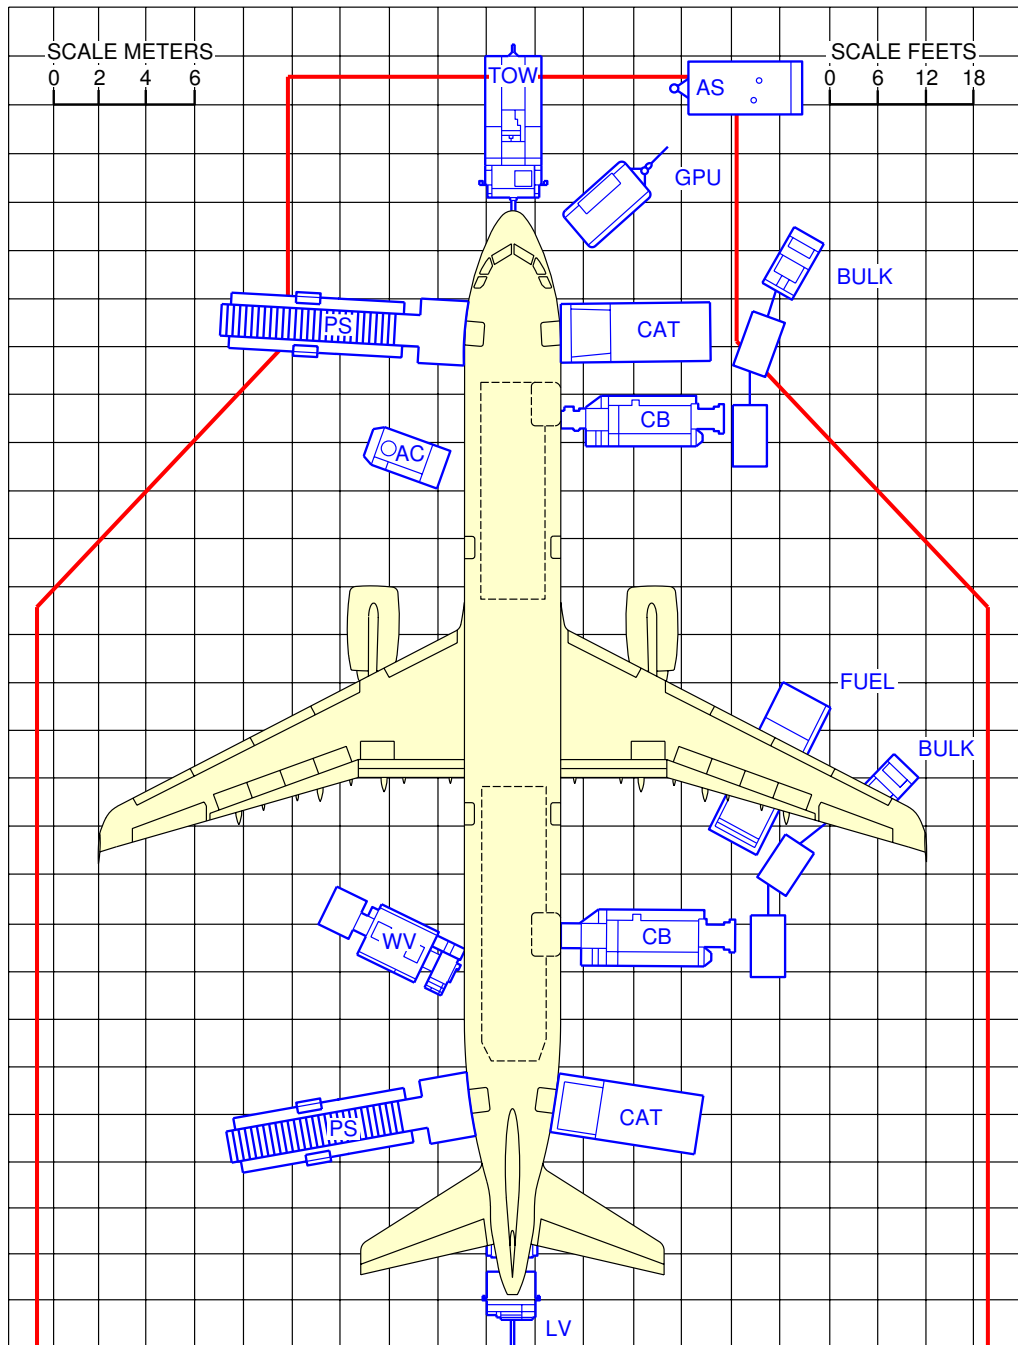

N_AC_050103_1_0030101_01_02

Aircraft at an Open Apron
Aircraft at an Open Apron (Bulk Loading)
FIGURE 1

****ON A/C A321-100 A321-200**

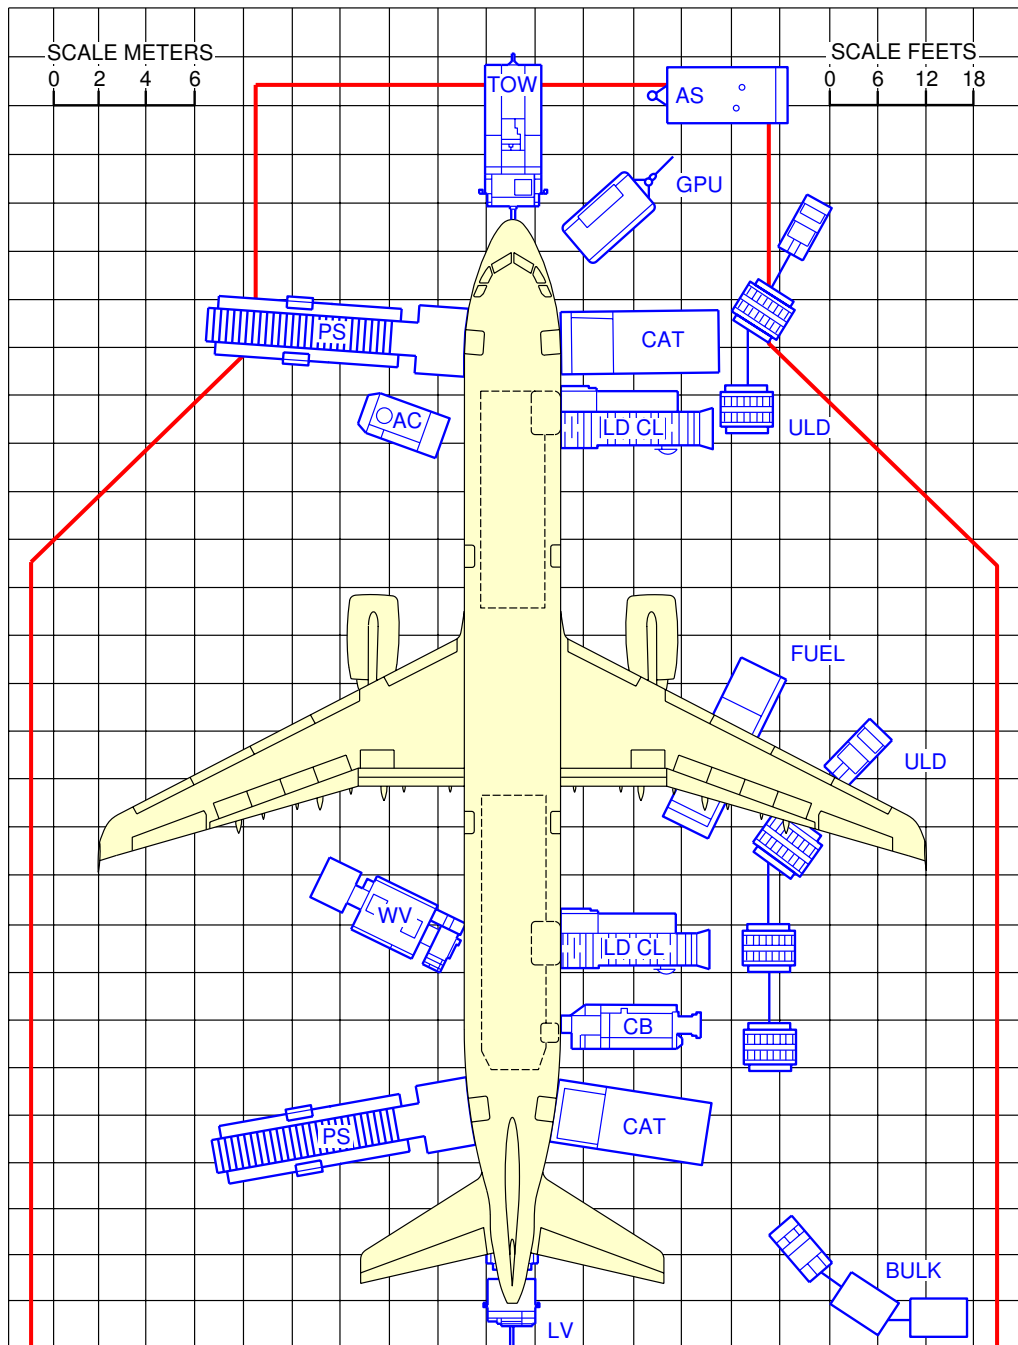

N_AC_050103_1_0060101_01_01

Aircraft at an Open Apron
Aircraft at an Open Apron (ULD Loading)
FIGURE 2

5-2-0 Terminal Operations - Full Servicing Turnaround****ON A/C A321-100 A321-200**Terminal Operations - Full Servicing Turnaround

1. This section provides a chart showing typical activities for full servicing turnaround.

These data are provided to show the general scope and type of activities involved in ramp operations during the turnaround of an aircraft.

Varying airline practices and operating circumstances may result in different sequences and different time intervals to do the activities shown.

5-2-1 Full Servicing Turnaround Charts

****ON A/C A321-100 A321-200**

Full Servicing Turnaround Charts

1. Assumptions for 56 minutes turnaround chart - Full Servicing.

Please note this turnaround time is an assumption regarding a given example.

A. Passenger handling: 185 pax / 1 bridge

(1) Deboarding

- 1L:185
- 2L:0
- Deboarding rate: 22 pax / min per door.
- No PRM

(2) Boarding

- 1L:185
- 2L:0
- Boarding rate: 18 pax / min per door.
- No PRM

B. Catering: R1 - R 2 / sequential

- Galley M1: 4 FSTE
- Galley M2: 10 FSTE

C. Cleaning: Time available

D. Security/Safety checks: Yes (4 min each)

- Cabin crew change: Yes (4 min)

E. Cargo

- 2 Cargo loaders
- 1 Belt loader
- 1 operator / BL
- No sliding carpet
- FWD compartment : 5 LD3
- AFT compartment : 5 LD3
- Bulk in bulk CC: 200 kg


F. Refuel: 5.6 tons, 7134 (l), 2 hoses (1 side)



G. Water servicing: 100%

H. Toilet servicing: 100%

****ON A/C A321-100 A321-200**

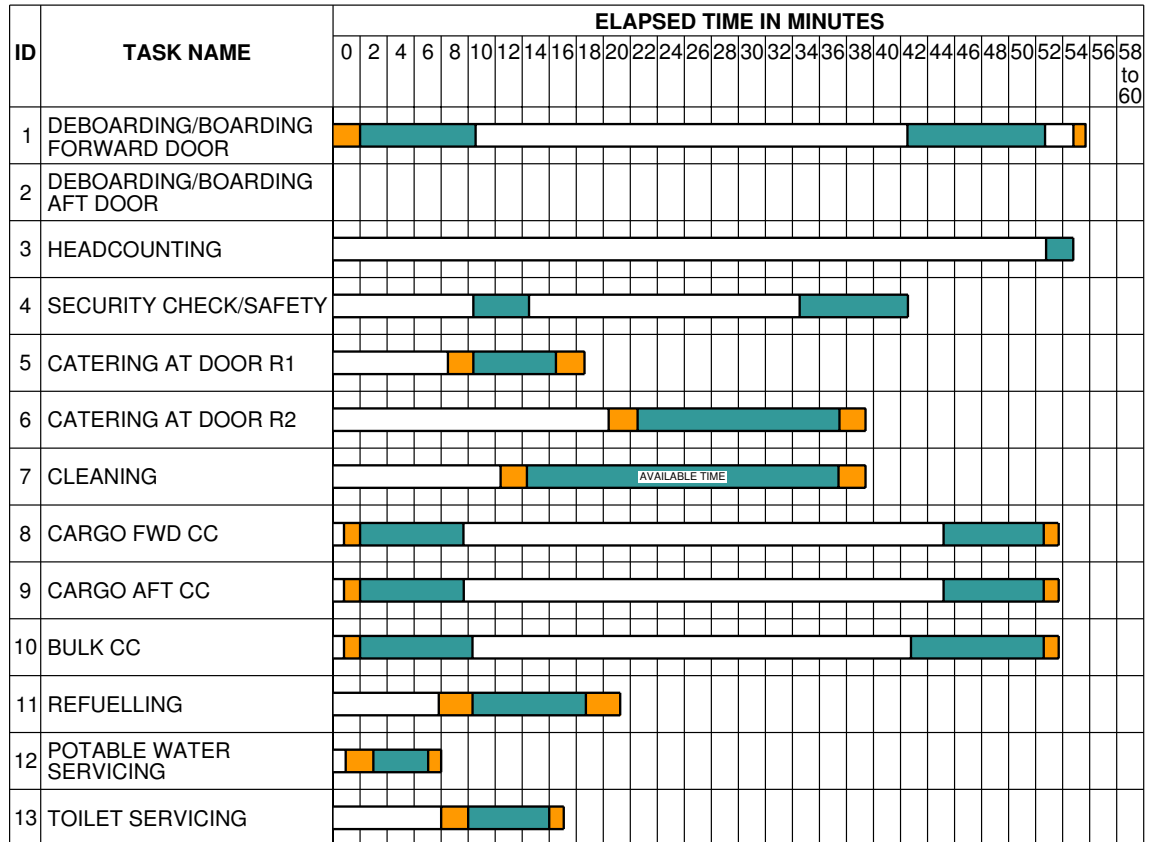TRT: 56 min



 GSE POSITIONING
 ACTIVITY

N_AC_050201_1_0070101_01_02

Turnaround Stations
 Full Servicing (56 Min.)
 FIGURE 1

5-3-0 Terminal Operation - Minimum Servicing Turnaround****ON A/C A321-100 A321-200**Terminal Operation

1. This section provides a chart showing typical activities for minimum servicing turnaround.

These data are provided to show the general scope and type of activities involved in ramp operations during the turnaround of an aircraft.

Varying airline practices and operating circumstances may result in different sequences and different time intervals to do the activities shown.

5-3-1 Minimum Servicing Turnaround Chart****ON A/C A321-100 A321-200**Minimum Servicing Turnaround Chart

1. Assumptions for 25 minutes turnaround chart - Minimum Servicing.

Please note this turnaround time is an assumption regarding a given example.

A. Passenger handling: 220 pax / 2 stairways

(1) Deboarding

- 1L: 110
- 2L: 110
- Deboarding rate: 20 pax / min per door.
- No PRM

(2) Boarding

- 1L: 110
- 2L: 110
- Boarding rate: 15 pax / min per door.
- No PRM

B. Catering: No

- Galley M1:
- Galley M2:

C. Cleaning: No

D. Security/Safety checks: Yes (4 min each)

- Cabin crew change: No

E. Cargo

- 2 Cargo loaders
- 1 Belt loader
- 1 operator / BL
- No sliding carpet
- FWD compartment bulk: 5 LD3
- AFT compartment bulk: 5 LD3
- Bulk in bulk CC: 200 kg


F. Refuel: 5.6 tons, 7134 (l), 2 hoses (1 side)



G. Water servicing: 0%:

H. Toilet servicing: 0%

**ON A/C A321-100 A321-200

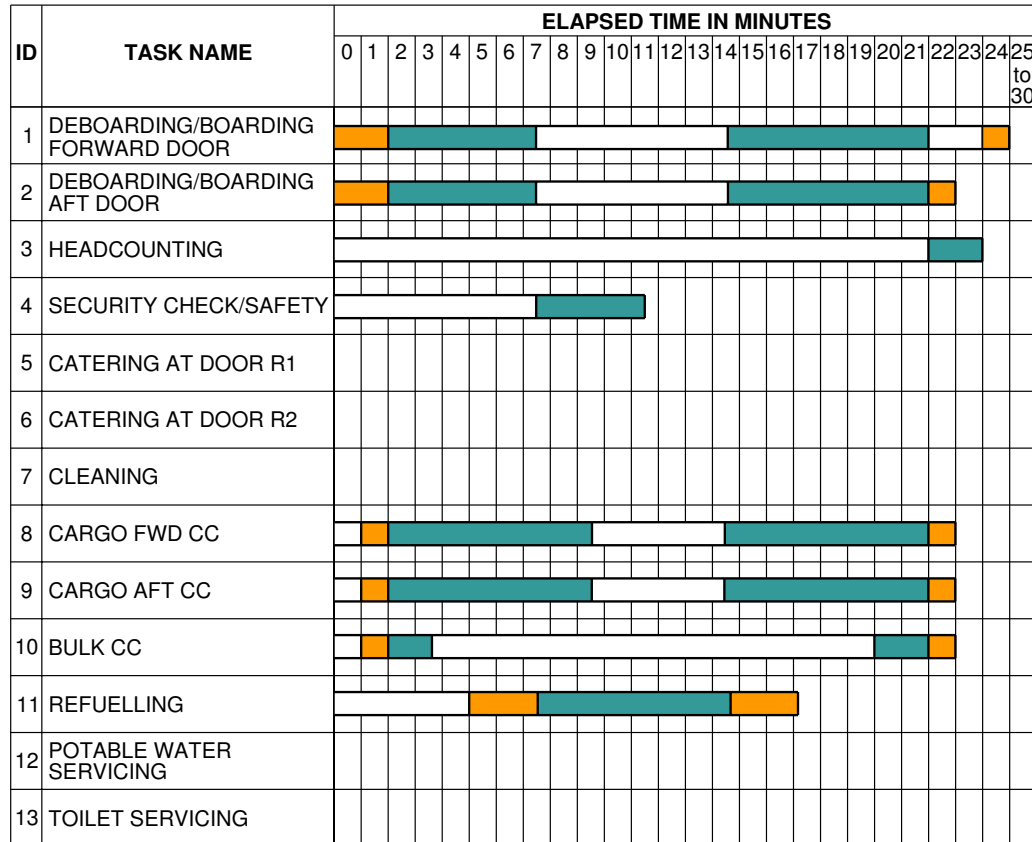TRT: 25 min



 GSE POSITIONING
 ACTIVITY

N_AC_050301_1_0040101_01_02

Turnaround Stations
 Minimum Servicing (25 Min.)
 FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

5-4-0 Ground Service Connections

****ON A/C A321-100 A321-200**

Ground Service Connections


1. Ground Service Connections.

5-4-1 Ground Service Connections Layout****ON A/C A321-100 A321-200**Ground Service Connections Layout

1. This section gives the ground service connections layout.

Ground Service Connections Layout	
1	– GROUND ELECTRICAL POWER RECEPTABLE
2	– TOILET SERVICING
3	– WATER FILLING AND DRAINAGE
4	– IDG OIL FILLING CONNECTOR
5	– ENGINE OIL FILLING CONNECTOR
6	– HYDRAULIC
7	– APU OIL FILLING CONNECTOR
8	– GROUND SERVICE CONDITIONED AIR CONNECTOR
9	– GROUND AIR CONDITIONING AND AIR START CONNECTOR
10	– GRAVITY FILLING PANELS
11	– REFUEL/DEFUEL CONNECTOR
12	– REFUEL/DEFUEL PANEL
13	– AIRCRAFT GROUNDING

****ON A/C A321-100 A321-200**

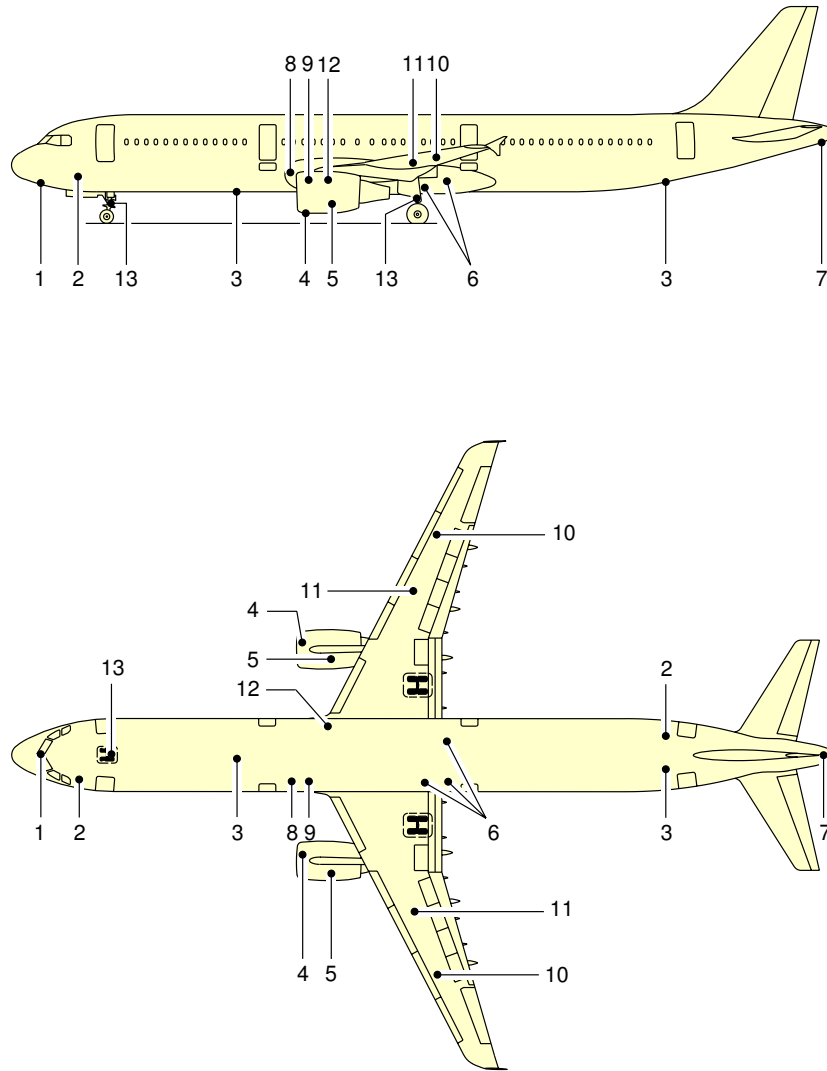

N_AC_050401_1_0070101_01_00

Ground Service Connections
Ground Service Connections Layout
FIGURE 1

5-4-2 Grounding Points

****ON A/C A321-100 A321-200**

Grounding Points


1. Grounding Points.

	DISTANCE: Meters (ft)			
	AFT OF NOSE	FROM AIRPLANE CENTERLINE		MEAN HEIGHT FROM GROUND
		R SIDE	L SIDE	
On Nose Landing Gear leg:	5.07 m (16.63 ft)	on centerline		0.94 m (3.08 ft)
On left Main Landing Gear leg:	21.97 m (72.08 ft)		3.79 m (12.43 ft)	1.07 m (3.51 ft)
On right Main Landing Gear leg:	21.97 m (72.08 ft)	3.79 m (12.43 ft)		1.07 m (3.51 ft)

- A. The grounding stud on each landing gear leg is designed for use with a clip-on connector (such as Appleton TGR).
- B. The grounding studs are used to connect the aircraft to an approved ground connection on the ramp or in the hangar for:
 - refuel/defuel operations,
 - maintenance operations,
 - bad weather conditions.

NOTE : In all other conditions, the electrostatic discharge through the tyre is sufficient.


****ON A/C A321-100 A321-200**

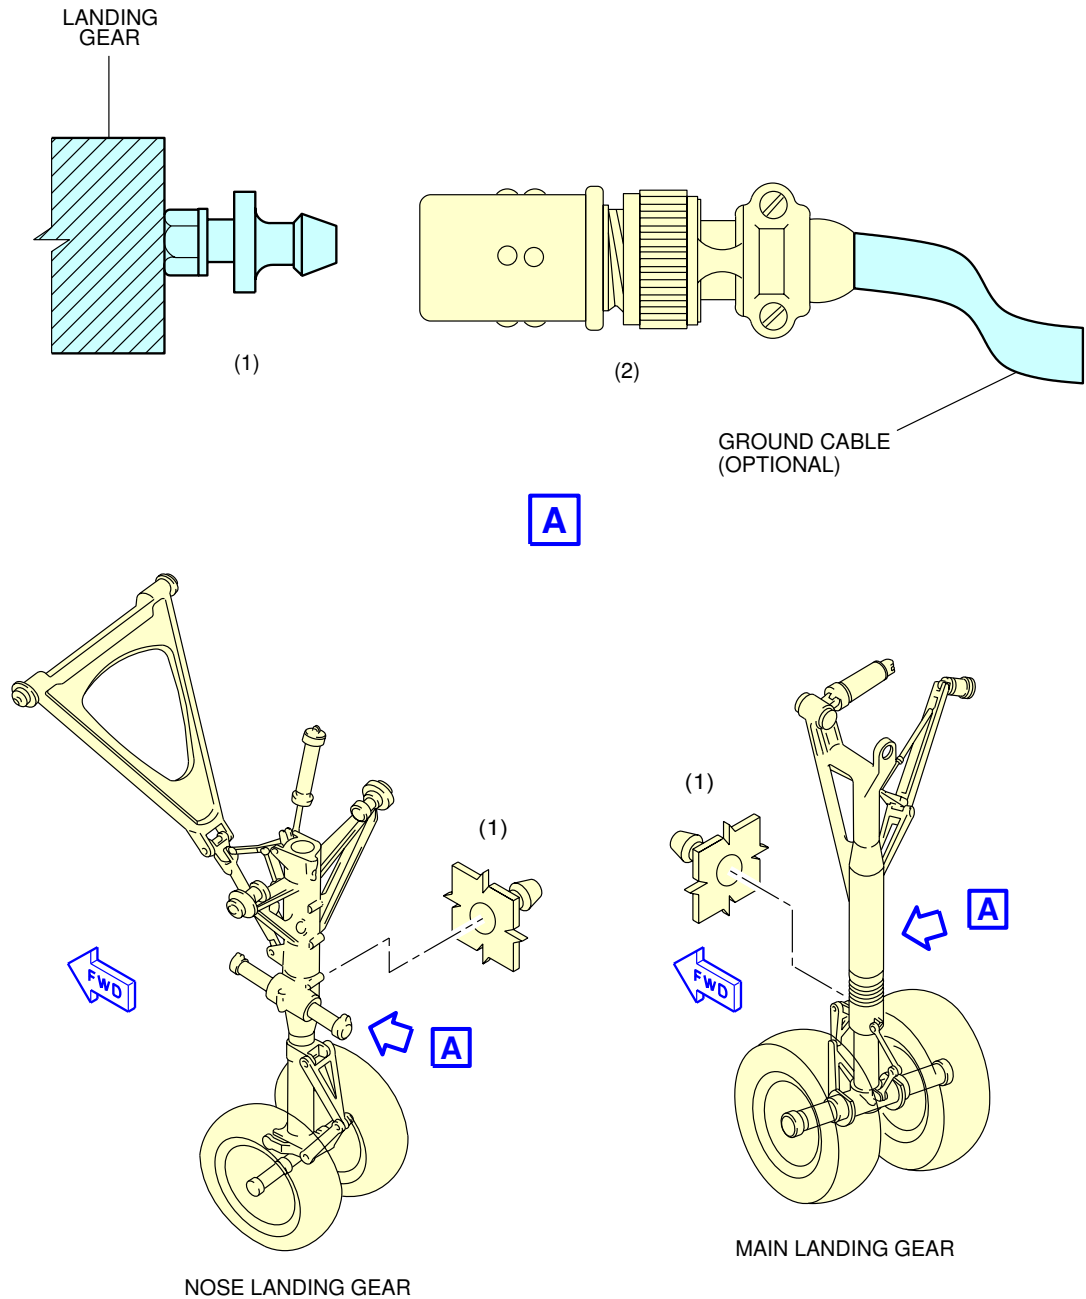

N_AC_050402_1_0070101_01_00


Ground Service Connections
Grounding Points
FIGURE 1

****ON A/C A321-100 A321-200**

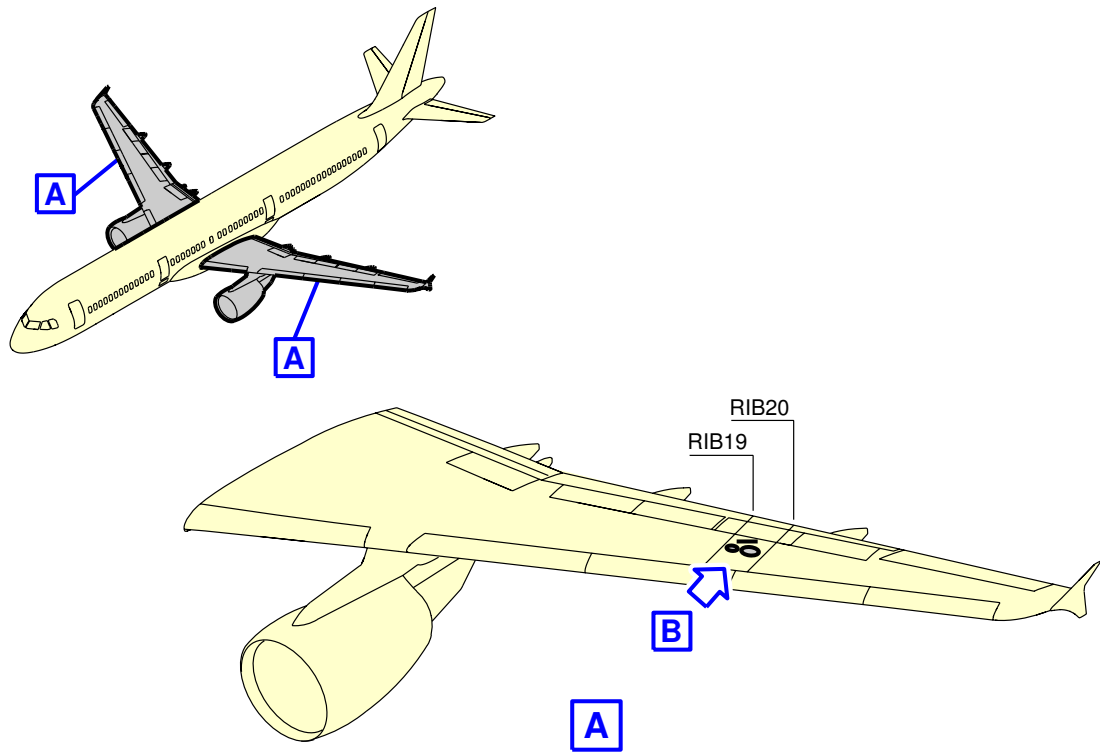

JET FUEL

FOR SPECIFICATIONS REFER
TO FLIGHT MANUAL

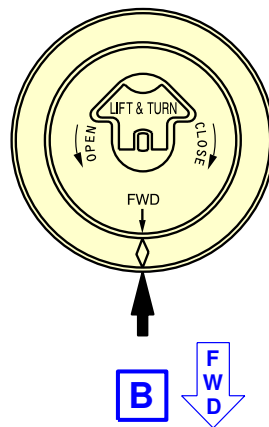

NOTE: R SIDE SYMMETRICAL

N_AC_050402_1_0080101_01_00

Ground Service Connections
Grounding Points
FIGURE 2

5-4-3 Hydraulic System

****ON A/C A321-100 A321-200**

Hydraulic System

1. Access.

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		RH SIDE m (ft)	LH SIDE m (ft)	
Green System: Access door 197CB	23.44 (76.9)	1.27 (4.17)		1.76 (5.77)
Yellow System: Access door 198CB	23.44 (76.9)		1.27 (4.17)	1.76 (5.77)
Blue System: Access door 197EB	24.49 (80.35)	1.27 (4.17)		1.76 (5.77)

NOTE : Distances are approximate.

2. Reservoir Pressurization.

On the air pressurization manifold:

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		RH SIDE m (ft)	LH SIDE m (ft)	
Access door 195AB	19.92 (65.35)		0.25 (0.82)	1.74 (5.71)

NOTE : Distances are approximate.

- One 1/4 in. AEROQUIP AE 96994E self-sealing connection common to the 3 reservoirs.

3. Accumulator Charging.

Four (MS28889-1) connections (one for each accumulator) for:

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		RH SIDE m (ft)	LH SIDE m (ft)	
Yellow System accumulator: Access door 196BB	20.1 (65.94)	0.25 (0.82)		1.99 (6.53)

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		RH SIDE m (ft)	LH SIDE m (ft)	
Green System accumulator: Left MLG door	21.04 (69.03)		0.25 (0.82)	3.2 (10.5)
Blue System accumulator: Access door 195BB	22.3 (72.51)		0.25 (0.82)	1.99 (6.53)
Yellow System braking accumulator: Access door 196BB	20.1 (65.94)	0.76 (2.49)		1.74 (5.71)

NOTE : Distances are approximate.

4. Reservoir Filling.

On the Green system ground service panel:

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		RH SIDE m (ft)	LH SIDE m (ft)	
Access door 197CB	23.44 (76.9)	1.27 (4.17)		1.76 (5.77)

NOTE : Distances are approximate.

One 1/4 in. AEROQUIP AE96993E self-sealing connection for pressurized supply.

One handpump filling connection for unpressurized (suction) supply.

5. Reservoir Drain.

On 3/8 in. self-sealing connection on reservoir for:

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		RH SIDE m (ft)	LH SIDE m (ft)	
Yellow System: Access door 196 BB - 198 CB	20.1 (65.94)	1.43 (4.69)		1.90 (6.23)
Green System: Left MLG door	21.04 (69.03)		1.27 (4.17)	2.61 (8.56)

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		RH SIDE m (ft)	LH SIDE m (ft)	
Blue System Access door 197 EB	24.49 (80.35)	1.27 (4.17)		1.76 (5.77)

NOTE : Distances are approximate.

On 3/8 in. self-sealing connection for the Blue system on:


- Blue system ground service panel.

6. Ground Test.

On each ground service panel:

- One self-sealing connector AE80532N (suction).
- One self-sealing connector AE80531K (delivery).



****ON A/C A321-100 A321-200**

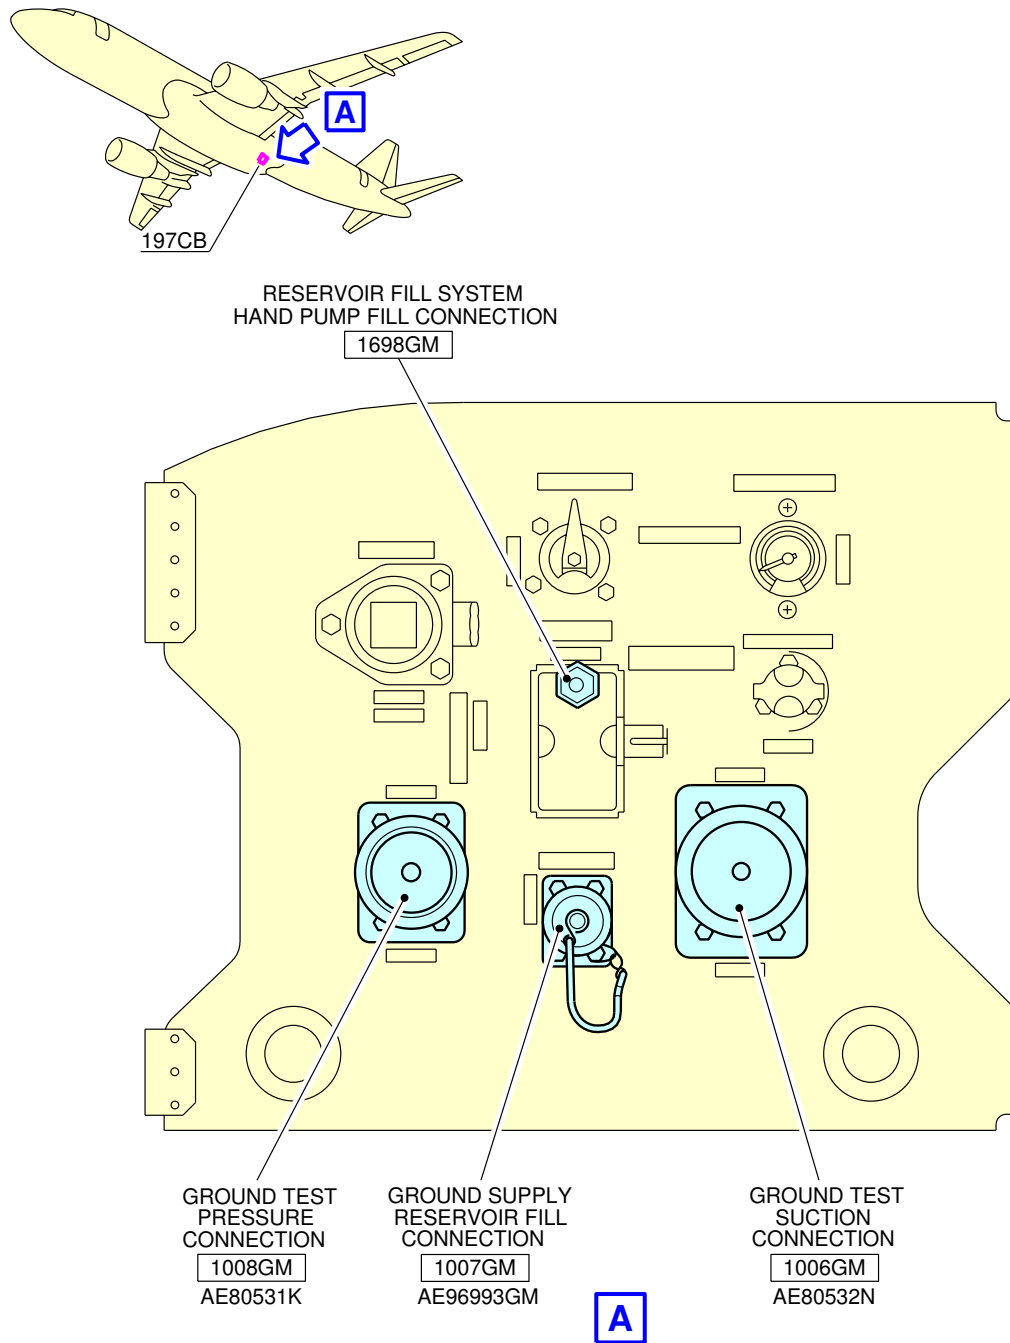

N_AC_050403_1_0040101_01_00

Hydraulic System
Green System Ground Service Panel
FIGURE 1


****ON A/C A321-100 A321-200**

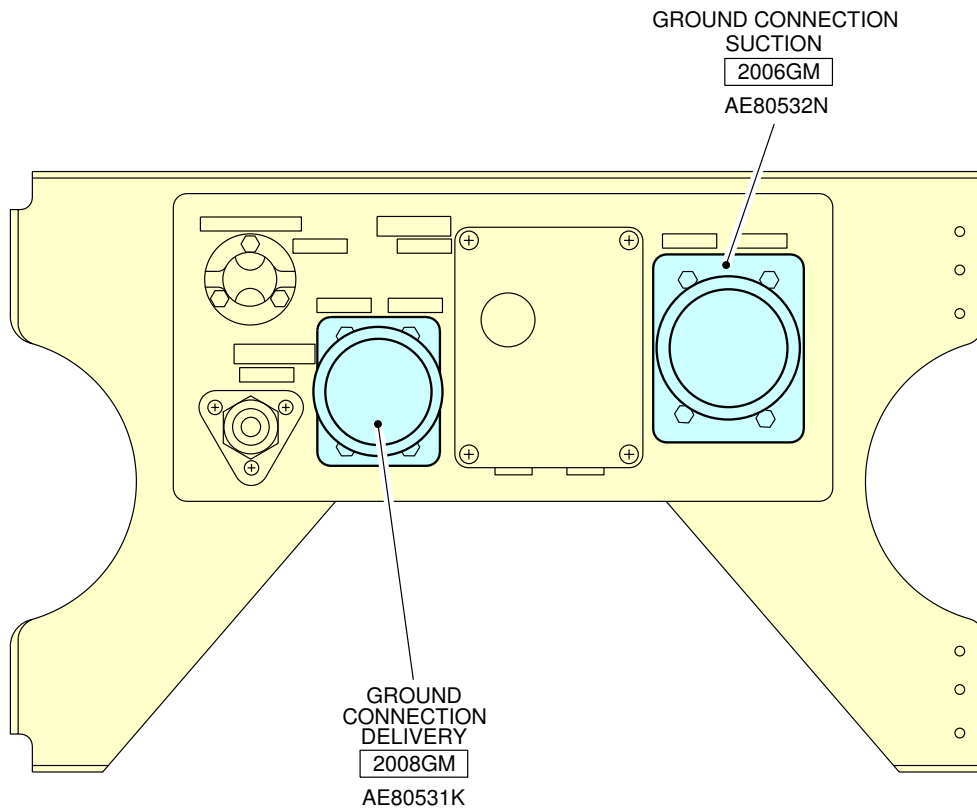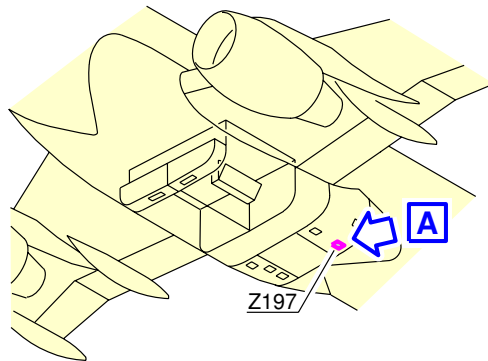

N_AC_050403_1_0050101_01_00


Hydraulic System
Blue System Ground Service Panel
FIGURE 2

****ON A/C A321-100 A321-200**

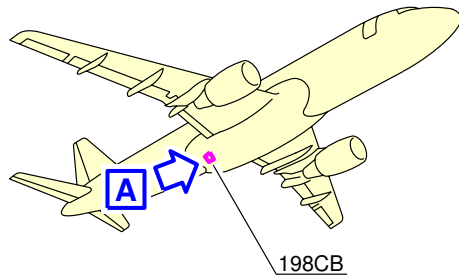

GROUND TEST
PRESSURE CONNECTION
3008GM
AE80531K

GROUND TEST
SUCTION CONNECTION
3006GM
AE80532N

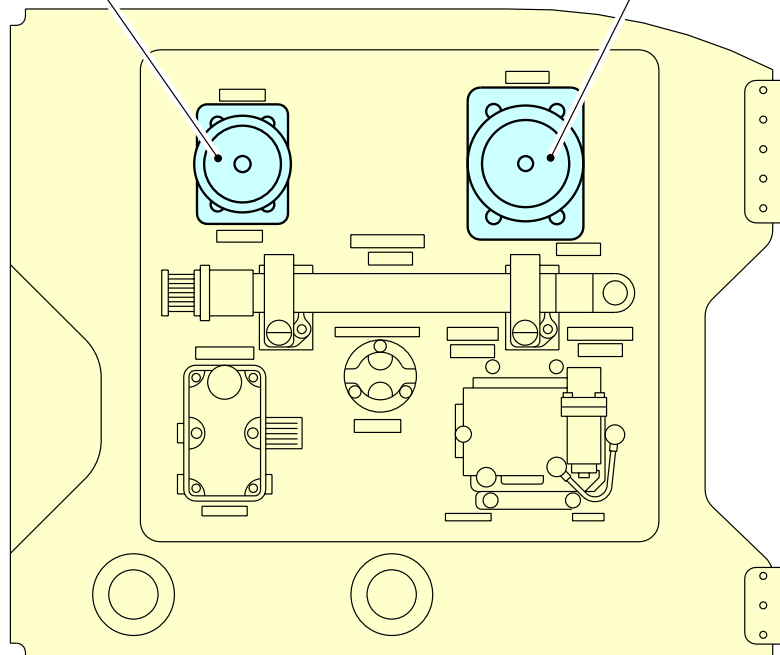

A

N_AC_050403_1_0060101_01_00

Hydraulic System
Yellow System Ground Service Panel
FIGURE 3

5-4-4 Electrical System

****ON A/C A321-100 A321-200**

Electrical System

1. Electrical System.

This chapter gives data related to the location of the ground service connections.

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		RH SIDE m (ft)	LH SIDE m (ft)	
A/C External Power: Access door 121AL	2.55 (8.37)	on centerline		2 (6.56)

NOTE : Distances are approximate.

2. Technical Specifications

This chapter gives data related to the location of the ground service connections.

A. External Power Receptacle:

- One MS90362-3 receptacle - 90 KVA.


B. Power Supply:

- Three-phase, 400 Hz, 115/200V

C. Electrical connectors for servicing

- AC outlets: Hubbel 5258
- DC outlets: Hubbel 7472
- Vacuum cleaner outlets: Hubbel 5258

**ON A/C A321-100 A321-200

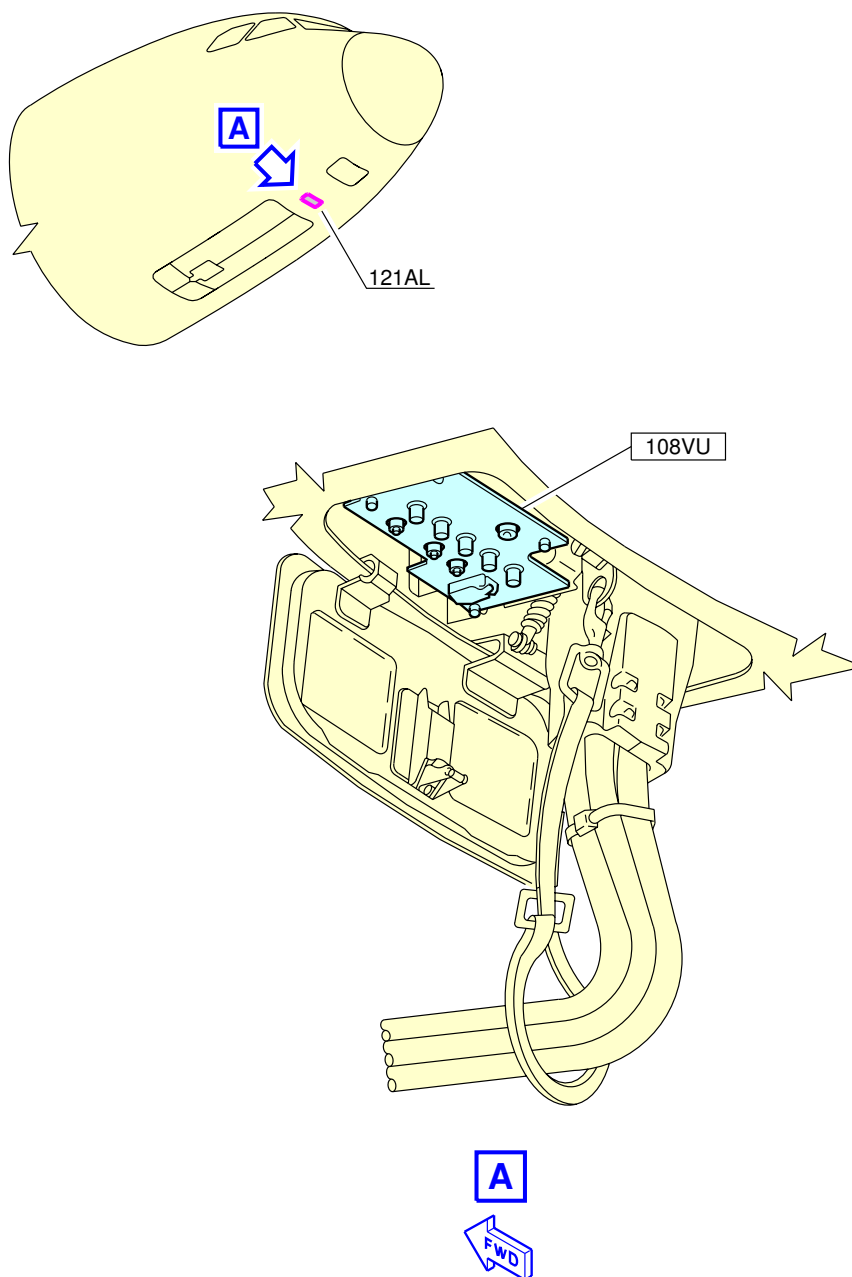

N_AC_050404_1_0010101_01_01

Ground Service Connections
External Power Receptacles
FIGURE 1

5-4-5 Oxygen System

****ON A/C A321-100 A321-200**

Oxygen System

- Oxygen System.

	DISTANCE: Meters (ft)			
	AFT OF NOSE	FROM AIRPLANE CENTERLINE		MEAN HEIGHT FROM GROUND
		R SIDE	L SIDE	
One service connection (external charging in the avionics compartment) MS22066 Std.	3.45 m (11.32 ft)		1.15 m (3.77 ft)	2.60 m (8.53 ft)

3/8" UNF × 24 TPI

Nominal pressure: 1850 psi (127.55 bar)

Max fill pressure: 2035 psi (140.31 bar)

NOTE : Internal charging connection provided.

5-4-6 Fuel System

****ON A/C A321-100 A321-200**

Fuel System

1. Refuel/Defuel Couplings.

This chapter gives data related to the location of the ground service connections.

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		RH SIDE m (ft)	LH SIDE m (ft)	
Refuel/Defuel Integrated Panel: Access door 192MB	20.6 (67.59)		1.8 (5.91)	1.8 (5.91)
Refuel/defuel coupling, Left Access Door 522HB (Optional)	21.5 (70.54)	10 (32.81)		3.5 (11.48)
Refuel/defuel coupling, Right Access Door 622HB	21.5 (70.54)		10 (32.81)	3.5 (11.48)
Gravity Refuel Coupling	23.4 (76.77)	12.4 (40.68)	12.4 (40.68)	3.7 (12.14)

NOTE : Distances are approximate.

2. Technical Specifications

This chapter gives data related to the specifications of the ground service connections.

A. Refuel/defuel couplings:

- Right wing: one standard ISO R45, 2.5in.
- Left wing: one optional standard ISO R45, 2.5 in.



B. Refuel pressure:

- Maximum pressure: 3.45 bar (50 psi)

C. Refuel Flow:

- 1400 l/minute (369.84 US gal/minute)

****ON A/C A321-100 A321-200**

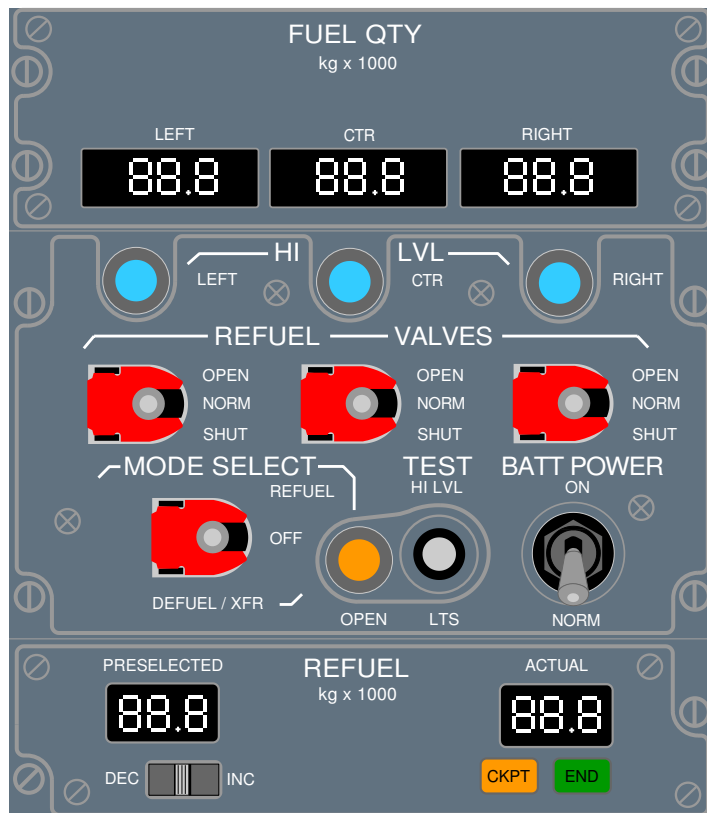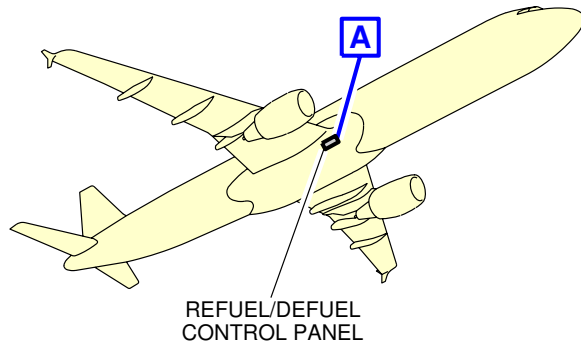


A

NOTE: STANDARD CONFIGURATION OF REFUEL/DEFUEL PANEL.

N_AC_050406_1_0010101_01_00

Ground Service Connections
Refuel/Defuel Panel
FIGURE 1


****ON A/C A321-100 A321-200**

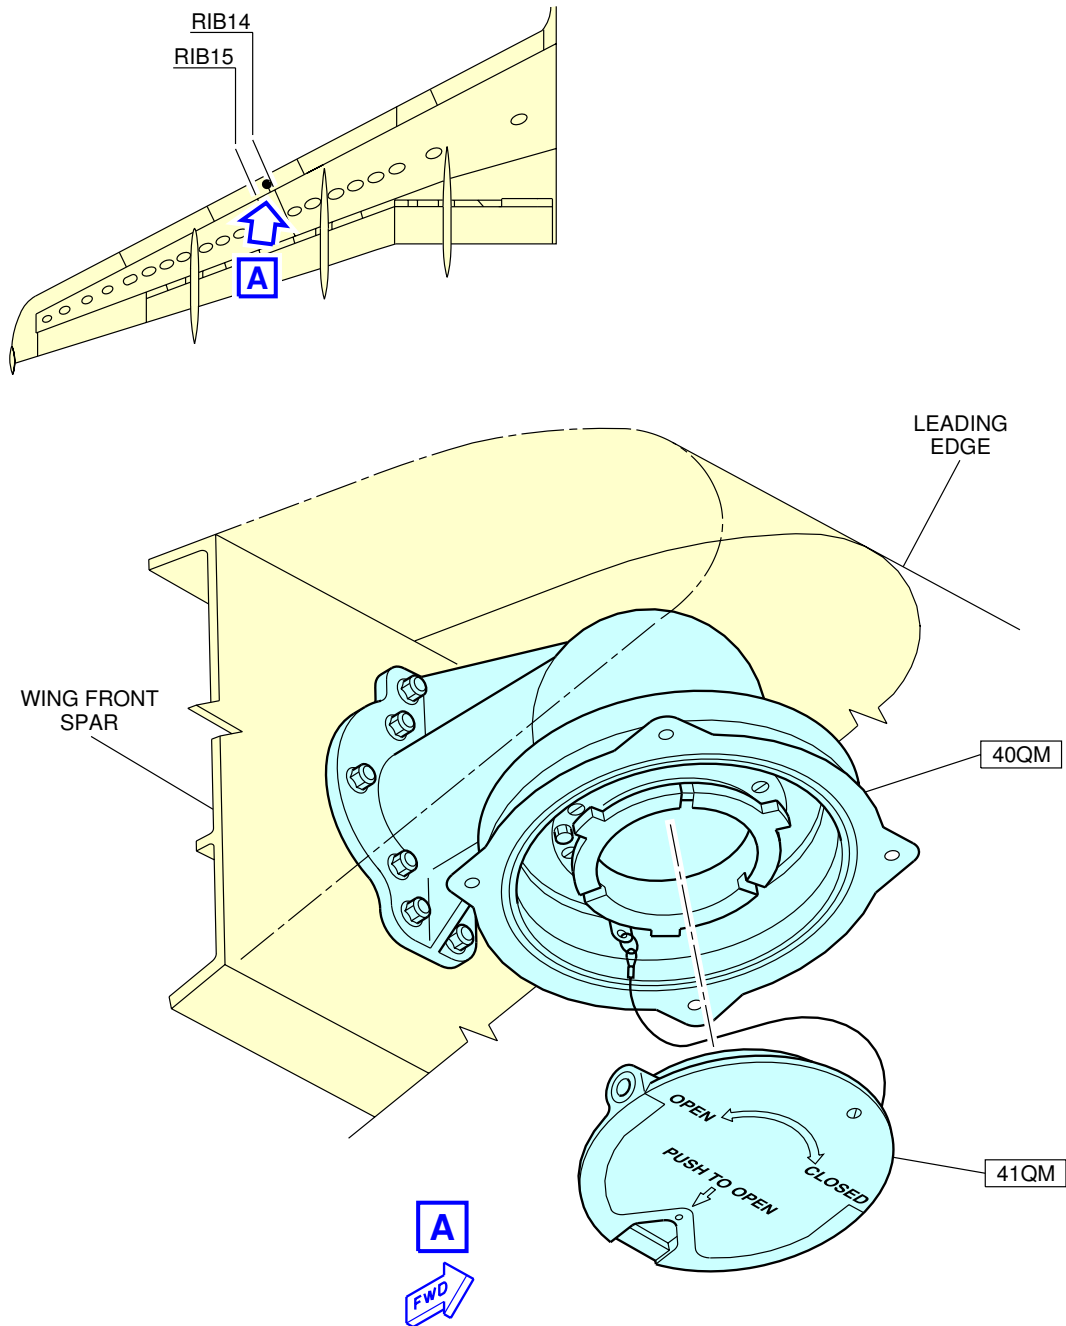

N_AC_050406_1_0020101_01_00

Ground Service Connections
Refuel/Defuel Couplings
FIGURE 2

****ON A/C A321-100 A321-200**

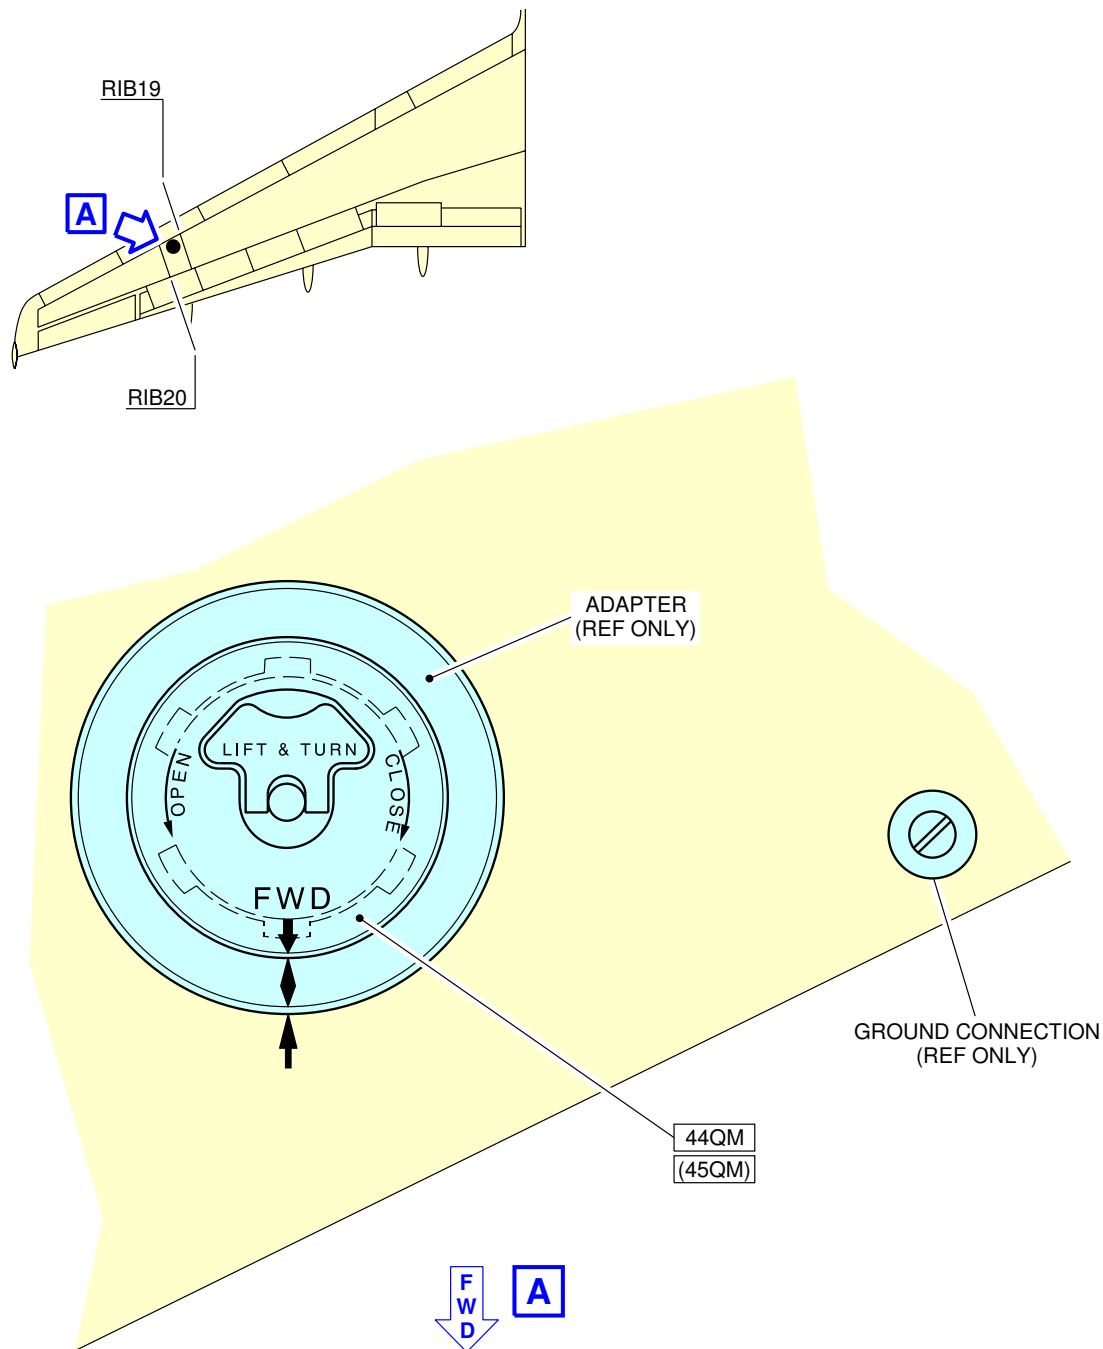

N_AC_050406_1_0030101_01_00

Ground Service Connections
Gravity Refuel Couplings
FIGURE 3

5-4-7 Pneumatic System

****ON A/C A321-100 A321-200**

Pneumatic System

1. High Pressure Air Connectors.

This chapter gives data related to the location of the ground service connections.

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		RH SIDE m (ft)	LH SIDE m (ft)	
HP Connector Access door 191DB	17.25 (56.59)		0.84 (2.76)	1.76 (5.77)

NOTE : Distances are approximate.

A. Connector:

- One standard 3 in. ISO TC20 connection (MS33740) for engine starting and cabin air preconditioning (HP) installed on the left side of the belly fairing

2. Low Pressure Air Connectors.

This chapter gives data related to the location of the ground service connections.

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		RH SIDE m (ft)	LH SIDE m (ft)	
LP Connector Access door 191CB	16.72 (54.86)		1.11 (3.64)	1.73 (5.68)

NOTE : Distances are approximate.

A. Connector:

- One standard 8 in. connection (SAE AS4262 type B) for cabin air preconditioning (LP);

5-4-8 Potable Water System

****ON A/C A321-100 A321-200**

Potable Water System

1. Potable Water Ground Service Panel.

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		RH SIDE m (ft)	LH SIDE m (ft)	
Access door 171AL:	38.2 (125.33)		0.3 (0.98)	2.6 (8.53)

NOTE : Distances are approximate

- A. Connector:
 - Fill/Drain Nipple 3/4 in. (ISO 17775)
- B. Usable capacity
 - Standard configuration - one tank:2000 l (52.83 US gal)
- C. Filling pressure:
 - 3.45 bar (50 psi)
- D. Typical flow rate:
 - 50 l/min (13.21 US gal/min)

2. Potable Water Ground Drain Panel.

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		RH SIDE m (ft)	LH SIDE m (ft)	
Potable Water Ground Service Panel: Access door 133AL:	11.8 (38.71)		0.15 (0.49)	1.75 (5.74)


NOTE : Distances are approximate

3. Technical Specifications

- A. Connectors:
 - (1) On the potable ground service panel (Access Door 171AL)
 - Fill/Drain Nipple 3/4 in (ISO 17775).
 - One ground pressurization connector.

- (2) On drain panel (Access Door 133AL)
 - Drain Nipple 3/4 in (ISO 17775)
- B. Usable capacity:
 - Standard configuration - one tank: 200 l (52.83 US gal)
- C. Filling pressure:
 - 3.45 bar (50 psi).
- D. Typical flow rate:
 - 50 l/min (13.21 US gal/min).

****ON A/C A321-100 A321-200**

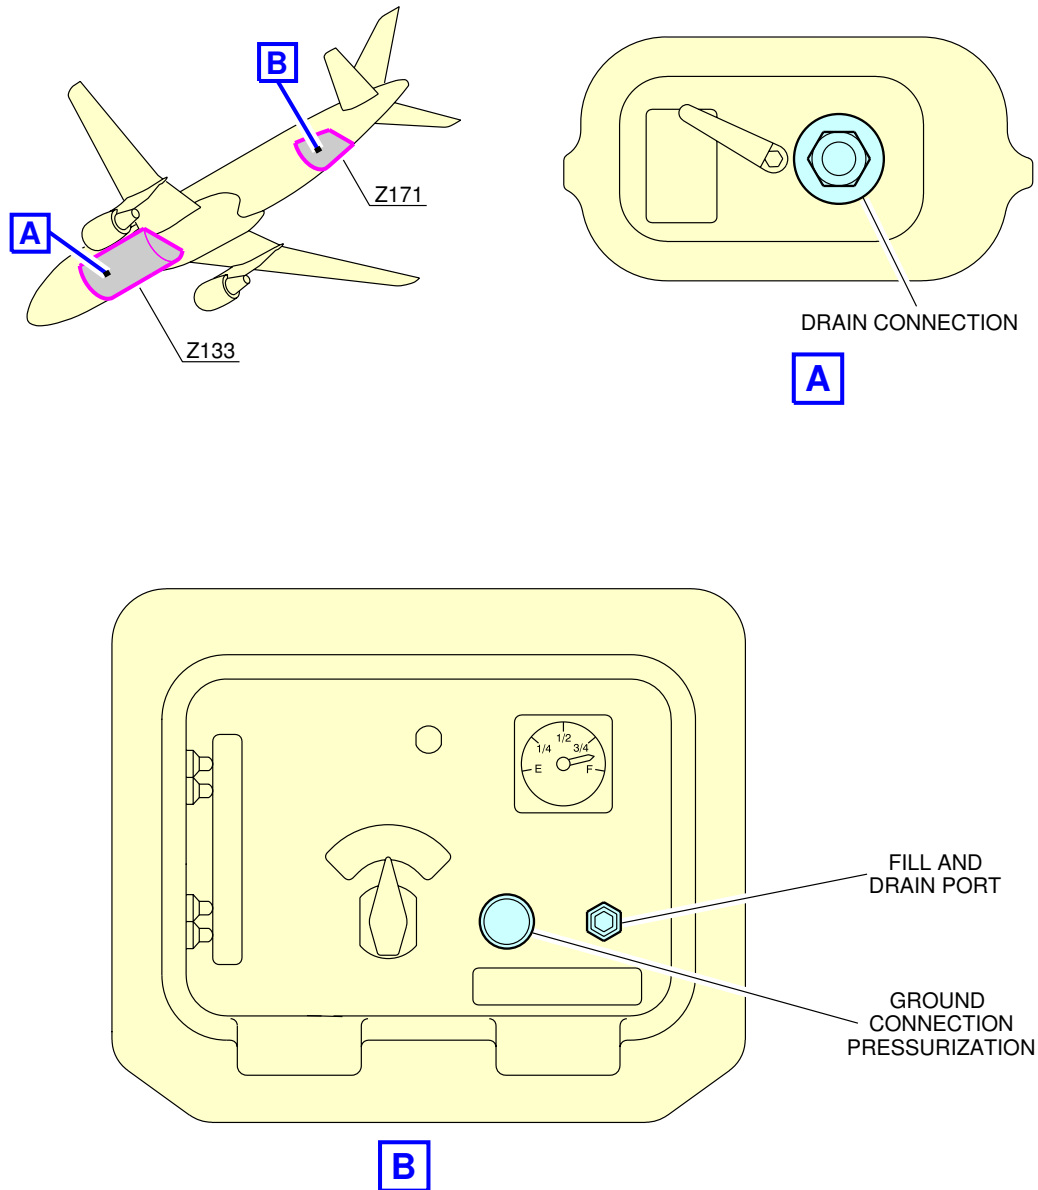

N_AC_050408_1_0010101_01_00

Ground Service Connections
Potable Water Ground Service Panel
FIGURE 1

5-4-9 Oil System

****ON A/C A321-100 A321-200**

Oil System

- Engine Oil Replenishment for CFM56 Series Engine (See FIGURE 5-4-9-991-001-A):
One gravity filling cap and one pressure filling connection per engine.

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		ENGINE 1 (LH) m (ft)	ENGINE 2 (RH) m (ft)	
Engine Oil Gravity Filling Cap: Access door: 437BL (LH), 447BL (RH)	17.38 (57.02)	6.63 (21.75)	4.82 (15.81)	1.46 (4.79)
Engine Oil Pressure Filling Port:	17.26 (56.62)	6.49 (21.29)	4.74 (15.55)	1.42 (4.66)

NOTE : Distances are approximate

- Tank capacity:
 - Full level: 19.6 l (5.18 US gal)
 - Usable: 9.46 l (2.50 US gal)
 - Maximum delivery pressure required: 25 psi (1.72 bar)
Maximum delivery flow required: 180 l/h (47.55 US gal/h)
- IDG Oil Replenishment for CFM56 Series Engine (See FIGURE 5-4-9-991-002-A):
One pressure filling connection per engine: OMP 2506-18 plus one connection overflow: OMP 2505-18.

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		ENGINE 1 (LH) m (ft)	ENGINE 2 (RH) m (ft)	
IDG Oil Pressure Filling Connection: Access door 438DR (LH), 448DR (RH)	16.46 (54)	6.9 (22.64)	5.52 (18.11)	0.68 (2.23)

NOTE : Distances are approximate

- A. Tank capacity: 5 l (1.32 US gal)
 - B. Delivery pressure required: 5 to 40 psi (0.34 to 2.76 bar) at the IDG inlet.
3. Starter Oil Replenishment for CFM56 Series Engine (See FIGURE 5-4-9-991-003-A:
One gravity filling cap per engine.

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		ENGINE 1 (LH) m (ft)	ENGINE 2 (RH) m (ft)	
Starter Oil Filling Connection:	16.81 (55.15)	5.3 (17.39)	6.2 (20.34)	0.76 (2.49)

NOTE : Distances are approximate

- A. Tank capacity: 0.8 l (0.21 US gal)
4. Engine Oil Replenishment for IAE V2500 Series Engine (See FIGURE 5-4-9-991-004-B):
One gravity filling cap per engine.

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		ENGINE 1 (LH) m (ft)	ENGINE 2 (RH) m (ft)	
Engine Oil Gravity Filling Cap: Access door 437BL (LH), 447BL (RH)	16.5 (54.13)	6.56 (21.52)	4.92 (16.14)	1.22 (4)

NOTE : Distances are approximate

- A. Tank capacity:
 - Full level: 28 l (7.39 US gal)
 - Usable: 23.50 l (6.21 US gal)
1. IDG Oil Replenishment for IAE V2500 Series Engine:
One pressure filling connection per engine: 2506-2 plus one overflow connection: 2505-2..

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		ENGINE 1 (LH) m (ft)	ENGINE 2 (RH) m (ft)	
IDG Oil Pressure Filling Connection:	17.06 (55.97)	5.42 (17.78)	6.04 (19.81)	0.8 (2.62)

NOTE : Distances are approximate

A. Tank capacity: 4.1 l (1.08 US gal)

5. Starter Oil Replenishment for IAE V2500 Series Engine (See FIGURE 5-4-9-991-006-B):
One gravity filling cap per engine.

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		ENGINE 1 (LH) m (ft)	ENGINE 2 (RH) m (ft)	
Starter Oil Filling Connection:	19.66 (64.5)	5.3 (17.39)	6.14 (20.14)	0.75 (2.46)

NOTE : Distances are approximate

A. Tank capacity: 0.35 l (0.09 US gal)

6. APU Oil System (See FIGURE 5-4-9-991-007-A):
APU oil gravity filling cap.

	AFT OF NOSE m (ft)	FROM AIRPLANE CENTERLINE (LEFT HAND) m (ft)	MEAN HEIGHT FROM GROUND m (ft)
GTCP 36-300	42.42 (139.17)	0.3 (0.98)	4.83 (15.85)
APS 3200	42.42 (139.17)	0.3 (0.98)	4.78 (15.68)
131-9	42.32 (138.84)	0.35 (1.15)	4.32 (14.17)

NOTE : Distances are approximate


- A. Tank capacity (usable):
- APU type GTCP 36-300: 6.20 l (1.64 US gal)
 - APU type APS 3200: 5.40 l (1.43 US gal)



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

- APU type 131-9: 6.25 l (1.65 US gal)


****ON A/C A321-100 A321-200**

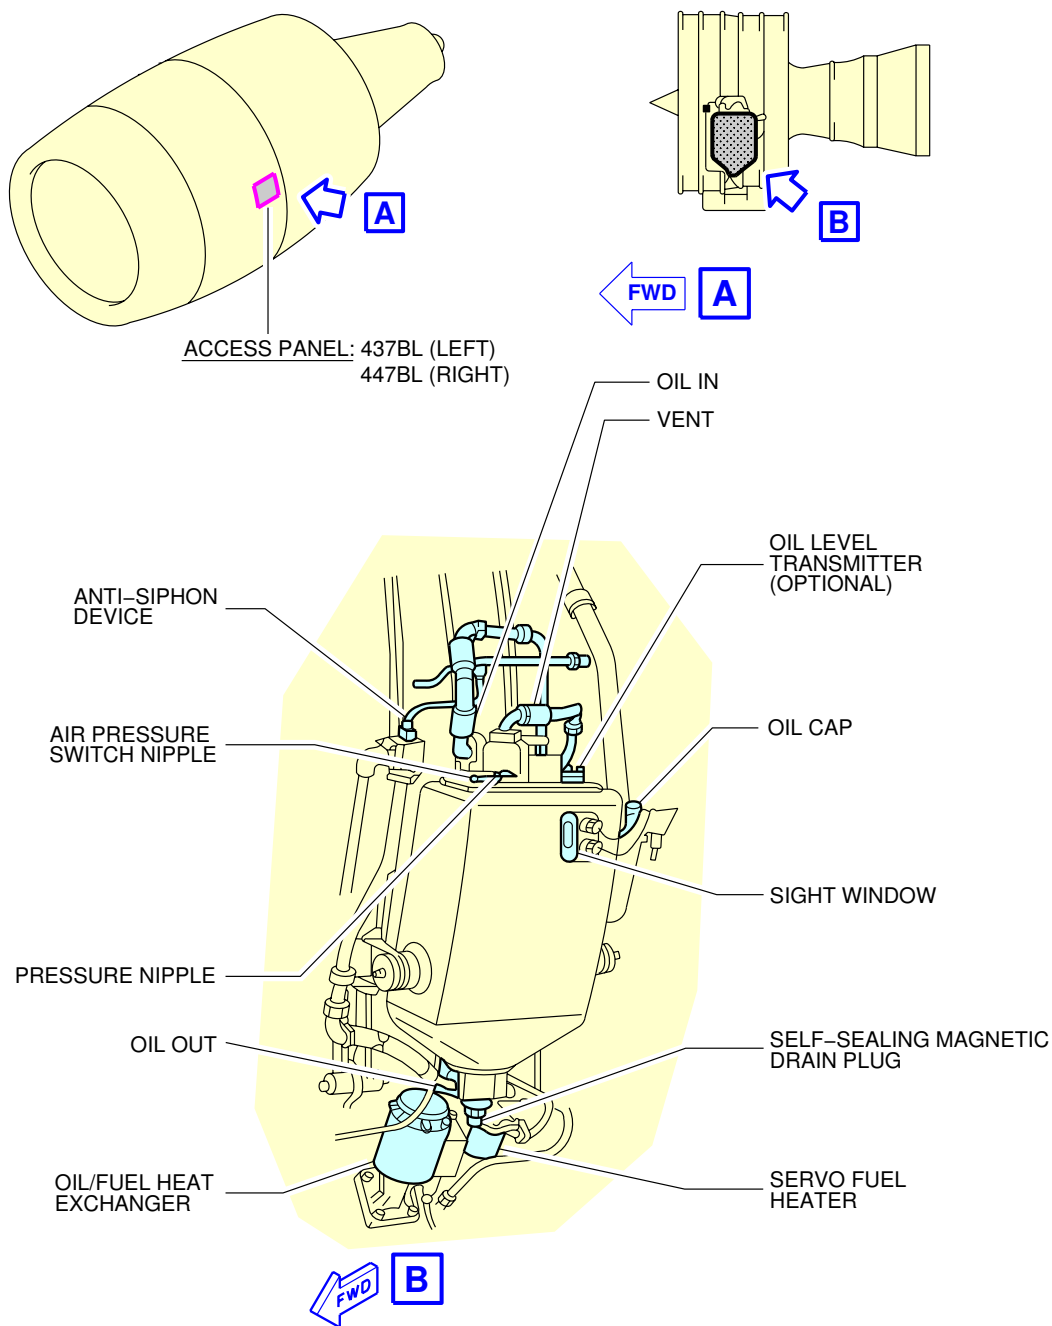

N_AC_050409_1_0010101_01_00

Ground Service Connections
Engine Oil Tank – CFM56 Series Engine
FIGURE 1



****ON A/C A321-100 A321-200**

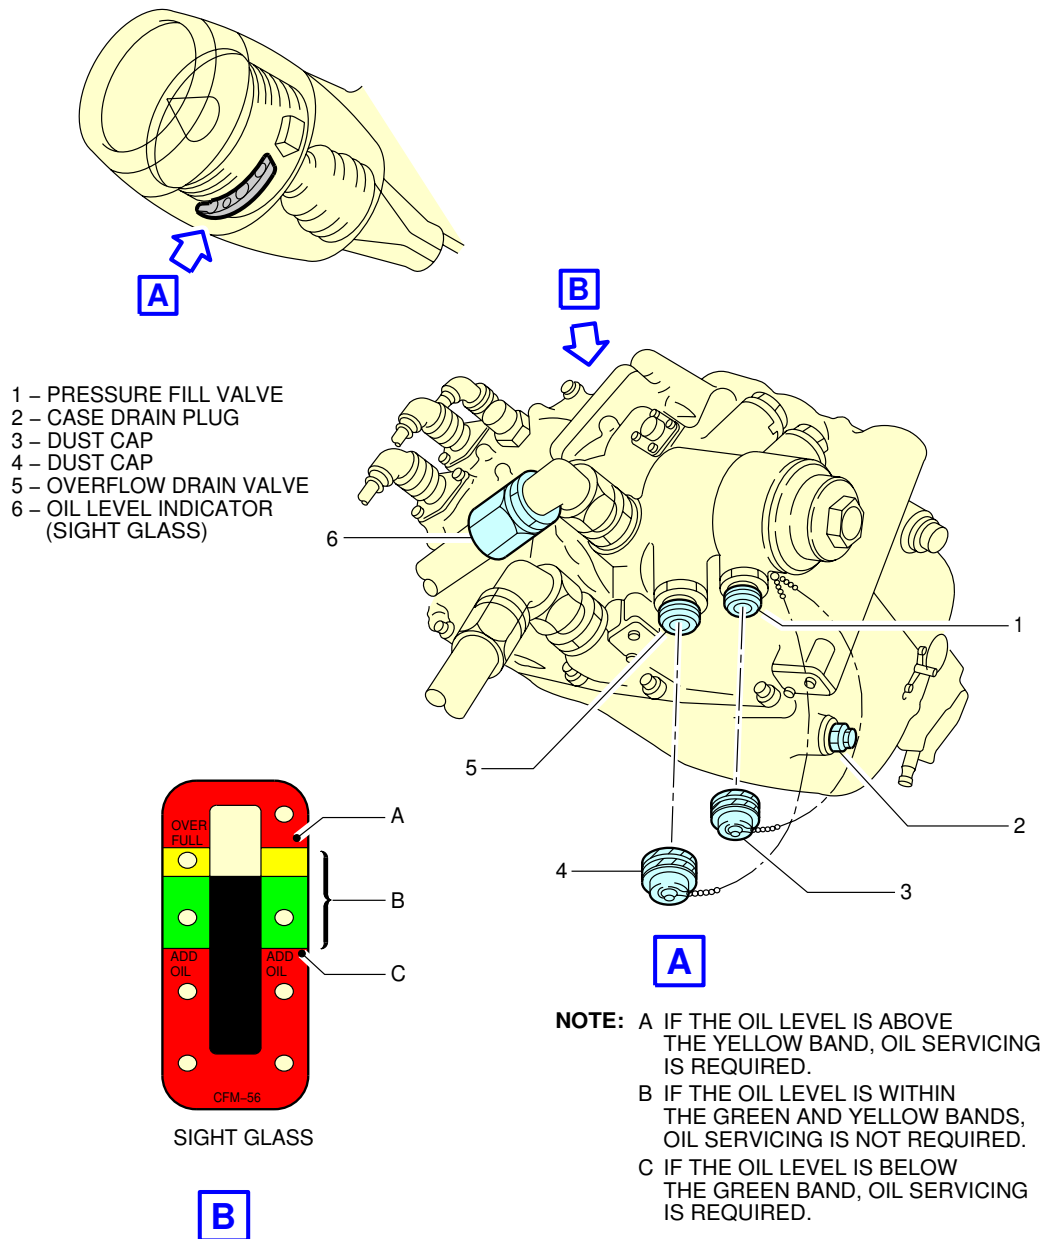

N_AC_050409_1_0020101_01_01

Ground Service Connections
 IDG Oil Tank - CFM56 Series Engine
 FIGURE 2


****ON A/C A321-100 A321-200**

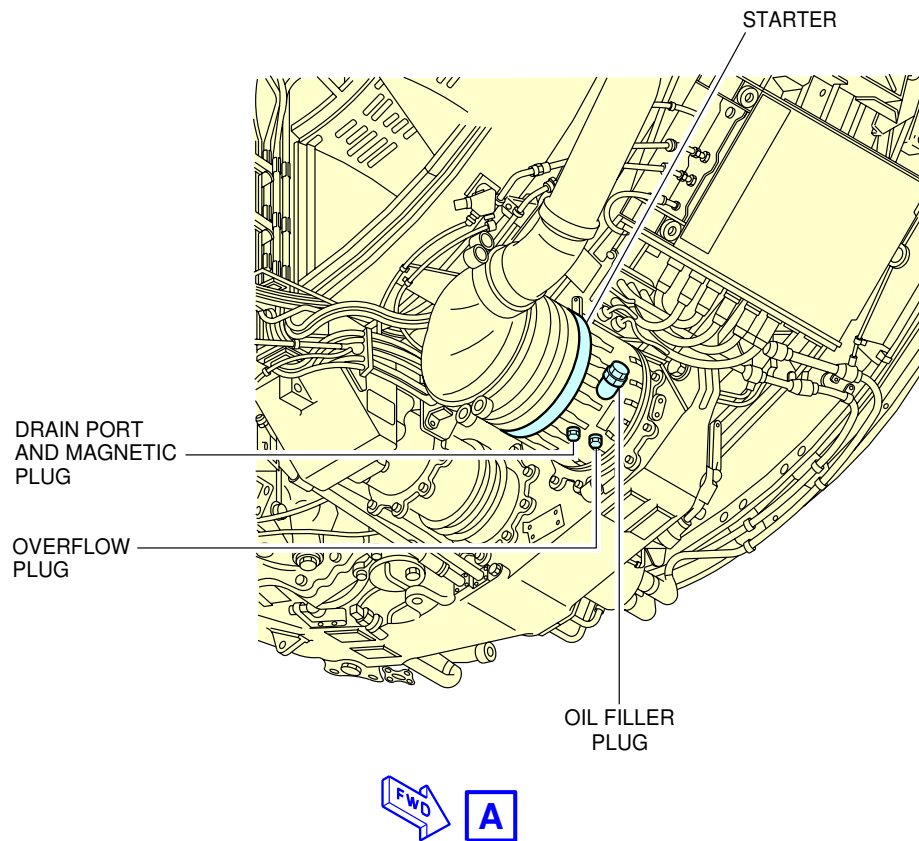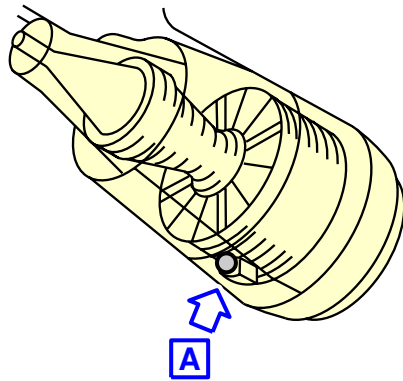

N_AC_050409_1_0030101_01_02

Ground Service Connections
 Starter Oil Tank – CFM56 Series Engine
 FIGURE 3

****ON A/C A321-100 A321-200**

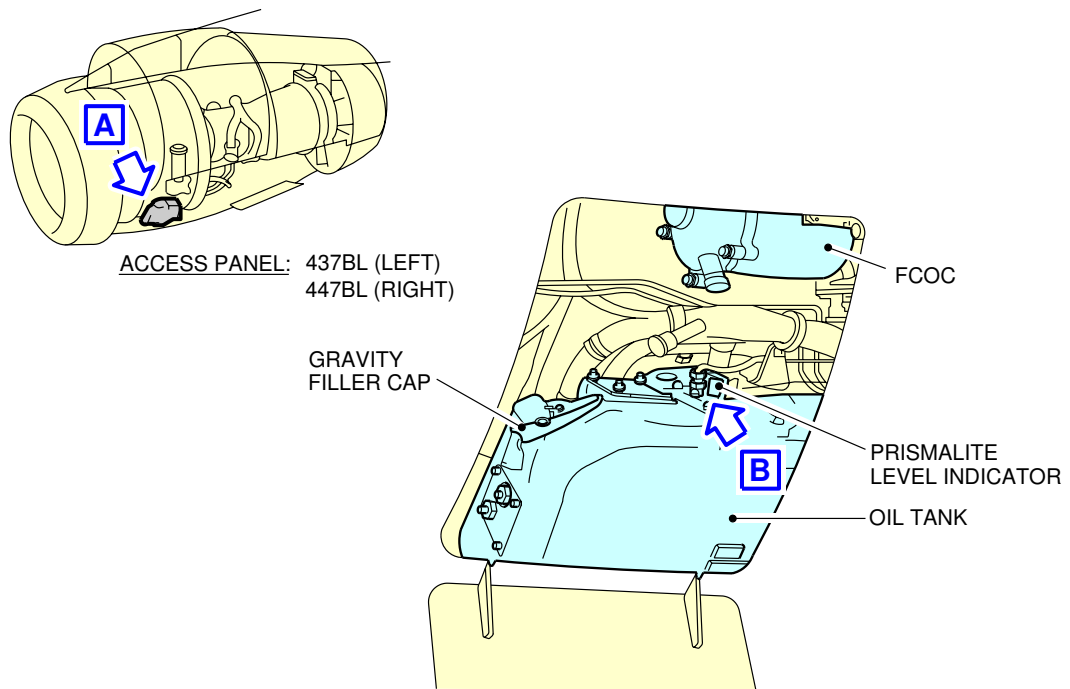


'FULL' LEVEL NOTCH
27.3 LT
29.0 US QTS
6.0 IMP GAL
(WITHIN 60 MIN FROM SHUTDOWN)

NOTCH '1'
26 LT
27 US QTS
5.7 IMP GAL

NOTCH '2'
23 LT
24 US QTS
5.1 IMP GAL


NOTCH '3'
20 LT
22 US QTS
4.5 IMP GAL



N_AC_050409_1_0040201_01_00

Ground Service Connections
Engine Oil Tank – IAE V2500 Series Engine
FIGURE 4


****ON A/C A321-100 A321-200**

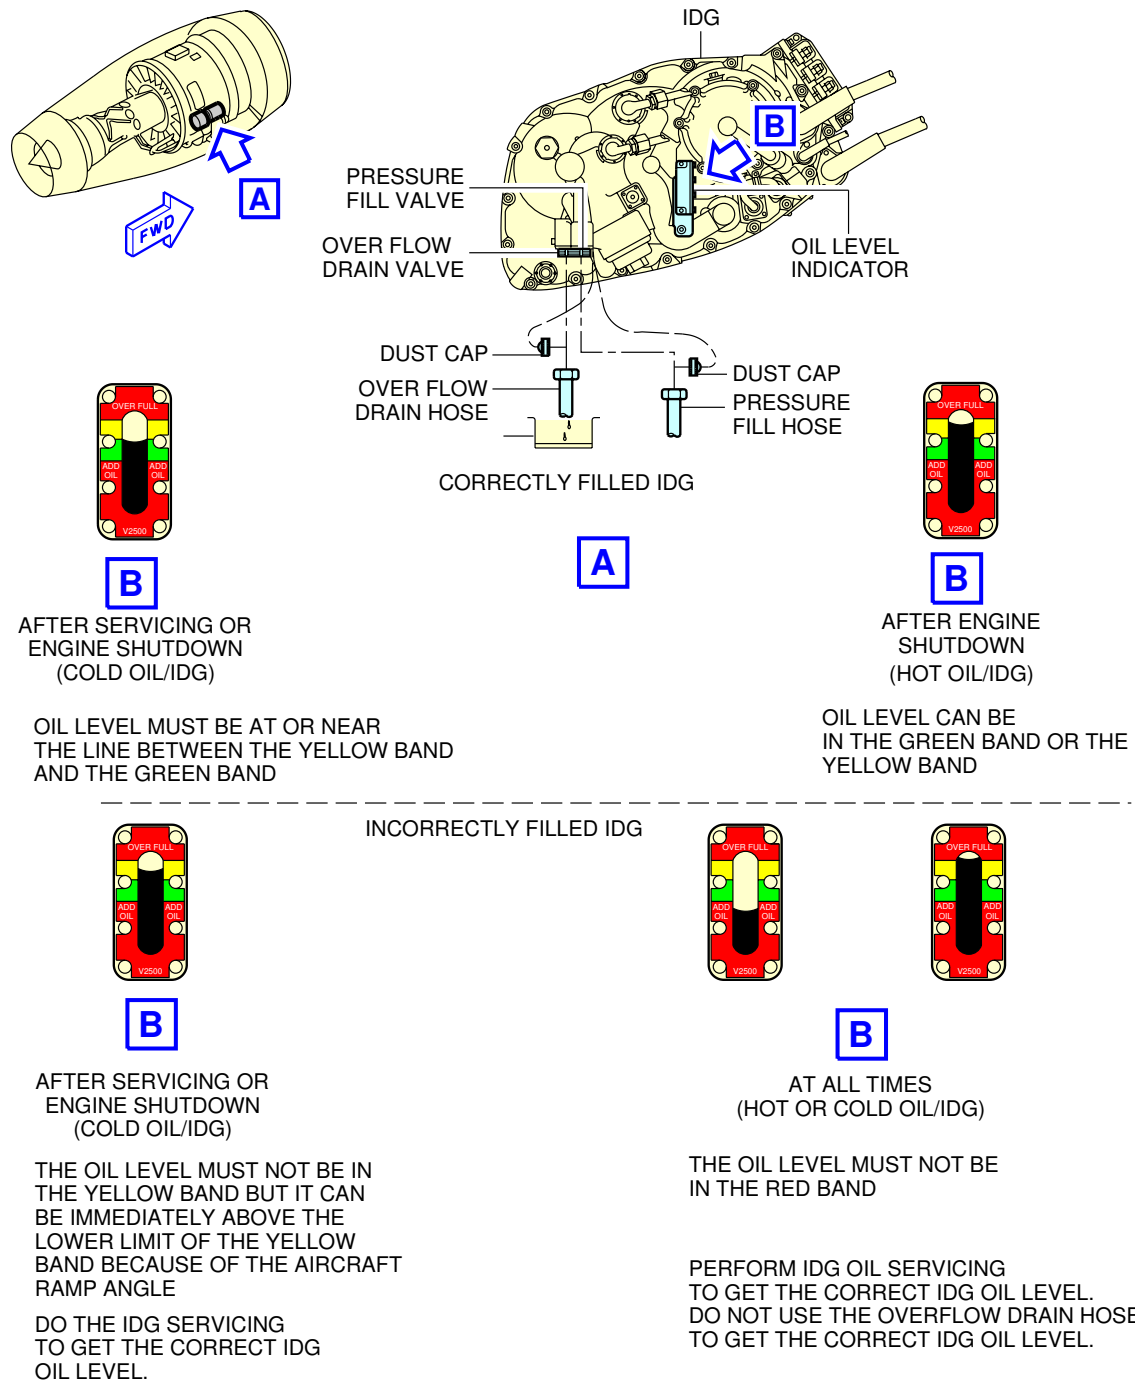

N_AC_050409_1_0050201_01_00

Ground Service Connections
IDG Oil Tank – IAE V2500 Series Engine
FIGURE 5


****ON A/C A321-100 A321-200**

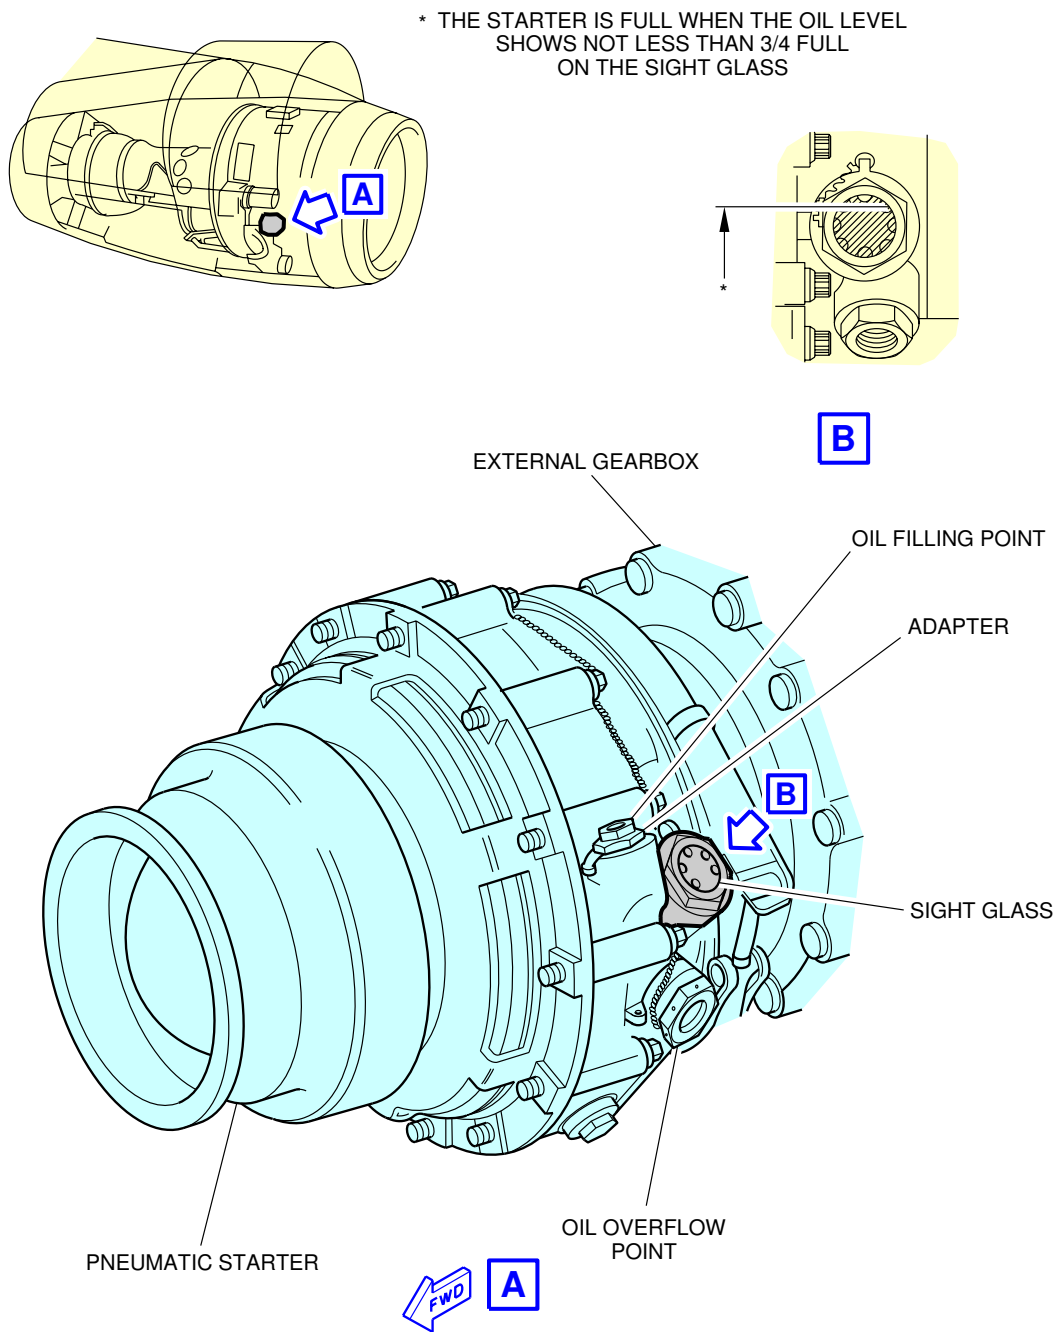

N_AC_050409_1_0060201_01_00

Ground Service Connections
Starter Oil Tank – IAE V2500 Series Engine
FIGURE 6

****ON A/C A321-100 A321-200**

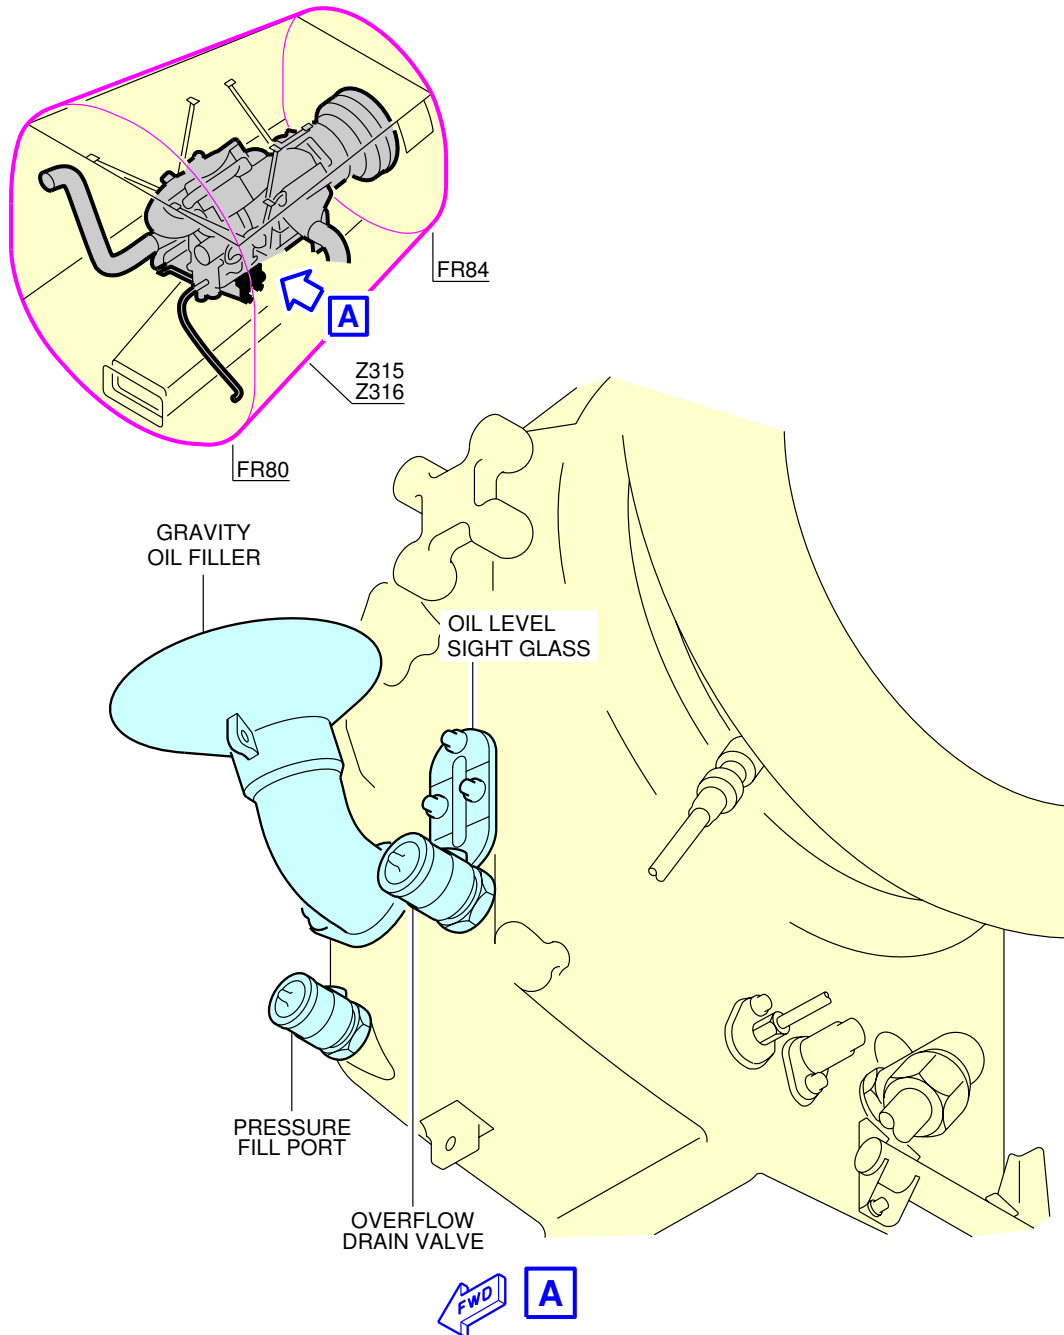

N_AC_050409_1_0070101_01_00

Ground Service Connections
APU Oil Tank
FIGURE 7

5-4-10 Vacuum Toilet System****ON A/C A321-100 A321-200**Vacuum Toilet System

1. Vacuum Toilet System.

ACCESS	AFT OF NOSE m (ft)	POSITION FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND m (ft)
		R SIDE m (ft)	L SIDE m (ft)	
Waste Water Ground Service Panel: Access door 172AR	38.2 (125.33)	0.8 (2.62)		2.8 (9.18)

NOTE : Distances are approximate

2. Technical Specifications

A. Connectors:

- Draining: 4 in (ISO 17775).
- Flushing and filling: 1 in (ISO 17775).

B. Usable waste tank capacity:

- Standard configuration - on tank: 177 l (30.91 US gal).



C. Waste tank - Rinsing:

- Operating pressure: 3.45 bar (50 psi).

D. Waste tank - Precharge:

- 10 l (2.64 US gal).

****ON A/C A321-100 A321-200**

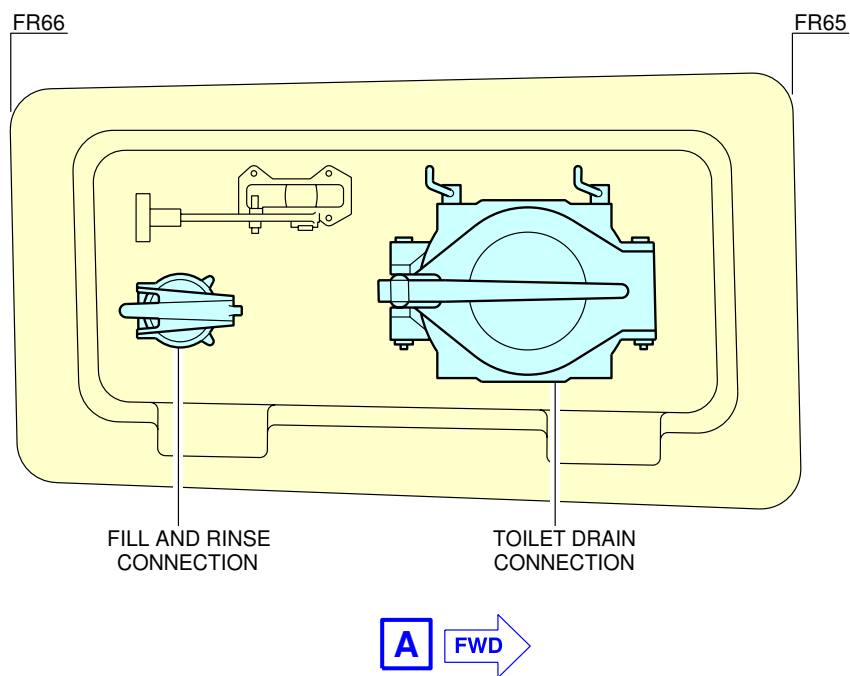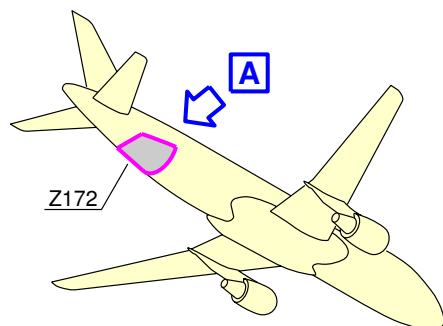

N_AC_050410_1_0010101_01_00

Ground Service Connections
Waste Water Ground Service Panel
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

5-5-0 Engine Starting Pneumatic Requirements

****ON A/C A321-100 A321-200**

Engine Starting Pneumatic Requirements

1. Engine Starting Pneumatic Requirements.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


5-5-1 Low Temperatures

****ON A/C A321-100 A321-200**

Low Temperature -40 ° C (-40 ° F)

1. This section provides the engine starting pneumatic requirements for a temperature of -40 ° C (-40 ° F).


****ON A/C A321-100 A321-200**

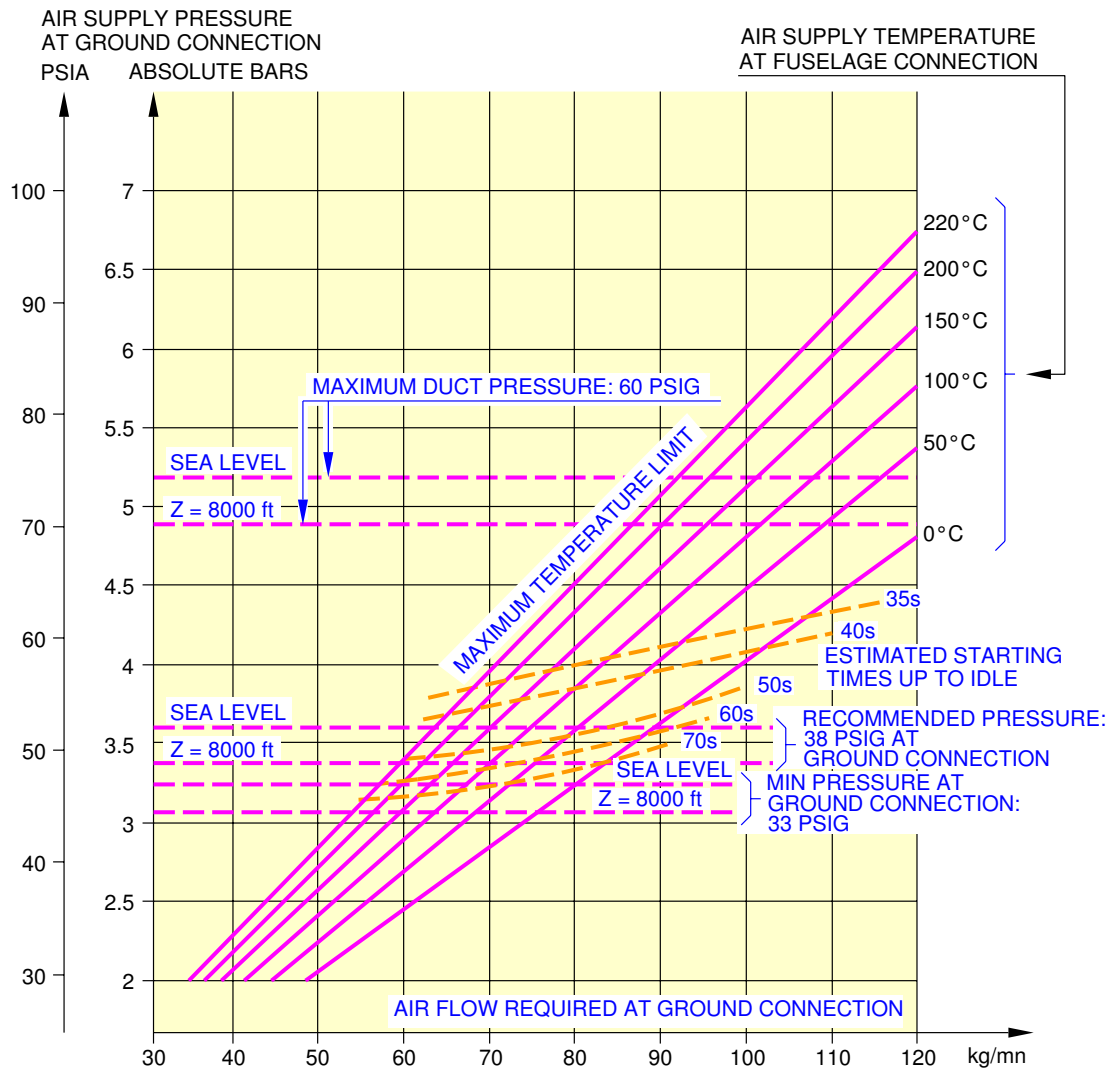

N_AC_050501_1_0070101_01_00

Engine Starting Pneumatic Requirements
Temperature -40 °C (-40 °F) – CFM56 series engine
FIGURE 1

****ON A/C A321-100 A321-200**

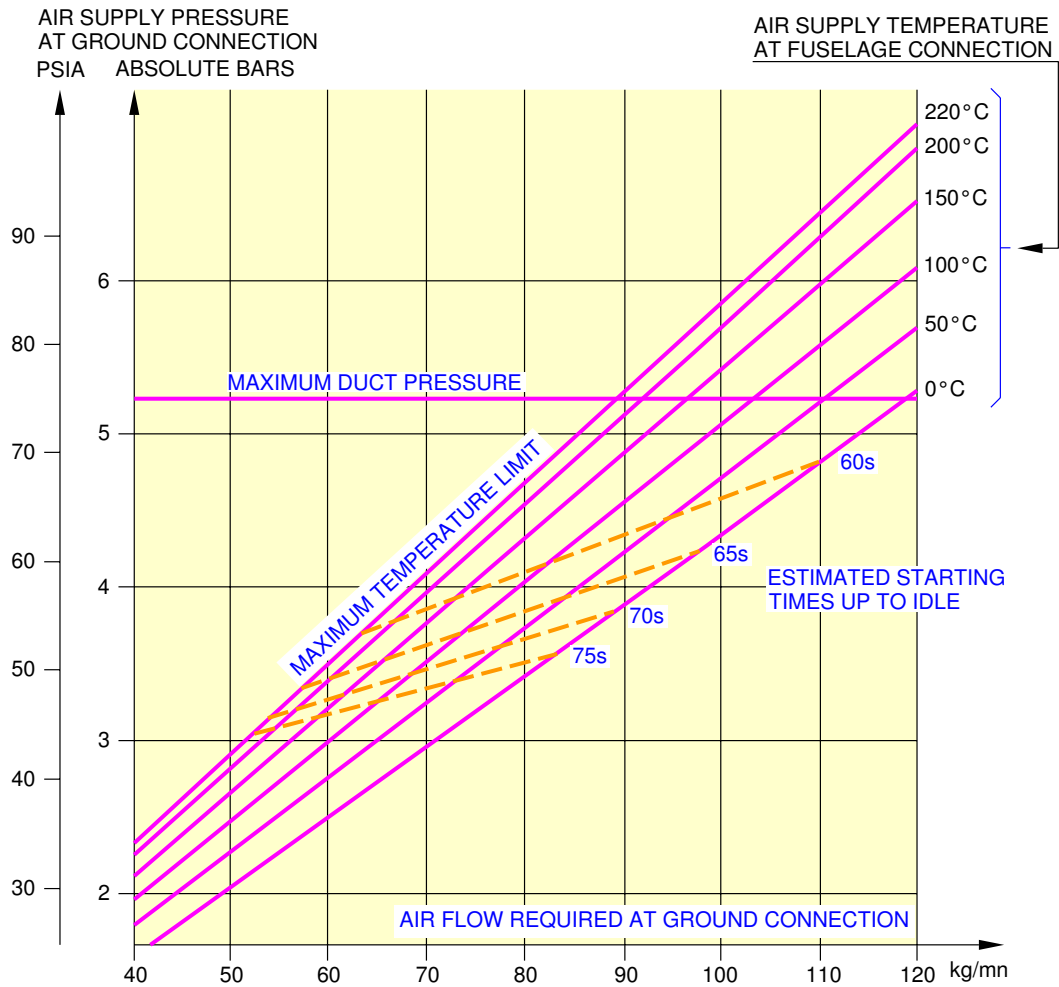


N_AC_050501_1_0080101_01_00

Engine Starting Pneumatic Requirements
Temperature -40 °C (-40 °F) – IAE V2500 series engine
FIGURE 2

5-5-2 Ambient Temperatures****ON A/C A321-100 A321-200**Ambient Temperature +15 °C (+59 °F)

1. This section provides the engine starting pneumatic requirements for a temperature of +15 °C (+59 °F).


****ON A/C A321-100 A321-200**

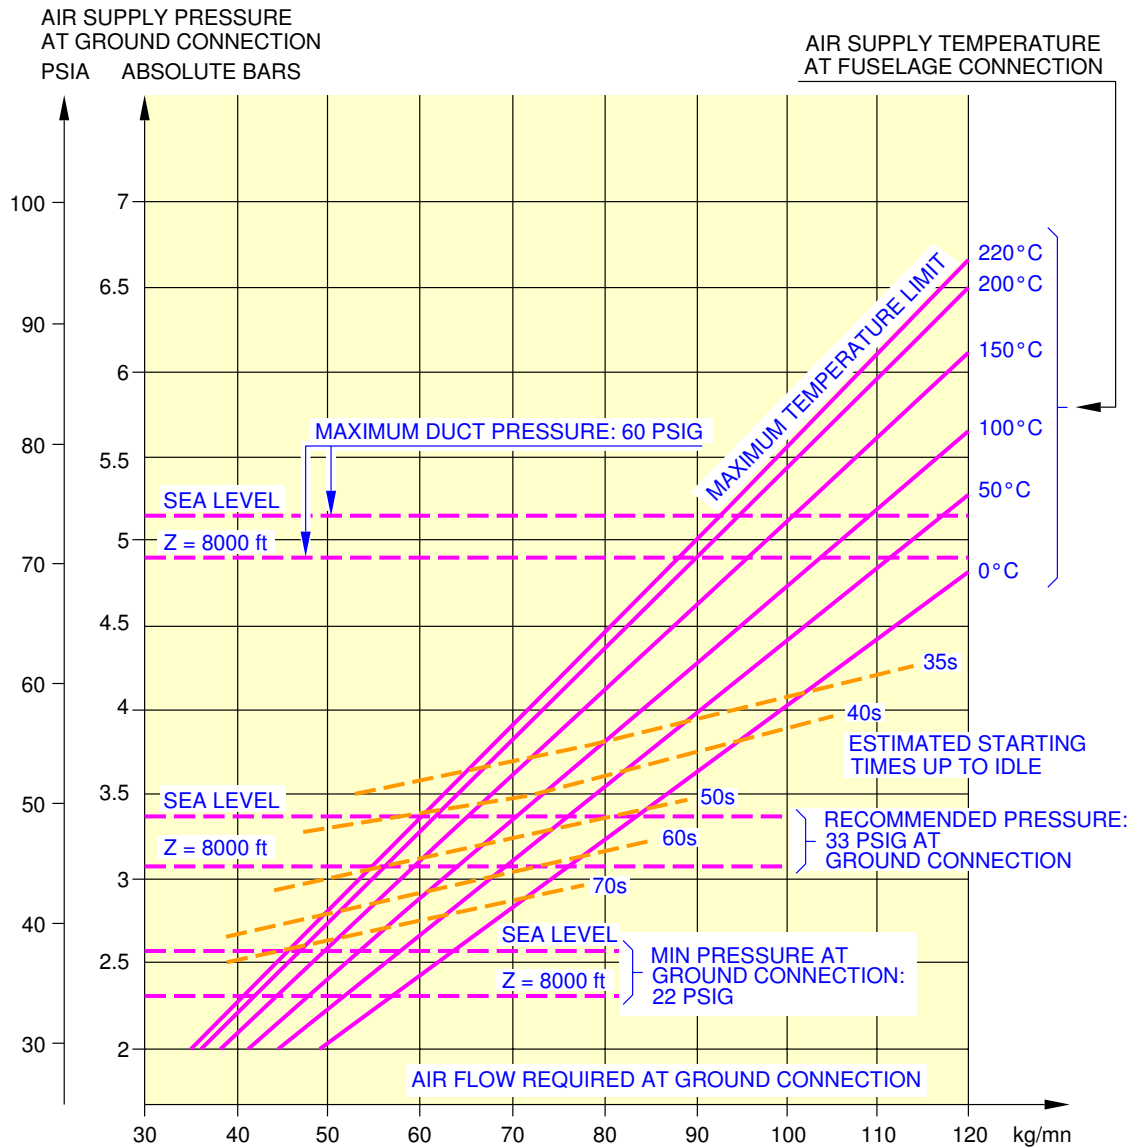

N_AC_050502_1_0070101_01_00

Engine Starting Pneumatic Requirements
Temperature +15°C (+59°F) – CFM56 series engine
FIGURE 1

****ON A/C A321-100 A321-200**

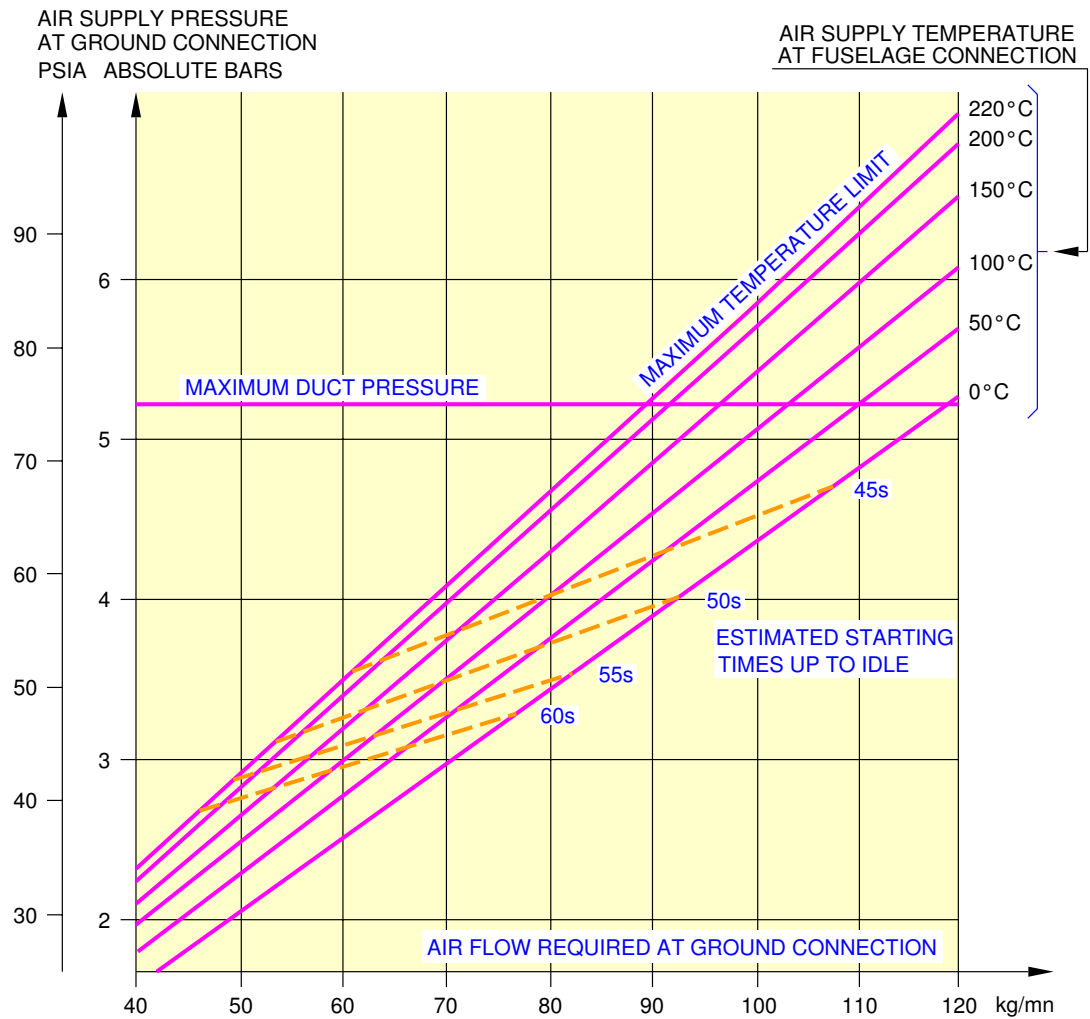


N_AC_050502_1_0080101_01_00

Engine Starting Pneumatic Requirements
 Temperature +15°C (+59°F) – IAE V2500 series engine
 FIGURE 2

5-5-3 High Temperatures****ON A/C A321-100 A321-200**High Temperature +50 ° C (+122 ° F) and +55 ° C (+131 ° F)

1. This section provides the engine starting pneumatic requirements for a temperature upper:
 - +50 ° C (+122 ° F) – IAE V2500
 - +55 ° C (+131 ° F) – CFM56


****ON A/C A321-100 A321-200**

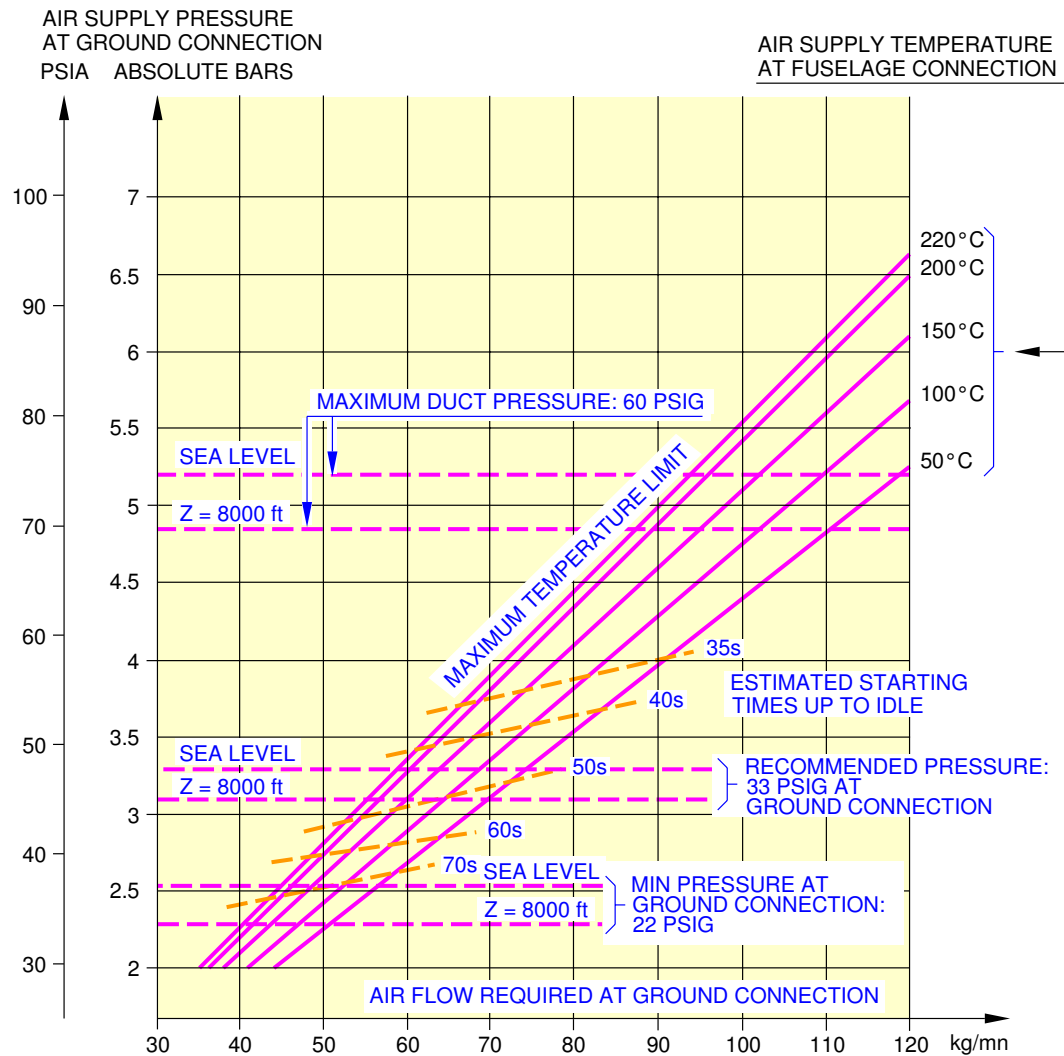

N_AC_050503_1_0070101_01_00

Engine Starting Pneumatic Requirements
Temperature +55 °C (+131 °F) – CFM56 series engine
FIGURE 1

****ON A/C A321-100 A321-200**

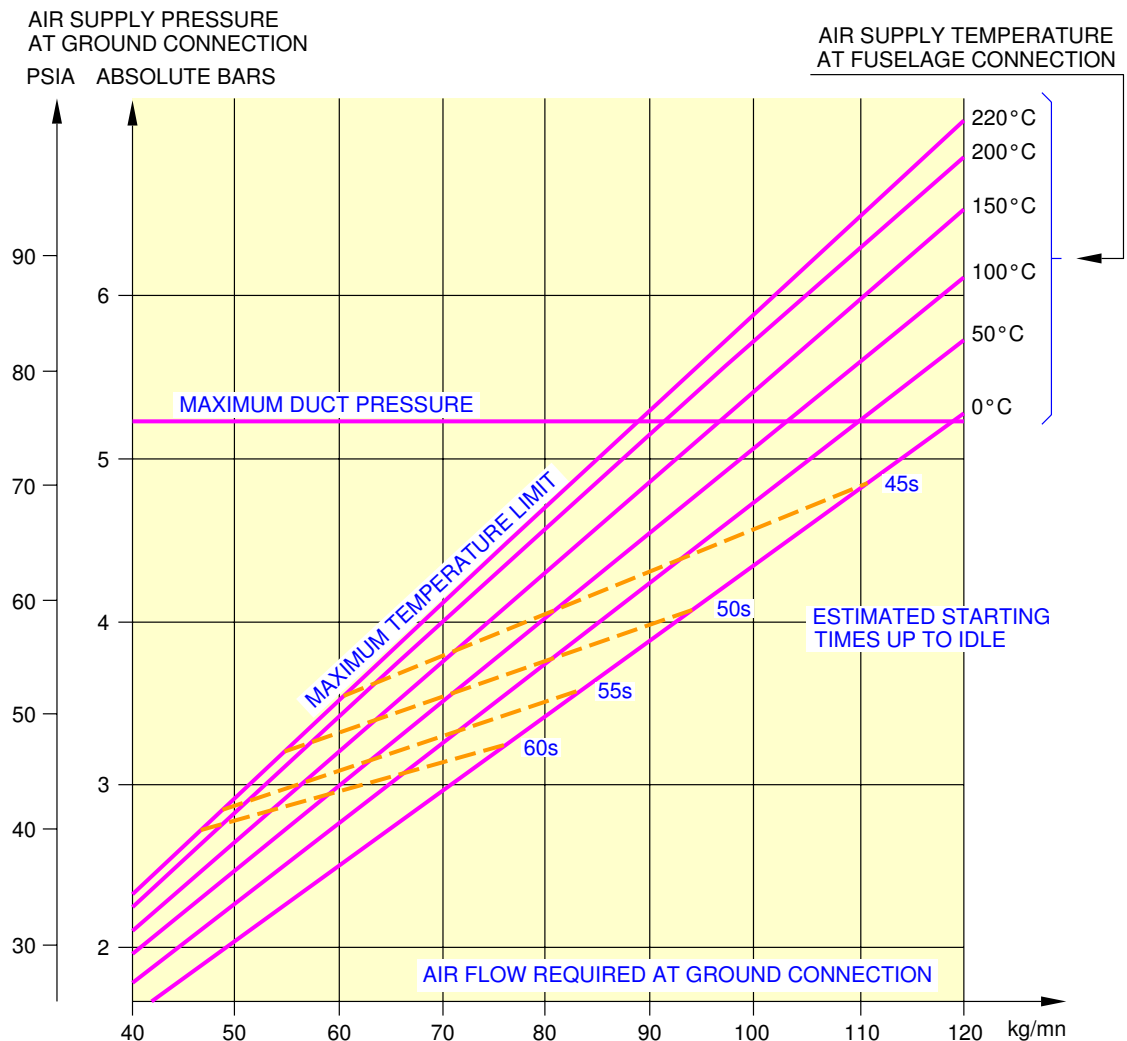

N_AC_050503_1_0080101_01_00

Engine Starting Pneumatic Requirements
 Temperature +50 °C (+122 °F) – IAE V2500 series engine
 FIGURE 2

5-6-0 Ground Pneumatic Power Requirements

****ON A/C A321-100 A321-200**

Ground Pneumatic Power Requirements

1. Ground Pneumatic Power Requirements.

FRESH AIRFLOW				PULL UP	PULL DOWN
TOTAL		CABIN		TIME T	TIME T
(kg/s)	(lb/s)	(kg/s)	(lb/s)	(min.)	(min.)
0.5	1.10	0.449	0.990	after 60 min. 8.0 ° C	–
0.6	1.32	0.539	1.188	after 60 min. 11.9 ° C	–
0.7	1.54	0.628	1.385	after 60 min. 15.5 ° C	–
0.8	1.76	0.718	1.583	after 60 min. 18.8 ° C	–
0.9	1.98	0.808	1.781	58.0	after 60 min. 31.1 ° C
1.0	2.20	0.898	1.980	51.0	after 60 min. 29.6 ° C
1.1	2.43	0.988	2.178	45.0	after 60 min. 28.2 ° C
1.2	2.65	1.077	2.374	40.5	58.5
1.3	2.87	1.167	2.573	36.5	46.0
1.4	3.09	1.257	2.771	33.0	37.5
1.5	3.31	1.347	2.970	30.0	31.0

NOTE : Data for unstabilized conditions see 5-6-1 and 5-6-2.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


5-6-1 Heating

****ON A/C A321-100 A321-200**

Heating

1. This section provides the ground pneumatic power requirements heating.

****ON A/C A321-100 A321-200**

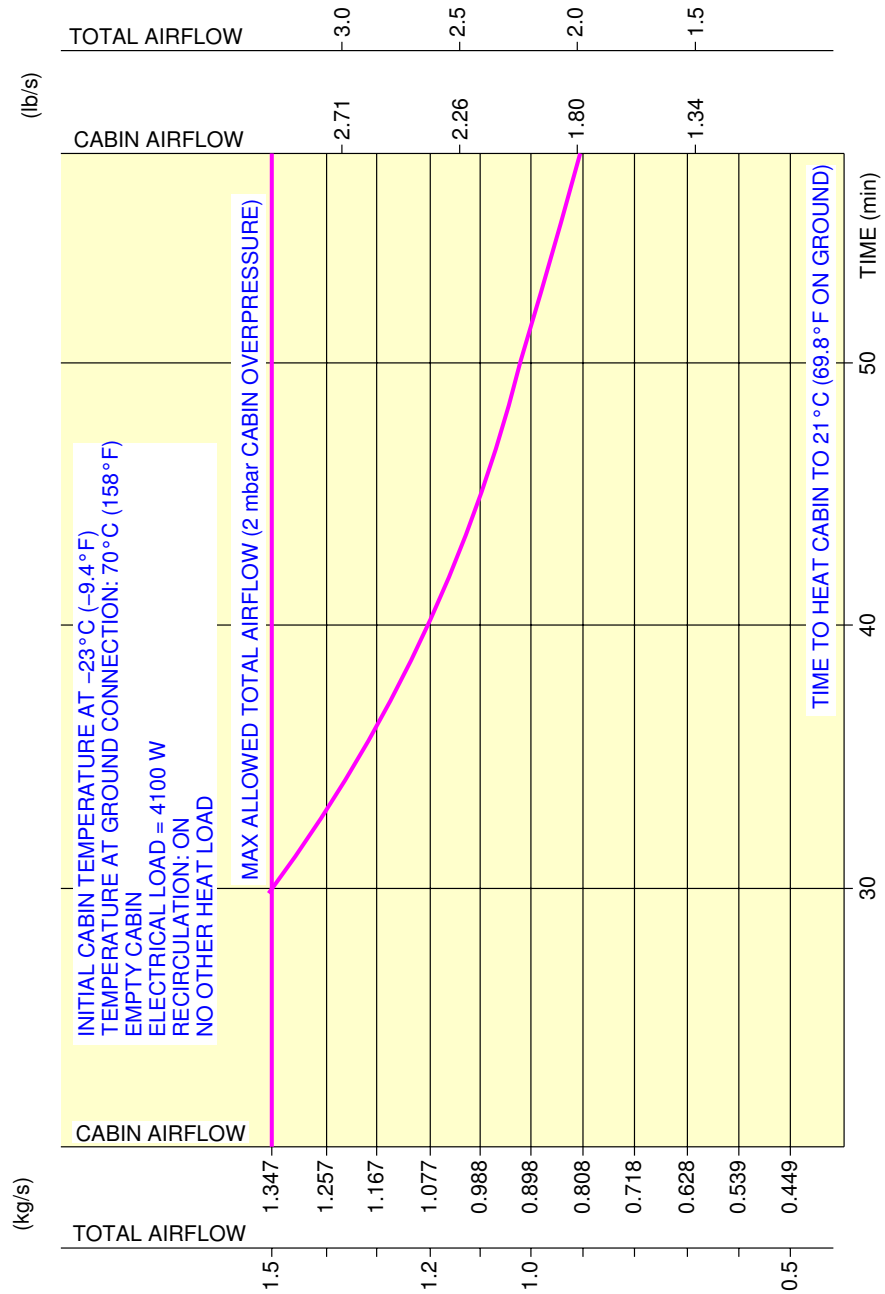

N_AC_050601_1_0040101_01_01

Ground Pneumatic Power Requirements
Heating
FIGURE 1



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


5-6-2 Cooling

****ON A/C A321-100 A321-200**

Cooling

1. This section provides the ground pneumatic power requirements cooling.

****ON A/C A321-100 A321-200**

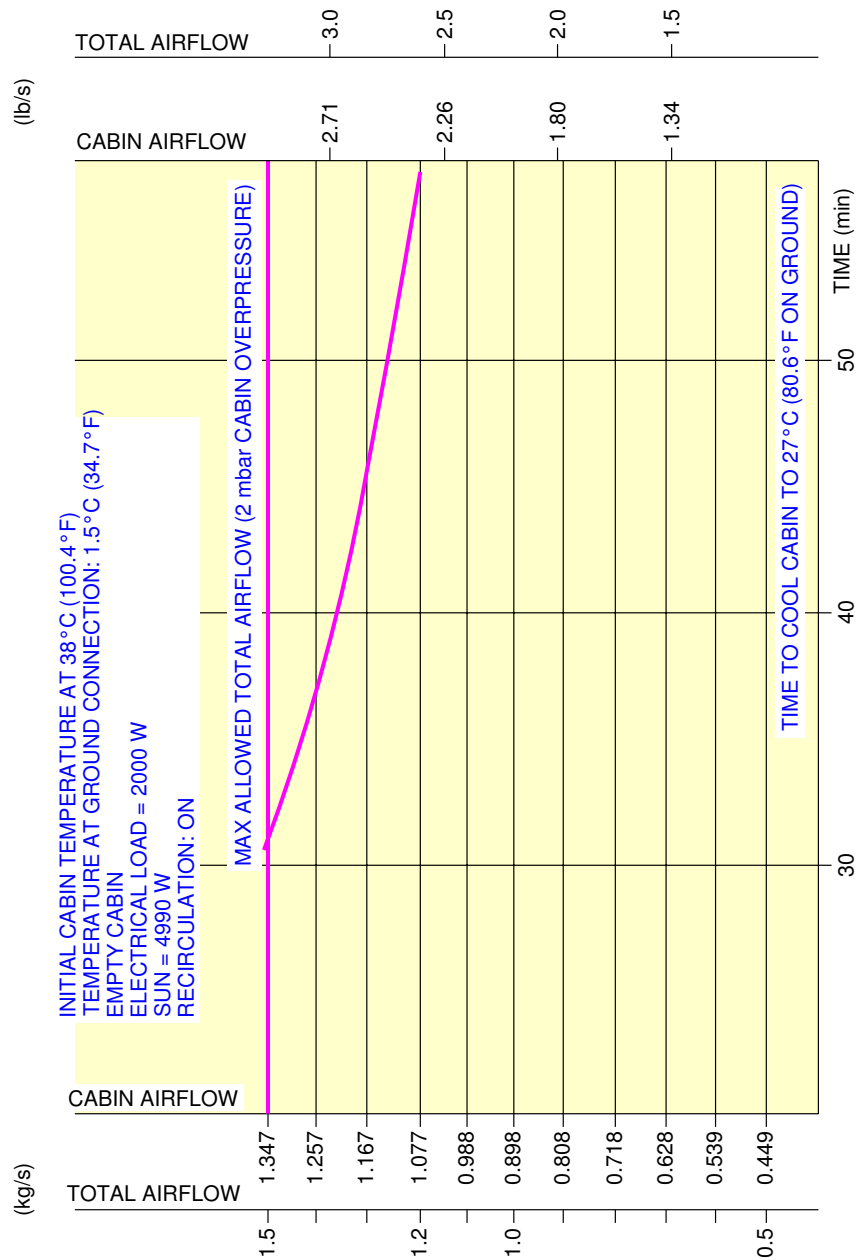

N_AC_050602_1_0040101_01_01

Ground Pneumatic Power Requirements
Cooling
FIGURE 1

5-7-0 Preconditioned Airflow Requirements

****ON A/C A321-100 A321-200**

Preconditioned Airflow Requirements

1. This section gives the preconditioned airflow requirements for cabin air conditioning.
 - A. Preconditioned Airflow Requirements.

FRESH AIRFLOW				CURVE 1	
TOTAL		CABIN		T FL	
(kg/s)	(lb/s)	(kg/s)	(lb/s)	(° C)	(° F)
0.5	1.10	0.449	0.990	-56.4	-69.5
0.6	1.32	0.539	1.188	-41.8	-43.2
0.7	1.54	0.628	1.385	-31.3	-24.3
0.8	1.76	0.718	1.583	-23.5	-10.3
0.9	1.98	0.808	1.781	-17.5	0.5
1.0	2.20	0.898	1.980	-12.7	9.1
1.1	2.43	0.988	2.178	-8.8	16.2
1.2	2.65	1.077	2.374	-5.5	22.1
1.3	2.87	1.167	2.573	-2.7	27.1
1.4	3.09	1.257	2.771	-0.4	31.3
1.5	3.31	1.347	2.970	1.7	35.1

NOTE : Data for stabilized conditions see 5-7-0.

- B. Preconditioned Airflow Requirements.

FRESH AIRFLOW				CURVE 2	
TOTAL		CABIN		T FL	
(kg/s)	(lb/s)	(kg/s)	(lb/s)	(° C)	(° F)
0.5	1.10	0.449	0.990	32.6	90.7
0.6	1.32	0.539	1.188	30.5	86.9
0.7	1.54	0.628	1.385	29.0	84.2
0.8	1.76	0.718	1.583	27.9	82.2
0.9	1.98	0.808	1.781	27.1	80.8
1.0	2.20	0.898	1.980	26.4	79.5
1.1	2.43	0.988	2.178	25.9	78.6
1.2	2.65	1.077	2.374	25.4	77.7
1.3	2.87	1.167	2.573	25.0	77.0
1.4	3.09	1.257	2.771	24.7	76.5

FRESH AIRFLOW				CURVE 2	
TOTAL		CABIN		T FL	
(kg/s)	(lb/s)	(kg/s)	(lb/s)	(° C)	(° F)
1.5	3.31	1.347	2.970	24.4	75.9

NOTE : Data for stabilized conditions see 5-7-0.

C. Preconditioned Airflow Requirements.

FRESH AIRFLOW				CURVE 3	
TOTAL		CABIN		T FL	
(kg/s)	(lb/s)	(kg/s)	(lb/s)	(° C)	(° F)
0.5	1.10	0.449	0.990	38.4	101.1
0.6	1.32	0.539	1.188	35.3	95.5
0.7	1.54	0.628	1.385	33.1	91.6
0.8	1.76	0.718	1.583	31.5	88.7
0.9	1.98	0.808	1.781	30.2	86.4
1.0	2.20	0.898	1.980	29.2	84.6
1.1	2.43	0.988	2.178	28.4	83.1
1.2	2.65	1.077	2.374	27.7	81.9
1.3	2.87	1.167	2.573	27.1	80.8
1.4	3.09	1.257	2.771	26.6	79.9
1.5	3.31	1.347	2.970	26.2	79.2

NOTE : Data for stabilized conditions see 5-7-0.

D. Preconditioned Airflow Requirements.

FRESH AIRFLOW				CURVE 4	
TOTAL		CABIN		T FL	
(kg/s)	(lb/s)	(kg/s)	(lb/s)	(° C)	(° F)
0.5	1.10	0.449	0.990	46.6	115.9
0.6	1.32	0.539	1.188	42.2	108.0
0.7	1.54	0.628	1.385	39.0	102.2
0.8	1.76	0.718	1.583	36.6	97.9
0.9	1.98	0.808	1.781	34.7	94.5
1.0	2.20	0.898	1.980	33.2	91.8
1.1	2.43	0.988	2.178	32.0	89.6
1.2	2.65	1.077	2.374	31.0	87.8
1.3	2.87	1.167	2.573	30.2	86.4
1.4	3.09	1.257	2.771	29.5	85.1




AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

FRESH AIRFLOW				CURVE 4	
TOTAL		CABIN		T FL	
(kg/s)	(lb/s)	(kg/s)	(lb/s)	(° C)	(° F)
1.5	3.31	1.347	2.970	28.8	83.8

NOTE : Data for stabilized conditions see 5-7-0.

****ON A/C A321-100 A321-200**

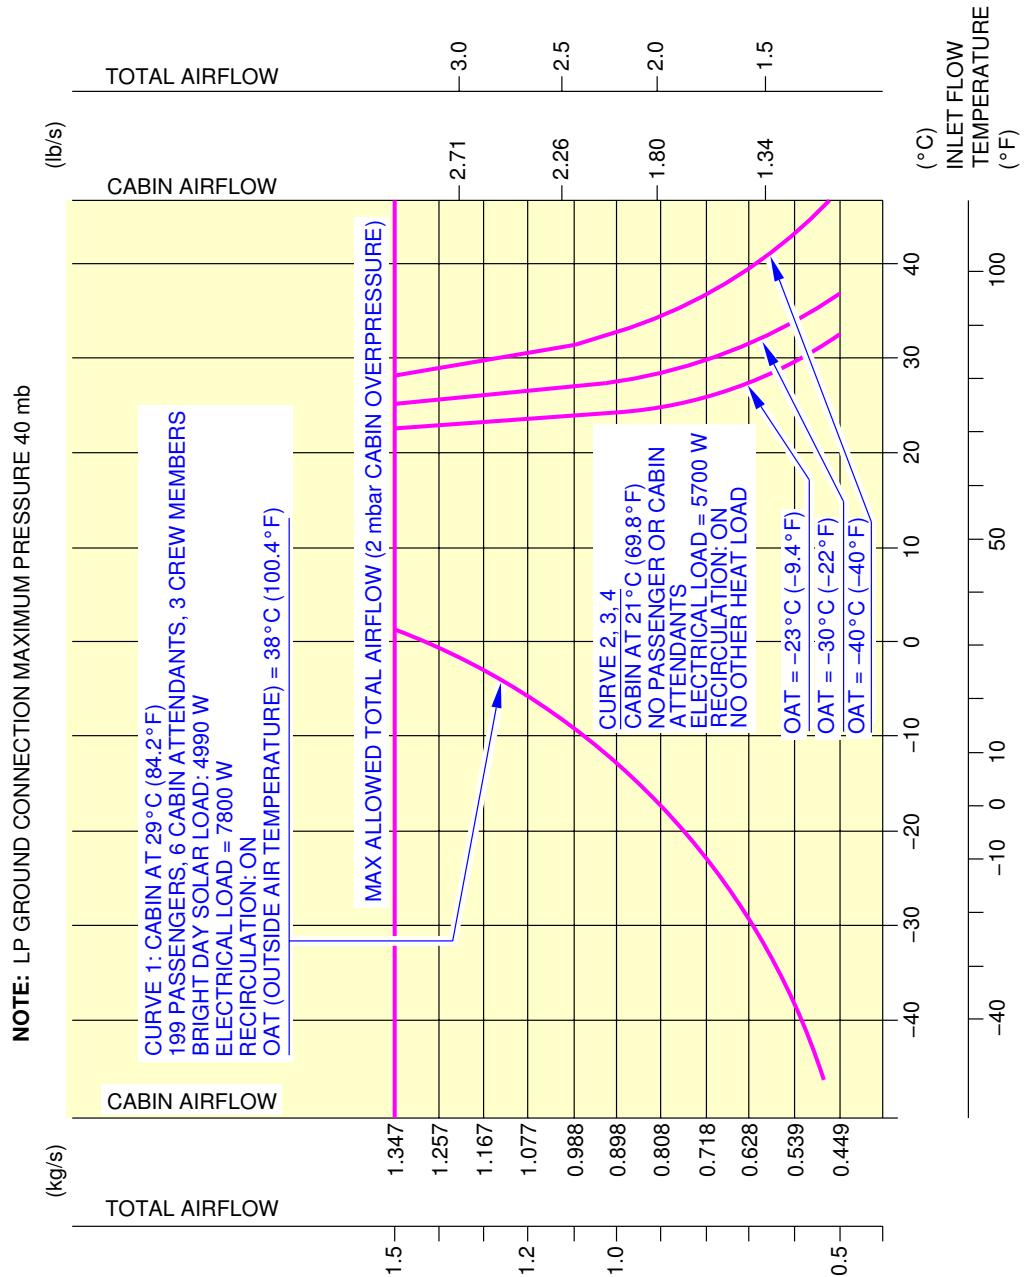

N_AC_050700_1_0040101_01_01

Preconditioned Airflow Requirements
FIGURE 1

5-8-0 Ground Towing Requirements****ON A/C A321-100 A321-200**Ground Towing Requirements**1. General**

This section provides information on aircraft towing.

This aircraft is designed with means for conventional or towbarless towing.

Information/procedures can be found for both in chapter 9 of the Aircraft Maintenance Manual.

Status on towbarless towing equipment qualification can be found in SIL 09-002.

It is possible to tow or push the aircraft, at maximum ramp weight with engines at zero or up to idle thrust, using a tow bar attached to the nose gear leg (refer to AMM chap 9 for conditions and limitations).

One tow bar fitting is installed at the front of the leg.

The main landing gears have attachment points for towing or debogging (for details, refer to chapter 07 of the Aircraft Recovery Manual).

A. The first part of this section shows the chart to determine the draw bar pull and tow tractor mass requirements as function of the following physical characteristics:

- Aircraft weight
- Number of engines at idle
- Slope.

The chart is based on the engine type with the highest idle thrust level.

B. The second part of this section supplies guidelines for the tow bar.

The aircraft tow bar shall respect the following norms:

- SAE AS 1614, "Main Line Aircraft Tow Bar Attach Fitting Interface"
- SAE ARP1915 Revision C, "Aircraft Tow Bar"
- ISO 8267-1, "Aircraft - Tow bar attachment fitting - Interface requirements - Part 1: Main line aircraft"
- ISO 9667, "Aircraft ground support equipment - Tow bars"
- IATA Airport Handling Manual AHM 958, "Functional Specification for an Aircraft Tow bar".


A conventional type tow bar is required which should be equipped with a damping system to protect the nose gear against jerks and with towing shear pins:

- A traction shear pin calibrated at 9425 daN (21188 lbf)
- A torsion pin calibrated at 826 m.daN (7311 lbf.in).

The towing head is designed according to SAE/AS 1614 (issue C) cat. I.

NOTE : Information on aircraft towing procedures and corresponding aircraft limitations are given in chapter 9 on the Aircraft Maintenance Manual.

****ON A/C A321-100 A321-200**

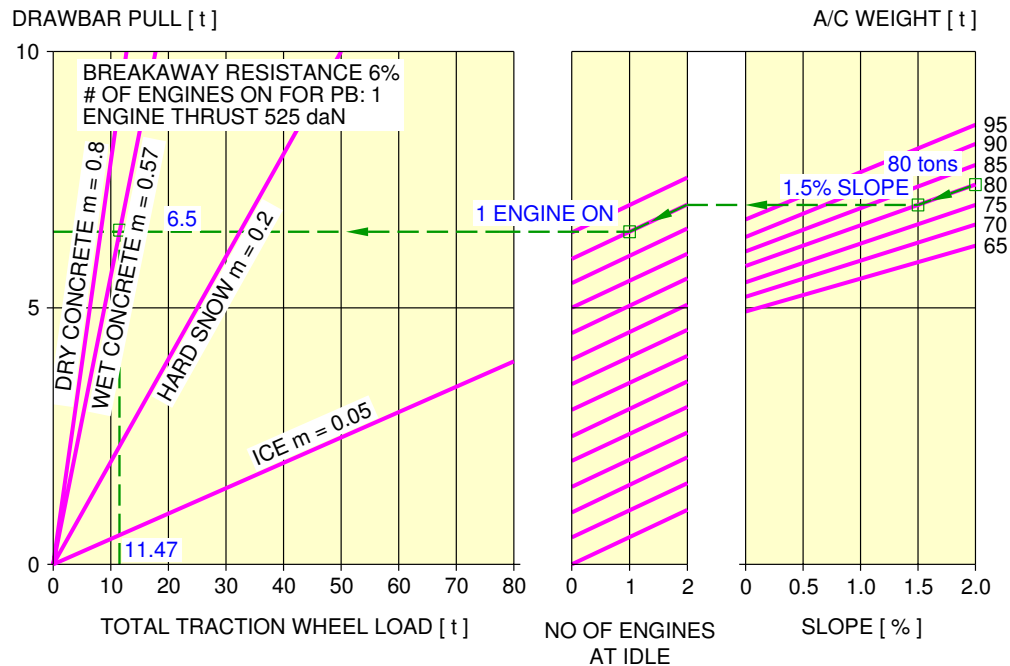


EXAMPLE HOW TO DETERMINE THE MASS REQUIREMENT TO TOW A A321 AT 80 t, AT 1.5% SLOPE, 1 ENGINE AT IDLE AND FOR WET TARMAC CONDITIONS:

- ON THE RIGHT HAND SIDE OF THE GRAPH, CHOOSE THE RELEVANT AIRCRAFT WEIGHT (80 t)
- FROM THIS POINT DRAW A PARALLEL LINE TO THE REQUIRED SLOPE PERCENTAGE (1.5%)
- FROM THE POINT OBTAINED DRAW A STRAIGHT HORIZONTAL LINE UNTIL NO OF ENGINES AT IDLE = 2
- FROM THIS POINT DRAW A PARALLEL LINE TO THE REQUESTED NUMBER OF ENGINES (1)
- FROM THIS POINT DRAW A STRAIGHT HORIZONTAL LINE TO THE DRAWBAR PULL AXIS
- THE Y-COORDINATE OBTAINED IS THE NECESSARY DRAWBAR PULL FOR THE TRACTOR (6.5 t)
- SEARCH THE INTERSECTION WITH THE "WET CONCRETE" LINE. THE OBTAINED X-COORDINATE IS THE RECOMMENDED MINIMUM TRACTOR WEIGHT (11.5 t)

N_AC_050800_1_0010401_01_03

Ground Towing Requirements
FIGURE 1


**ON A/C A321-100 A321-200

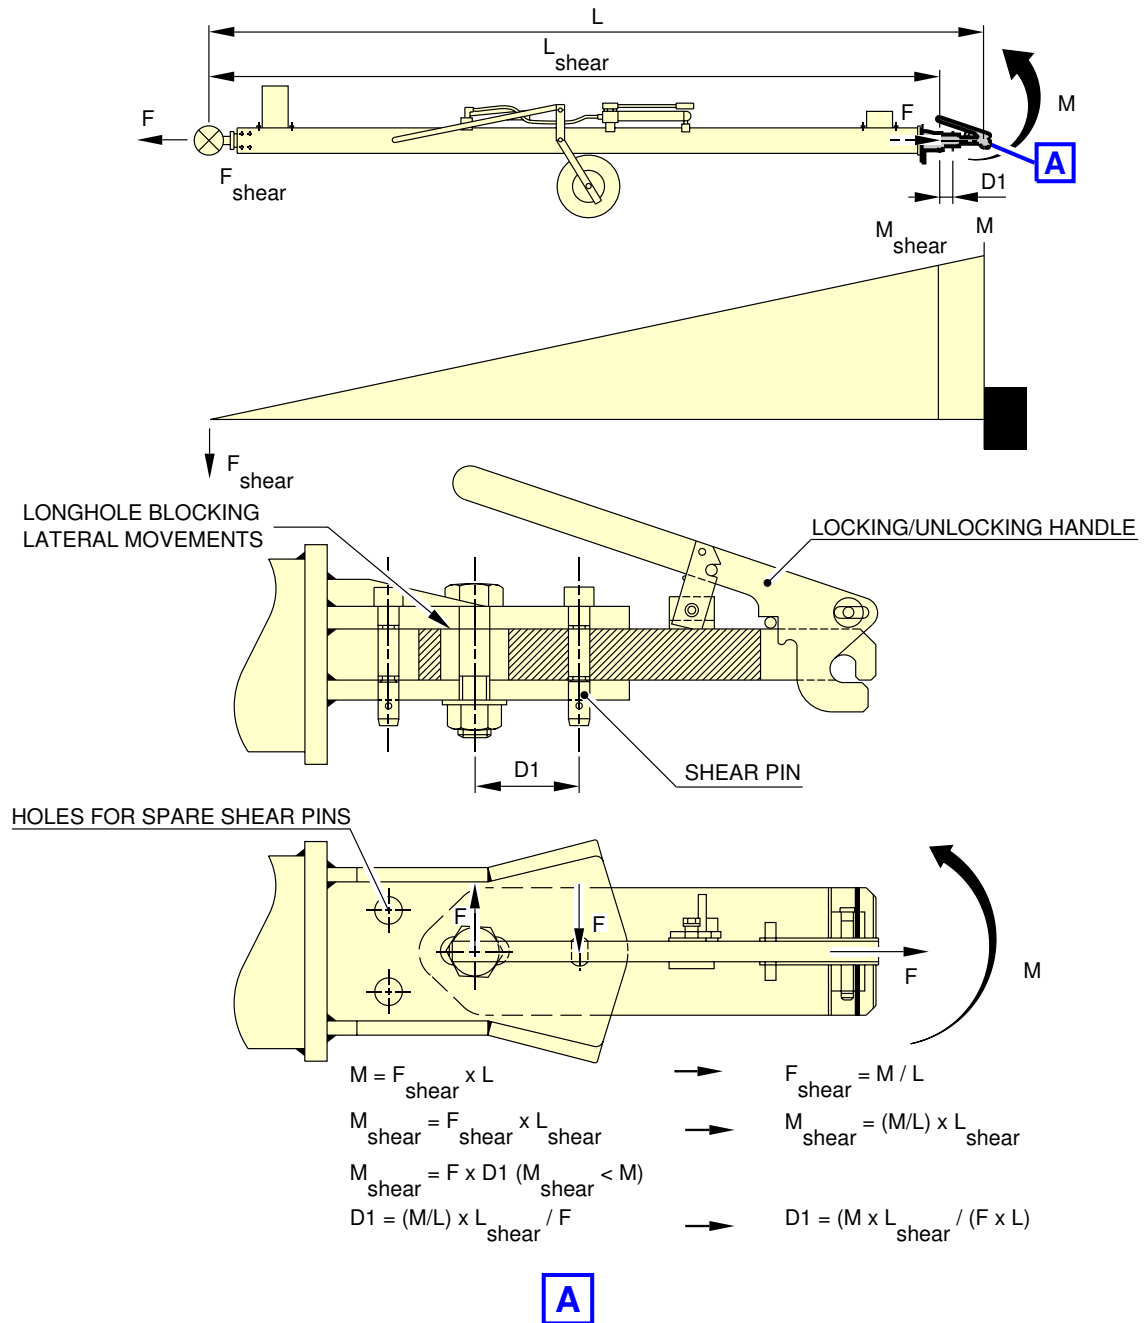

N_AC_050800_1_0020101_01_03

Ground Towing Requirements
Typical Tow Bar Configuration 1
FIGURE 2

**ON A/C A321-100 A321-200

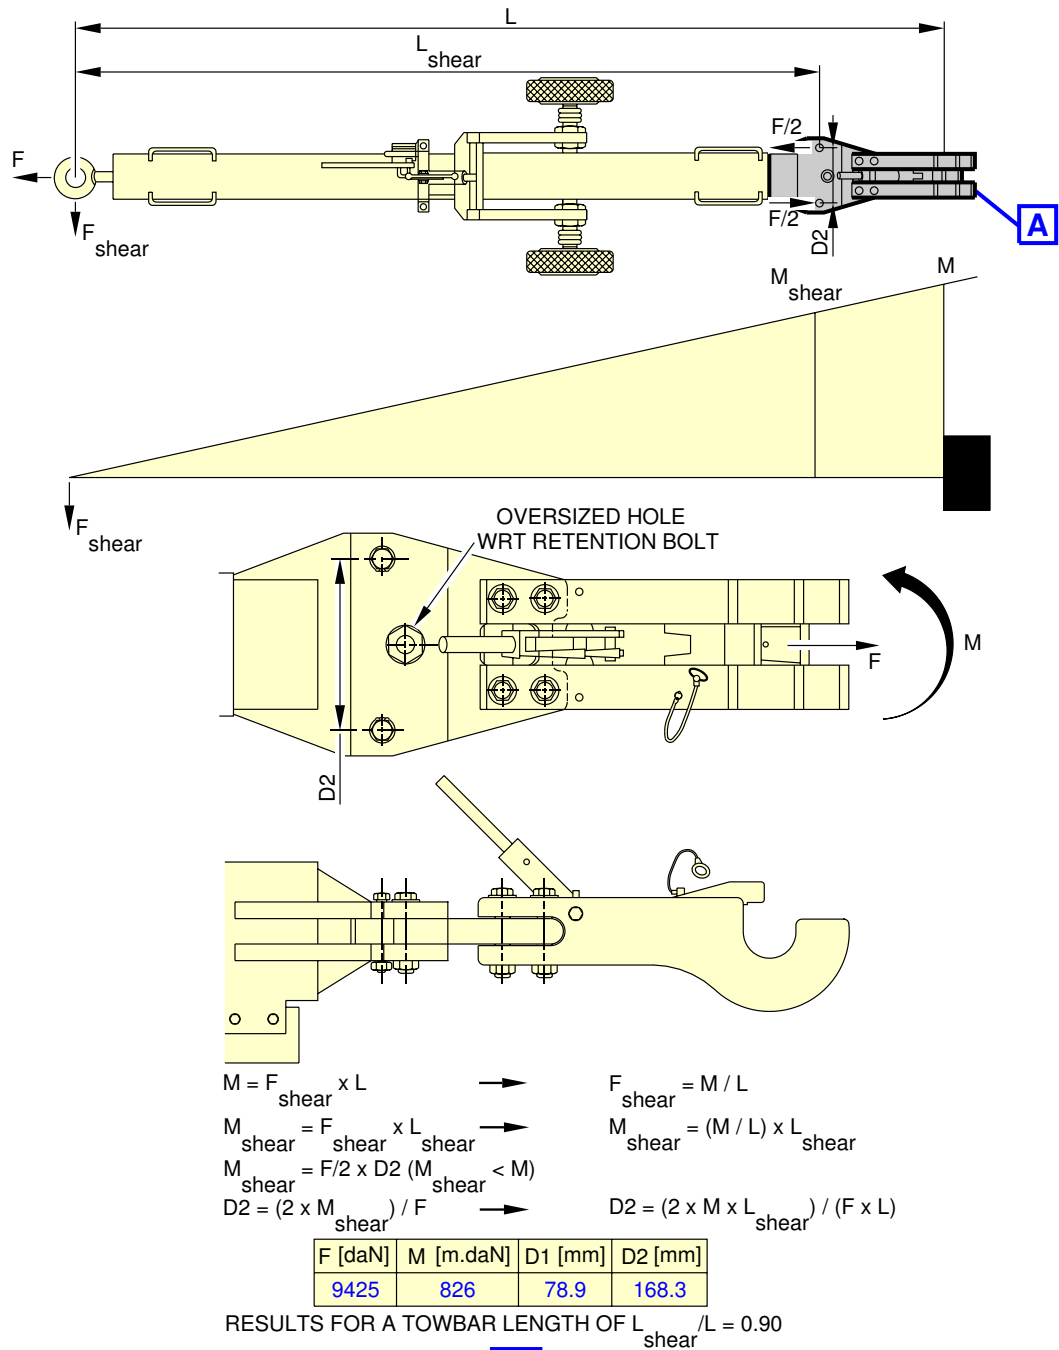

A

N_AC_050800_1_0030101_01_01

Ground Towing Requirements
Typical Tow Bar Configuration 2
FIGURE 3



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

OPERATING CONDITIONS

6-1-0 Engine Exhaust Velocities and Temperatures

****ON A/C A321-100 A321-200**

Engine Exhaust Velocities and Temperatures

1. General

This section shows the estimated engine exhaust efflux velocities and temperatures contours for Ground Idle, Breakaway, Maximum Takeoff conditions.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


6-1-1 Engine Exhaust Velocities Contours - Ground Idle Power

****ON A/C A321-100 A321-200**

Engine Exhaust Velocities Contours - Ground Idle Power

1. This section gives engine exhaust velocities contours at ground idle power.


****ON A/C A321-100 A321-200**

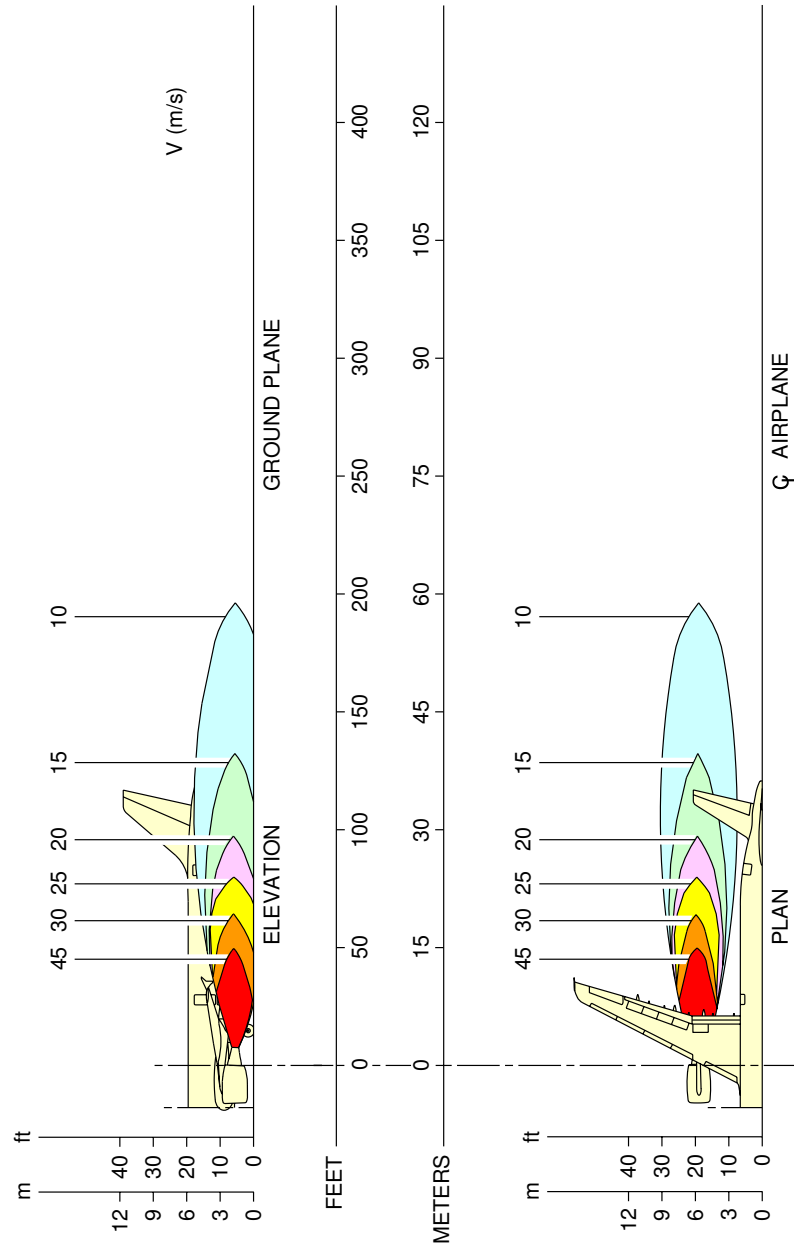

N_AC_060101_1_0070101_01_00

Engine Exhaust Velocities
Ground Idle Power – CFM56-5B series engine
FIGURE 1

****ON A/C A321-100 A321-200**

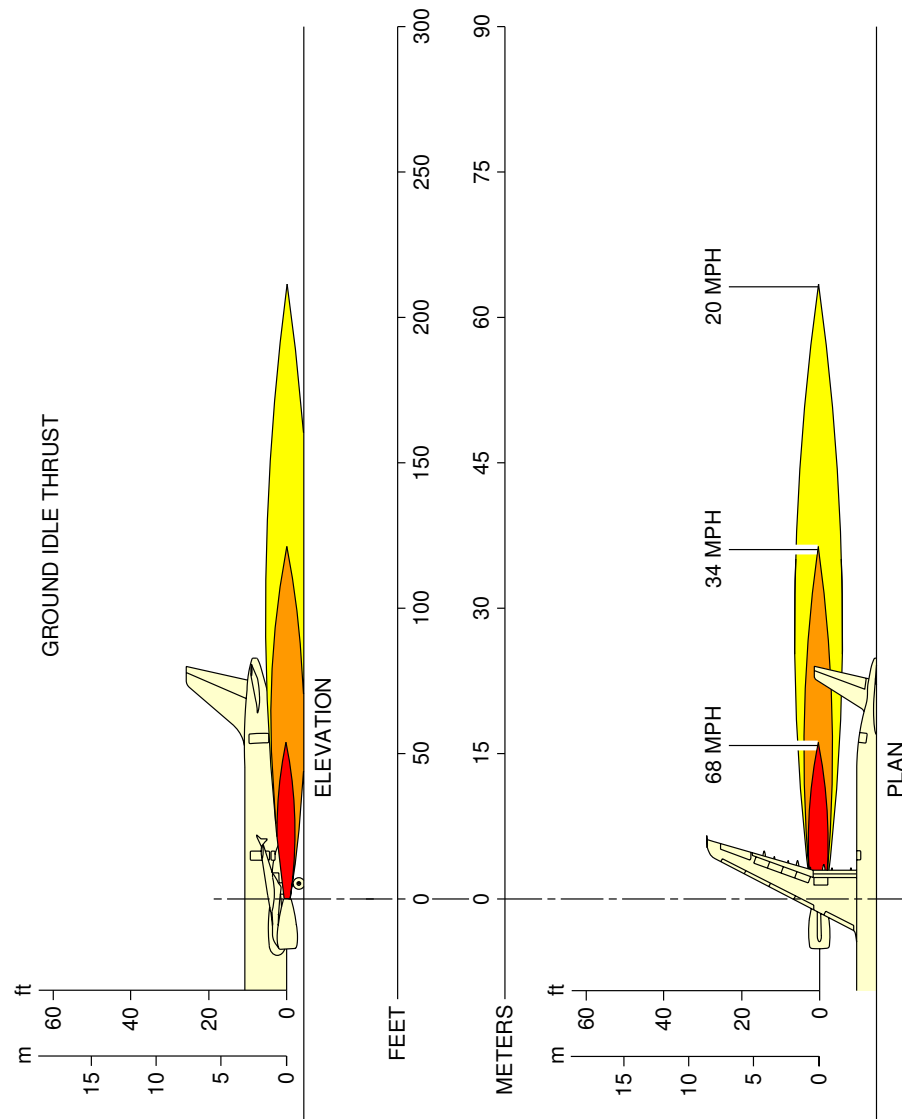

N_AC_060101_1_0080101_01_00

Engine Exhaust Velocities
Ground Idle Power – IAE V2500 series engine
FIGURE 2



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


6-1-2 Engine Exhaust Temperatures Contours - Ground Idle Power

****ON A/C A321-100 A321-200**

Engine Exhaust Temperatures Contours - Ground Idle Power

1. This section gives engine exhaust temperatures contours at ground idle power.


****ON A/C A321-100 A321-200**

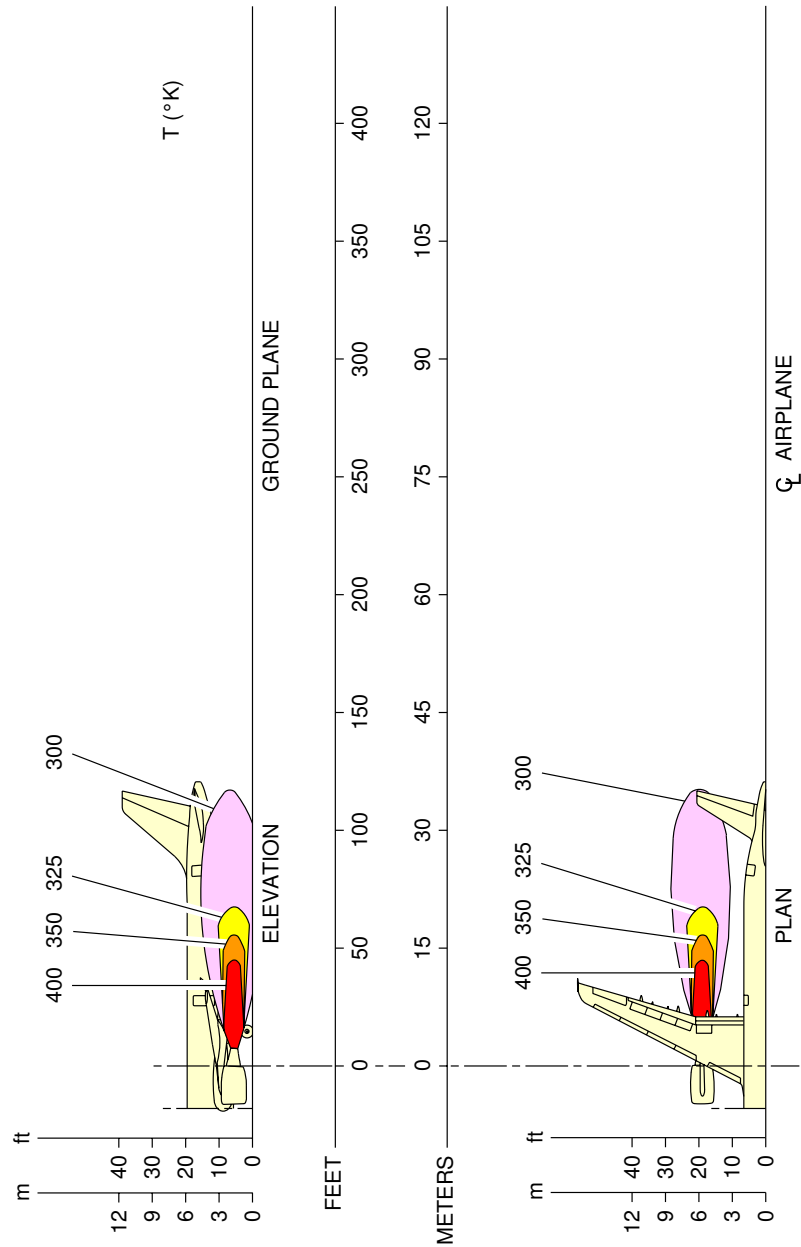

N_AC_060102_1_0070101_01_00

Engine Exhaust Temperatures
Ground Idle Power – CFM56-5B series engine
FIGURE 1

****ON A/C A321-100 A321-200**

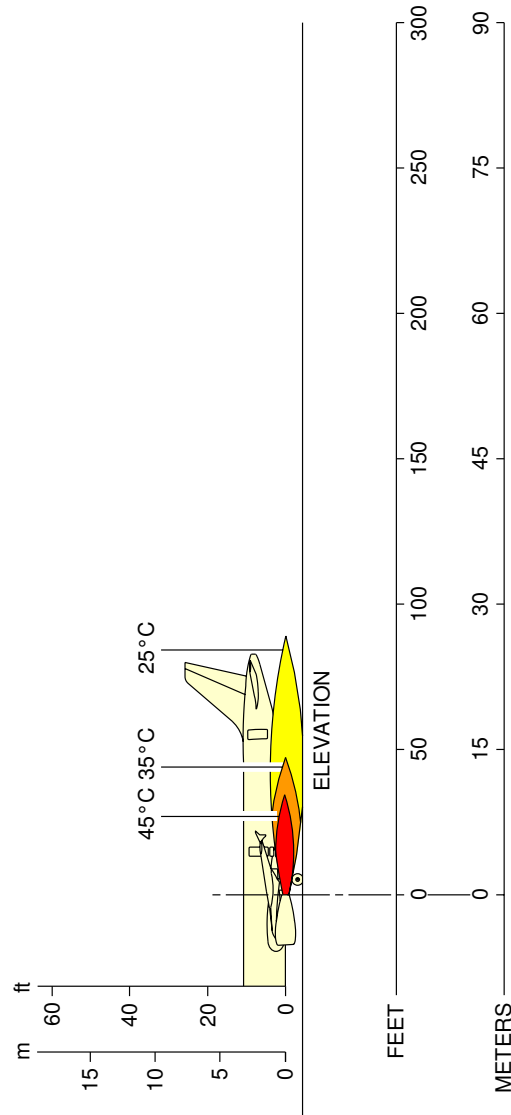


N_AC_060102_1_0080101_01_00

Engine Exhaust Temperatures
Ground Idle Power – IAE V2500 series engine
FIGURE 2

6-1-5 Engine Exhaust Velocities Contours - Takeoff Power****ON A/C A321-100 A321-200**Engine Exhaust Velocities Contours - Takeoff Power

1. This section gives engine exhaust velocities contours at takeoff power.


****ON A/C A321-100 A321-200**

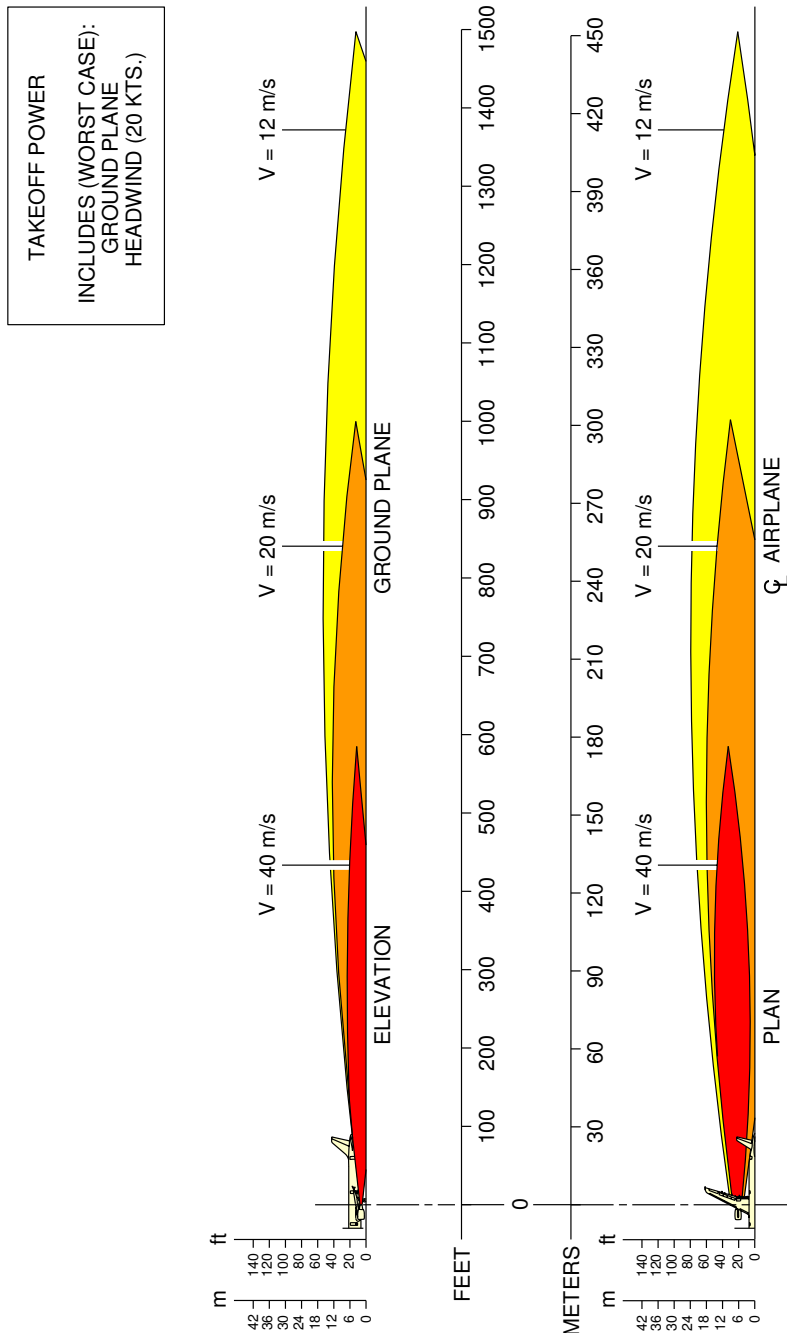

N_AC_060105_1_0070101_01_00

Engine Exhaust Velocities
Takeoff Power – CFM56-5B series engine
FIGURE 1

****ON A/C A321-100 A321-200**

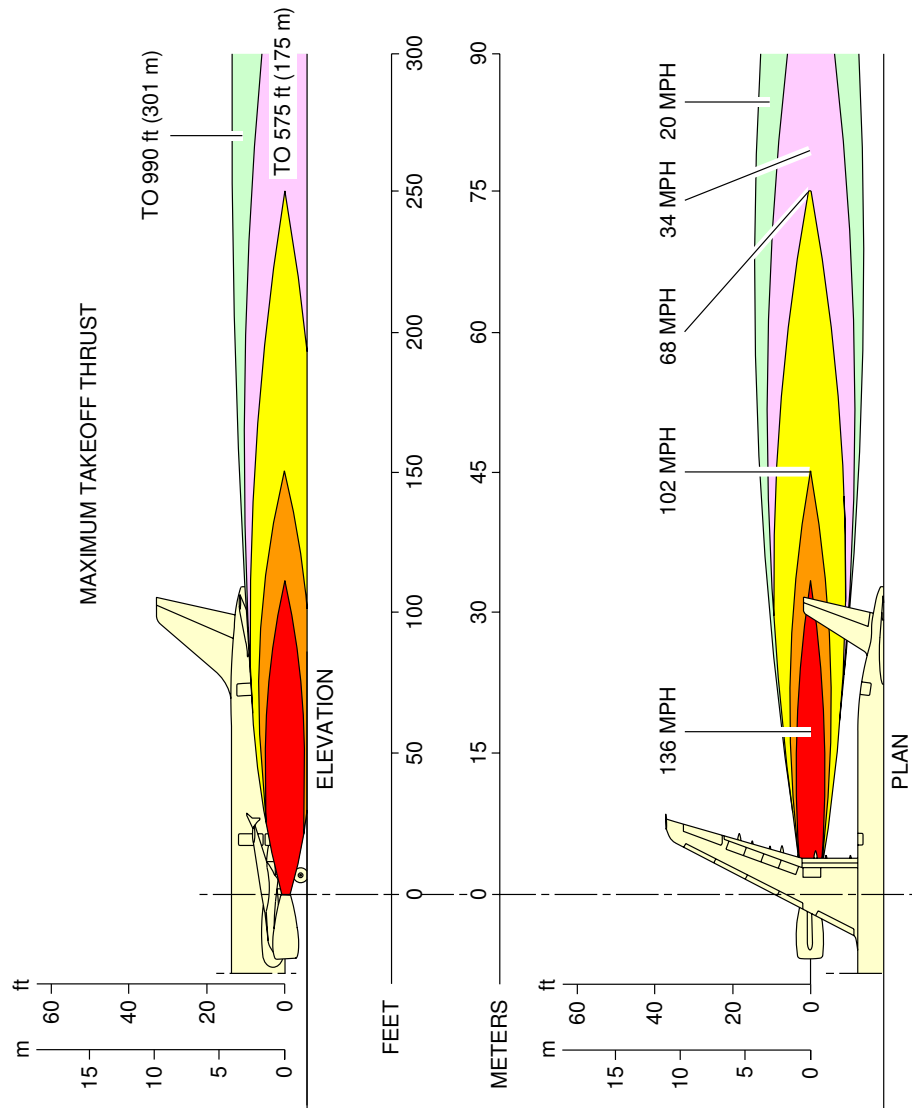

N_AC_060105_1_0080101_01_00

Engine Exhaust Velocities
Takeoff Power – IAE V2500 series engine
FIGURE 2



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


6-1-6 Engine Exhaust Temperatures Contours - Takeoff Power

****ON A/C A321-100 A321-200**

Engine Exhaust Temperatures Contours - Takeoff Power

1. This section gives engine exhaust temperatures contours at takeoff power.


****ON A/C A321-100 A321-200**

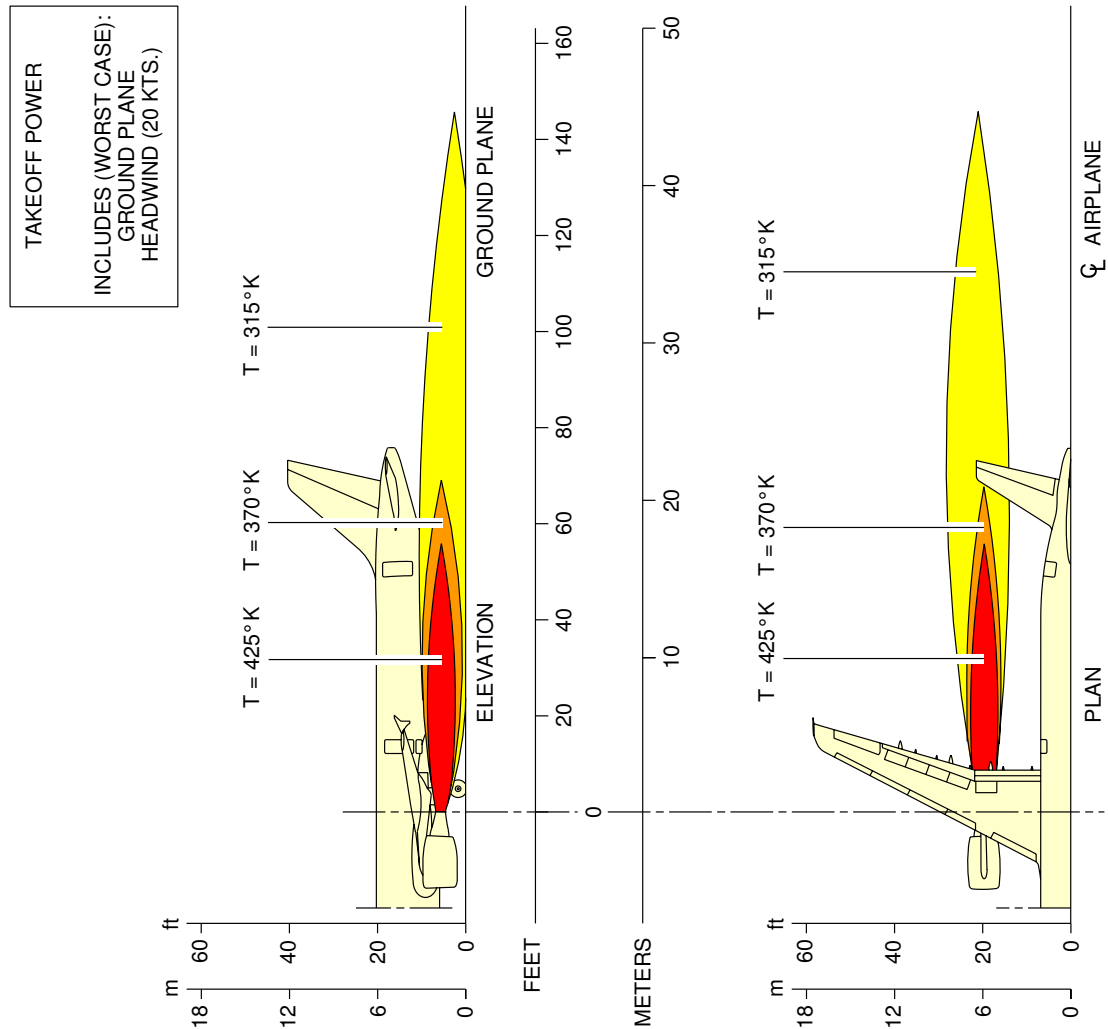

N_AC_060106_1_0070101_01_00

Engine Exhaust Temperatures
Takeoff Power – CFM56-5B series engine
FIGURE 1

****ON A/C A321-100 A321-200**

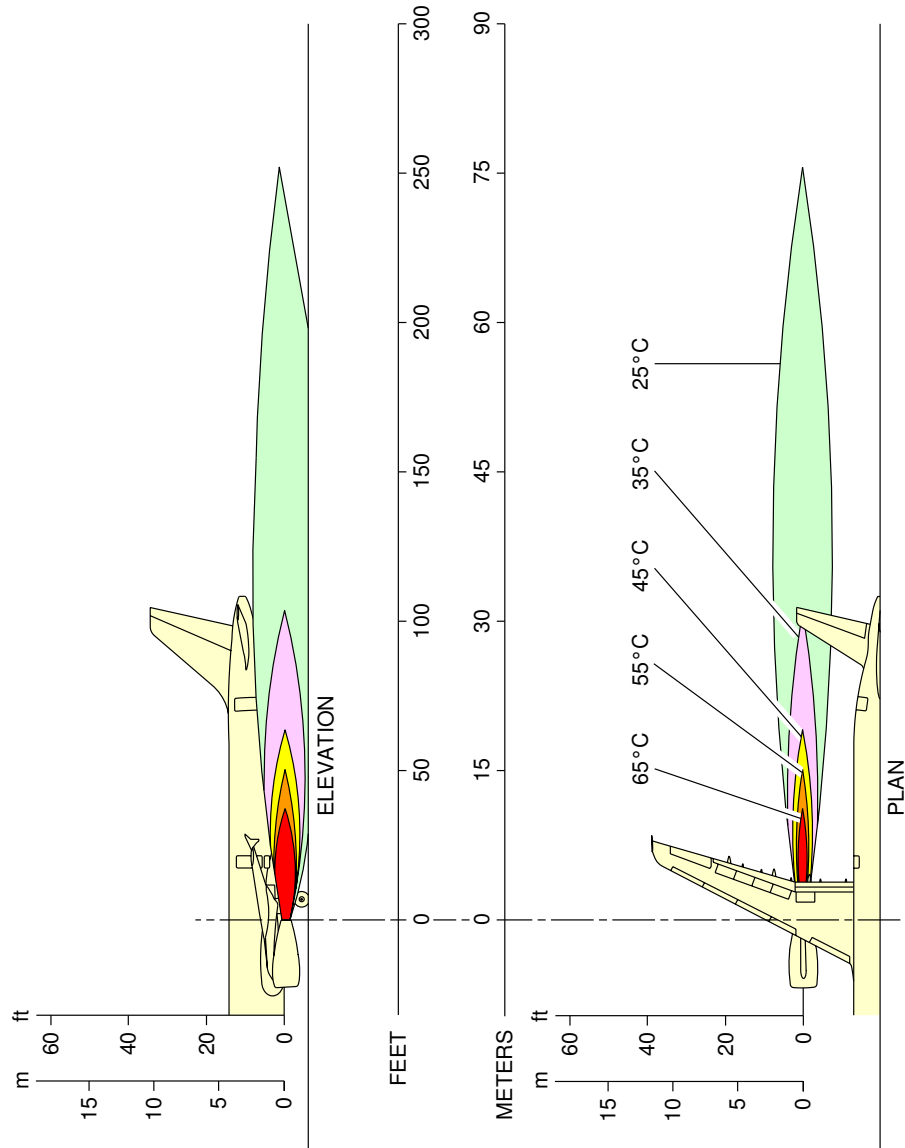

N_AC_060106_1_0080101_01_00

Engine Exhaust Temperatures
Takeoff Power – IAE V2500 series engine
FIGURE 2



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

6-2-0 Airport and Community Noise

****ON A/C A321-100 A321-200**

Airport and Community Noise

1. Airport and Community Noise Data

This section gives data concerning engine maintenance run-up noise to permit evaluation of possible attenuation requirements.

6-2-1 Noise Data****ON A/C A321-100 A321-200**Noise Data

1. Noise Data for CFM56-5B series engine

A. Description of test conditions:

The arc of circle (radius = 60 m (196.85 ft)), with microphones 1.2 m (3.94 ft) high, is centered on the position of the noise reference point.

A.P.U.: off; E.C.S.: Packs off.

B. Engine parameters: 2 engines running

C. Meteorological data:

The meteorological parameters measured 1.6 m (5.25 ft) from the ground on the day of test were as follows:

- Temperature: 20.3 °C (69 °F)
- Relative humidity: 43%
- Atmospheric pressure: 988 hPa
- Wind speed: Negligible
- No rain

2. Noise Data for IAE V2500 series engine

A. Description of test conditions:

The arc of circle (radius = 60 m (196.85 ft)), with microphones 1.2 m (3.94 ft) high, is centered on the position of the noise reference point.

A.P.U.: off; E.C.S.: Packs off.



B. Engine parameters: 2 engines running


C. Meteorological data:

The meteorological parameters measured 1.6 m (5.25 ft) from the ground on the day of test were as follows:

- Temperature: 12 °C (54 °F)
- Relative humidity: 62.5%
- Atmospheric pressure: 1000 hPa
- Wind speed: Negligible
- No rain

****ON A/C A321-100 A321-200**

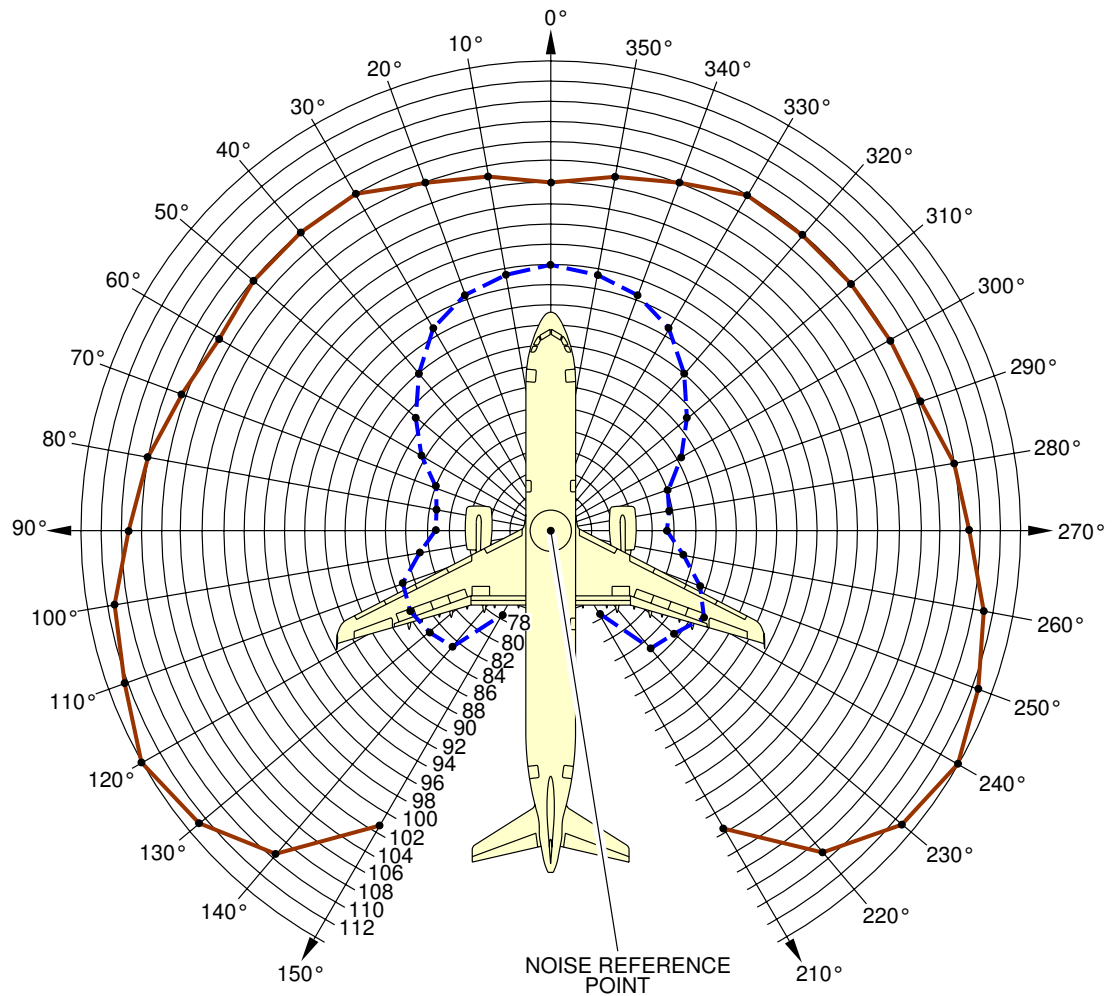

	GROUND IDLE	MAX THRUST POSSIBLE ON BRAKES
N1	21.6%	96%
CURVE		




N_AC_060201_1_0100101_01_00

Airport and Community Noise
CFM56-5B series engine
FIGURE 1

****ON A/C A321-100 A321-200**

	GROUND IDLE	MAX THRUST POSSIBLE ON BRAKES
E.P.R	1.007	1.397
N2	57.7%	92.5%
CURVE		

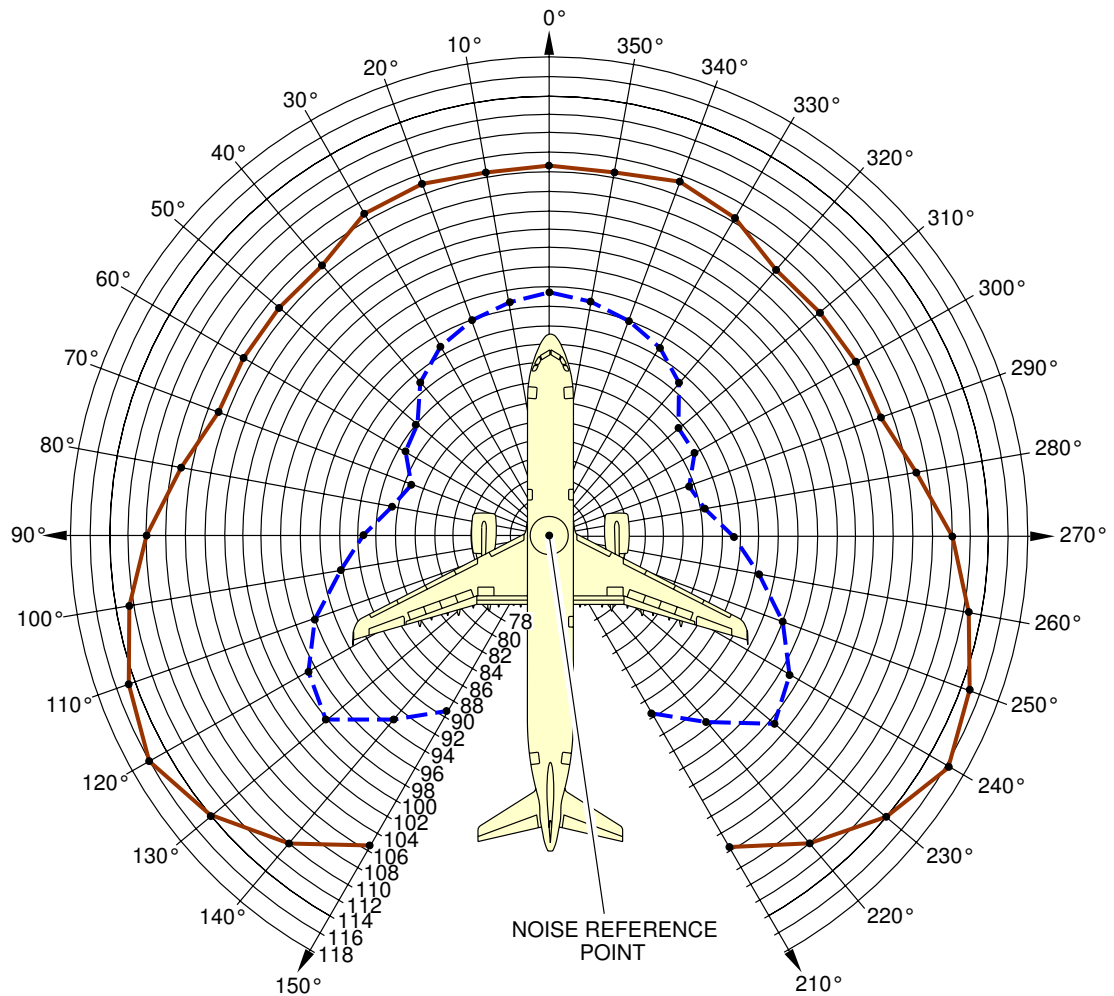

N_AC_060201_1_0110101_01_00

Airport and Community Noise
IAE V2500 series engine
FIGURE 2



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

6-3-0 Danger Areas of Engines

****ON A/C A321-100 A321-200**

Danger Areas of Engines

1. Danger Areas of the Engines.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


6-3-1 Ground Idle Power

****ON A/C A321-100 A321-200**

Ground Idle Power

1. This section gives danger areas of the engines at ground idle power conditions.

****ON A/C A321-100 A321-200**

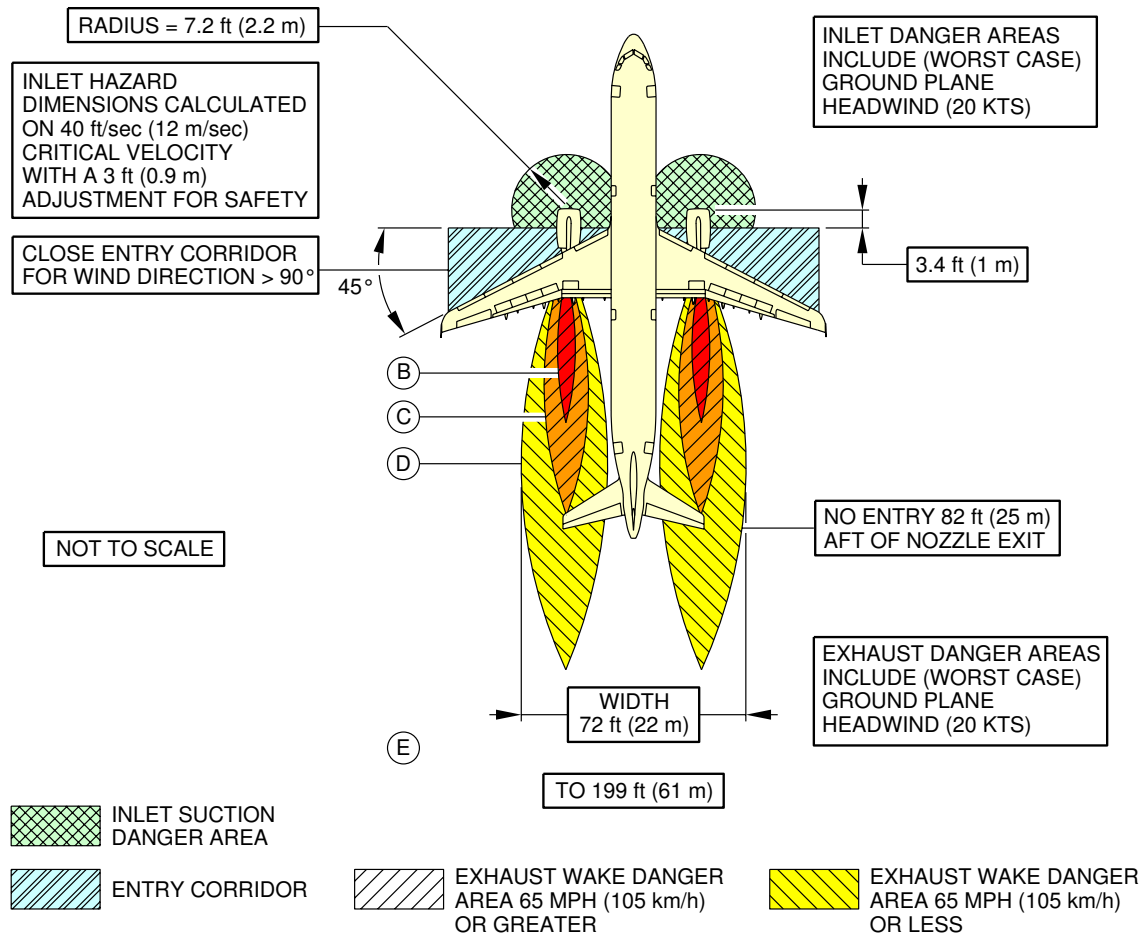


AREA	APPROX. WIND VELOCITY MPH (km/h)	POSSIBLE EFFECTS WITHIN DANGER ZONE BASED ON "RADIOLOGICAL DEFENSE" VOL. II, ARMED FORCES SPECIAL WEAPONS PROJECT, NOV. 1951
A	210-145 (338-233)	A MAN STANDING WILL BE PICKED UP AND THROWN; AIRCRAFT WILL BE COMPLETELY DESTROYED OR DAMAGED BEYOND ECONOMICAL REPAIR; COMPLETE DESTRUCTION OF FRAME OR BRICK HOMES.
B	145-105 (233-169)	A MAN STANDING FACE-ON WILL BE PICKED UP AND THROWN; DAMAGE NEARING TOTAL DESTRUCTION TO LIGHT INDUSTRIAL BUILDINGS OR RIGID STEEL FRAMING; CORRUGATED STEEL STRUCTURES LESS SEVERELY.
C	105-65 (169-105)	MODERATE DAMAGE TO LIGHT INDUSTRIAL BUILDINGS AND TRANSPORT-TYPE AIRCRAFT.
D	65-20 (105-32)	LIGHT TO MODERATE DAMAGE TO TRANSPORT-TYPE AIRCRAFT
E	< 20 (32)	BEYOND DANGER AREA




N_AC_060301_1_0090101_01_01

Danger Areas of Engines
CFM56-5B series engine
FIGURE 1

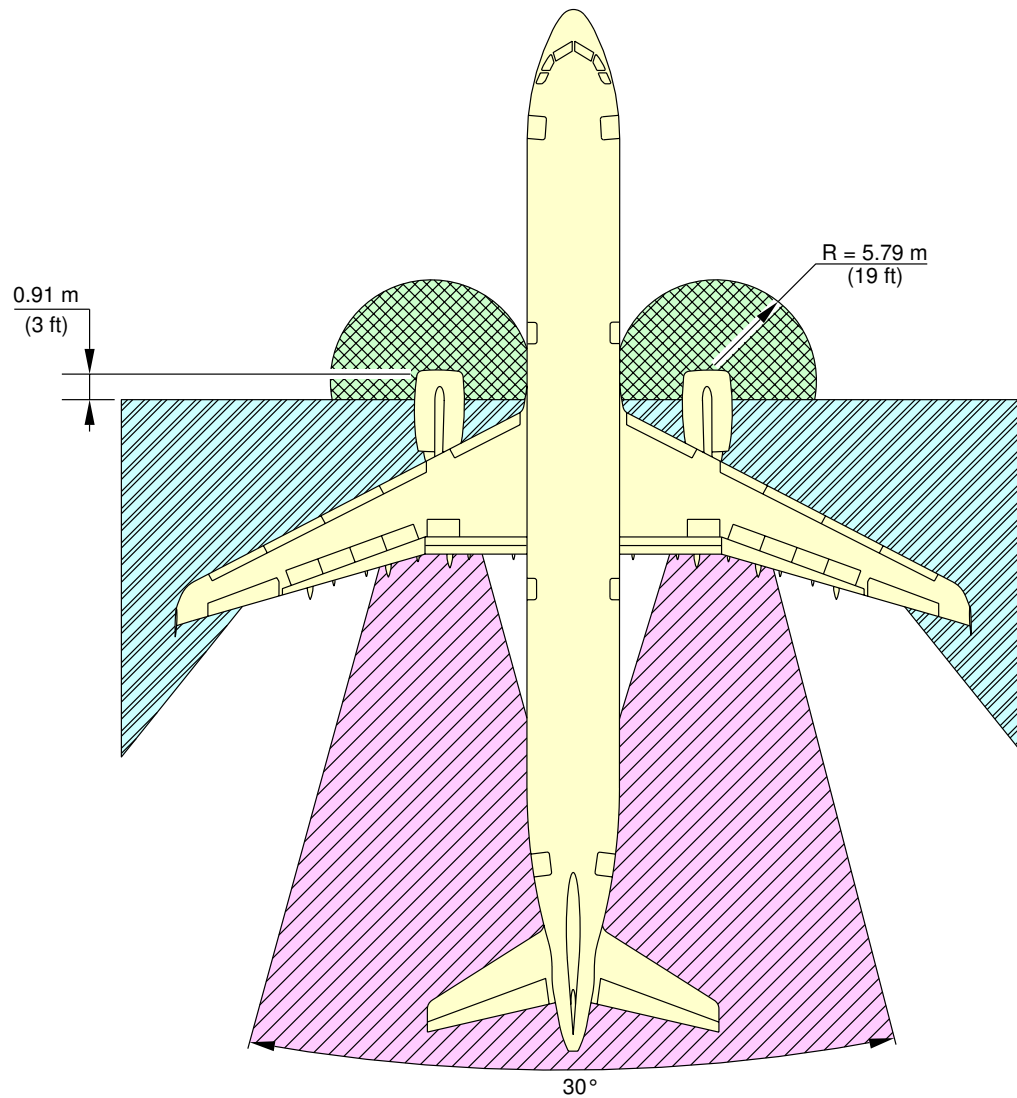****ON A/C A321-100 A321-200**



TO 59 m (195 ft) AFT COMMON NOZZLE ASSEMBLY (CNA)

-  INTAKE SUCTION DANGER AREA
GROUND IDLE
-  ENTRY CORRIDOR
-  EXHAUST DANGER AREA

N_AC_060301_1_0100101_01_00

Danger Areas of Engines
IAE V2500 series engine
FIGURE 2



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


6-3-2 Takeoff Power

****ON A/C A321-100 A321-200**

Takeoff Power

1. This section gives danger areas of the engines at max takeoff conditions.

****ON A/C A321-100 A321-200**

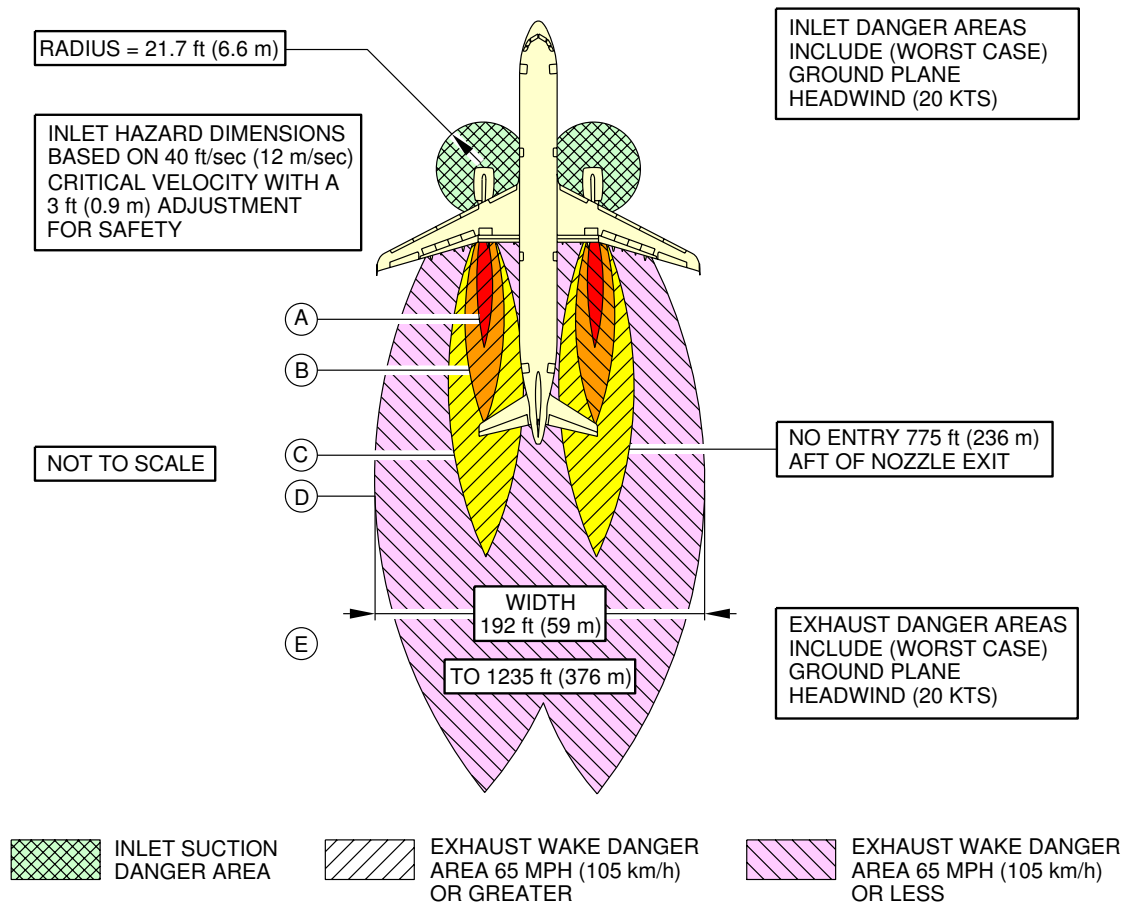





AREA	APPROX. WIND VELOCITY MPH (km/h)	POSSIBLE EFFECTS WITHIN DANGER ZONE BASED ON "RADIOLOGICAL DEFENSE" VOL. II, ARMED FORCES SPECIAL WEAPONS PROJECT, NOV. 1951
A	210-145 (338-233)	A MAN STANDING WILL BE PICKED UP AND THROWN; AIRCRAFT WILL BE COMPLETELY DESTROYED OR DAMAGED BEYOND ECONOMICAL REPAIR; COMPLETE DESTRUCTION OF FRAME OR BRICK HOMES.
B	145-105 (233-169)	A MAN STANDING FACE-ON WILL BE PICKED UP AND THROWN; DAMAGE NEARING TOTAL DESTRUCTION TO LIGHT INDUSTRIAL BUILDINGS OR RIGID STEEL FRAMING; CORRUGATED STEEL STRUCTURES LESS SEVERELY.
C	105-65 (169-105)	MODERATE DAMAGE TO LIGHT INDUSTRIAL BUILDINGS AND TRANSPORT-TYPE AIRCRAFT.
D	65-20 (105-32)	LIGHT TO MODERATE DAMAGE TO TRANSPORT-TYPE AIRCRAFT
E	< 20 (32)	BEYOND DANGER AREA

N_AC_060302_1_0070101_01_01

Danger Areas of Engines
CFM56-5B series engine
FIGURE 1

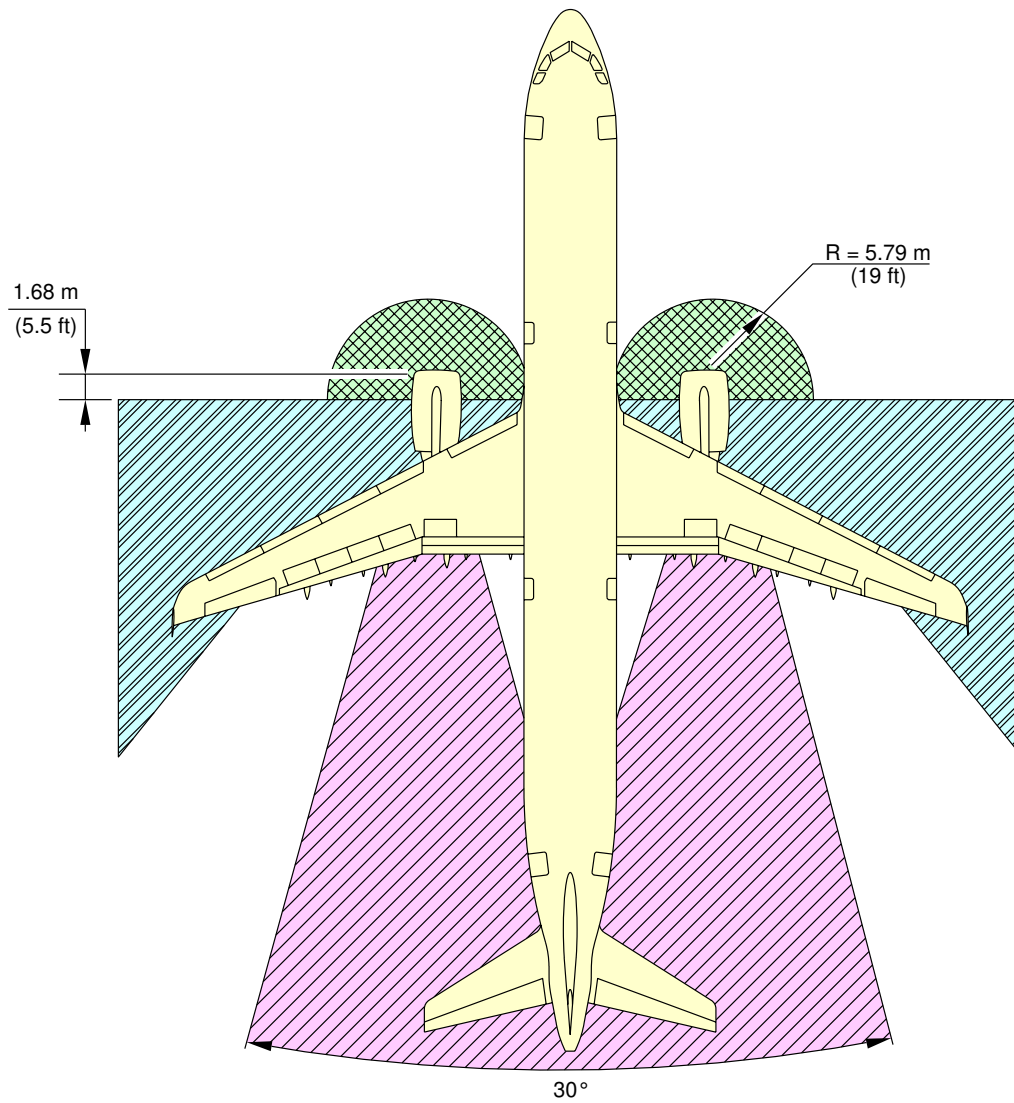****ON A/C A321-100 A321-200**



-  INTAKE SUCTION DANGER AREA
-  ENTRY CORRIDOR
-  EXHAUST DANGER AREA

N_AC_060302_1_0080101_01_00

Danger Areas of Engines
IAE V2500 series engine
FIGURE 2



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

6-4-0 APU Exhaust Velocities and Temperatures

****ON A/C A321-100 A321-200**

APU Exhaust Velocities and Temperatures

1. APU Exhaust Velocities and Temperatures.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


6-4-1 APU

****ON A/C A321-100 A321-200**

APU - APIC & GARRETT

1. This section gives APU exhaust velocities and temperatures.

****ON A/C A321-100 A321-200**

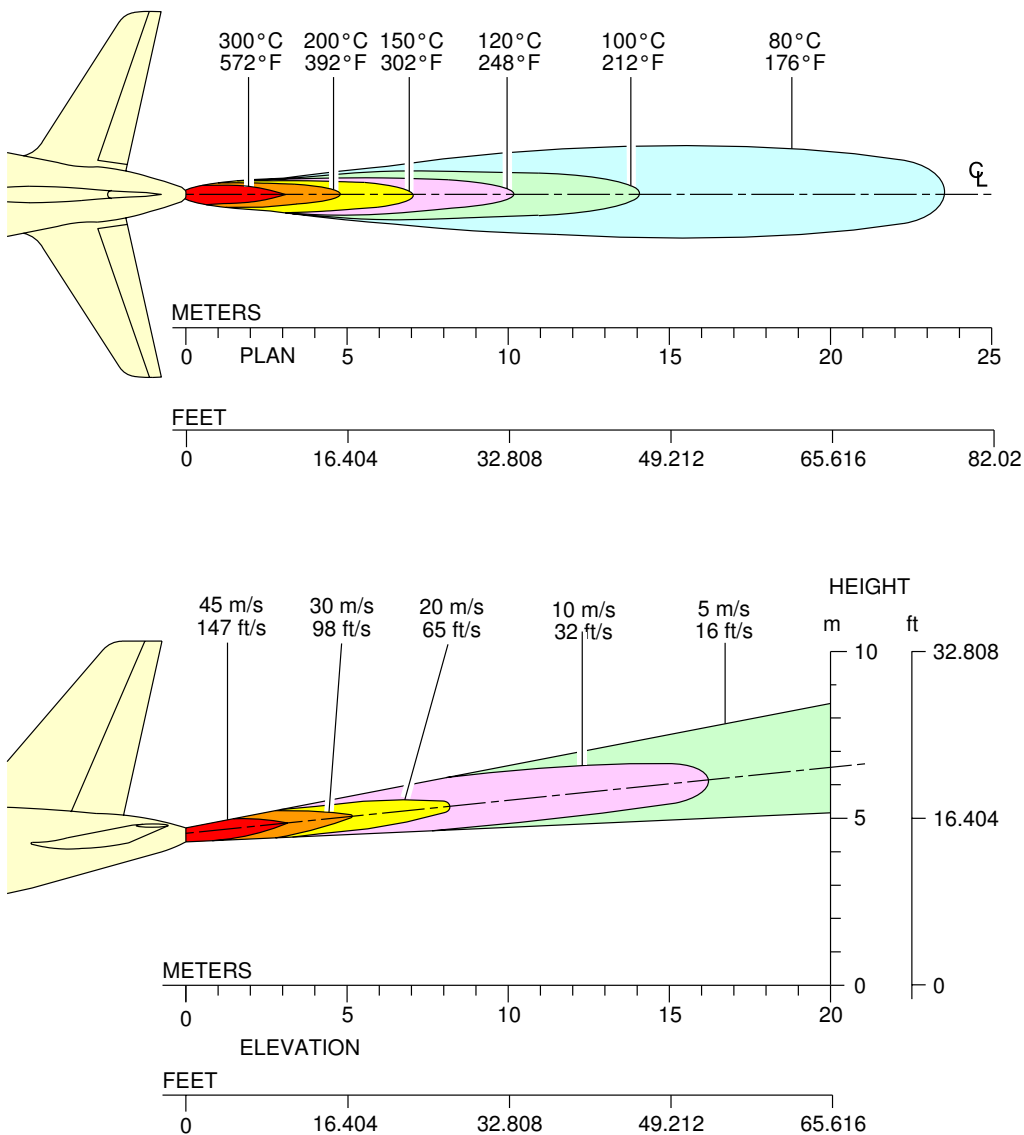

N_AC_060401_1_0040101_01_00

Exhaust Velocities and Temperatures
APU – APIC & GARRETT
FIGURE 1

PAVEMENT DATA**7-1-0 General Information******ON A/C A321-100 A321-200**General Information

1. General Information

This brief description of the pavement charts that follow will help in their use for airport planning.

To aid in the interpolation between the discrete values shown, each airplane configuration is shown with a minimum range of five loads on the main landing gear.

All curves on the charts represent data at a constant specified tire pressure with:

- The airplane loaded to the maximum ramp weight
- The Center of Gravity (CG) at its maximum permissible aft position.

Pavement requirements for commercial airplanes are derived from the static analysis of loads imposed on the main landing gear struts.

The A/C codes are used for configuration management of chapter 07 only. There is no relation between these A/C codes and the ICAO A/C codes used for determining the airplane wing span and outer main gear wheel span as described in ICAO-Annex 14 Volume 1, Aerodrome Design and Operation Chapter 1.4, Table 1-1.

Section 7-2-0 presents basic data on the landing gear footprint configuration, maximum ramp weights and tire sizes and pressures.

Section 7-3-0 shows maximum vertical and horizontal pavement loads for certain critical conditions at the tire-ground interfaces.

Section 7-4-1 contain charts to find these loads throughout the stability limits of the airplane at rest on the pavement.

These main landing gear loads are used as the point of entry to the pavement design charts which follow, interpolating load values where necessary.

Section 7-5-1 use procedures in Instruction Report No S-77-1 "Procedures for Development of CBR Design Curves", dated June 1977 and as modified according to the methods described in ICAO Aerodrome Design Manual, Part 3. Pavements, 2nd Edition, 1983, Section 1.1 (The ACN-PCN Method), and utilizing the alpha factors approved by ICAO in October 2007.

The report was prepared by the U.S. Army Corps Engineers Waterways Experiment Station, Soils and Pavement Laboratory, Vicksburg, Mississippi.

The line showing 10 000 coverages is used to calculate Aircraft Classification Number (ACN).

The procedure that follows is used to develop flexible pavement design curves such as shown in Section 7-5-1.

- With the scale for pavement thickness at the bottom and the scale for CBR at the top, an arbitrary line is drawn representing 10 000 coverages.
- Incremental values of the weight on the main landing gear are then plotted.
- Annual departure lines are drawn based on the load lines of the weight on the main landing gear that is shown on the graph.

Section 7-7-1 gives the rigid pavement design curves that have been prepared with the use of the Westergaard Equation. This is in general accordance with the procedures outlined in the Portland Cement Association publications, "Design of Concrete Airport Pavement", 1973 and "Computer Program for Airport Pavement Design", (Program PDILB), 1967 both by Robert G. Packard.

The procedure that follows is used to develop rigid pavement design curves such as shown in Section 7-7-1.

- With the scale for pavement thickness on the left and the scale for allowable working stress on the right, an arbitrary load line is drawn. This represents the maximum weight to be shown for the main landing gear.
- All values of the subgrade modulus (k values) are then plotted.
- Additional load lines for the incremental values of weight on the main landing gear are drawn on the basis of the curve for $k = 300$ already shown on the graph.

All Load Classification Number (LCN) curves shown in Section 7-6-1 and Section 7-8-2 have been developed from a computer program based on data provided in International Civil Aviation Organisation (ICAO) document 7920-AN/865/2, Aerodrome Manual, Part 2, "Aerodrome Physical Characteristics", Second Edition, 1965.

The flexible pavement charts in Section 7-6-1 show LCN against equivalent single wheel load, and equivalent single wheel load against pavement thickness.

The rigid pavement charts in Section 7-8-2 show LCN against equivalent single wheel load and equivalent single wheel load against radius of relative stiffness.

Section 7-9-0 gives ACN data prepared in accordance with the ACN/PCN system as referenced in ICAO Annex 14, "Aerodromes", Volume 1 Fourth Edition July 2004, incorporating Amendments 1 to 6.

The ACN/PCN system gives a standardized international airplane/pavement rating system replacing the various S, T, TT, LCN, AUW, ISWL, etc., rating systems used throughout the world.

The ACN is the Aircraft Classification Number and PCN is the corresponding Pavement Classification Number.

An aircraft having an ACN equal to or less than the PCN can operate without restriction on the pavement.

Numerically the ACN is two times the derived single wheel load expressed in thousands of kilograms. The derived single wheel is defined as the load on a single tire inflated to 1.25 Mpa (181 psi) that would have the same pavement requirements as the aircraft.

Computationally the ACN/PCN system uses PCA program PDILB for rigid pavements, and S-77-1 for flexible pavements to calculate ACN values.

The Airport Authority must decide on the method of pavement analysis and the results of their evaluation shown as follows:

PAVEMENT TYPE	SUBGRADE CATEGORY	PCN	
		TIRE PRESSURE CATEGORY	EVALUATION METHOD
R – Rigid	A – High	W – No Limit	T – Technical
F – Flexible	B – Medium	X – To 1.5 Mpa (217 psi)	U – Using Aircraft
	C – Low	Y – To 1.0 Mpa (145 psi)	
	D – Ultra Low	Z – To 0.5 Mpa (73 psi)	

Section 7-9-1 shows the aircraft ACN values for flexible pavements.

The four subgrade categories are:

- A. High Strength CBR 15
- B. Medium Strength CBR 10
- C. Low Strength CBR 6
- D. Ultra Low Strength CBR 3

Section 7-9-2 shows the aircraft ACN for rigid pavements.

The four subgrade categories are:

- A. High Strength Subgrade $k = 150 \text{ MN/m}^3$ (550 pci)
- B. Medium Strength Subgrade $k = 80 \text{ MN/m}^3$ (300 pci)
- C. Low Strength Subgrade $k = 40 \text{ MN/m}^3$ (150 pci)
- D. Ultra Low Strength Subgrade $k = 20 \text{ MN/m}^3$ (75 pci)

****ON A/C A321-100 A321-200**

MODEL	WV	AIRCRAFT CODE
A321-111	04	C
A321-112	04	C
A321-131	04	C
A321-214	09	D
A321-111	06	E
A321-112	06	E
A321-131	06	E
A321-111	07	G
A321-112	07	G
A321-131	07	G
A321-214	08	H
A321-111	00	I
A321-112	00	I
A321-131	00	I
A321-214	07	J
A321-111	02	L
A321-112	02	L
A321-131	02	L
A321-111	05	M
A321-112	05	M
A321-131	05	M
A321-211	06	O
A321-231	06	O

MODEL	WV	AIRCRAFT CODE
A321-111	03	P
A321-112	03	P
A321-131	03	P
A321-211	05	Q
A321-231	05	Q
A321-211	10	R
A321-231	10	R
A321-211	04	S
A321-231	04	S
A321-111	08	U
A321-112	08	U
A321-131	08	U
A321-211	00	V
A321-231	00	V
A321-211	02	X
A321-231	02	X
A321-213	02	X
A321-232	02	X
A321-211	03	Z
A321-231	03	Z
A321-211	01	AA
A321-231	01	AA
A321-211	11	AB
A321-231	11	AB

NOTE: FOR WEIGHT VARIANT DEFINITION, REFER TO CHAPTER 02-01-01.

NOTE: THE A/C CODES ARE USED FOR CONFIGURATION MANAGEMENT OF CHAPTER 07 ONLY. THERE IS NO RELATION BETWEEN THESE A/C CODES AND THE ICAO A/C CODES USED FOR DETERMINING THE AIRPLANE WING SPAN AND OUTER MAIN GEAR WHEEL SPAN AS DESCRIBED IN ICAO-ANNEX 14 VOLUME 1, AERODROME DESIGN AND OPERATION CHAPTER 1.4, TABLE 1-1.

N_AC_070100_1_0040101_01_00

Aircraft Codes
Aircraft Codes
FIGURE 1

7-2-0 Landing Gear Footprint

****ON A/C A321-100 A321-200**


Landing Gear Footprint

1. This section gives Landing Gear Footprint.

I NOTE : For A/C Code definition, refer to chapter 7-1-0.

****ON A/C A321-100 A321-200**

A/C CODE	C – D – E
PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP	SEE SECTION 7-4-1
NOSE GEAR TIRE SIZE	30 x 8.8 R15 (30 x 8.8 – 15)
NOSE GEAR TIRE PRESSURE	10.1 bar (146 psi)
MAIN GEAR TIRE SIZE	1 270 x 455 R22 (49 x 18 – 22)
MAIN GEAR TIRE PRESSURE	12.8 bar (186 psi)

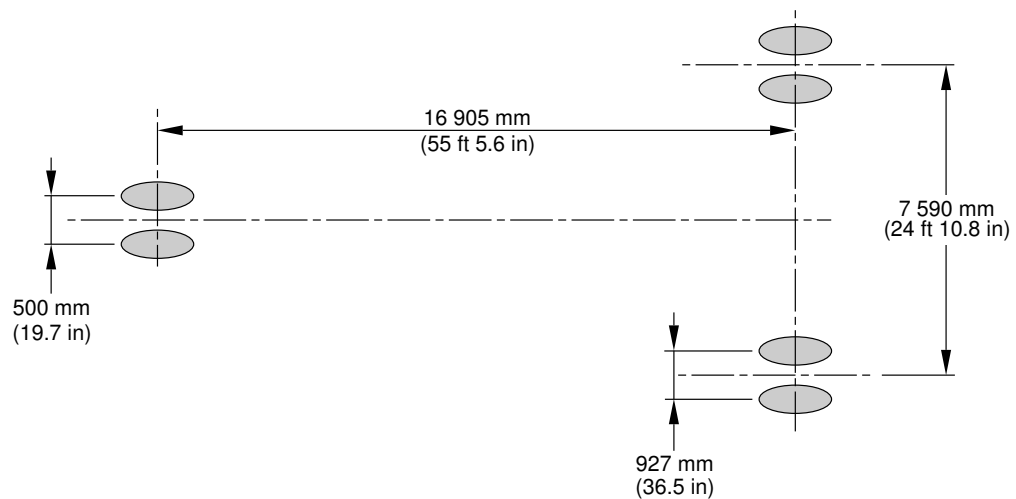


N_AC_070200_1_0280101_01_00

Landing Gear Footprint
Landing Gear Footprint
FIGURE 1

****ON A/C A321-100 A321-200**

A/C CODE	G – H – I – J – L – M – O
PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP	SEE SECTION 7-4-1
NOSE GEAR TIRE SIZE	30 x 8.8 R15 (30 x 8.8 – 15)
NOSE GEAR TIRE PRESSURE	10.8 bar (157 psi)
MAIN GEAR TIRE SIZE	1 270 x 455 R22 (49 x 18 – 22)
MAIN GEAR TIRE PRESSURE	13.6 bar (197 psi)

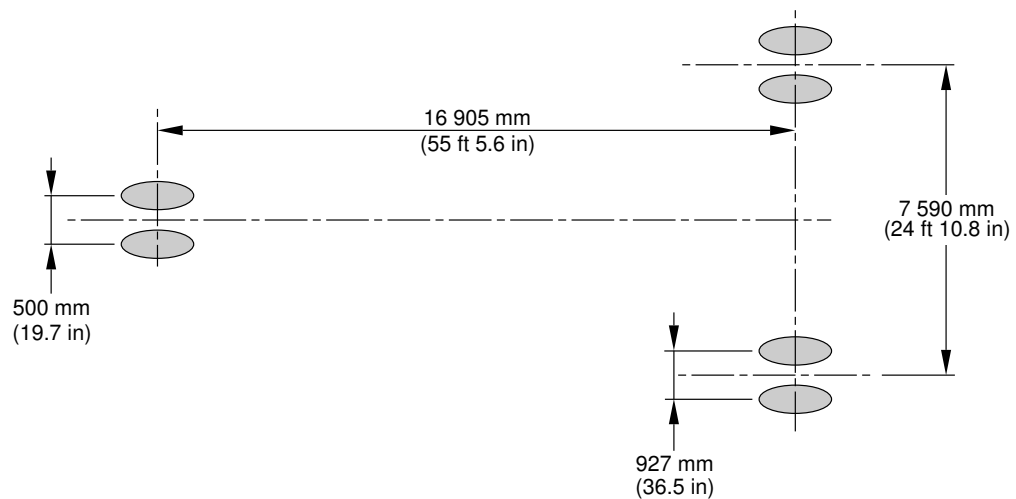


N_AC_070200_1_0290101_01_00

Landing Gear Footprint
Landing Gear Footprint
FIGURE 2

****ON A/C A321-100 A321-200**

A/C CODE	P – Q – R
PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP	SEE SECTION 7-4-1
NOSE GEAR TIRE SIZE	30 x 8.8 R15 (30 x 8.8 – 15)
NOSE GEAR TIRE PRESSURE	11 bar (160 psi)
MAIN GEAR TIRE SIZE	1 270 x 455 R22 (49 x 18 – 22)
MAIN GEAR TIRE PRESSURE	13.9 bar (202 psi)

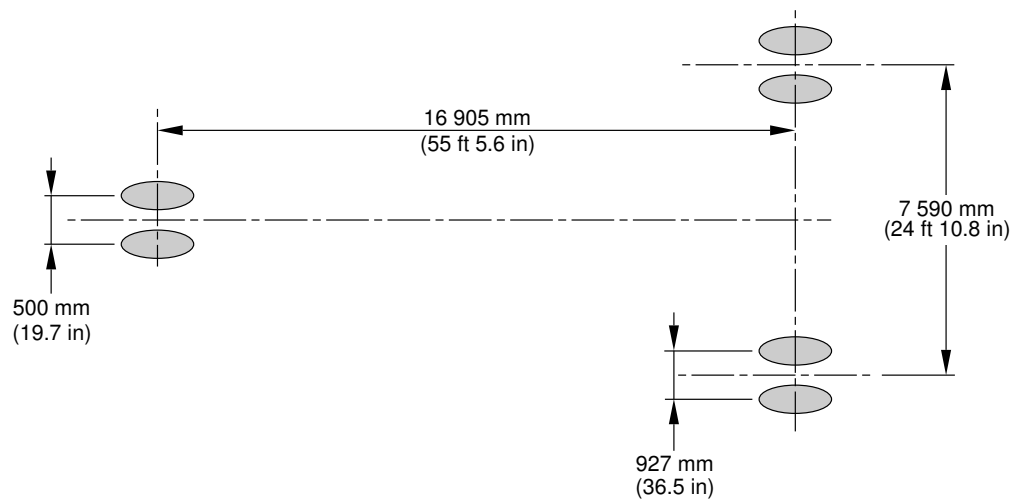


N_AC_070200_1_0300101_01_00

Landing Gear Footprint
Landing Gear Footprint
FIGURE 3

****ON A/C A321-100 A321-200**

A/C CODE	S – U – V – X
PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP	SEE SECTION 7-4-1
NOSE GEAR TIRE SIZE	30 x 8.8 R15 (30 x 8.8 – 15)
NOSE GEAR TIRE PRESSURE	11.6 bar (168 psi)
MAIN GEAR TIRE SIZE	1 270 x 455 R22 (49 x 18 – 22)
MAIN GEAR TIRE PRESSURE	14.6 bar (212 psi)

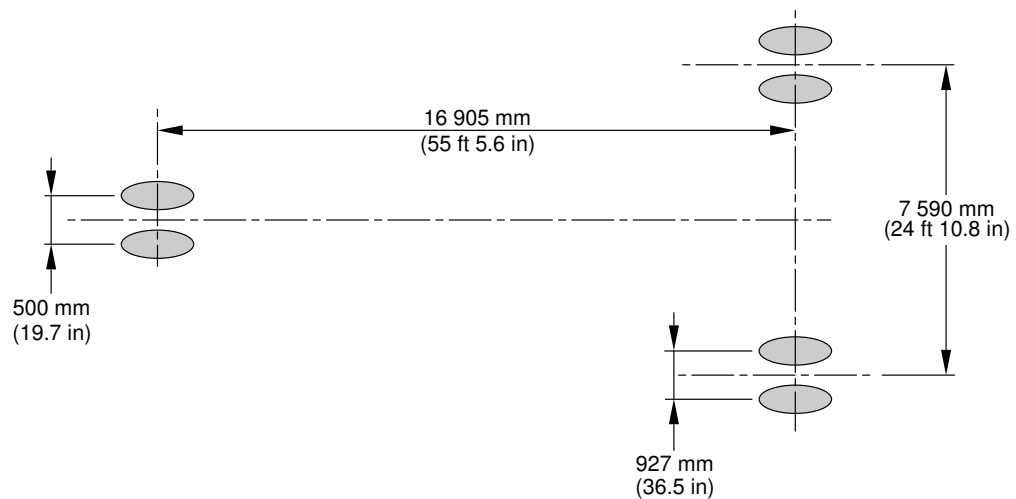


N_AC_070200_1_0310101_01_00

Landing Gear Footprint
Landing Gear Footprint
FIGURE 4

****ON A/C A321-200**

A/C CODE	Z – AA – AB
PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP	SEE SECTION 7-4-1
NOSE GEAR TIRE SIZE	30 x 8.8 R15 (30 x 8.8 – 15)
NOSE GEAR TIRE PRESSURE	11.6 bar (168 psi)
MAIN GEAR TIRE SIZE	1 270 x 455 R22 (49 x 18 – 22)
MAIN GEAR TIRE PRESSURE	15 bar (218 psi)

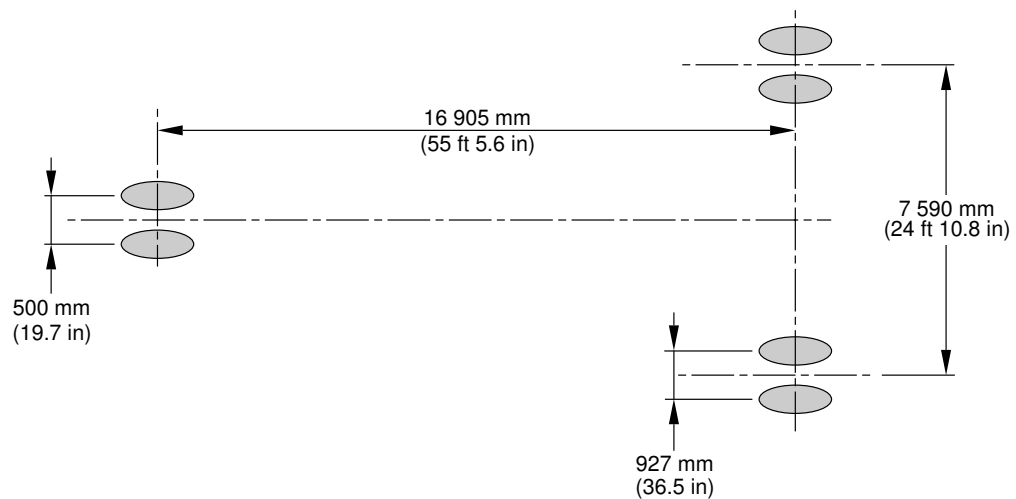

N_AC_070200_1_0320101_01_00

Landing Gear Footprint
Landing Gear Footprint
FIGURE 5

7-3-0 Maximum Pavement Loads


****ON A/C A321-100 A321-200**

Maximum Pavement Loads

1. This section gives Maximum Pavement Loads.

I NOTE : For A/C code definition, refer to chapter 7-1-0.

****ON A/C A321-100 A321-200**

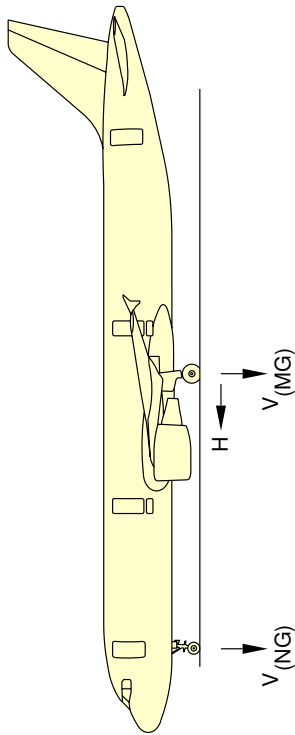

1 A/C CODE	2 MAXIMUM RAMP WEIGHT		3 STATIC LOAD AT MOST FWD CG (1)		4 STATIC BRAKING @ 10 ft/s ² DECELERATION		5 STATIC LOAD AT MAX AFT CG (2)		6 STEADY BRAKING @ 10 ft/s ² DECELERATION		7 AT INSTANTANEOUS BRAKING COEFFICIENT = 0.8	
	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg
C	172 850	78 400	18 675	8 480	35 125	15 930	82 700	37 510	26 850	12 180	66 150	30 010
D	172 850	78 400	18 675	8 470	35 075	15 910	82 700	37 510	26 850	12 180	66 150	30 010
E	172 850	78 400	18 675	8 480	35 125	15 930	82 700	37 510	26 850	12 180	66 150	30 010


V (NG) MAXIMUM VERTICAL NOSE GEAR GROUND LOAD AT MOST FORWARD CG
V (MG) MAXIMUM VERTICAL MAIN GEAR GROUND LOAD AT MOST AFT CG
H MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING
A/C CODE
 (1) C MRW = 78 400 kg FWD CG = 15.4 % MAC AT A/C WEIGHT = 78 400 kg
 D MRW = 78 400 kg FWD CG = 15.4 % MAC AT A/C WEIGHT = 78 400 kg
 E MRW = 78 400 kg FWD CG = 15.4 % MAC AT A/C WEIGHT = 78 400 kg
 (2) C MRW = 78 400 kg AFT CG = 41 % MAC AT A/C WEIGHT = 78 400 kg
 D MRW = 78 400 kg AFT CG = 41 % MAC AT A/C WEIGHT = 78 400 kg
 E MRW = 78 400 kg AFT CG = 41 % MAC AT A/C WEIGHT = 78 400 kg

NOTE: ALL LOADS CALCULATED USING AIRPLANE MAXIMUM RAMP WEIGHT

N_AC_070300_1_0330101_01_00

Maximum Pavement Loads
Maximum Pavement Loads
FIGURE 1

****ON A/C A321-100 A321-200**

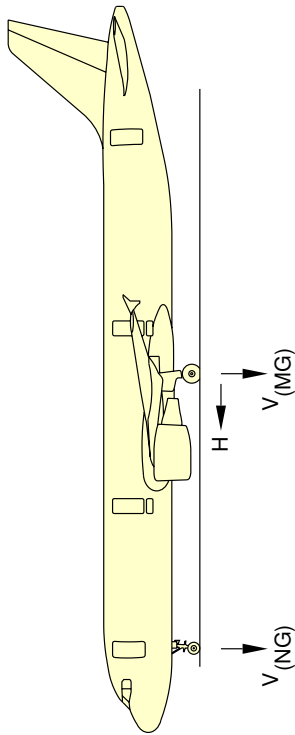

1	2		3		4		5		6			
A/C CODE	MAXIMUM RAMP WEIGHT		STATIC LOAD AT MOST FWD CG (1)		STATIC BRAKING @ 10 ft/s ² DECELERATION		STATIC LOAD AT MAX AFT CG (2)		STEADY BRAKING @ 10 ft/s ² DECELERATION		AT INSTANTANEOUS BRAKING COEFFICIENT = 0.8	
	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg
G	177 250	80 400	18 750	8 510	35 600	16 140	84 800	38 470	27 550	12 490	67 850	30 780
H	177 250	80 400	18 750	8 510	35 550	16 120	84 750	38 440	27 550	12 490	67 800	30 750
I	183 875	83 400	18 900	8 570	36 300	16 470	87 975	39 910	28 575	12 960	70 375	31 920

$V(NG)$ MAXIMUM VERTICAL NOSE GEAR GROUND LOAD AT MOST FORWARD CG
 $V(MG)$ MAXIMUM VERTICAL MAIN GEAR GROUND LOAD AT MOST AFT CG
 H MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING

A/C CODE


- | | | | |
|-----|---|-----------------|---|
| (1) | G | MRW = 80 400 kg | FWD CG = 16.3 % MAC AT A/C WEIGHT = 80 400 kg |
| | H | MRW = 80 400 kg | FWD CG = 16.3 % MAC AT A/C WEIGHT = 80 400 kg |
| | I | MRW = 83 400 kg | FWD CG = 17.5 % MAC AT A/C WEIGHT = 83 400 kg |
| (2) | G | MRW = 80 400 kg | AFT CG = 41 % MAC AT A/C WEIGHT = 80 400 kg |
| | H | MRW = 80 400 kg | AFT CG = 40.7 % MAC AT A/C WEIGHT = 80 400 kg |
| | I | MRW = 83 400 kg | AFT CG = 41 % MAC AT A/C WEIGHT = 83 400 kg |

NOTE: ALL LOADS CALCULATED USING AIRPLANE MAXIMUM RAMP WEIGHT

N_AC_070300_1_0340101_01_00

Maximum Pavement Loads
FIGURE 2

****ON A/C A321-100 A321-200**

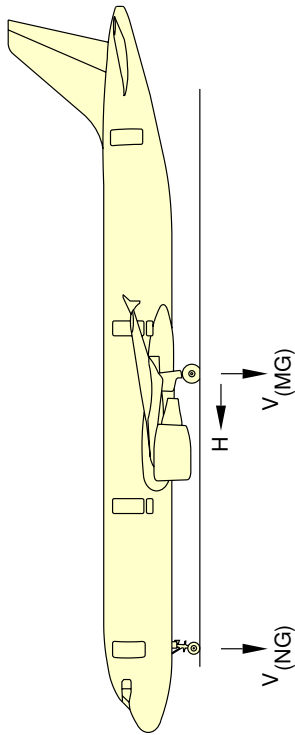

1	2		3		4		5		6		
			VNG				VMG (PER STRUT)		H (PER STRUT)		
A/C CODE	MAXIMUM RAMP WEIGHT		STATIC LOAD AT MOST FWD CG		STATIC BRAKING @ 10 ft/s ² DECELERATION		STATIC LOAD AT MAX AFT CG (2)		STEADY BRAKING @ 10 ft/s ² DECELERATION		AT INSTANTANEOUS BRAKING COEFFICIENT = 0.8
	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	
J	183 875	83 400	18 875	8 560	36 250	16 440	87 675	39 770	28 575	12 960	31 820
L	183 875	83 400	18 900	8 570	36 300	16 470	87 975	39 910	28 575	12 960	31 920
M	183 875	83 400	18 900	8 570	36 300	16 470	87 975	39 910	28 575	12 960	31 920

	MAXIMUM VERTICAL NOSE GEAR GROUND LOAD AT MOST FORWARD CG	MAXIMUM VERTICAL MAIN GEAR GROUND LOAD AT MOST AFT CG	MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING
$V_{(NG)}$			
$V_{(MG)}$			
H			

A/C CODE

(1) 2

└

M

1

0 1

 Σ

...

A

$$\text{FWD CG} = 17.5\% \text{ MAC AT A/C WEIGHT} = 83\,400 \text{ kg}$$
$$\text{FWD CG} = 17.5 \% \text{ MAC AT A/C WEIGHT} = 83\,400 \text{ kg}$$

FWD CG = 17.5 % MAC AT A/C WEIGHT = 83 400 kg

AFT CG = 39.7 % MAC AT A/C WEIGHT = 79 538 kg

AFT CG = 41 % MAC AT A/C WEIGHT = 83 400 kg

AFT CG = 41 % MAC AT A/C WEIGHT = 83 400 kg

H
C
L
S
D
A
D
E
S
L
D
C


ING AIRPLANE MAXIMUM RAMP WEIGHT

NOTE: ALL LOADS CALCULATED USING AIRPLANE MAXIMUM RAMP WEIGHT

N_AC_070300_1_0350101_01_00

Maximum Pavement Loads
FIGURE 3

****ON A/C A321-100 A321-200**

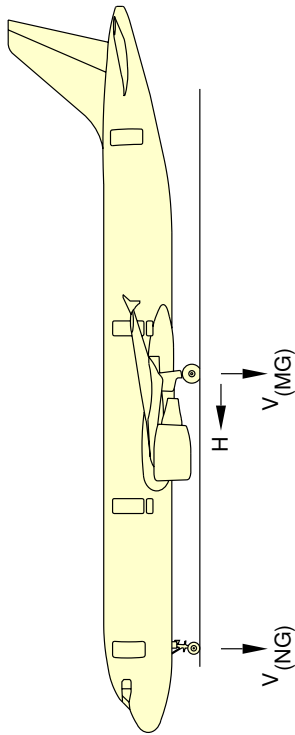

1 A/C CODE	2 MAXIMUM RAMP WEIGHT		3 STATIC LOAD AT MOST FWD CG		4 STATIC BRAKING @ 10 ft/s ² DECELERATION		5 VMG (PER STRUT) STATIC LOAD AT MAX AFT CG (2)		6 H (PER STRUT) STEADY BRAKING @ 10 ft/s ² DECELERATION		7 AT INSTANTANEOUS BRAKING COEFFICIENT = 0.8	
	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg
O	183 875	83 400	18 875	8 560	36 250	16 440	87 675	39 770	28 575	12 960	70 150	31 820
P	188 275	85 400	18 950	8 600	36 775	16 680	90 100	40 860	29 250	13 270	72 075	32 690
Q	188 275	85 400	19 325	8 760	37 075	16 820	89 650	40 660	29 250	13 270	71 700	32 530

$V(NG)$ MAXIMUM VERTICAL NOSE GEAR GROUND LOAD AT MOST FORWARD CG
 $V(MG)$ MAXIMUM VERTICAL MAIN GEAR GROUND LOAD AT MOST AFT CG
 H MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING

A/C CODE


- | | | | |
|-----|---|-----------------|---|
| (1) | O | MRW = 83 400 kg | FWD CG = 17.5 % MAC AT A/C WEIGHT = 83 400 kg |
| | P | MRW = 85 400 kg | FWD CG = 18.3 % MAC AT A/C WEIGHT = 85 400 kg |
| | Q | MRW = 85 400 kg | FWD CG = 17.5 % MAC AT A/C WEIGHT = 85 400 kg |
| (2) | O | MRW = 83 400 kg | AFT CG = 39.7 % MAC AT A/C WEIGHT = 83 400 kg |
| | P | MRW = 85 400 kg | AFT CG = 41 % MAC AT A/C WEIGHT = 85 400 kg |
| | Q | MRW = 85 400 kg | AFT CG = 39.1 % MAC AT A/C WEIGHT = 85 400 kg |

NOTE: ALL LOADS CALCULATED USING AIRPLANE MAXIMUM RAMP WEIGHT

N_AC_070300_1_0360101_01_00

Maximum Pavement Loads
FIGURE 4

****ON A/C A321-100 A321-200**

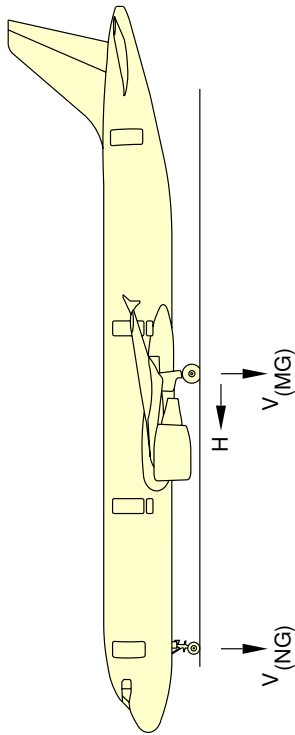

1 A/C CODE	2 MAXIMUM RAMP WEIGHT		3 STATIC LOAD AT MOST FWD CG (1)		4 STATIC BRAKING @ 10 ft/s ² DECELERATION		5 VMG (PER STRUT) STATIC LOAD AT MAX AFT CG (2)		6 H (PER STRUT) STEADY BRAKING @ 10 ft/s ² DECELERATION		AT INSTANTANEOUS BRAKING COEFFICIENT = 0.8	
	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg
R	188 275	85 400	19 325	8 760	37 075	16 820	89 650	40 660	29 250	13 270	71 700	32 530
S	192 675	87 400	18 725	8 490	36 900	16 740	92 150	41 800	29 950	13 580	73 725	33 440
U	197 100	89 400	20 225	9 180	38 850	17 620	93 550	42 440	30 625	13 890	74 850	33 950

$V(NG)$ MAXIMUM VERTICAL NOSE GEAR GROUND LOAD AT MOST FORWARD CG
 $V(MG)$ MAXIMUM VERTICAL MAIN GEAR GROUND LOAD AT MOST AFT CG
 H MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING

A/C CODE


- (1) R MRW = 85 400 kg FWD CG = 17.5 % MAC AT A/C WEIGHT = 85 400 kg
 S MRW = 87 400 kg FWD CG = 17.5 % MAC AT A/C WEIGHT = 87 400 kg
 U MRW = 89 400 kg FWD CG = 17.5 % MAC AT A/C WEIGHT = 89 400 kg
- (2) R MRW = 85 400 kg AFT CG = 39.1 % MAC AT A/C WEIGHT = 85 400 kg
 S MRW = 87 400 kg AFT CG = 38.5 % MAC AT A/C WEIGHT = 87 400 kg
 U MRW = 89 400 kg AFT CG = 38 % MAC AT A/C WEIGHT = 89 400 kg

NOTE: ALL LOADS CALCULATED USING AIRPLANE MAXIMUM RAMP WEIGHT

N_AC_070300_1_0370101_01_00

Maximum Pavement Loads
FIGURE 5

**ON A/C A321-200

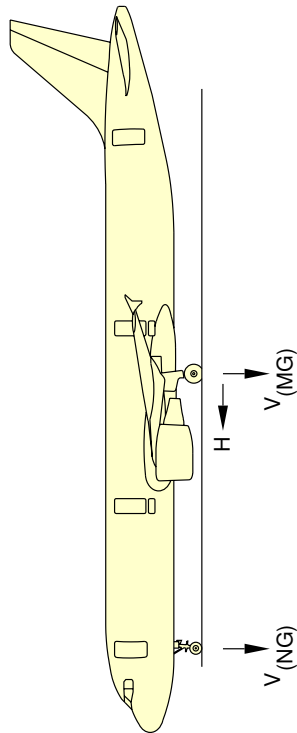

1 A/C CODE	2 MAXIMUM RAMP WEIGHT		3 STATIC LOAD AT MOST FWD CG		4 STATIC BRAKING @ 10 ft/s ² DECELERATION		5 VMG (PER STRUT) STATIC LOAD AT MAX AFT CG (2)		6 H (PER STRUT) STEADY BRAKING @ 10 ft/s ² DECELERATION		AT INSTANTANEOUS BRAKING COEFFICIENT = 0.8	
	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg
V	197 100	89 400	19 125	8 680	37 725	17 110	94 125	42 700	30 625	13 890	75 300	34 160
X	197 100	89 400	19 125	8 680	37 725	17 110	94 125	42 700	30 625	13 890	75 300	34 160
Z	201 500	91 400	19 050	8 640	37 525	17 030	96 125	43 600	31 325	14 200	76 900	34 880

V (NG) MAXIMUM VERTICAL NOSE GEAR GROUND LOAD AT MOST FORWARD CG
 V (MG) MAXIMUM VERTICAL MAIN GEAR GROUND LOAD AT MOST AFT CG
 H MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING

A/C CODE


(1) V MRW = 89 400 kg FWD CG = 17.5 % MAC AT A/C WEIGHT = 89 400 kg
 X MRW = 89 400 kg FWD CG = 17.5 % MAC AT A/C WEIGHT = 89 400 kg
 Z MRW = 91 400 kg FWD CG = 17.5 % MAC AT A/C WEIGHT = 89 000 kg
 (2) V MRW = 89 400 kg AFT CG = 38 % MAC AT A/C WEIGHT = 89 400 kg
 X MRW = 89 400 kg AFT CG = 38 % MAC AT A/C WEIGHT = 89 400 kg
 Z MRW = 91 400 kg AFT CG = 37.5 % MAC AT A/C WEIGHT = 91 400 kg

NOTE: ALL LOADS CALCULATED USING AIRPLANE MAXIMUM RAMP WEIGHT

N_AC_070300_1_0380101_01_00

 Maximum Pavement Loads
 FIGURE 6

****ON A/C A321-200**

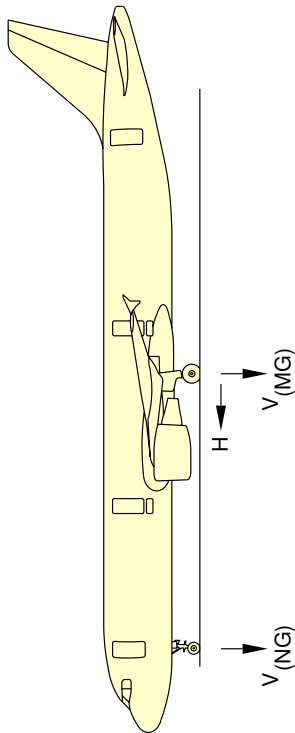

1	2		3		4		5		6		
			VNG				VMG (PER STRUT)		H (PER STRUT)		
A/C CODE	MAXIMUM RAMP WEIGHT		STATIC LOAD AT MOST FWD CG (1)		STATIC BRAKING @ 10 ft/s ² DECELERATION		STATIC LOAD AT MAX AFT CG (2)		STEADY BRAKING @ 10 ft/s ² DECELERATION		AT INSTANTANEOUS BRAKING COEFFICIENT = 0.8
	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	
AA	205 900	93 400	18 825	8 530	37 800	17 140	98 100	44 490	32 000	14 510	35 590
AB	207 025	93 900	18 475	8 380	37 450	16 990	98 575	44 720	32 175	14 590	35 770

Maximum Pavement Loads
Maximum Pavement Loads
FIGURE 7

V (NG) MAXIMUM VERTICAL NOSE GEAR GROUND LOAD AT MOST FORWARD CG
V (MG) MAXIMUM VERTICAL MAIN GEAR GROUND LOAD AT MOST AFT CG
H MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING

A/C CODE

(1) AA MRW = 93 400 kg FWD CG = 19 % MAC AT A/C WEIGHT = 91 500 kg
AB MRW = 93 900 kg FWD CG = 19.7 % MAC AT A/C WEIGHT = 91 500 kg

(2) AA MRW = 93 400 kg AFT CG = 37 % MAC AT A/C WEIGHT = 93 400 kg
AB MRW = 93 900 kg AFT CG = 36.9 % MAC AT A/C WEIGHT = 93 900 kg

NOTE: ALL LOADS CALCULATED USING AIRPLANE MAXIMUM RAMP WEIGHT

N_AC_070300_1_0390101_01_00

7-4-0 Landing Gear Loading on Pavement

****ON A/C A321-100 A321-200**

Landing Gear Loading on Pavement

1. General

In the example shown in Section 7-4-1 Landing Gear Loading on Pavement, A/C Code C, the Gross Aircraft Weight is 60 000 kg (132 275 lb) and the percentage of weight on the Main Landing Gear is 95.7 %.

For these conditions the total weight on the Main Landing Gear is 57 420 kg (126 575 lb).

7-4-1 Landing Gear Loading on Pavement


****ON A/C A321-100 A321-200**

Landing Gear Loading on Pavement

1. This section gives Landing Gear Loading on Pavement.

I NOTE : For A/C Code definition, refer to chapter 7-1-0.


****ON A/C A321-100**

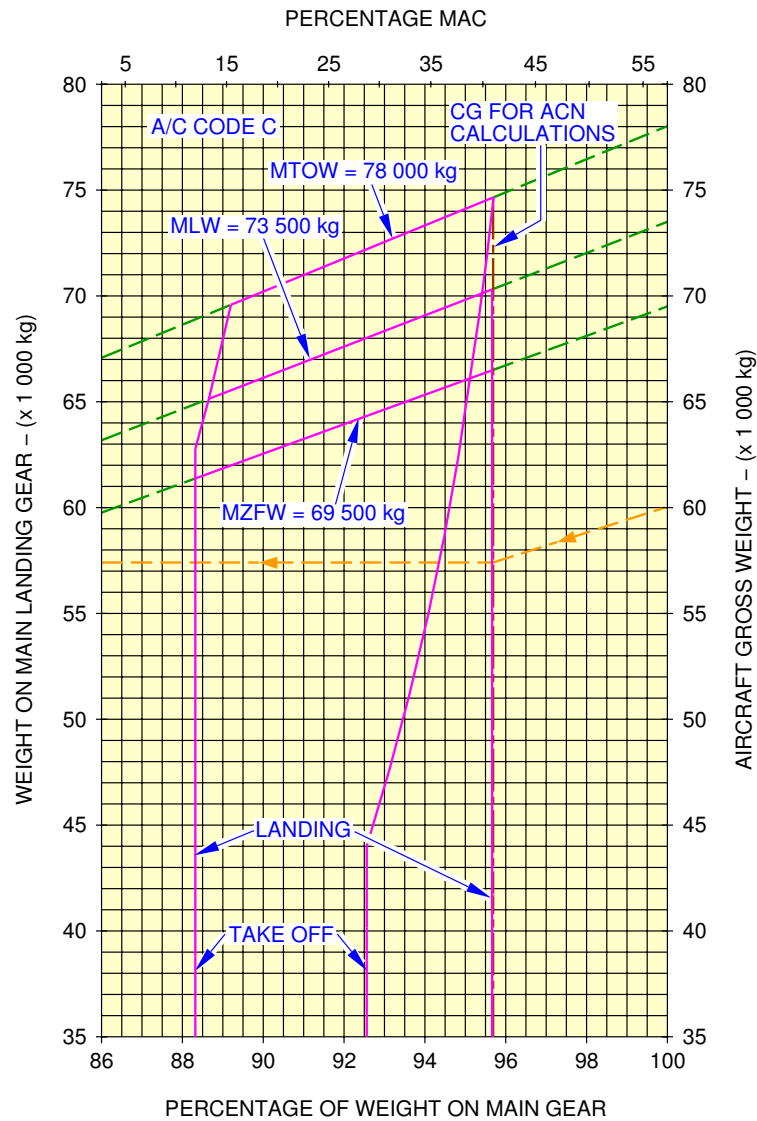

N_AC_070401_1_0650101_01_00

Landing Gear Loading on Pavement
FIGURE 1


****ON A/C A321-200**

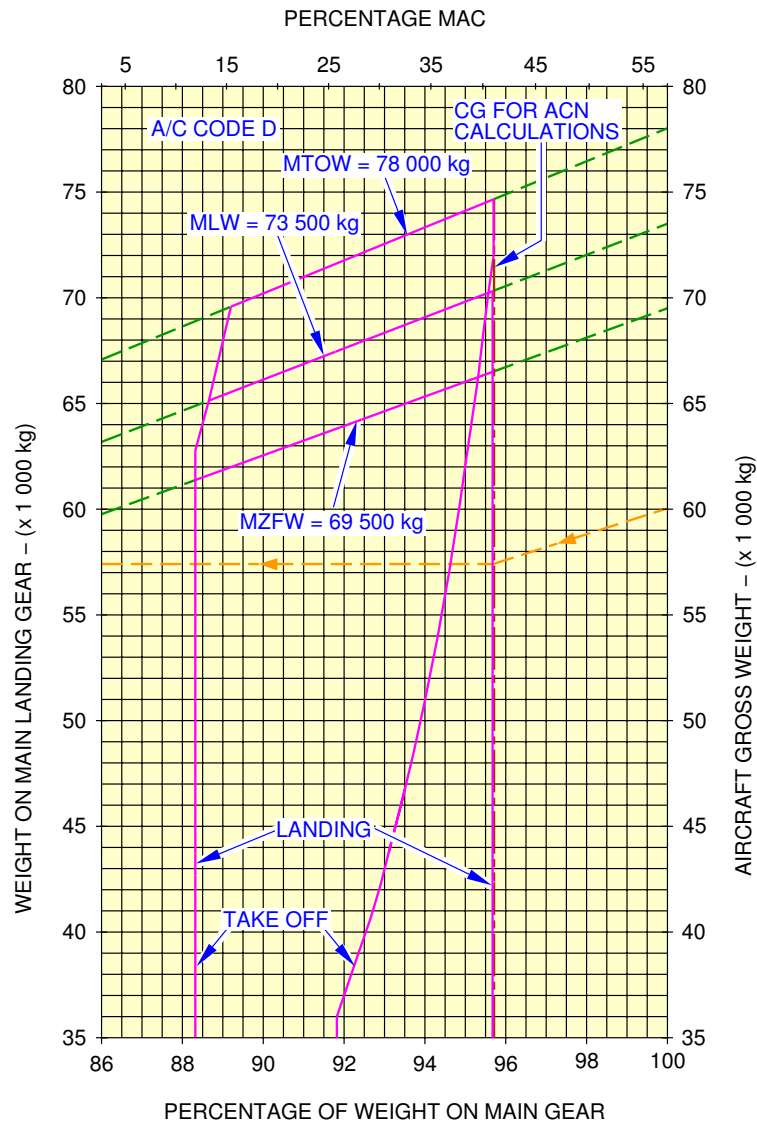

N_AC_070401_1_0660101_01_00

Landing Gear Loading on Pavement
FIGURE 2


**ON A/C A321-100

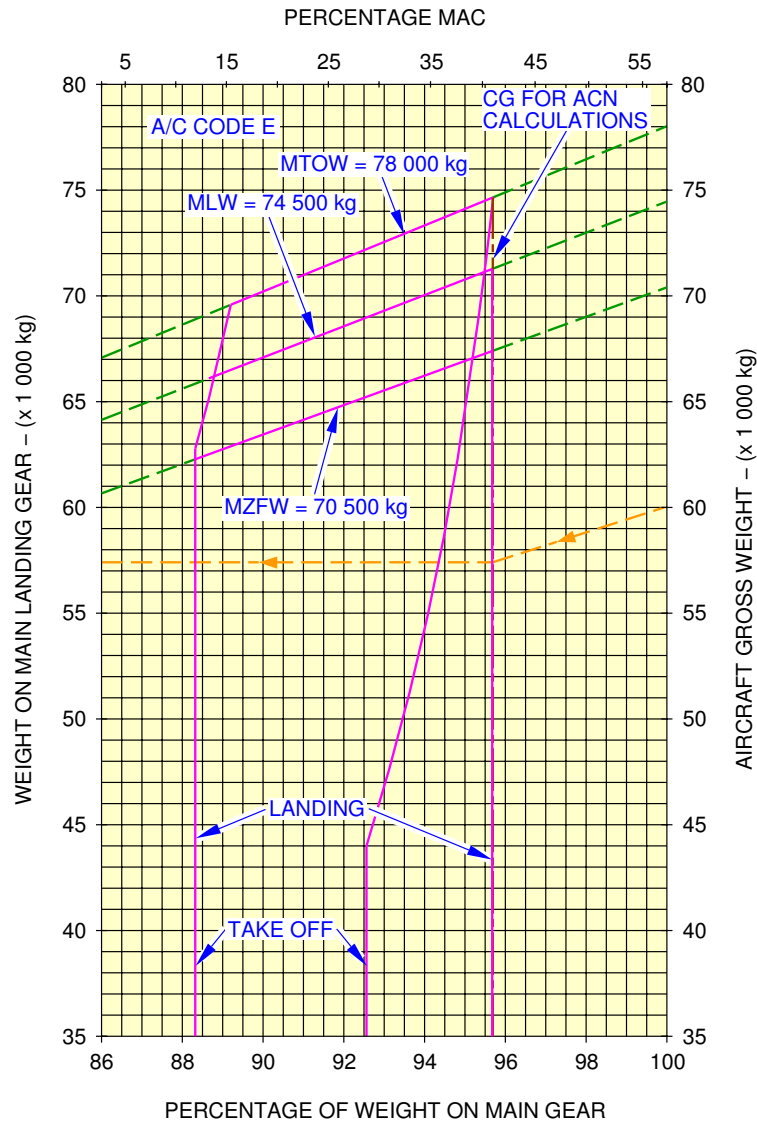

N_AC_070401_1_0670101_01_00

Landing Gear Loading on Pavement
FIGURE 3


****ON A/C A321-100**

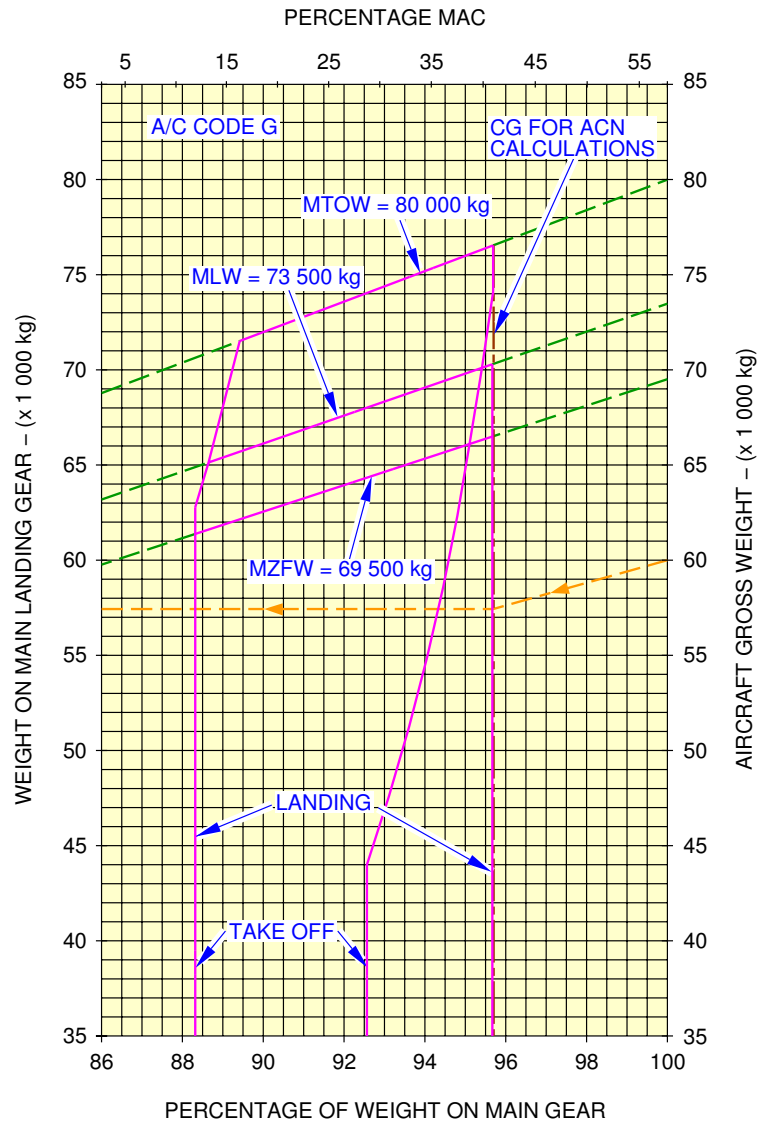

N_AC_070401_1_0680101_01_00

Landing Gear Loading on Pavement
FIGURE 4


**ON A/C A321-200

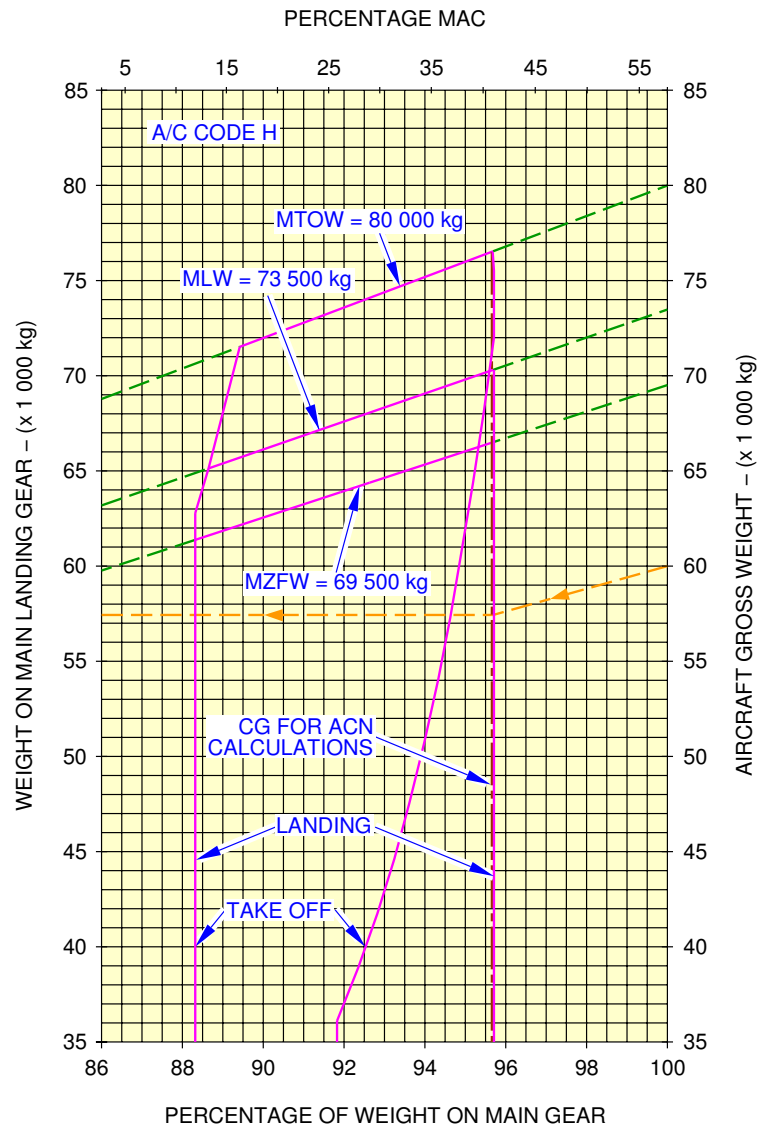

N_AC_070401_1_0690101_01_00

Landing Gear Loading on Pavement
FIGURE 5


****ON A/C A321-100**

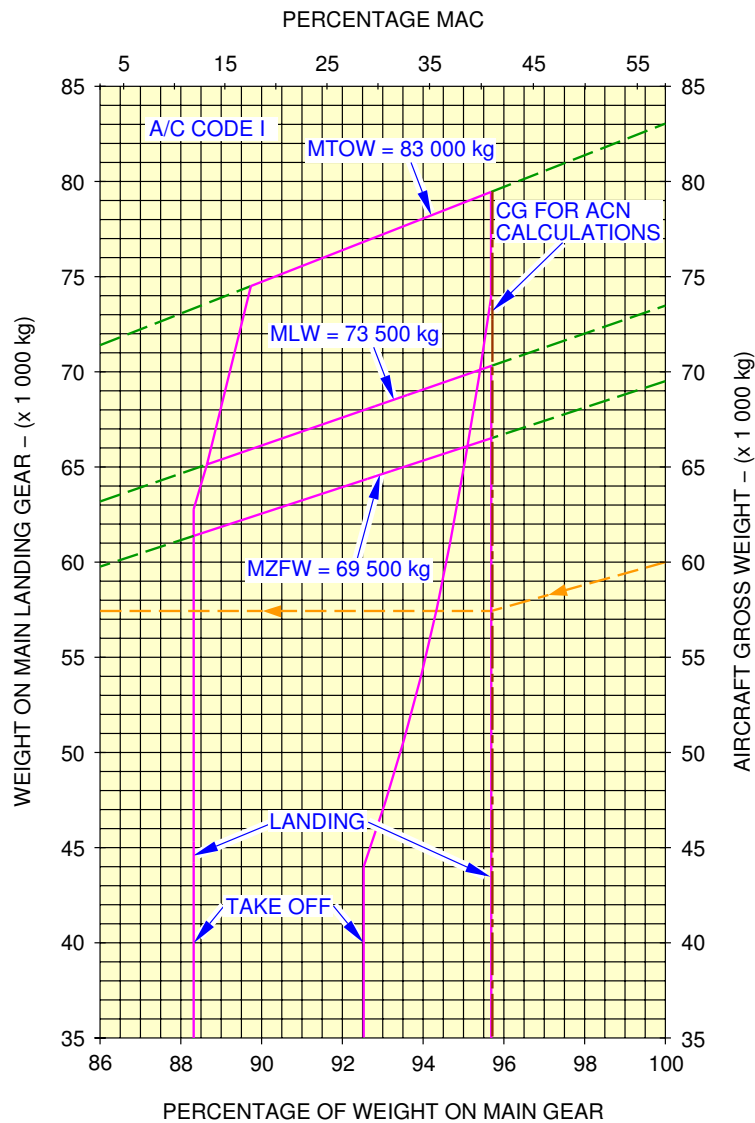

N_AC_070401_1_0700101_01_00

Landing Gear Loading on Pavement
FIGURE 6


****ON A/C A321-200**

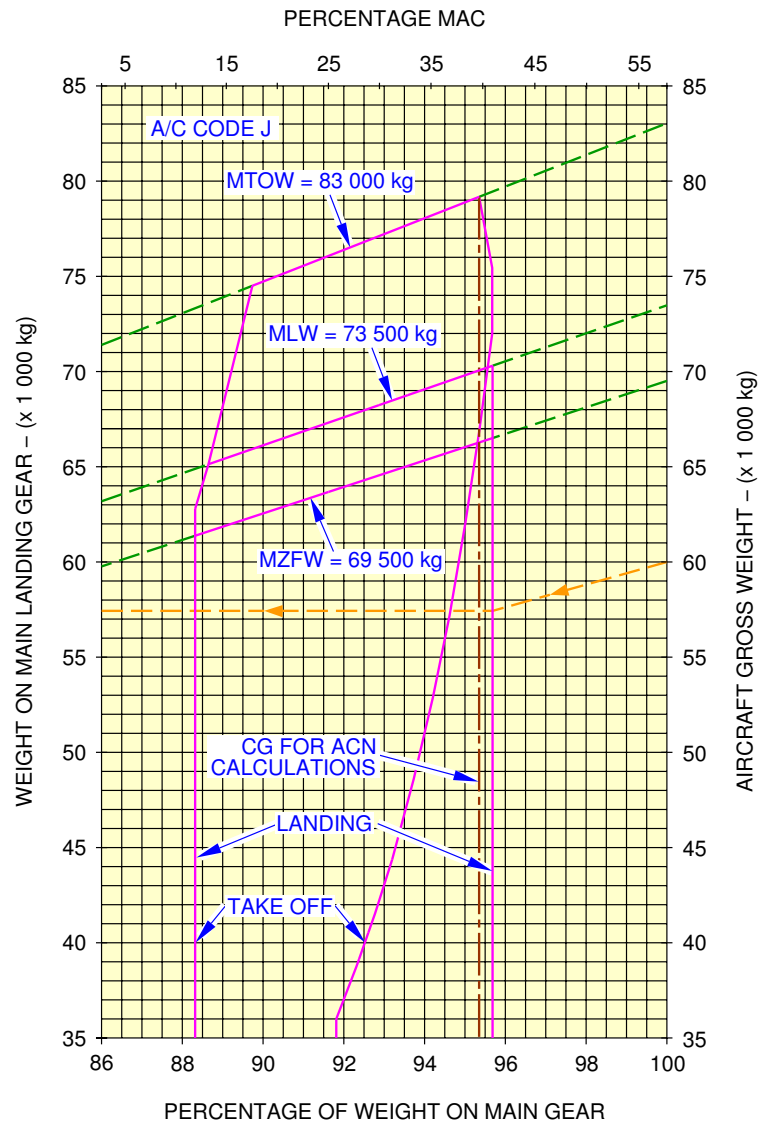

N_AC_070401_1_0710101_01_00

Landing Gear Loading on Pavement
FIGURE 7


****ON A/C A321-100**

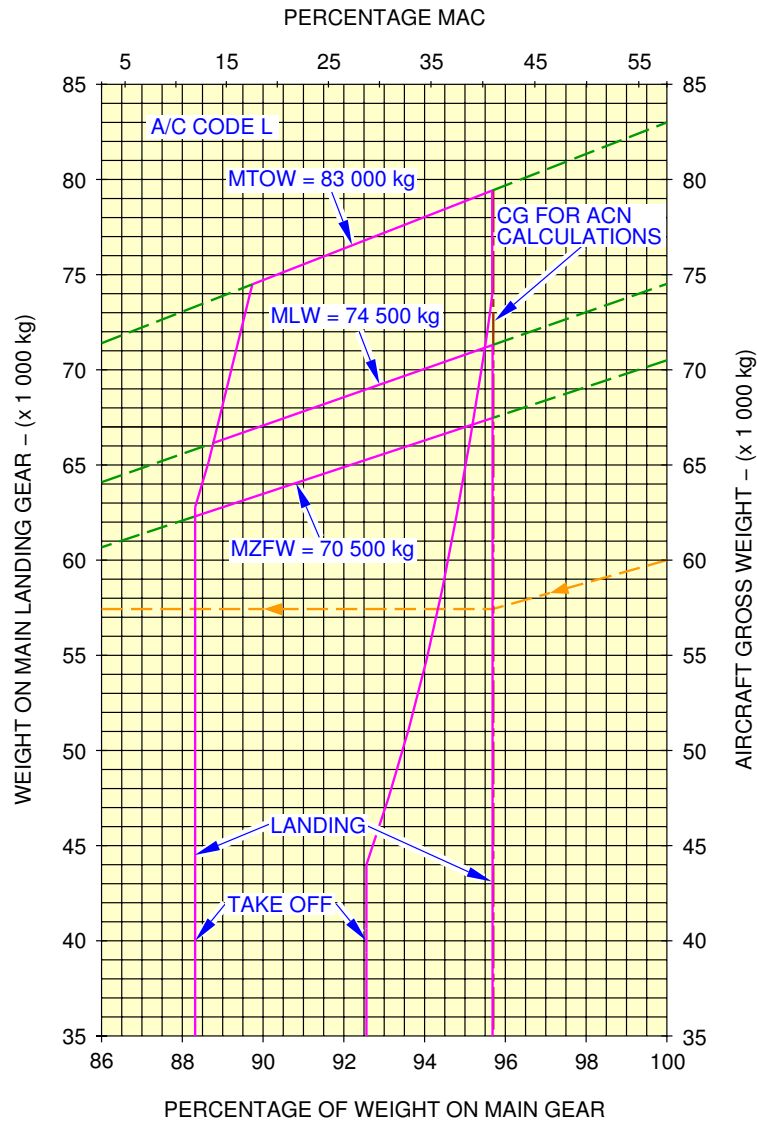

N_AC_070401_1_0720101_01_00

Landing Gear Loading on Pavement
FIGURE 8


**ON A/C A321-100

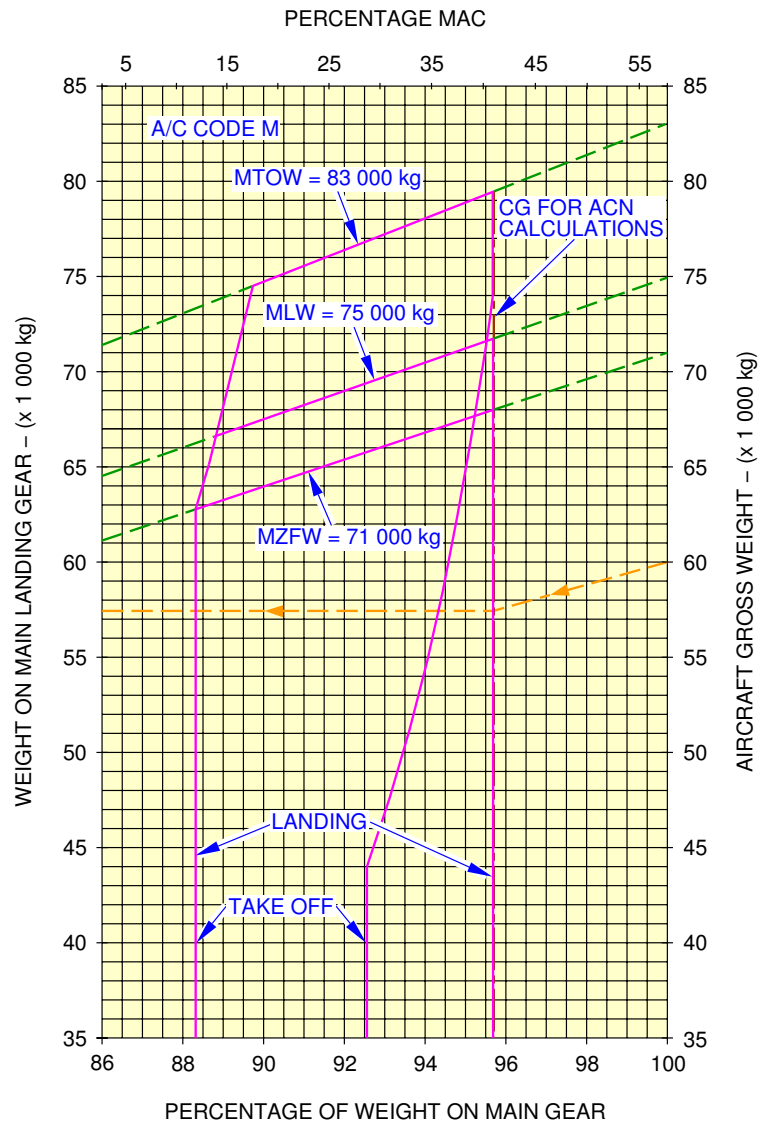

N_AC_070401_1_0730101_01_00

Landing Gear Loading on Pavement
FIGURE 9


**ON A/C A321-200

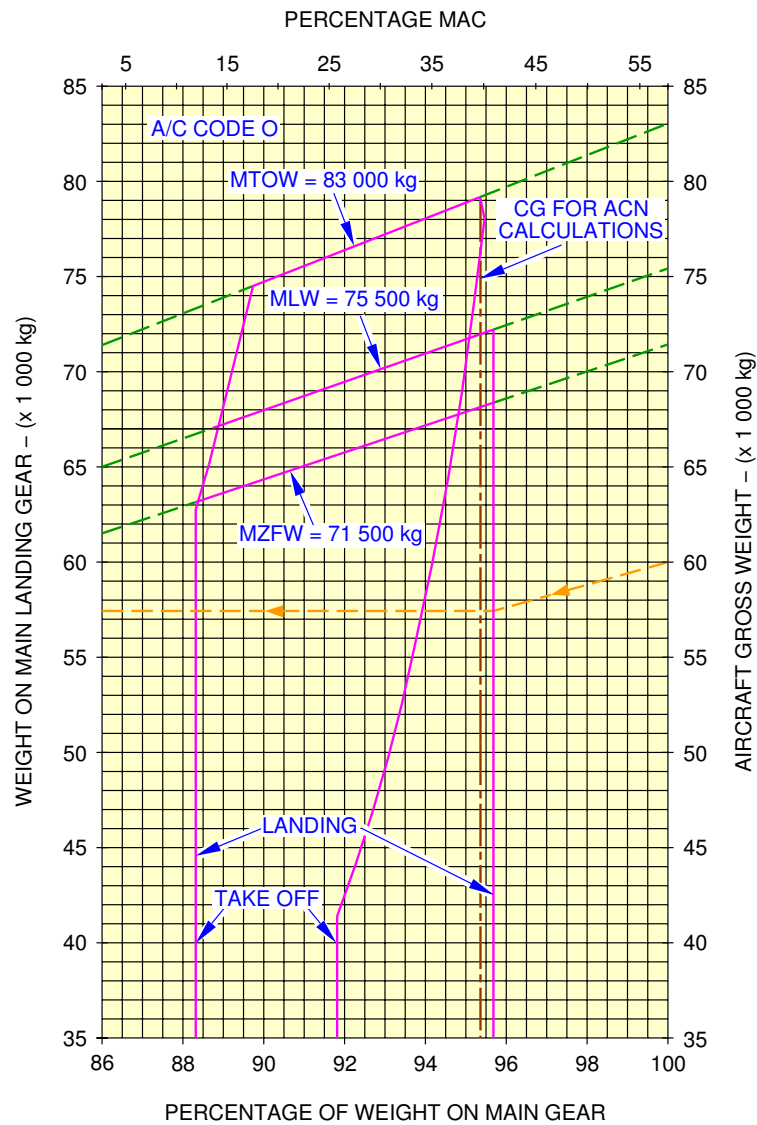

N_AC_070401_1_0740101_01_00

Landing Gear Loading on Pavement
Landing Gear Loading on Pavement
FIGURE 10


**ON A/C A321-100

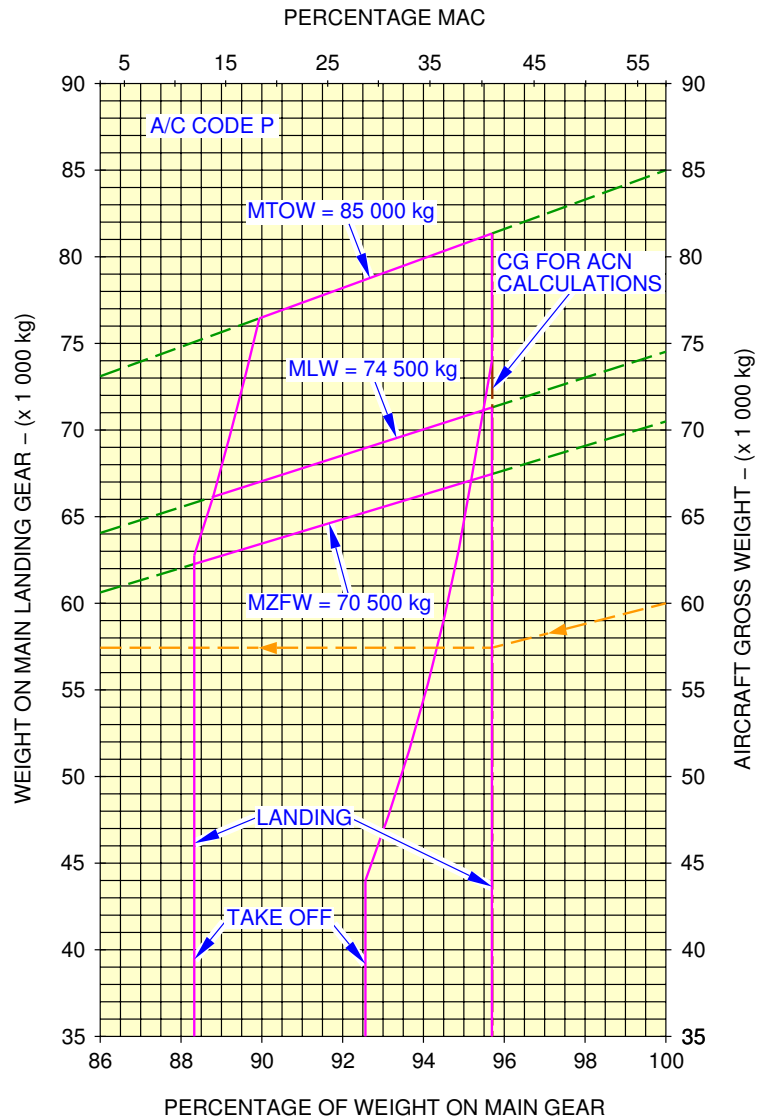

N_AC_070401_1_0750101_01_00

Landing Gear Loading on Pavement
FIGURE 11


**ON A/C A321-200

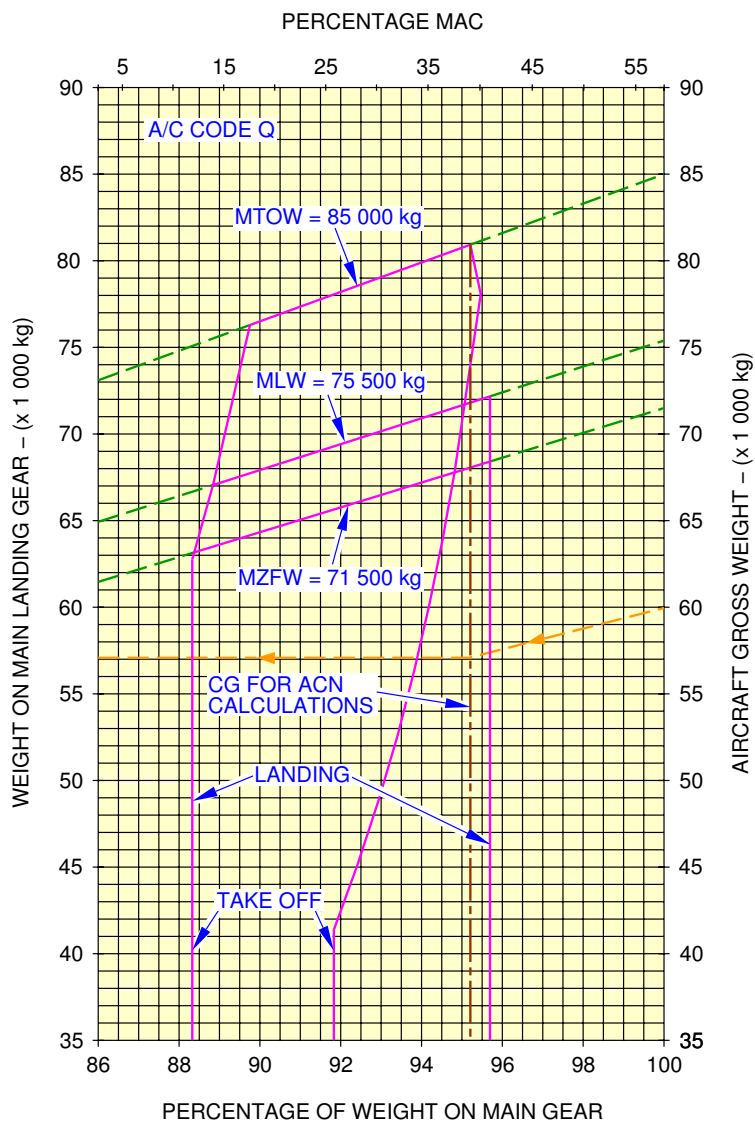

N_AC_070401_1_0760101_01_00

Landing Gear Loading on Pavement
FIGURE 12


**ON A/C A321-200

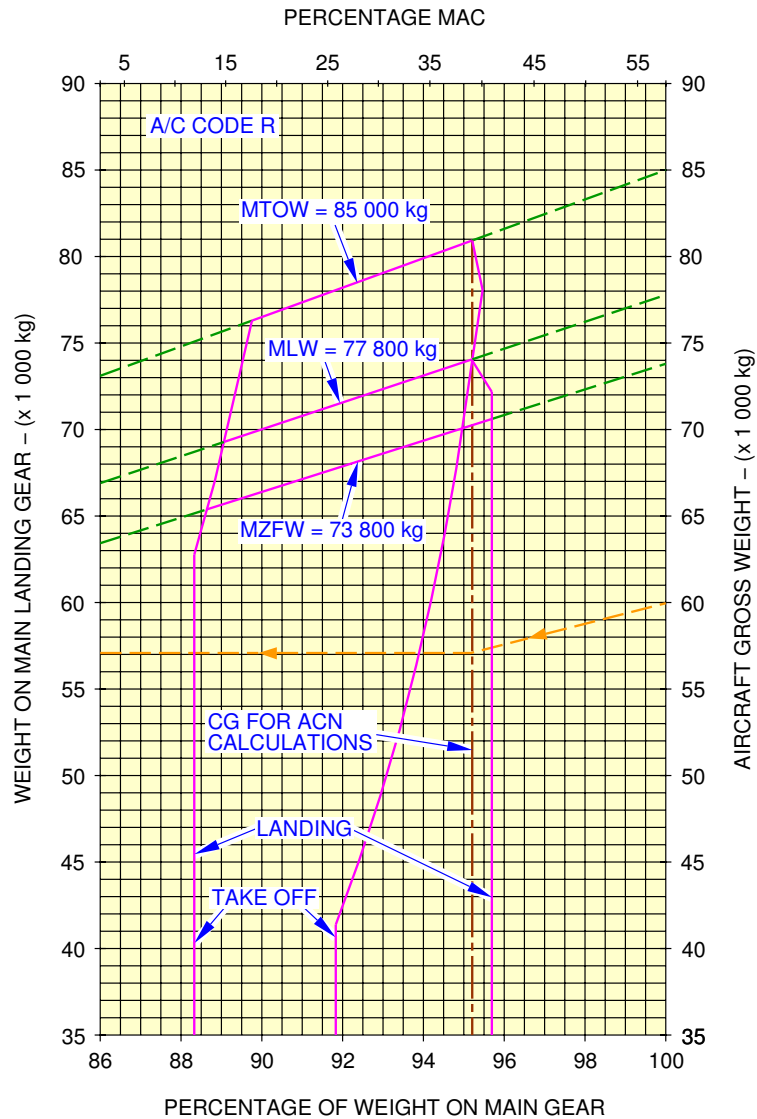

N_AC_070401_1_0770101_01_00

Landing Gear Loading on Pavement
FIGURE 13


**ON A/C A321-200

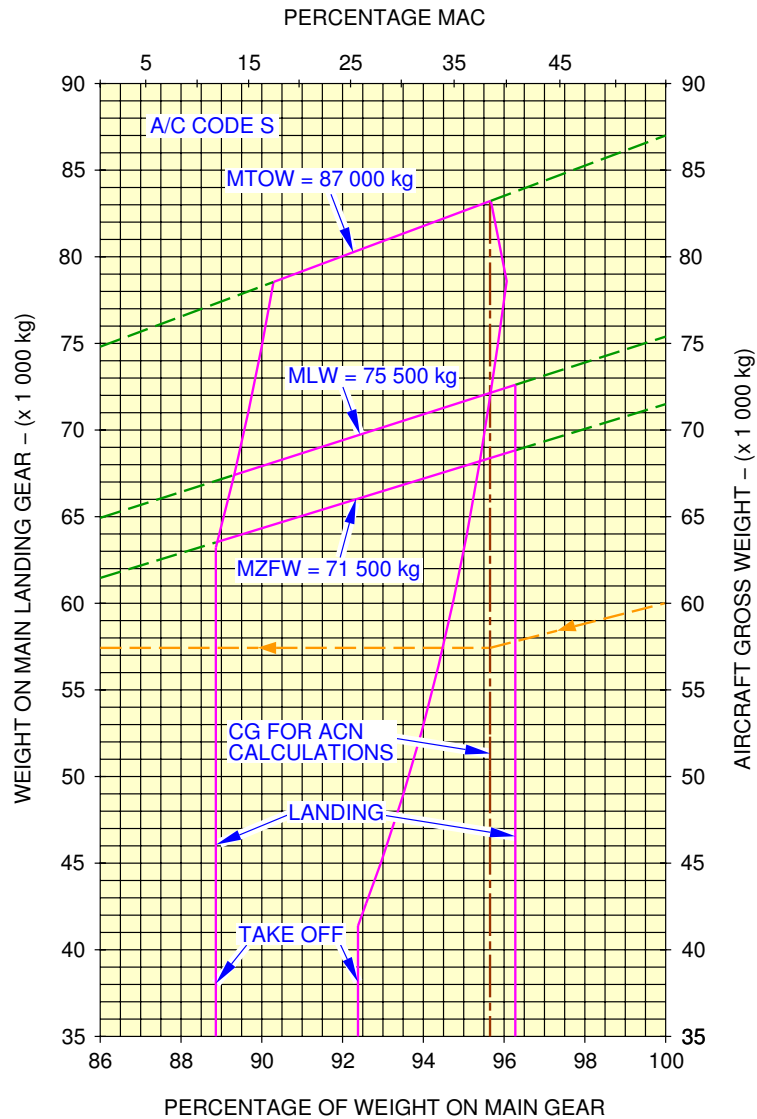

N_AC_070401_1_0780101_01_00

Landing Gear Loading on Pavement
FIGURE 14


**ON A/C A321-100

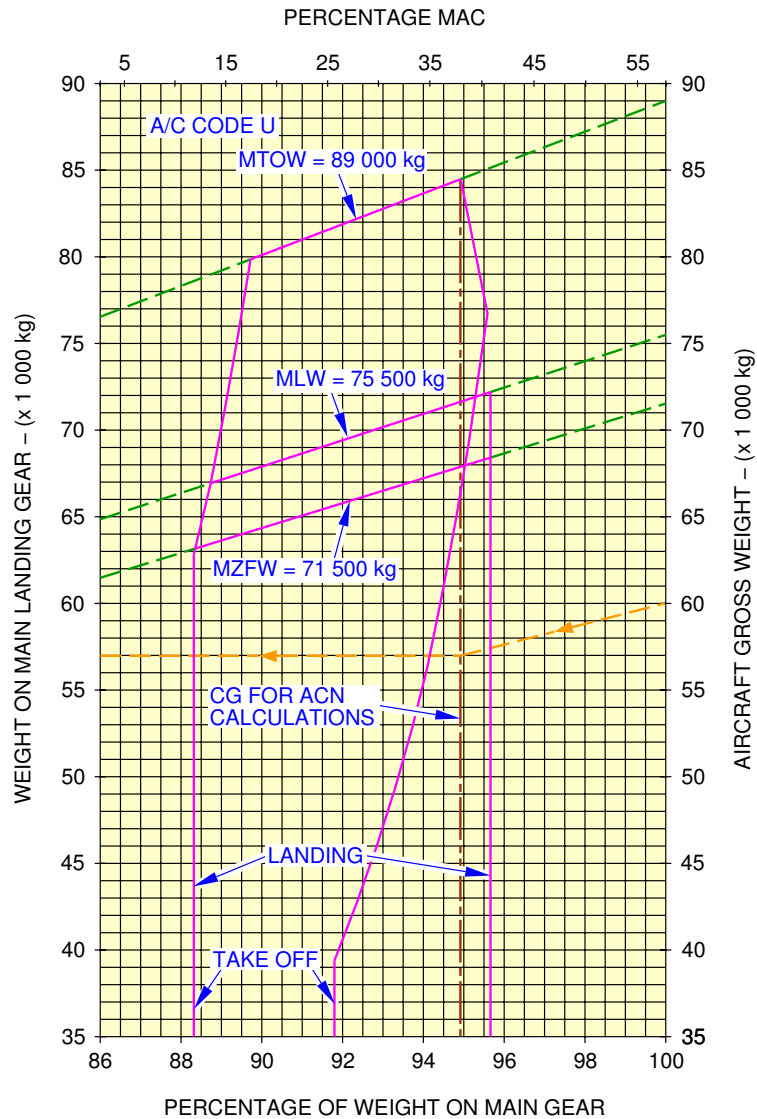

N_AC_070401_1_0790101_01_00

Landing Gear Loading on Pavement
FIGURE 15


****ON A/C A321-200**

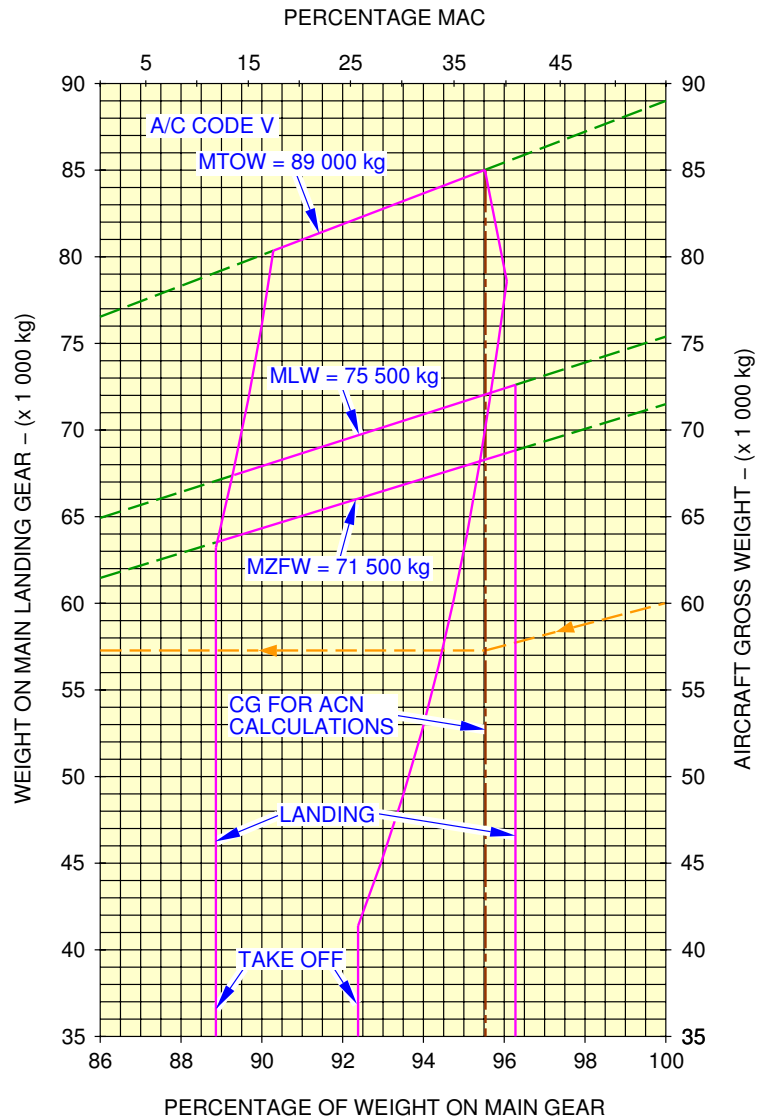

N_AC_070401_1_0800101_01_00

Landing Gear Loading on Pavement
FIGURE 16


****ON A/C A321-200**

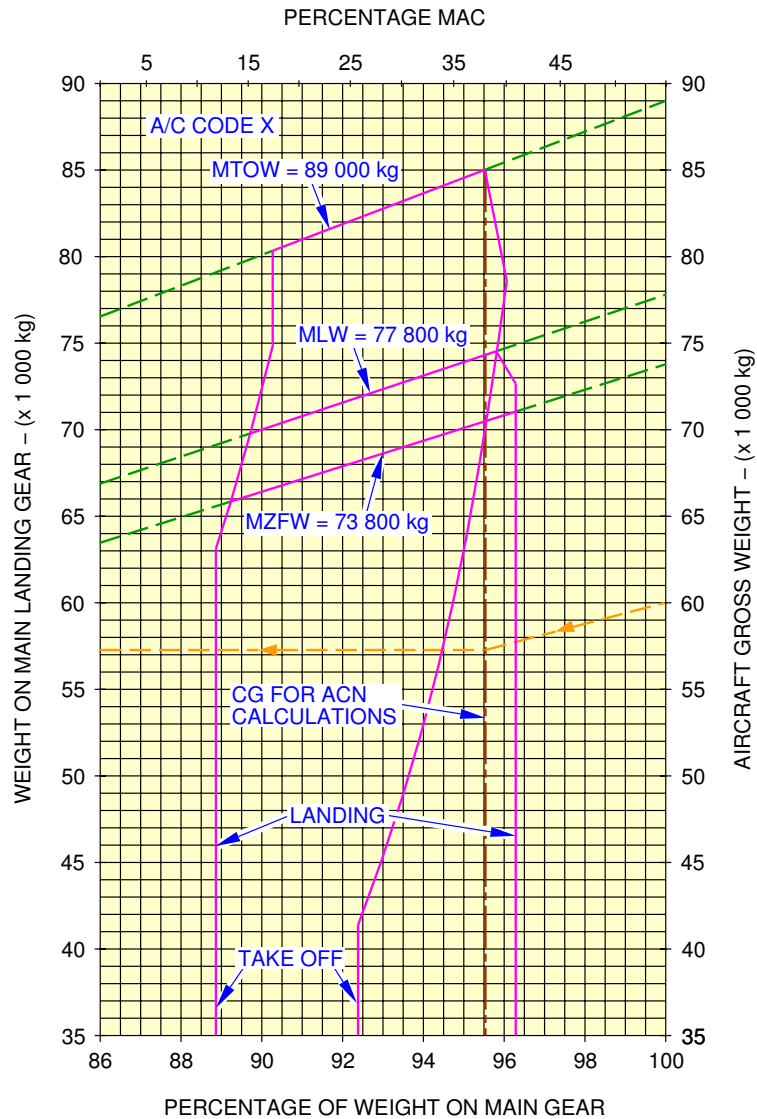

N_AC_070401_1_0810101_01_00

Landing Gear Loading on Pavement
FIGURE 17


****ON A/C A321-200**

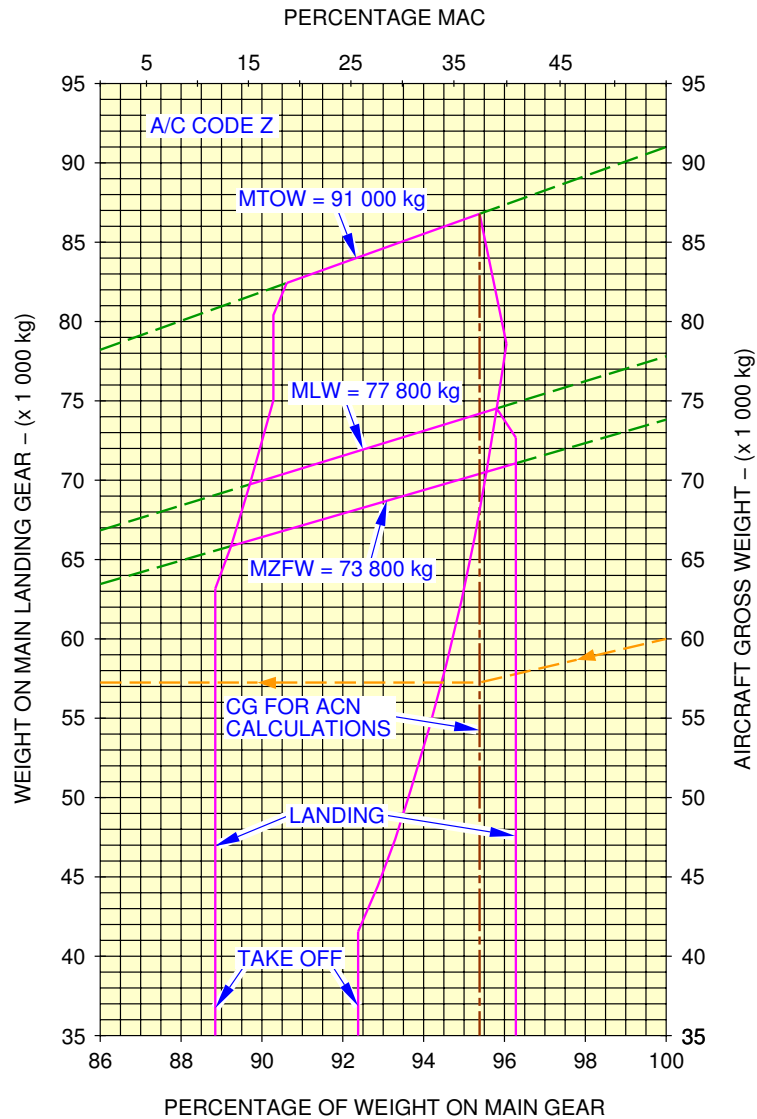

N_AC_070401_1_0820101_01_00

Landing Gear Loading on Pavement
FIGURE 18


**ON A/C A321-200

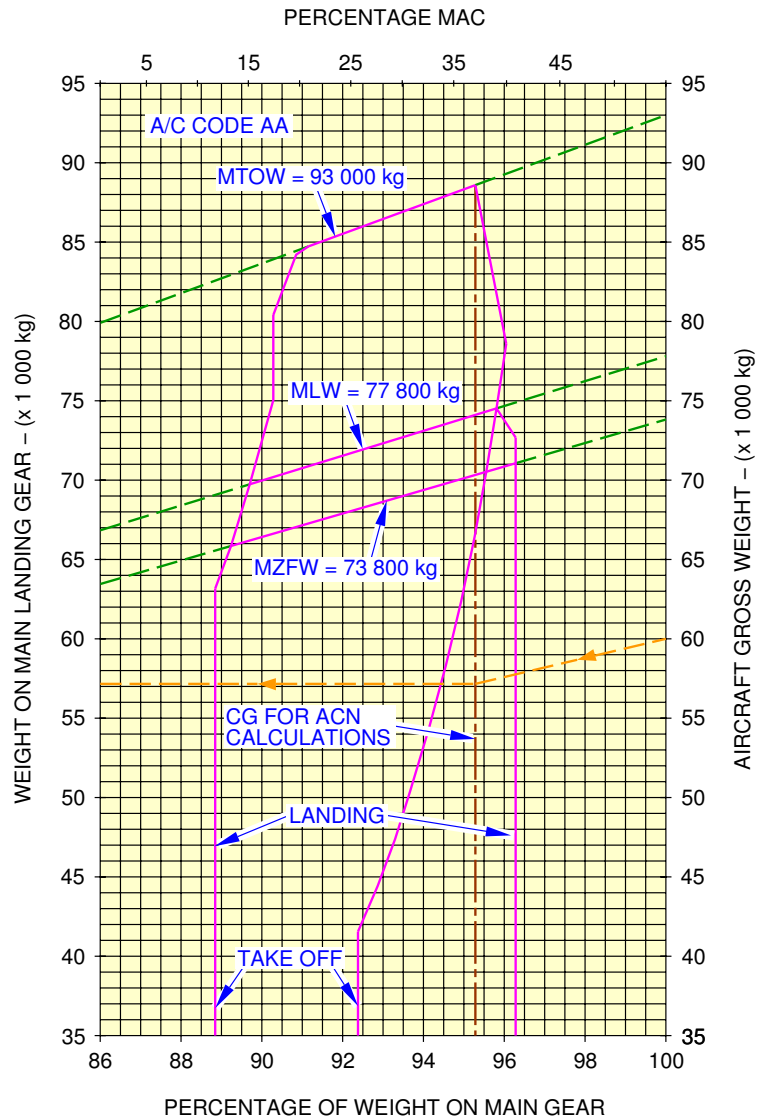

N_AC_070401_1_0830101_01_00

Landing Gear Loading on Pavement
FIGURE 19

**ON A/C A321-200

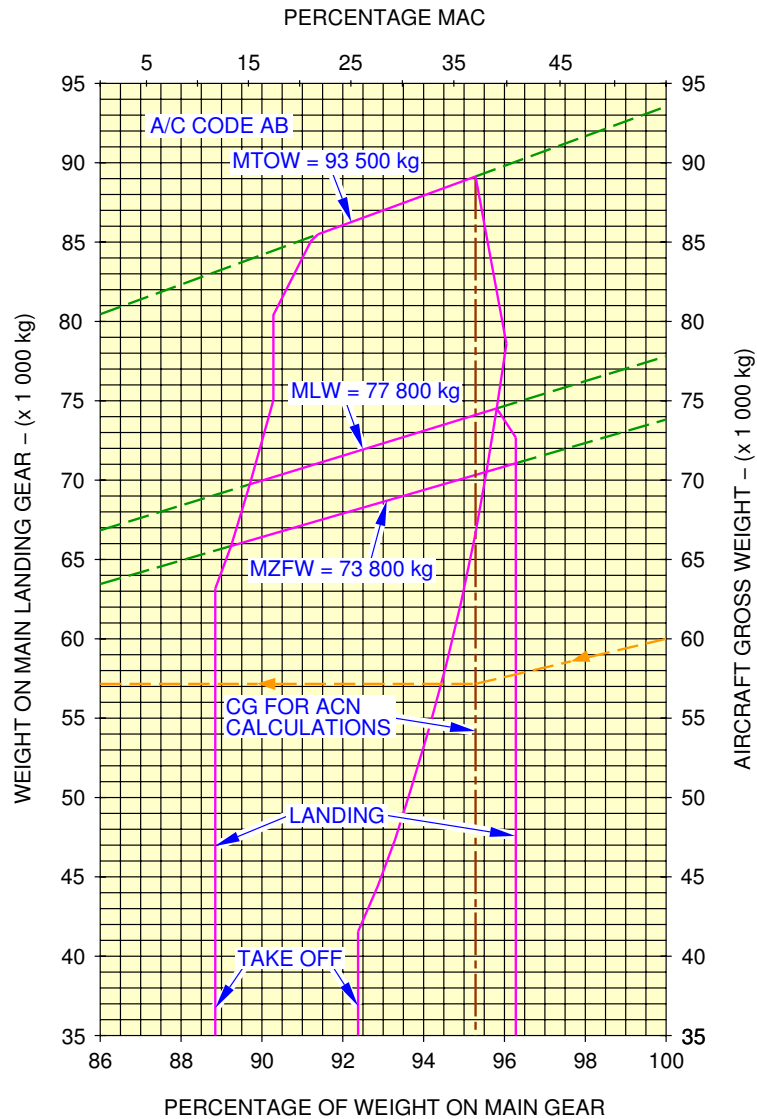

N_AC_070401_1_0840101_01_00

Landing Gear Loading on Pavement
FIGURE 20

7-5-0 Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method****ON A/C A321-100 A321-200**Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method**1. General**

In order to determine a particular Flexible Pavement Thickness, the Subgrade Strength (CBR), the Annual Departure Level and the weight on one Main Landing Gear must be known.

In the example shown in Section 7-5-1 Flexible Pavement Requirements, A/C Code C for:

- a CBR value of 10
- an Annual Departure Level of 25 000
- the Load on one MLG of 30 000 kg (66 150 lb).

For these conditions, the Flexible Pavement Thickness is 52.5 cm (20.7 in).


The line showing 10 000 Coverages is used to calculate the Aircraft Classification Number (ACN).

7-5-1 Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method****ON A/C A321-100 A321-200**Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method

1. This section gives Flexible Pavement Requirements.

I NOTE : For A/C Code definition, refer to chapter 7-1-0.

****ON A/C A321-100**

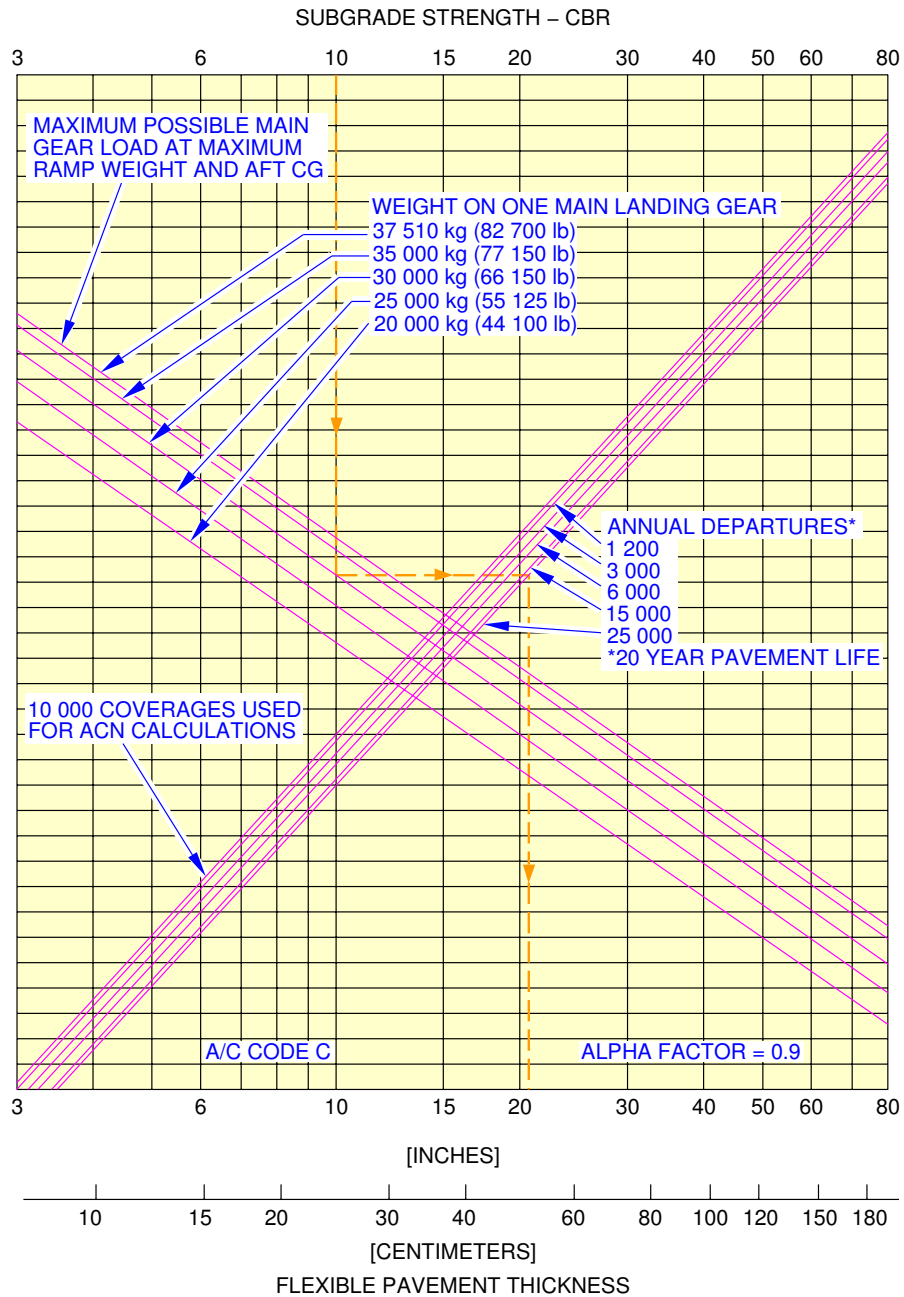


1 270 x 455 R22 (49 x 18–22) TIRES
TIRE PRESSURE CONSTANT AT 12.8 bar (186 psi)

N_AC_070501_1_1080101_01_00

Flexible Pavement Requirements
FIGURE 1

****ON A/C A321-200**

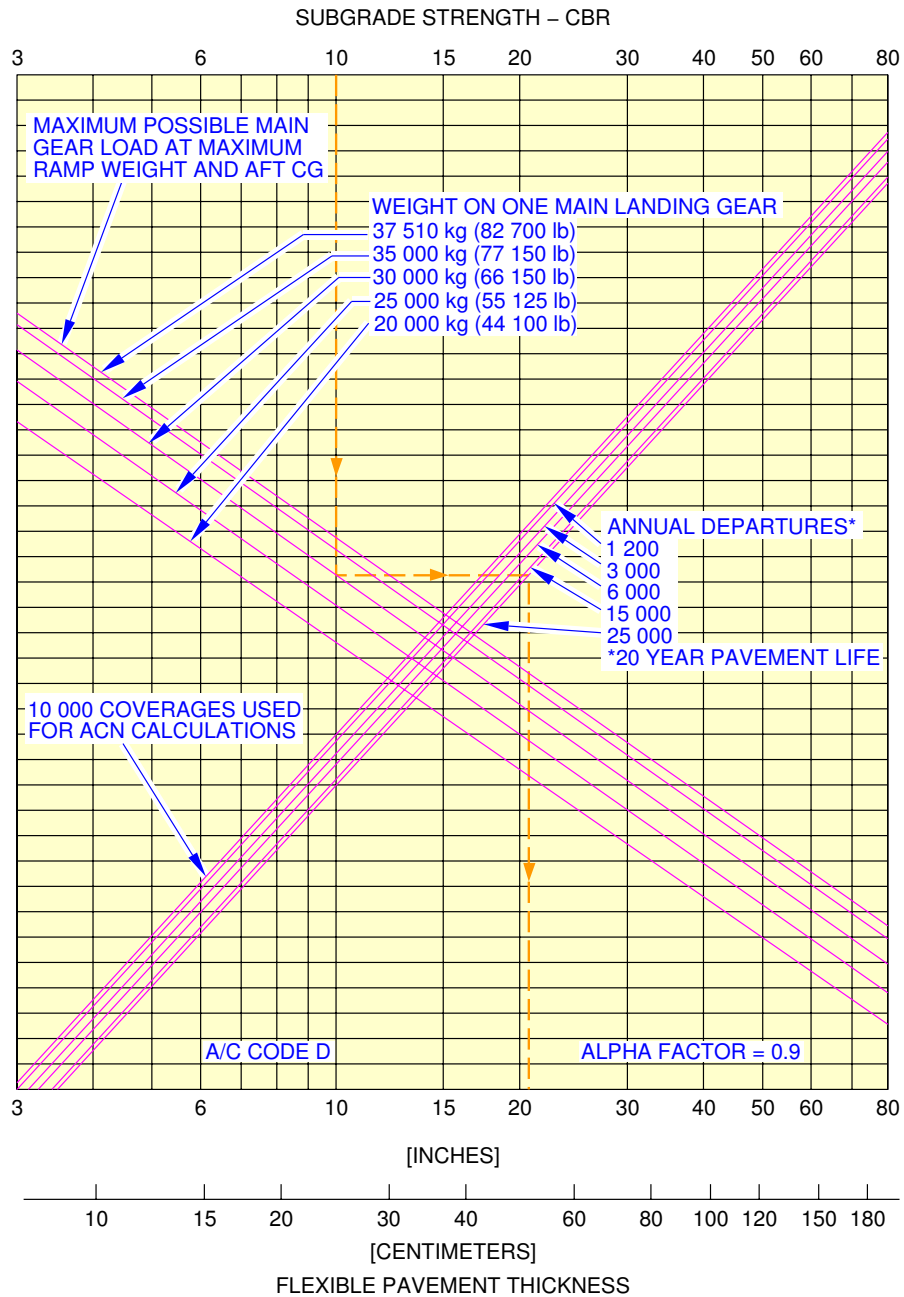


1 270 x 455 R22 (49 x 18–22) TIRES
TIRE PRESSURE CONSTANT AT 12.8 bar (186 psi)

N_AC_070501_1_1090101_01_00

Flexible Pavement Requirements
FIGURE 2

****ON A/C A321-100**

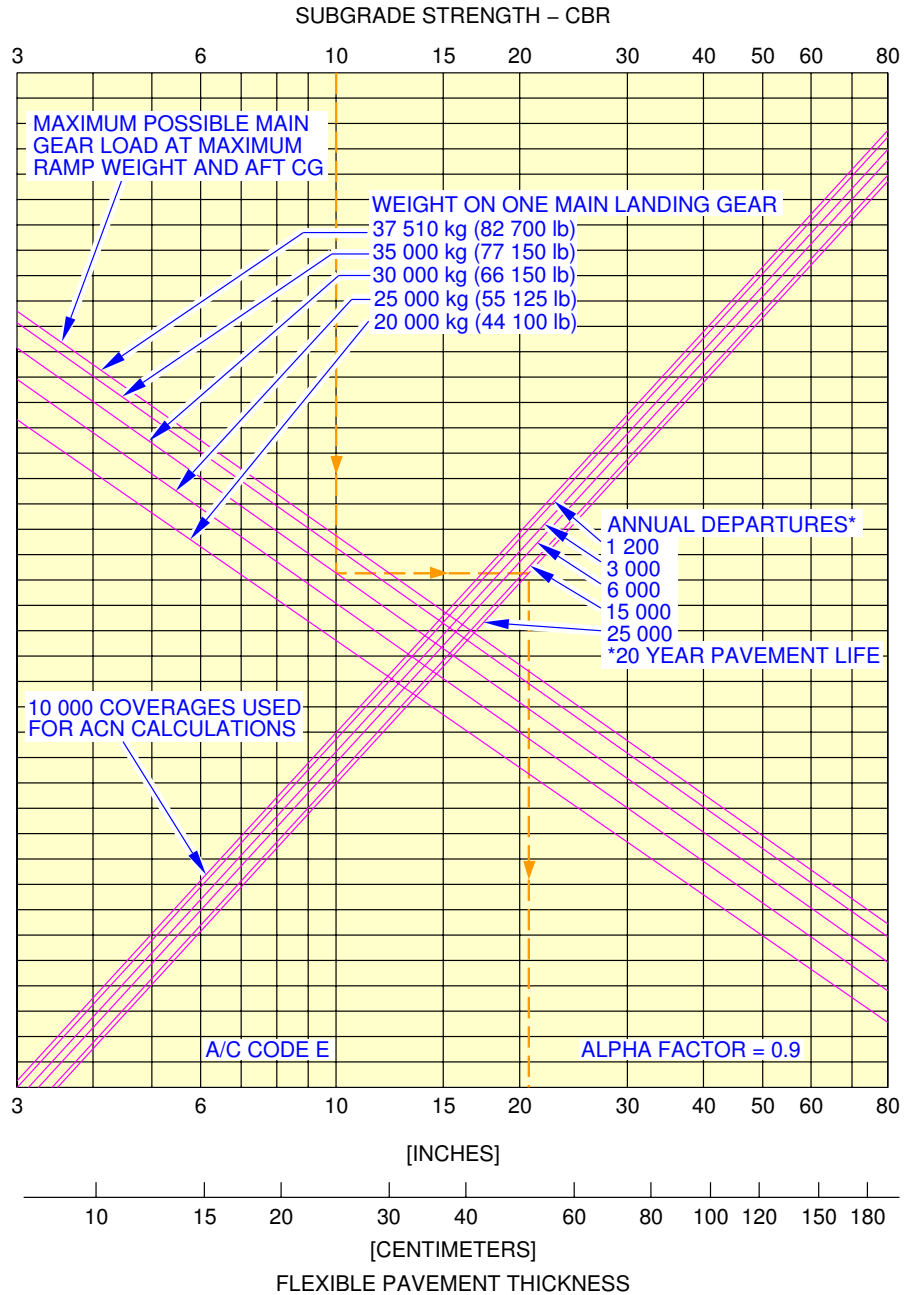


1 270 x 455 R22 (49 x 18–22) TIRES
TIRE PRESSURE CONSTANT AT 12.8 bar (186 psi)

N_AC_070501_1_1100101_01_00

Flexible Pavement Requirements
FIGURE 3

****ON A/C A321-100**

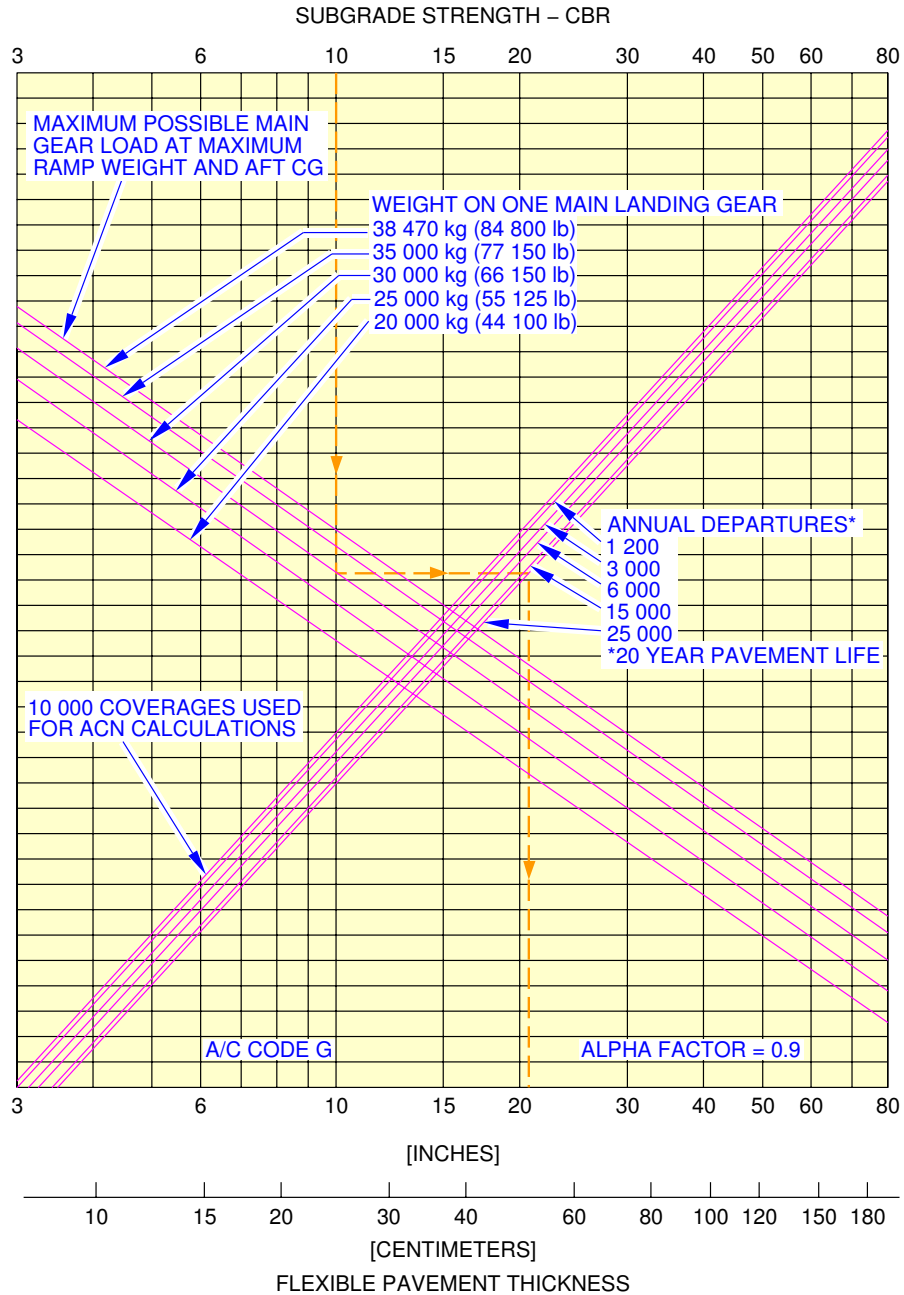


1 270 x 455 R22 (49 x 18–22) TIRES
TIRE PRESSURE CONSTANT AT 13.6 bar (197 psi)

N_AC_070501_1_1110101_01_00

Flexible Pavement Requirements
FIGURE 4

****ON A/C A321-200**

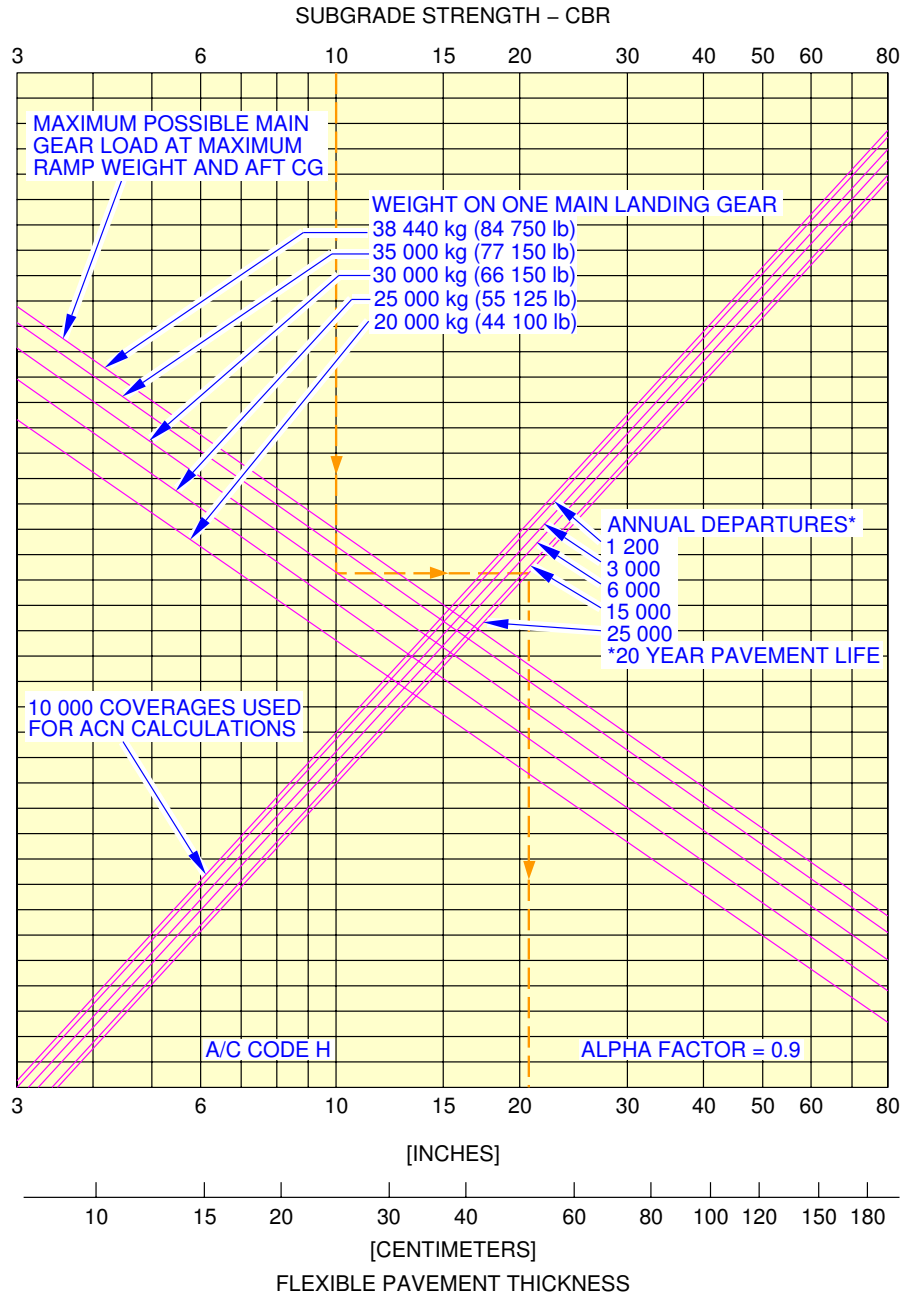


1 270 x 455 R22 (49 x 18–22) TIRES
TIRE PRESSURE CONSTANT AT 13.6 bar (197 psi)

N_AC_070501_1_1120101_01_00

Flexible Pavement Requirements
FIGURE 5

**ON A/C A321-100

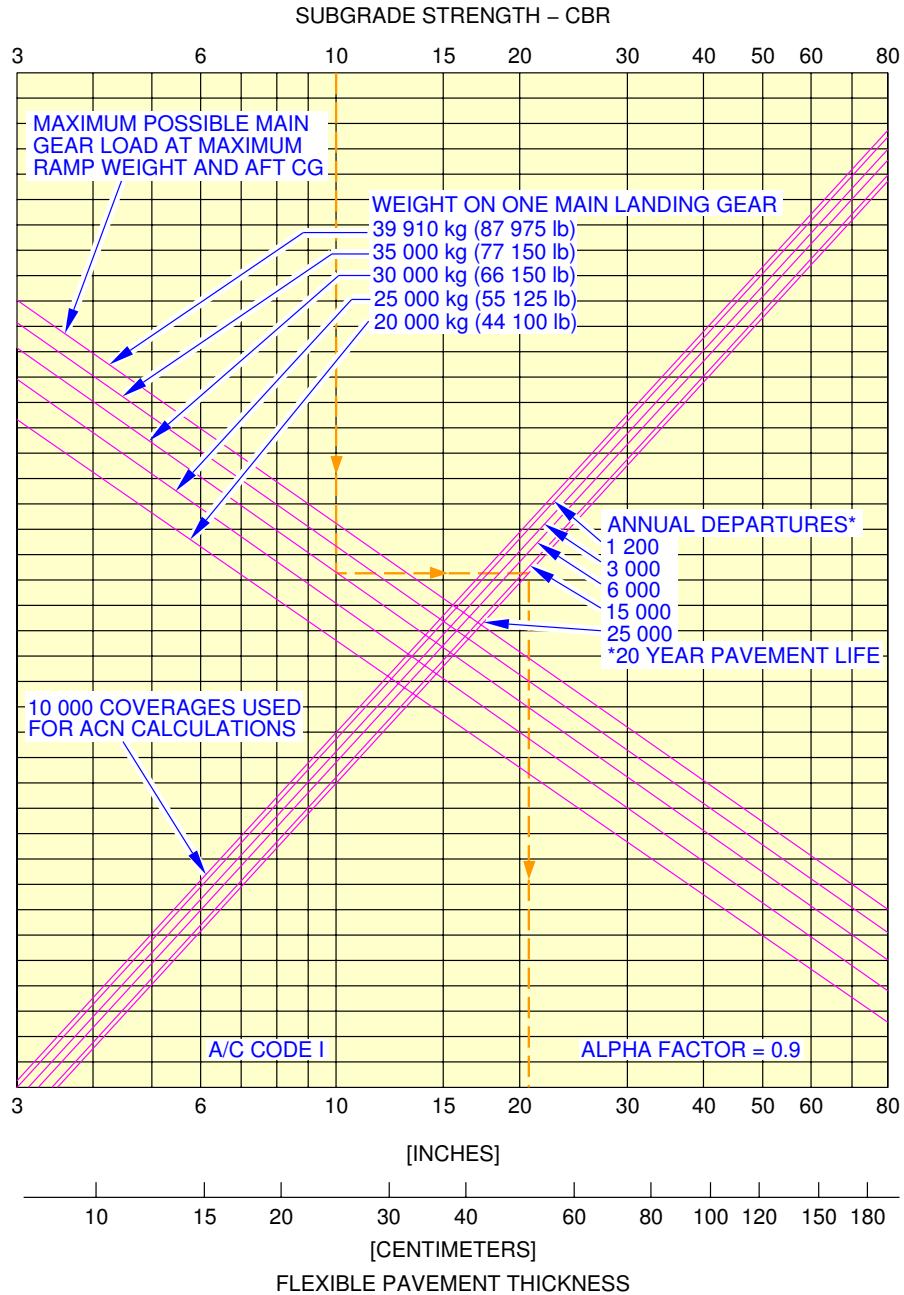


1 270 x 455 R22 (49 x 18–22) TIRES
TIRE PRESSURE CONSTANT AT 13.6 bar (197 psi)

N_AC_070501_1_1130101_01_00

Flexible Pavement Requirements
FIGURE 6

****ON A/C A321-200**

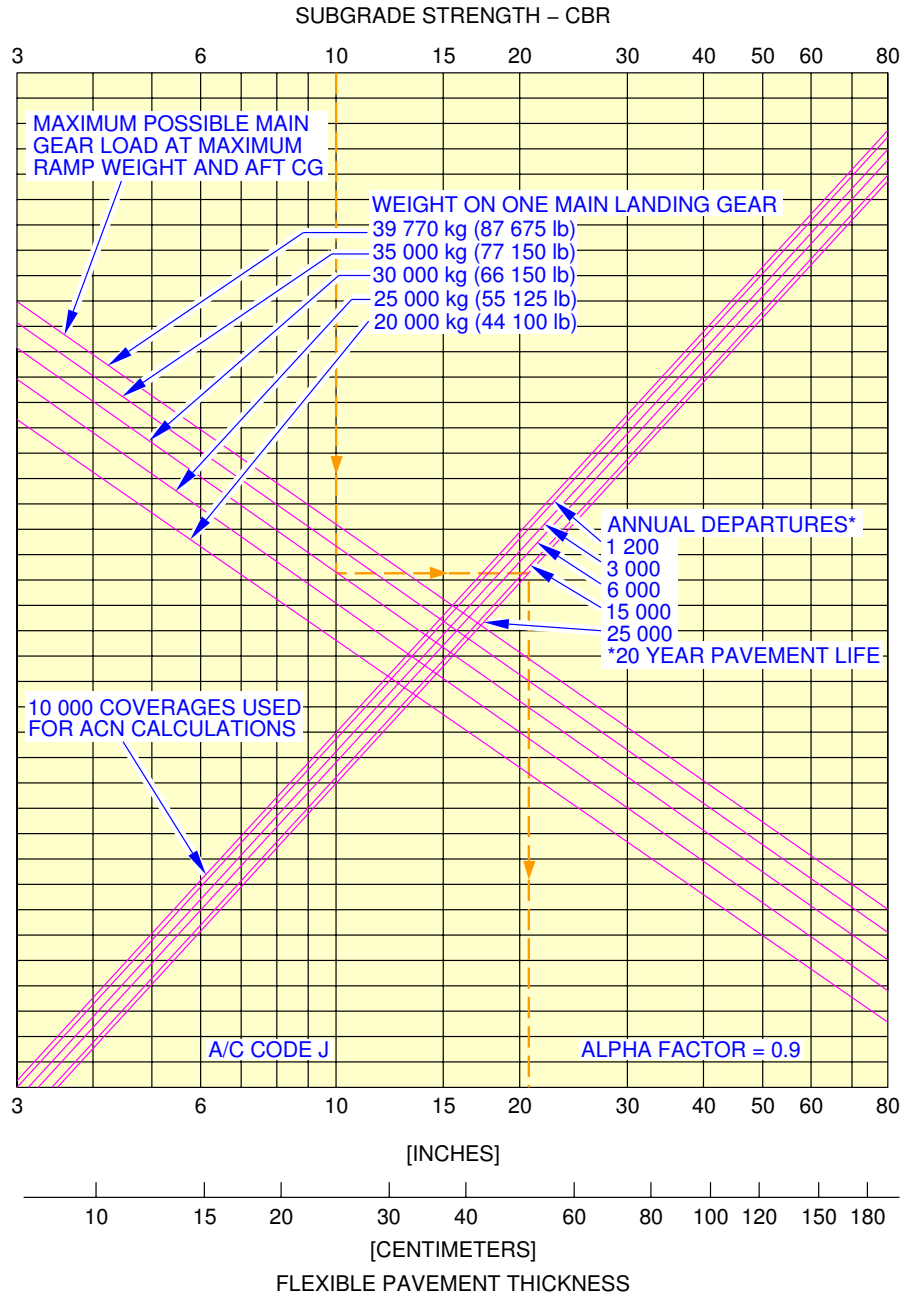


1 270 x 455 R22 (49 x 18–22) TIRES
TIRE PRESSURE CONSTANT AT 13.6 bar (197 psi)

N_AC_070501_1_1140101_01_00

Flexible Pavement Requirements
FIGURE 7

****ON A/C A321-100**

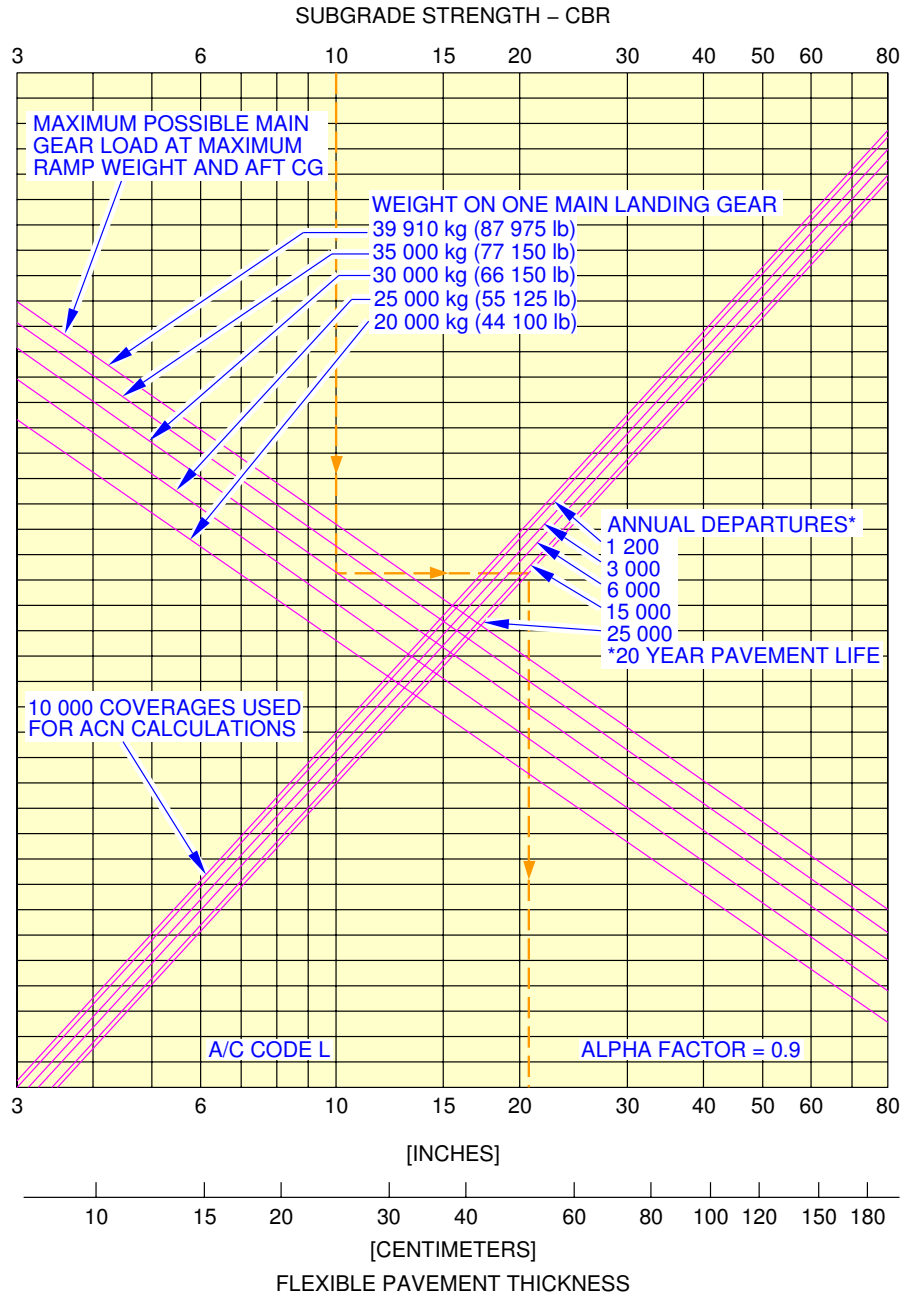


1 270 x 455 R22 (49 x 18–22) TIRES
TIRE PRESSURE CONSTANT AT 13.6 bar (197 psi)

N_AC_070501_1_1150101_01_00

Flexible Pavement Requirement
Flexible Pavement Requirements
FIGURE 8

****ON A/C A321-100**

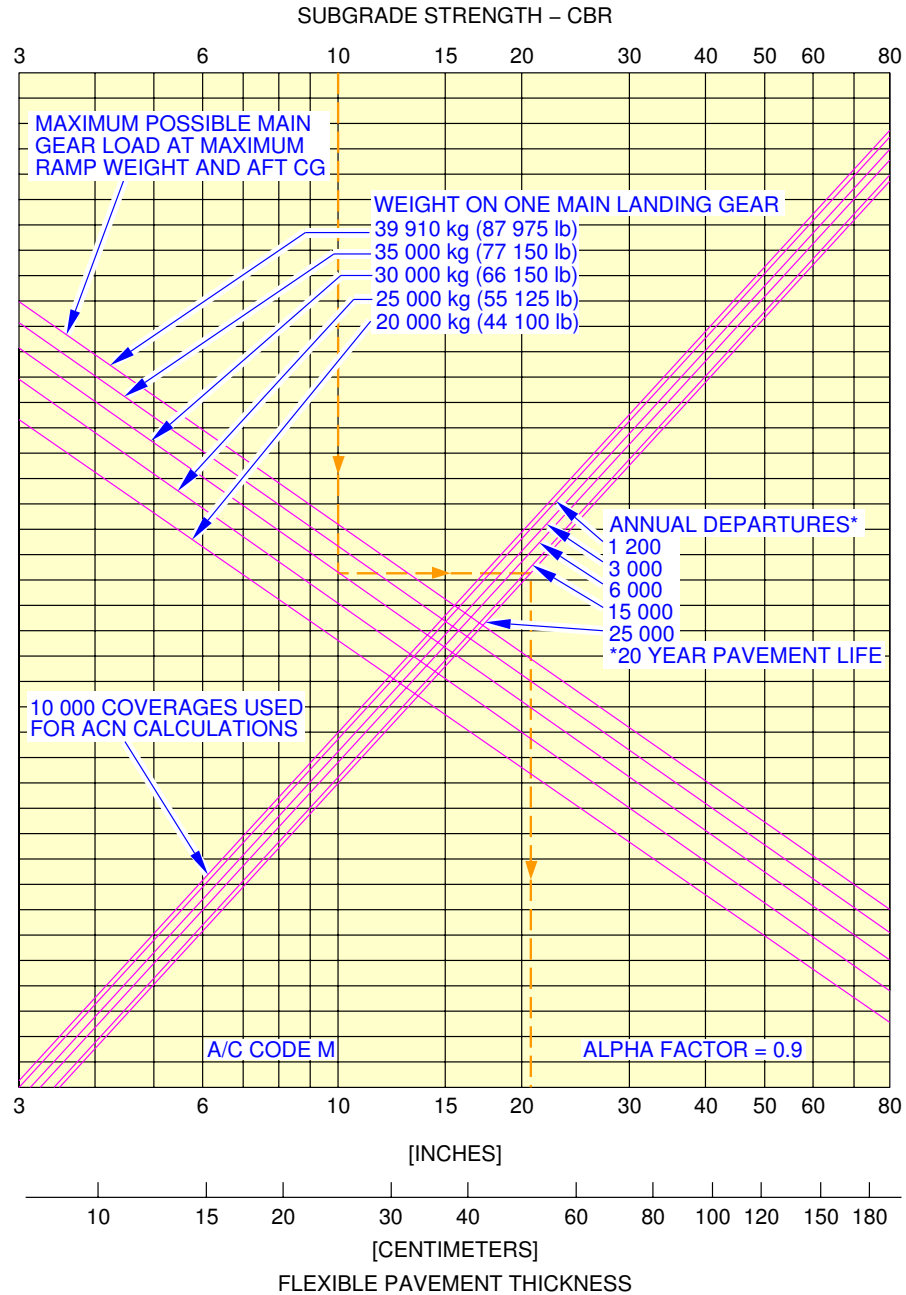


1 270 x 455 R22 (49 x 18–22) TIRES
TIRE PRESSURE CONSTANT AT 13.6 bar (197 psi)

N_AC_070501_1_1160101_01_00

Flexible Pavement Requirements
FIGURE 9

**ON A/C A321-200

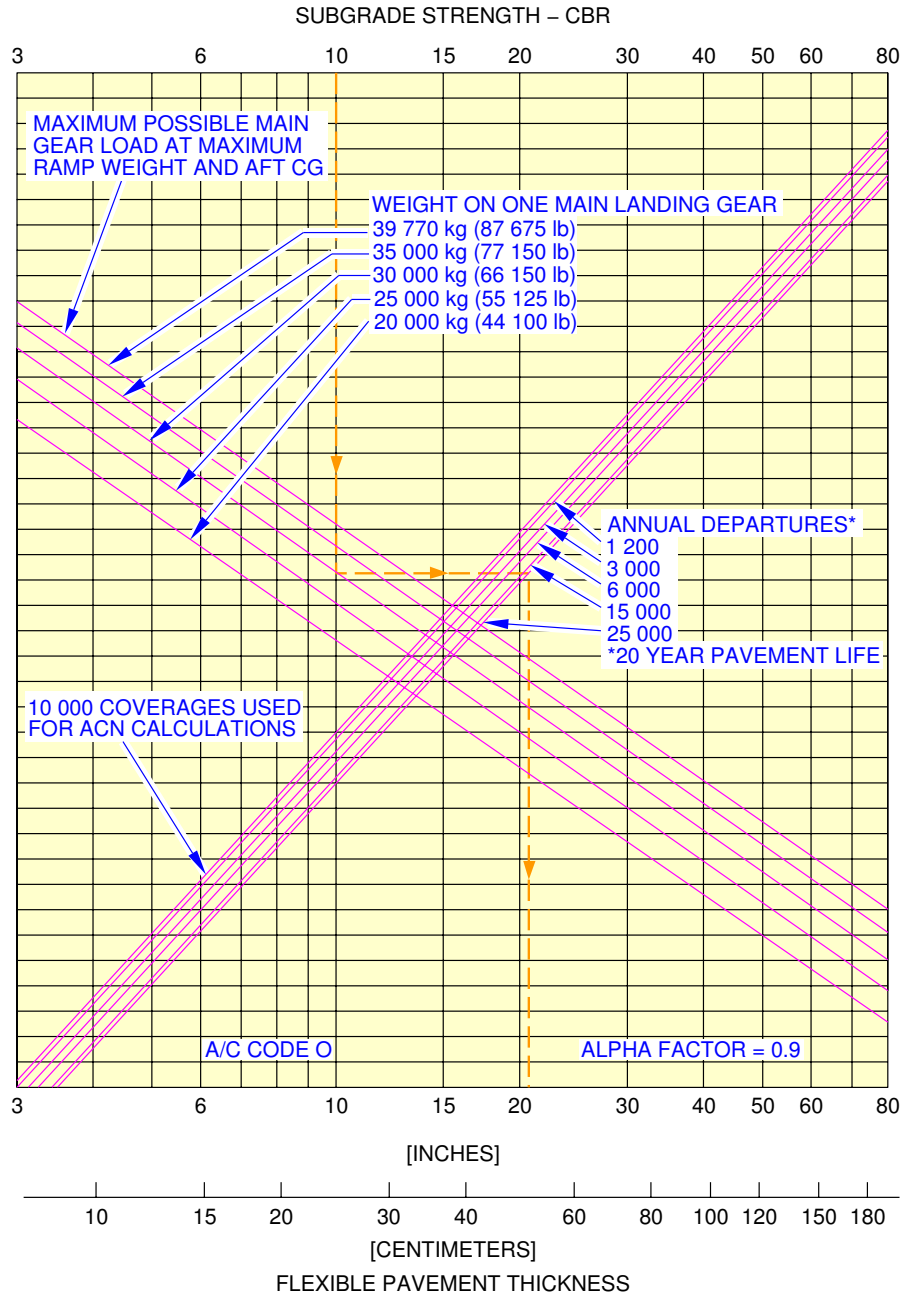


1 270 x 455 R22 (49 x 18–22) TIRES
TIRE PRESSURE CONSTANT AT 13.6 bar (197 psi)

N_AC_070501_1_1170101_01_00

Flexible Pavement Requirements
FIGURE 10


****ON A/C A321-100**

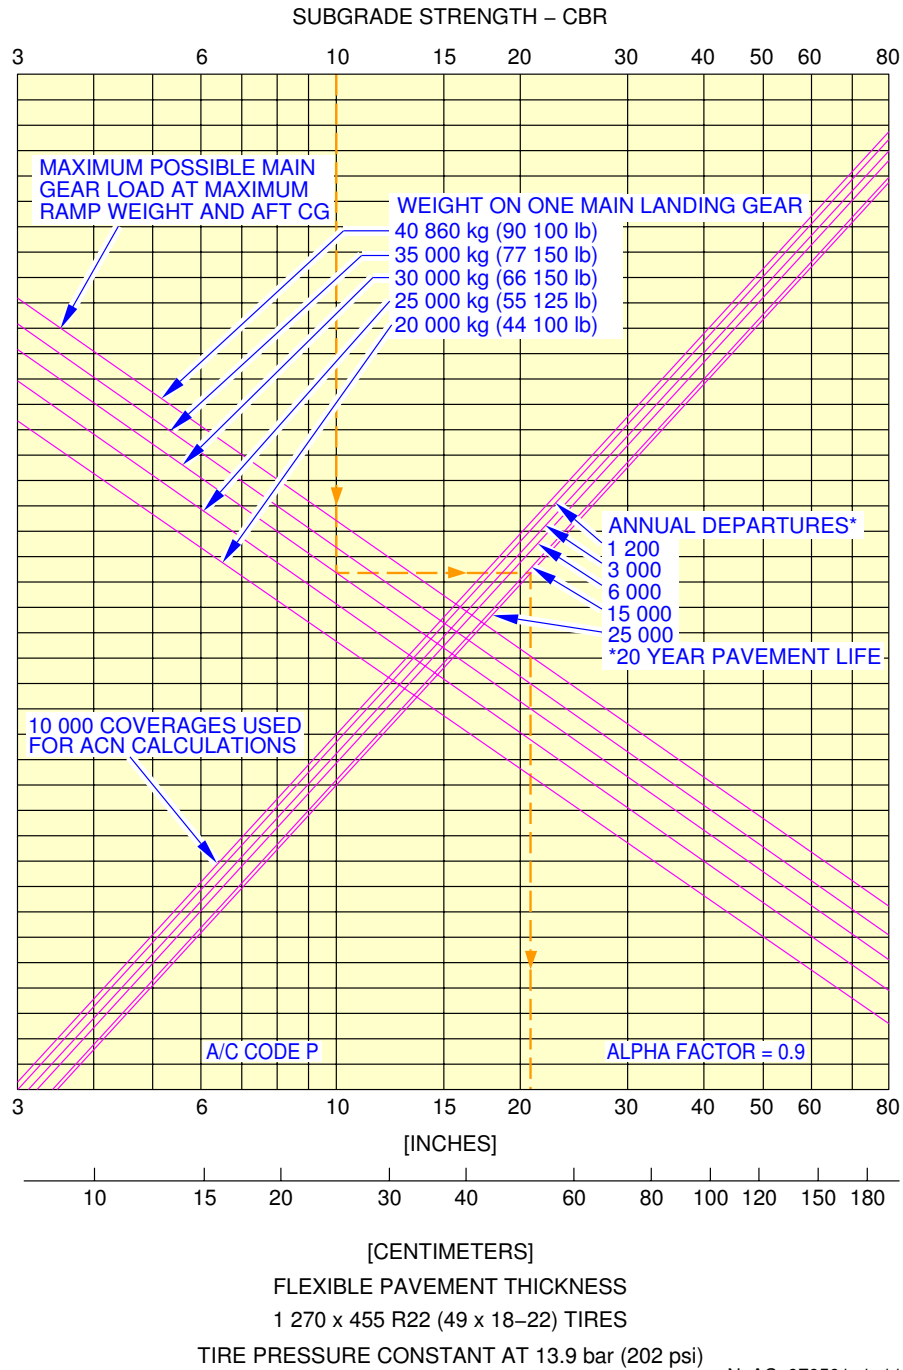

N_AC_070501_1_1180101_01_00

Flexible Pavement Requirements
FIGURE 11


**ON A/C A321-200

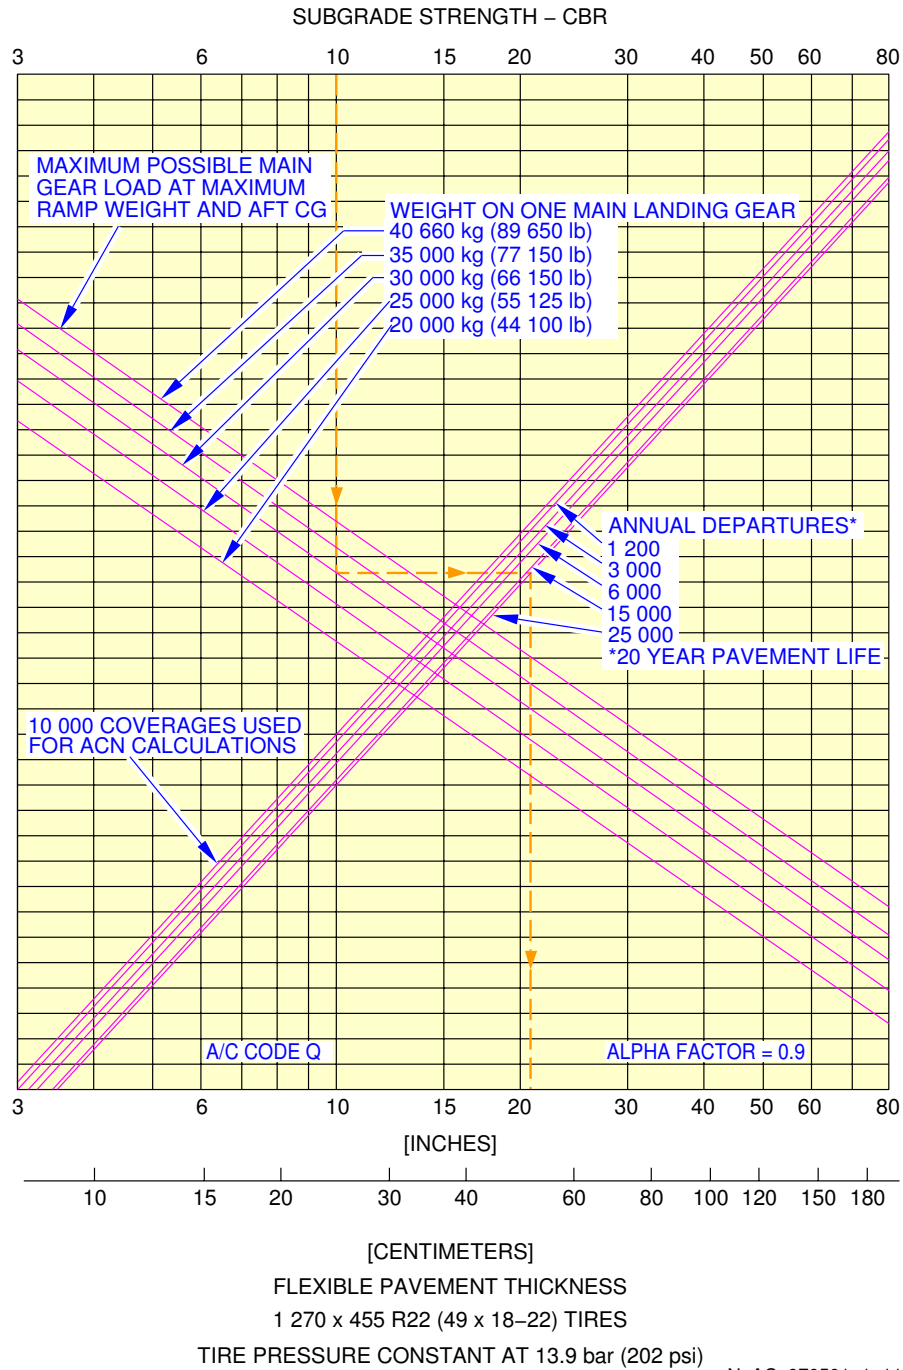

N_AC_070501_1_1190101_01_00

Flexible Pavement Requirements
FIGURE 12


**ON A/C A321-200

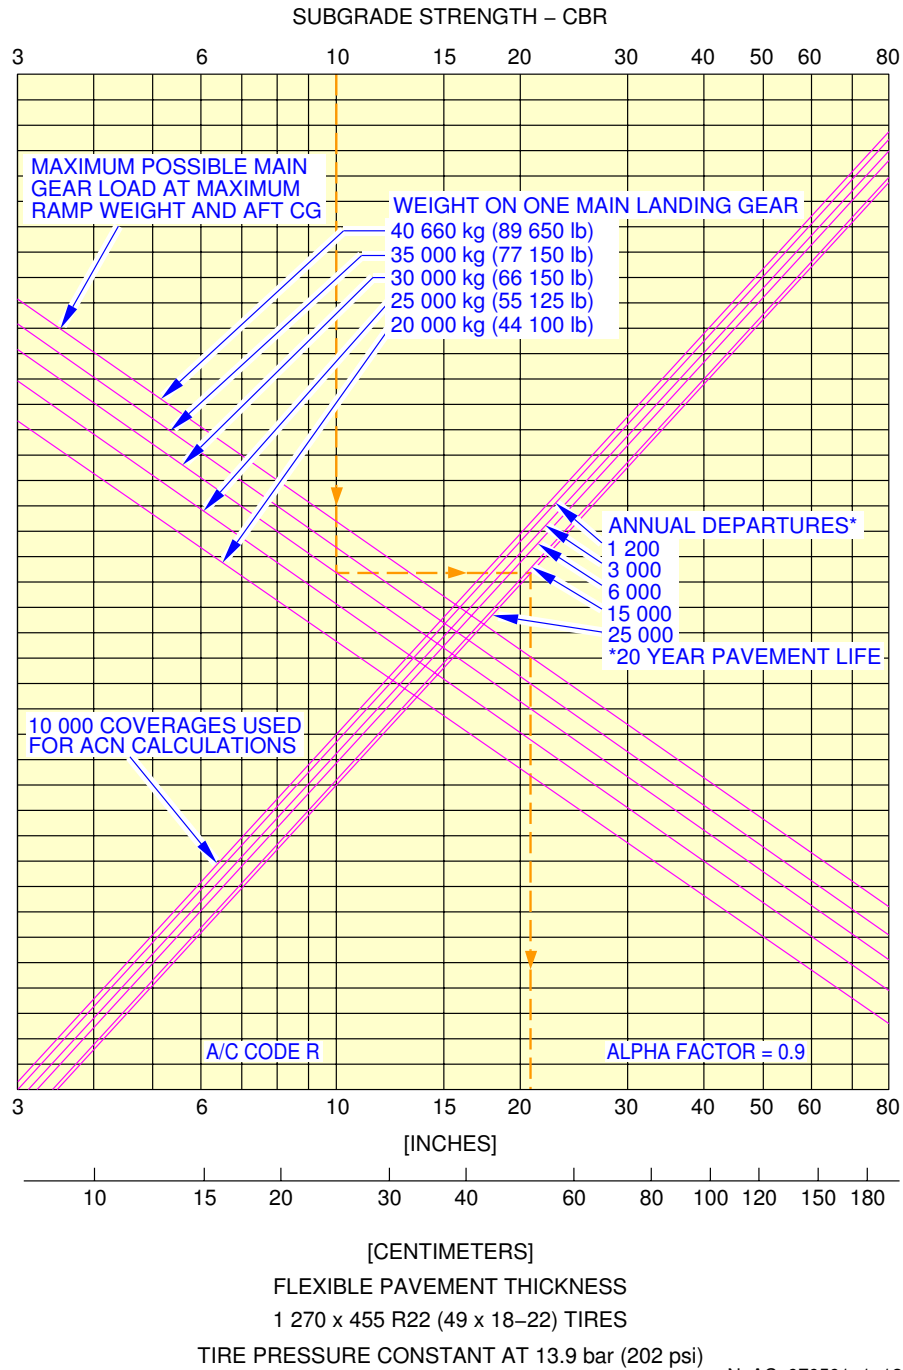

N_AC_070501_1_1200101_01_00

Flexible Pavement Requirements
FIGURE 13


**ON A/C A321-200

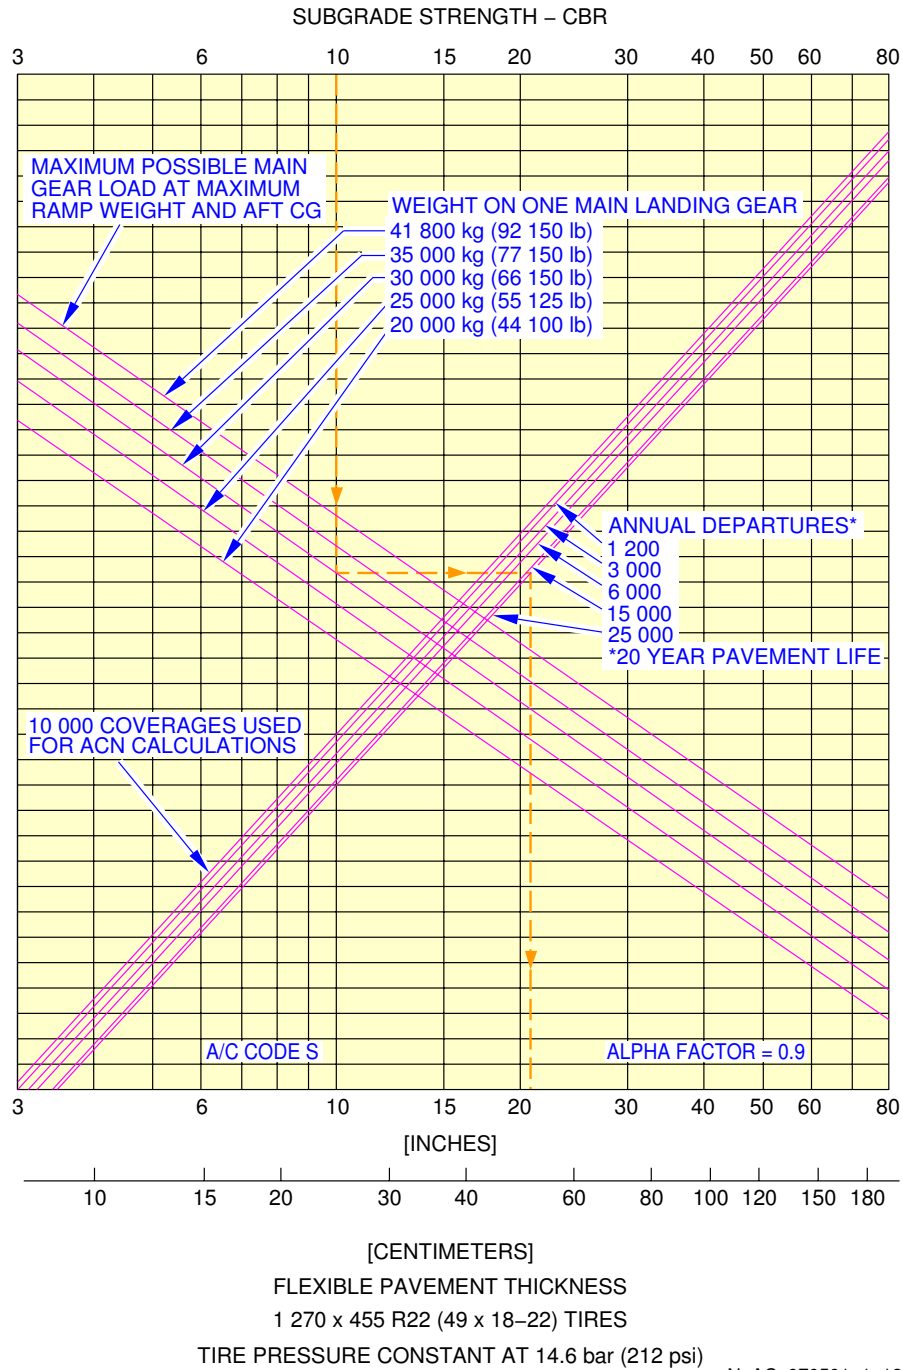

N_AC_070501_1_1210101_01_00

Flexible Pavement Requirements
FIGURE 14


****ON A/C A321-100**

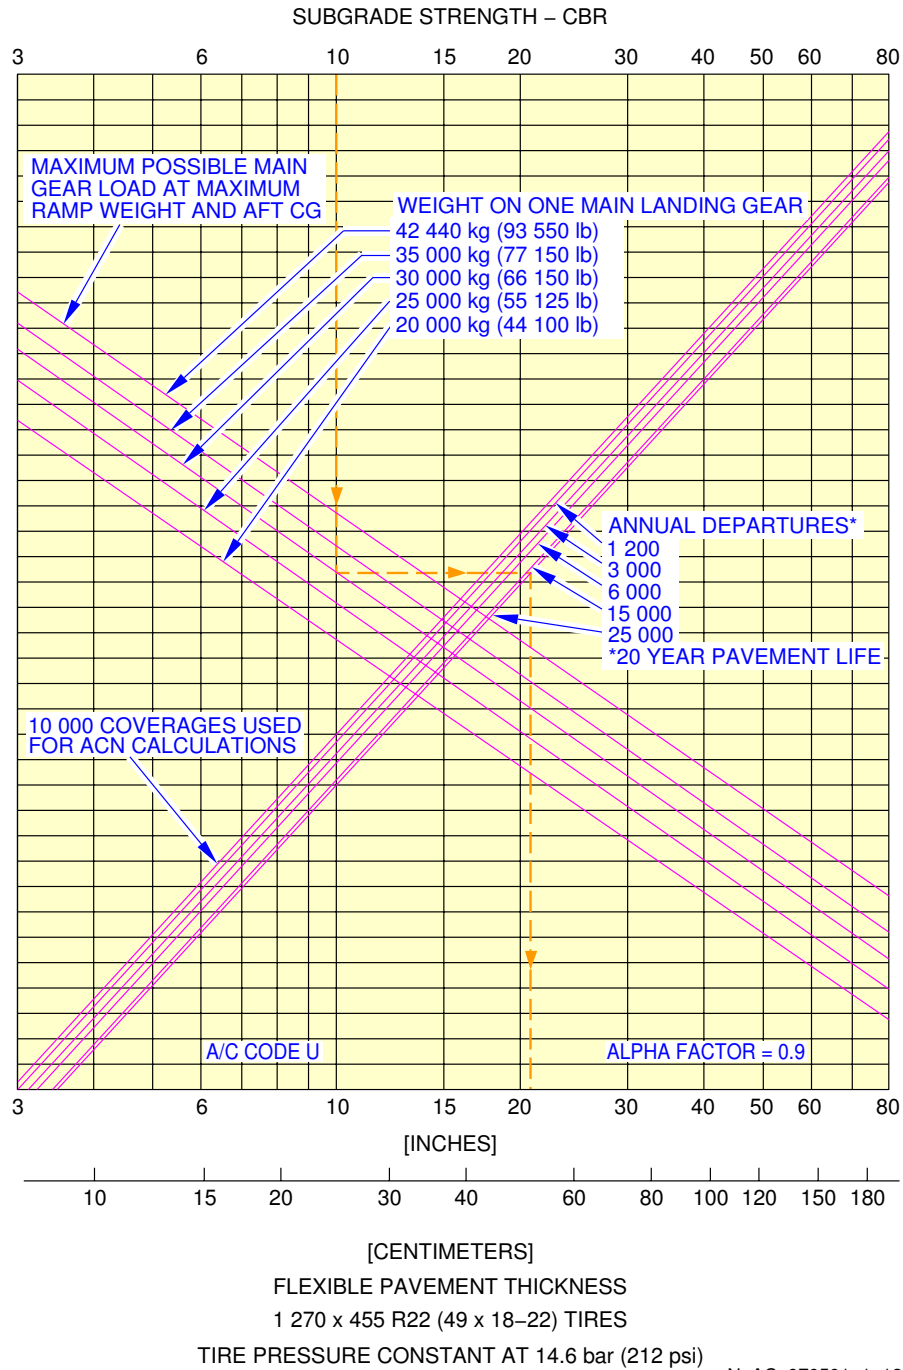

N_AC_070501_1_1220101_01_00

Flexible Pavement Requirements
FIGURE 15


**ON A/C A321-200

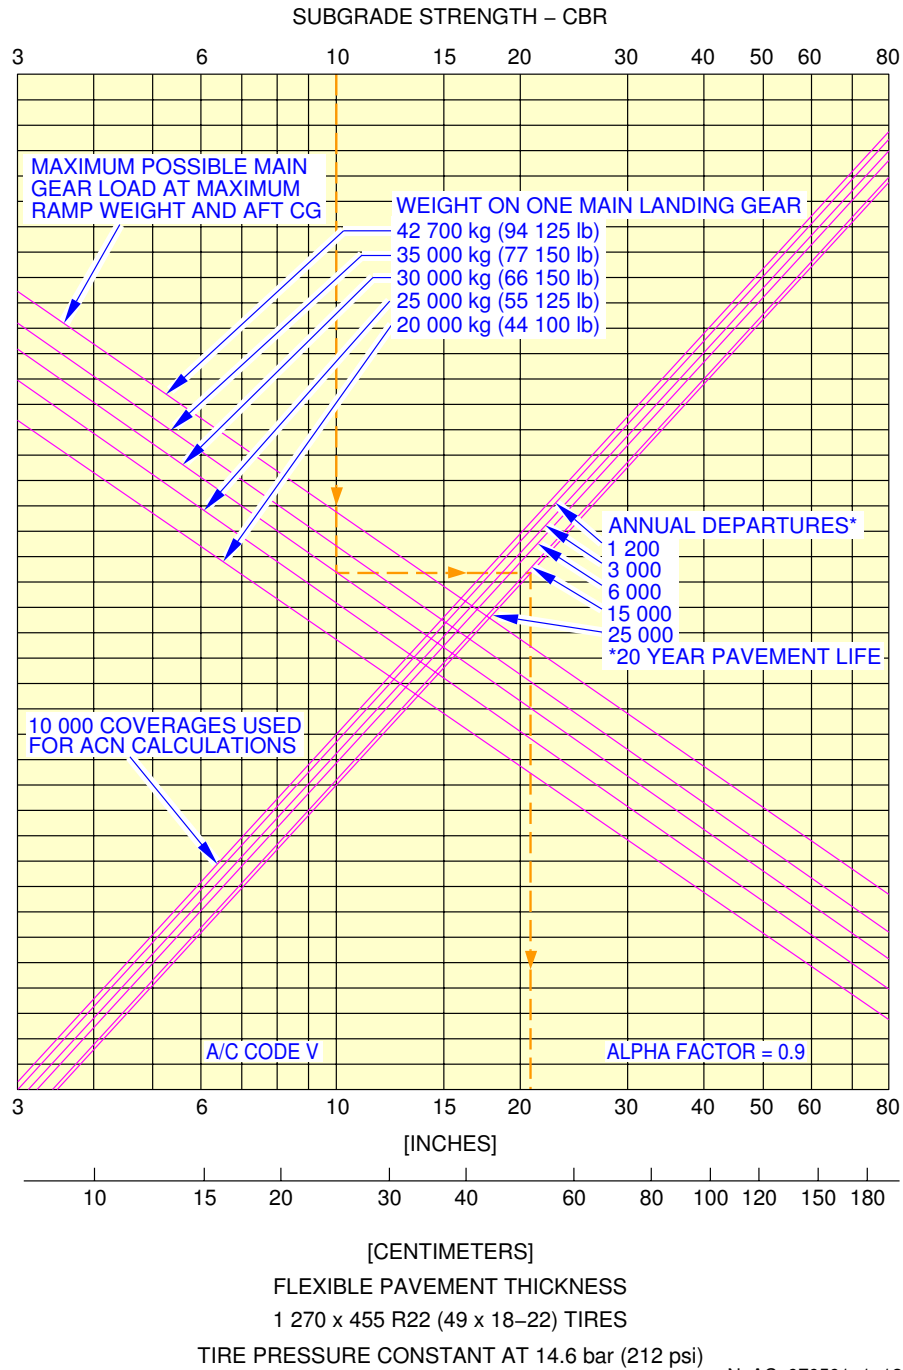

N_AC_070501_1_1230101_01_00

Flexible Pavement Requirements
FIGURE 16


**ON A/C A321-200

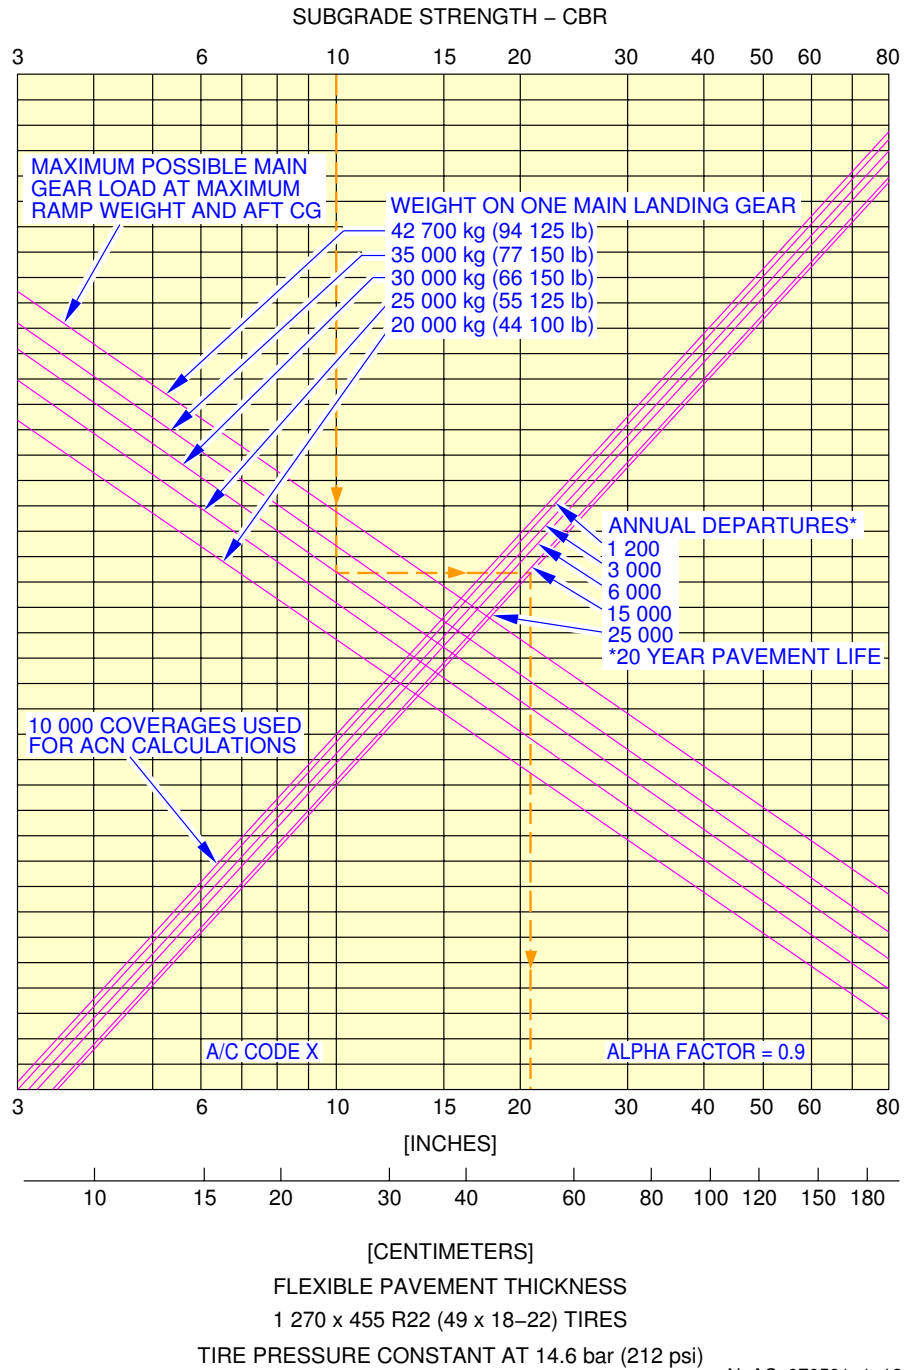

N_AC_070501_1_1240101_01_00

Flexible Pavement Requirement
Flexible Pavement Requirements
FIGURE 17


**ON A/C A321-200

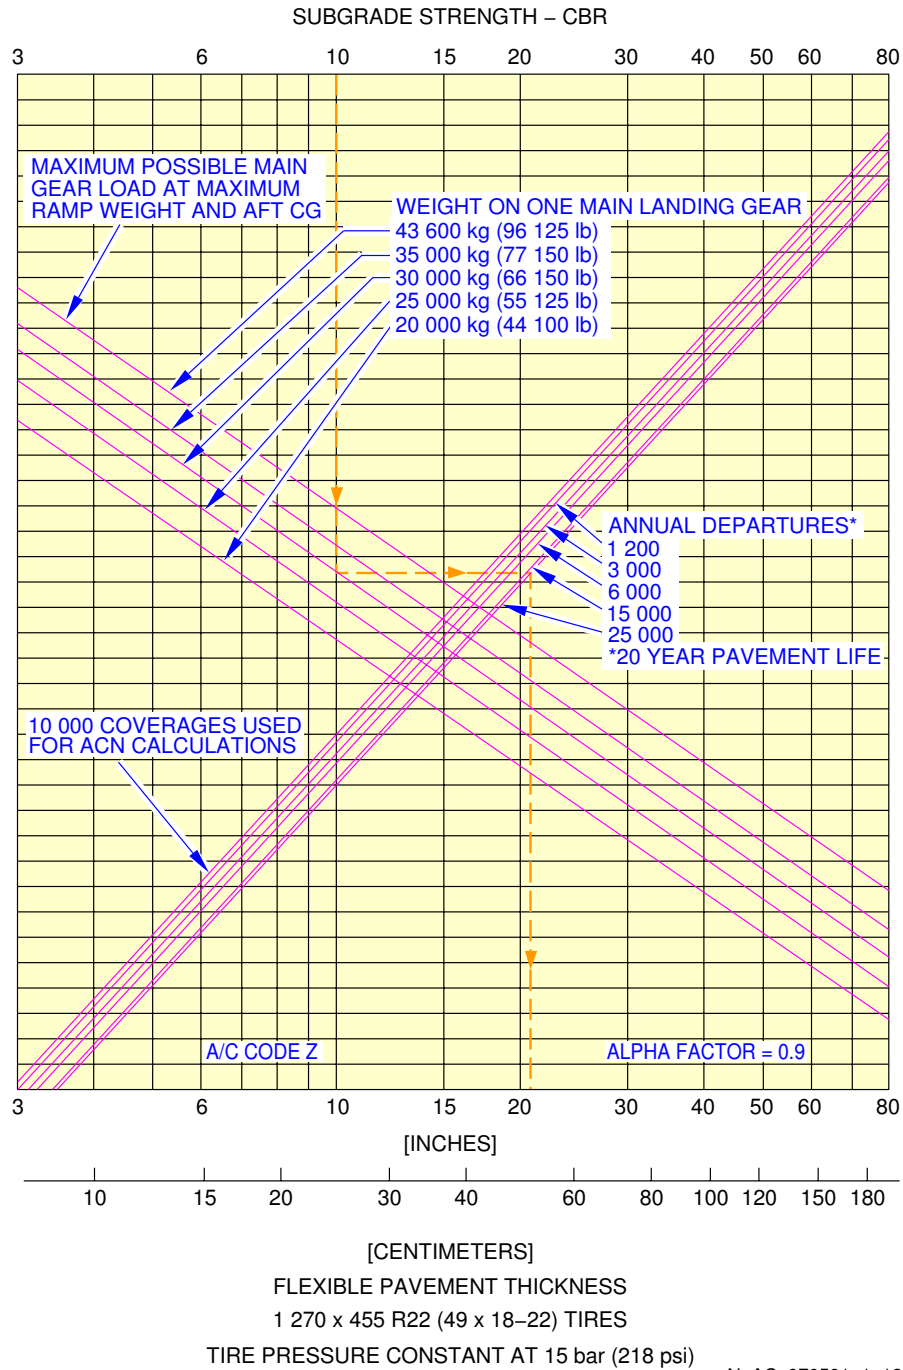

N_AC_070501_1_1250101_01_00

Flexible Pavement Requirements
FIGURE 18


****ON A/C A321-200**

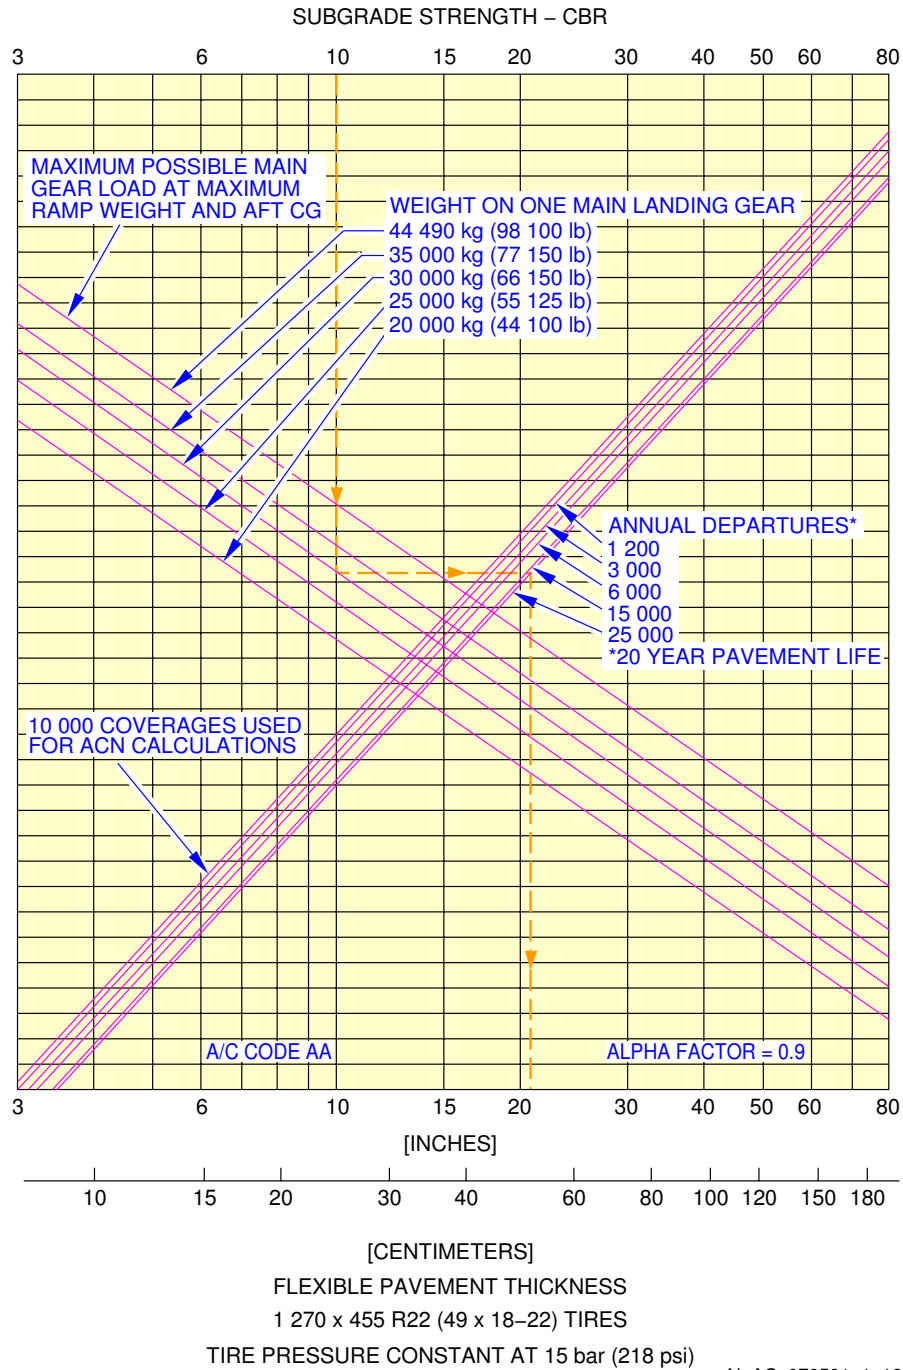

N_AC_070501_1_1260101_01_00

Flexible Pavement Requirements
FIGURE 19

**ON A/C A321-200

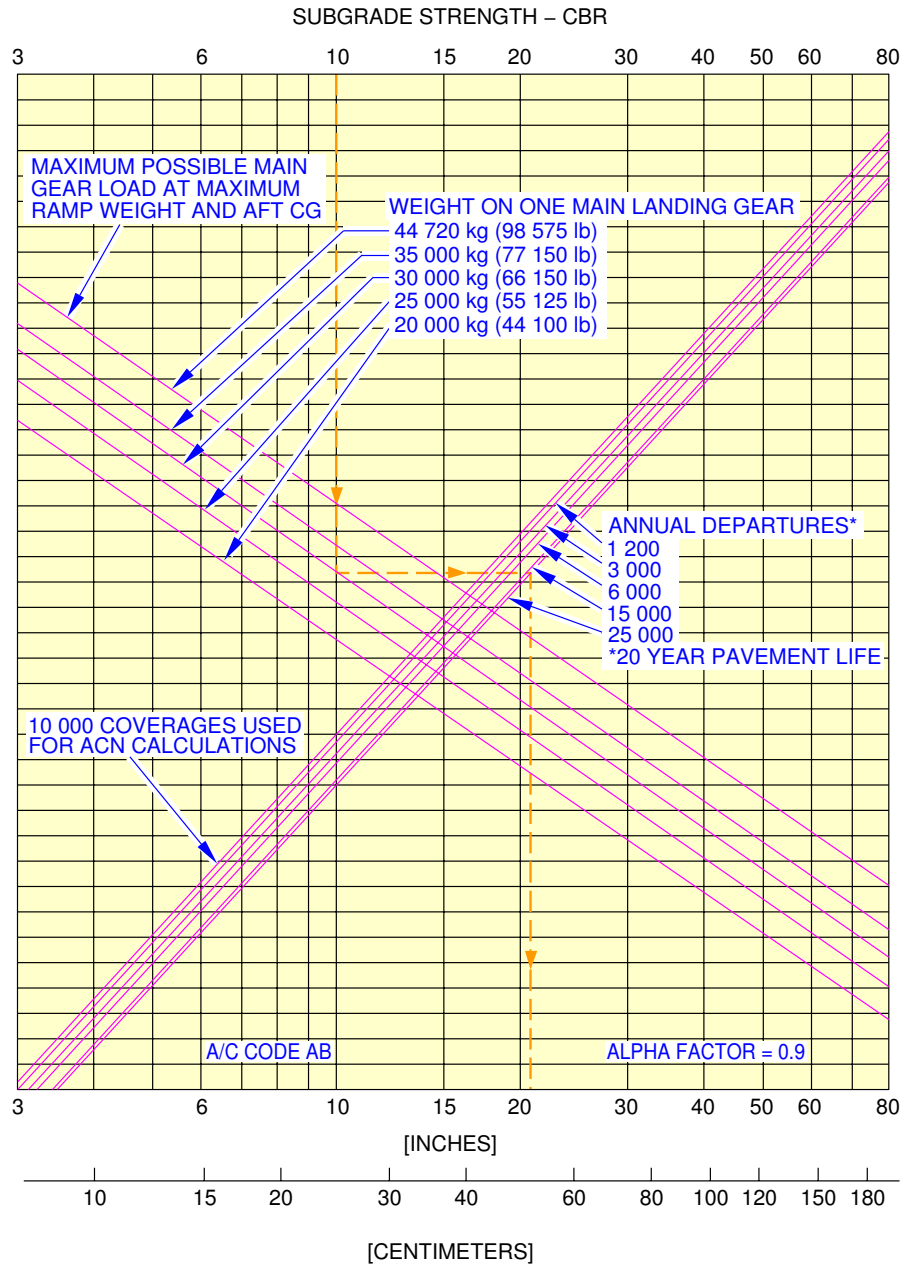

FLEXIBLE PAVEMENT THICKNESS

1 270 x 455 R22 (49 x 18–22) TIRES

TIRE PRESSURE CONSTANT AT 15 bar (218 psi)

N_AC_070501_1_1270101_01_00

Flexible Pavement Requirements
FIGURE 20

7-6-0 Flexible Pavement Requirements - LCN Conversion****ON A/C A321-100 A321-200**Flexible Pavement Requirements - LCN Conversion**1. General**

In order to determine the airplane weight that can be accommodated on a particular Flexible Pavement, both the LCN of the pavement and the thickness (h) must be known.

In the example shown in Section 7-6-1 Flexible Pavement Requirements - LCN Conversion, A/C Code C for:

The thickness (h) is shown at 20 inches with an LCN of 73.5.

For these conditions, the weight on one Main Landing Gear is 35 000 kg (77 150 lb).

7-6-1 Flexible Pavement Requirements - LCN Conversion


****ON A/C A321-100 A321-200**

Flexible Pavement Requirements - LCN Conversion

1. This section gives Flexible Pavement Requirements - LCN Conversion.

I NOTE : For A/C Code definition, refer to chapter 7-1-0.

****ON A/C A321-100**

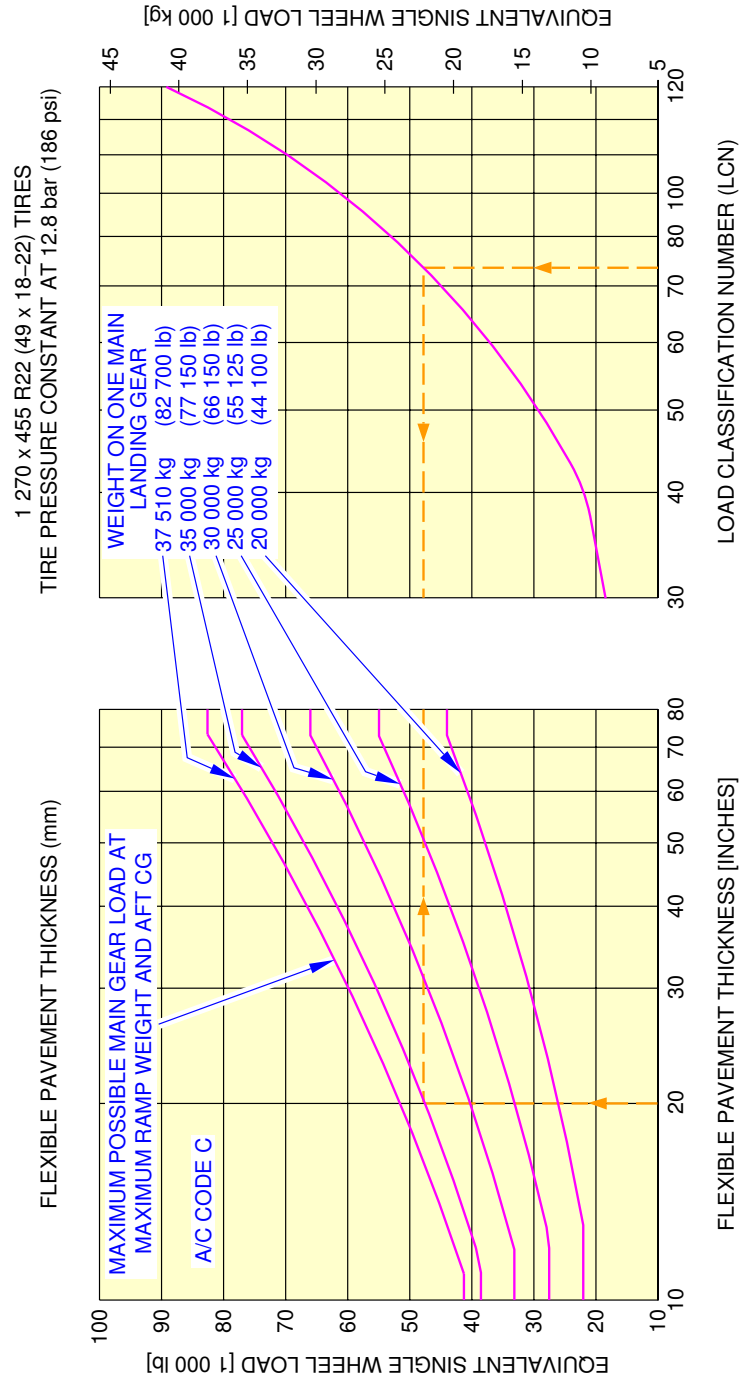


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1110101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 1

****ON A/C A321-200**

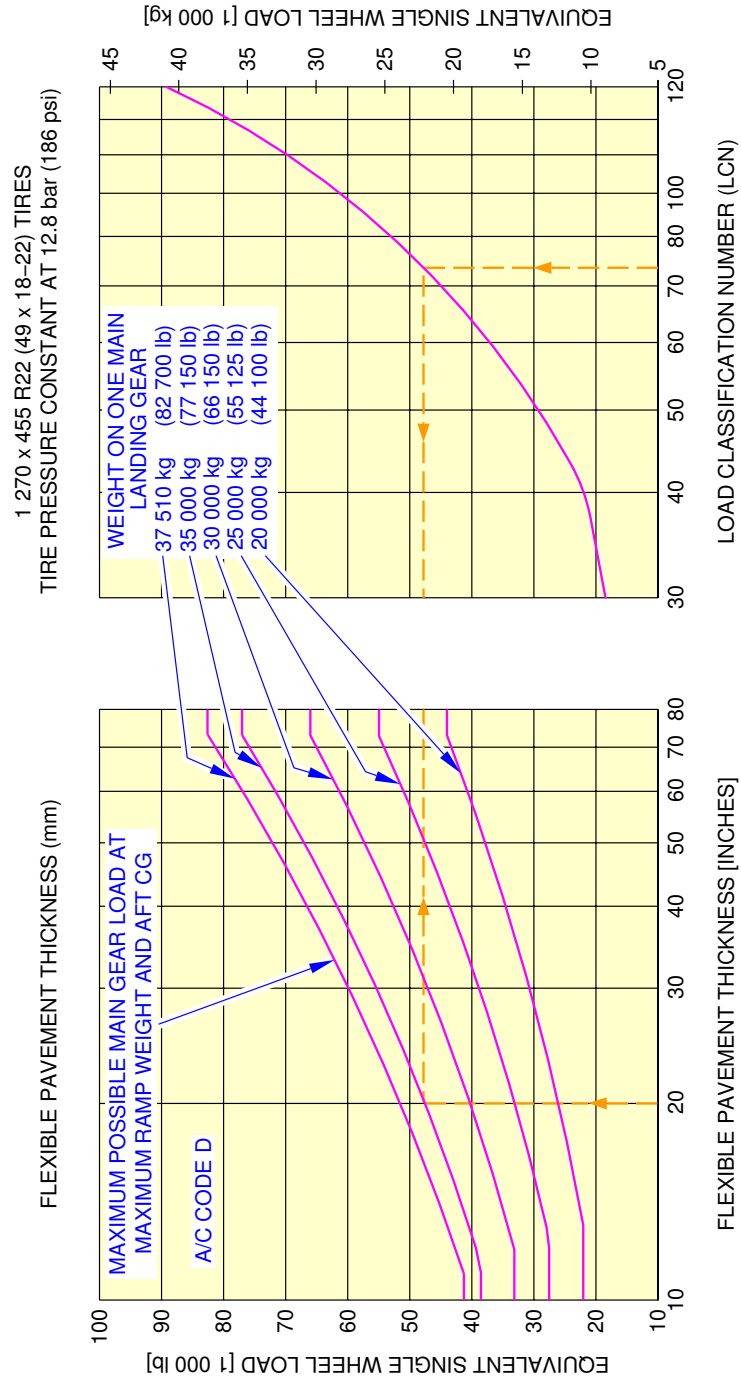


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1120101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 2


****ON A/C A321-100**

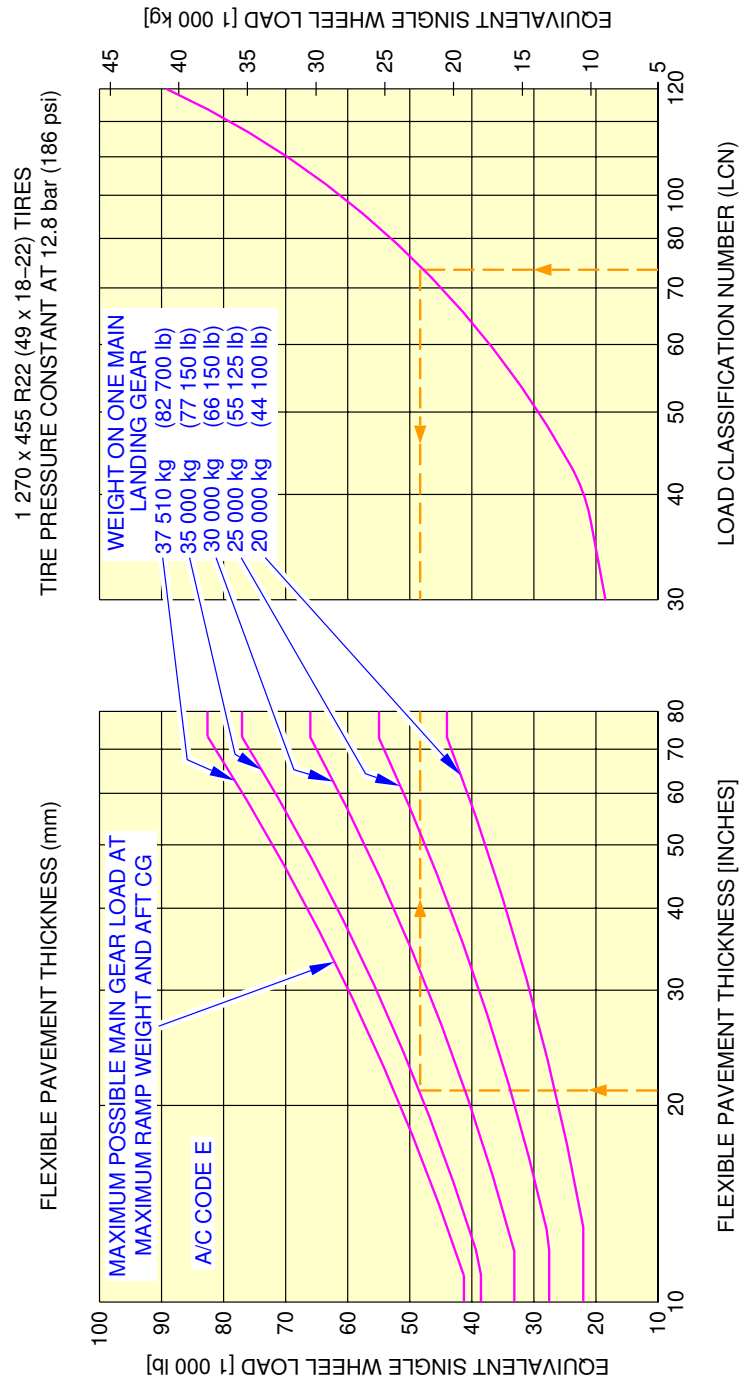

N_AC_070601_1_1130101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 3

****ON A/C A321-100**

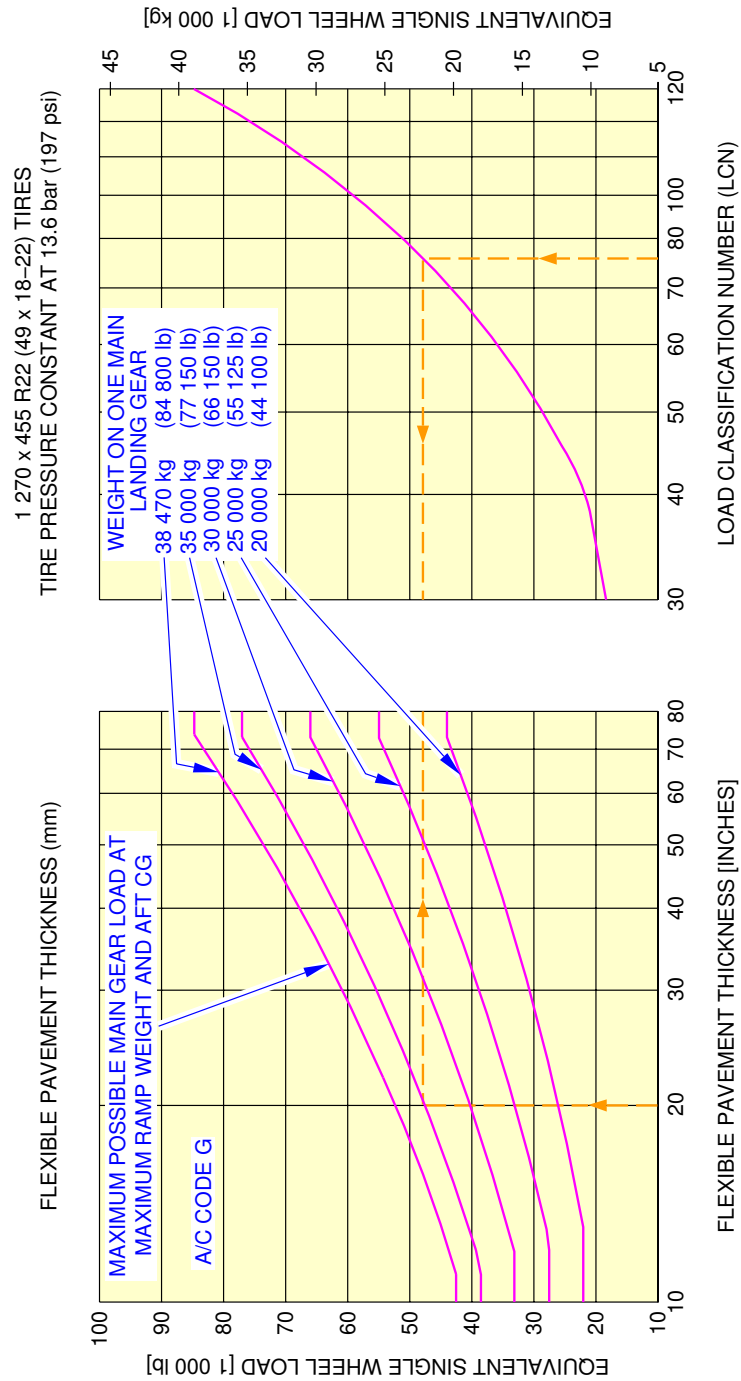


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1140101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 4

****ON A/C A321-200**

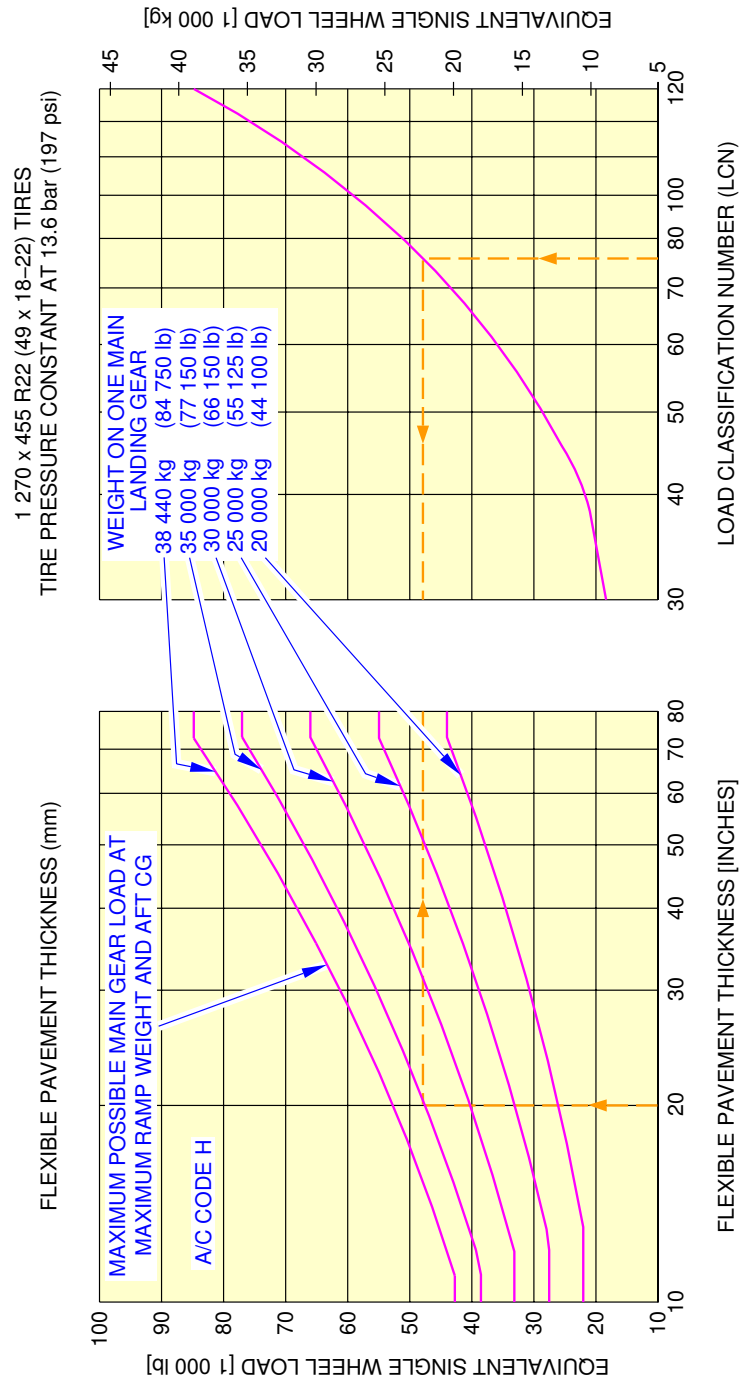


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1150101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 5

****ON A/C A321-100**

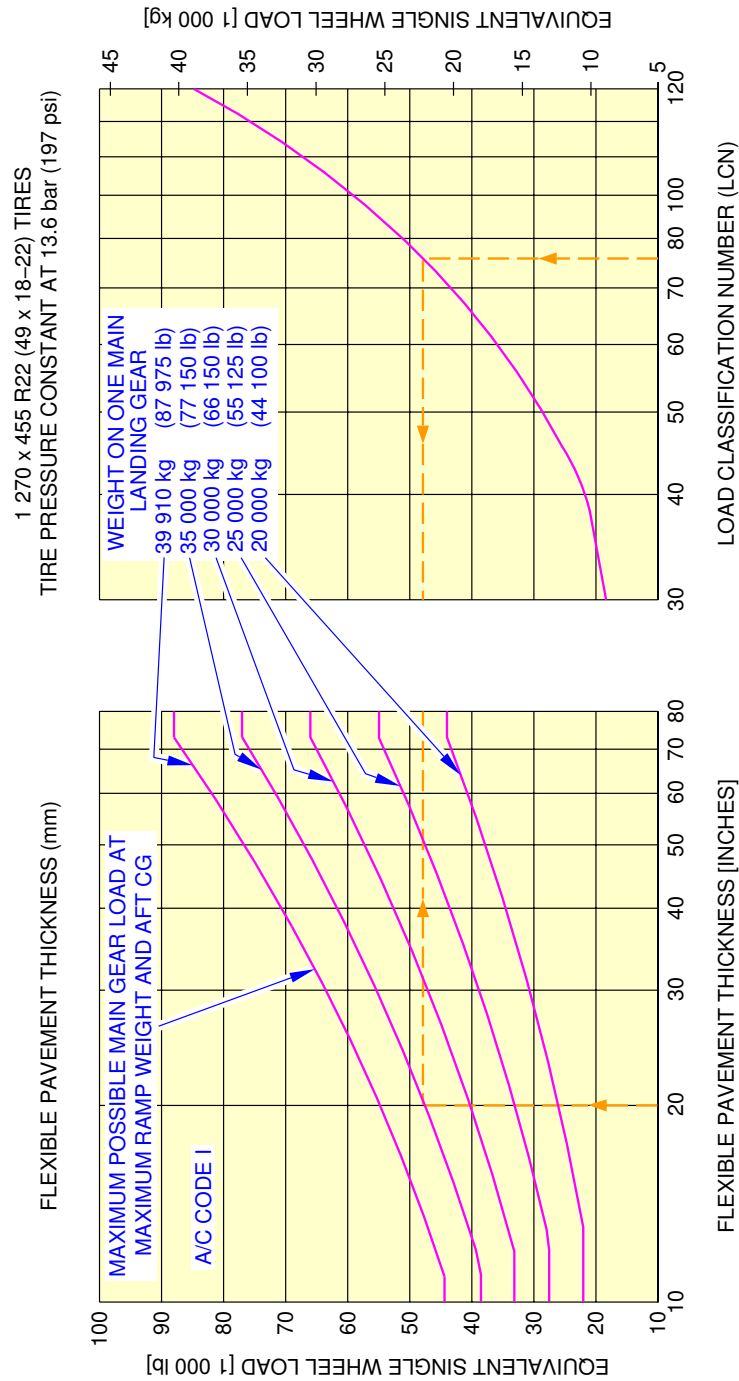


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1160101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 6

****ON A/C A321-200**

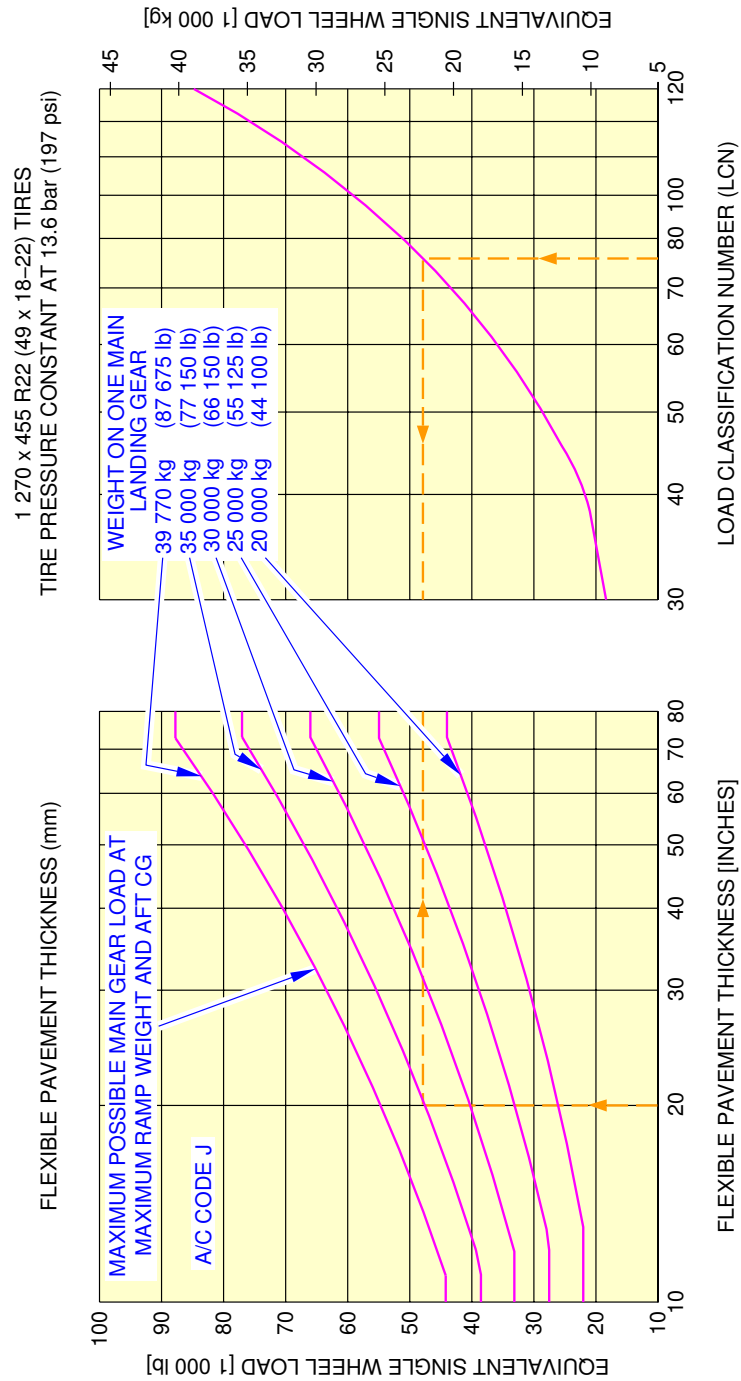


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1170101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 7


****ON A/C A321-100**

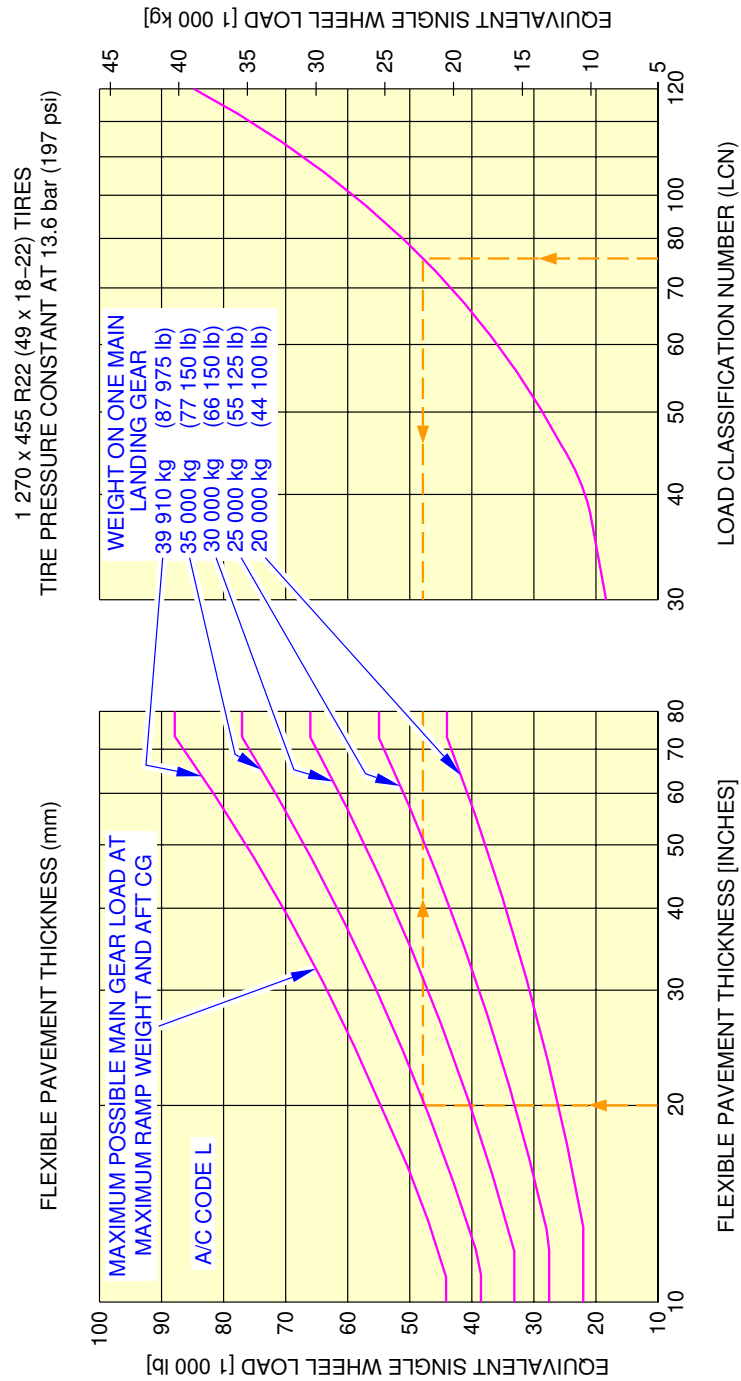

N_AC_070601_1_1180101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 8

****ON A/C A321-100**

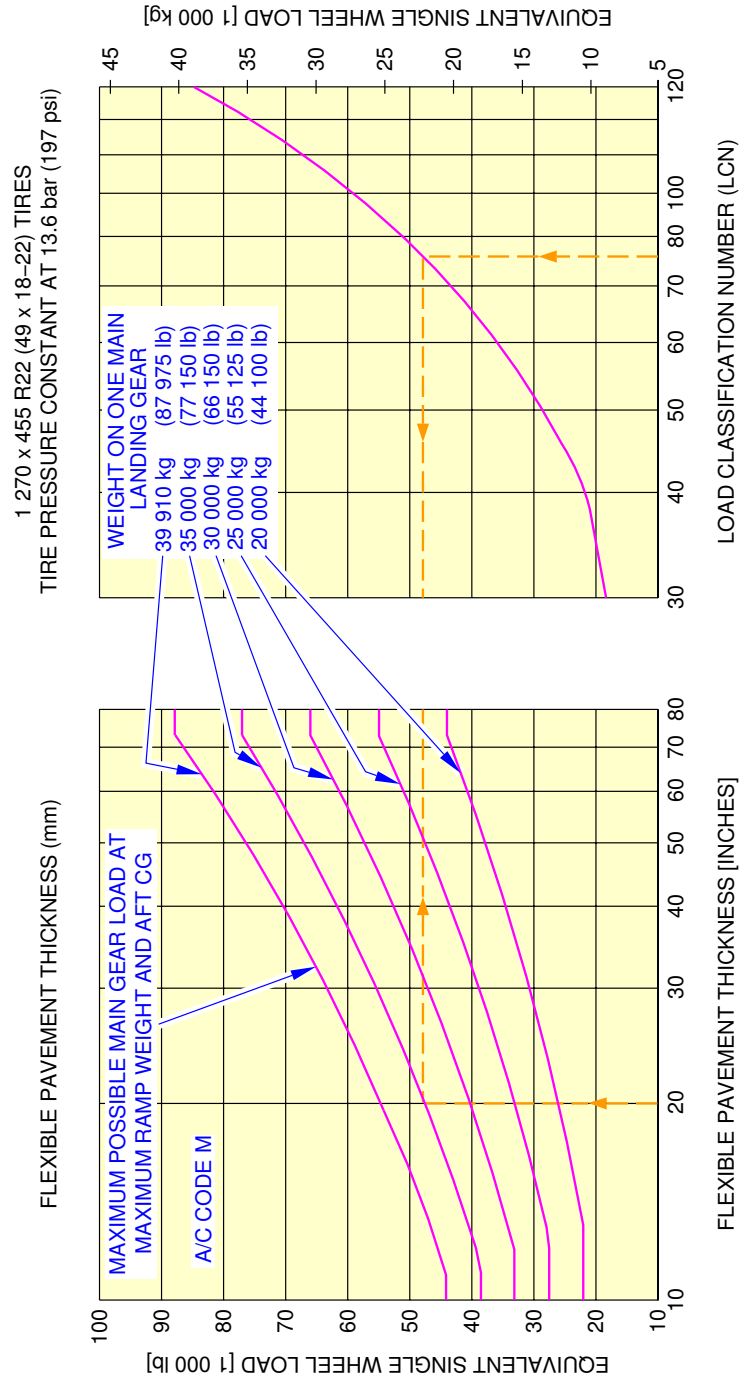


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1190101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 9


****ON A/C A321-200**

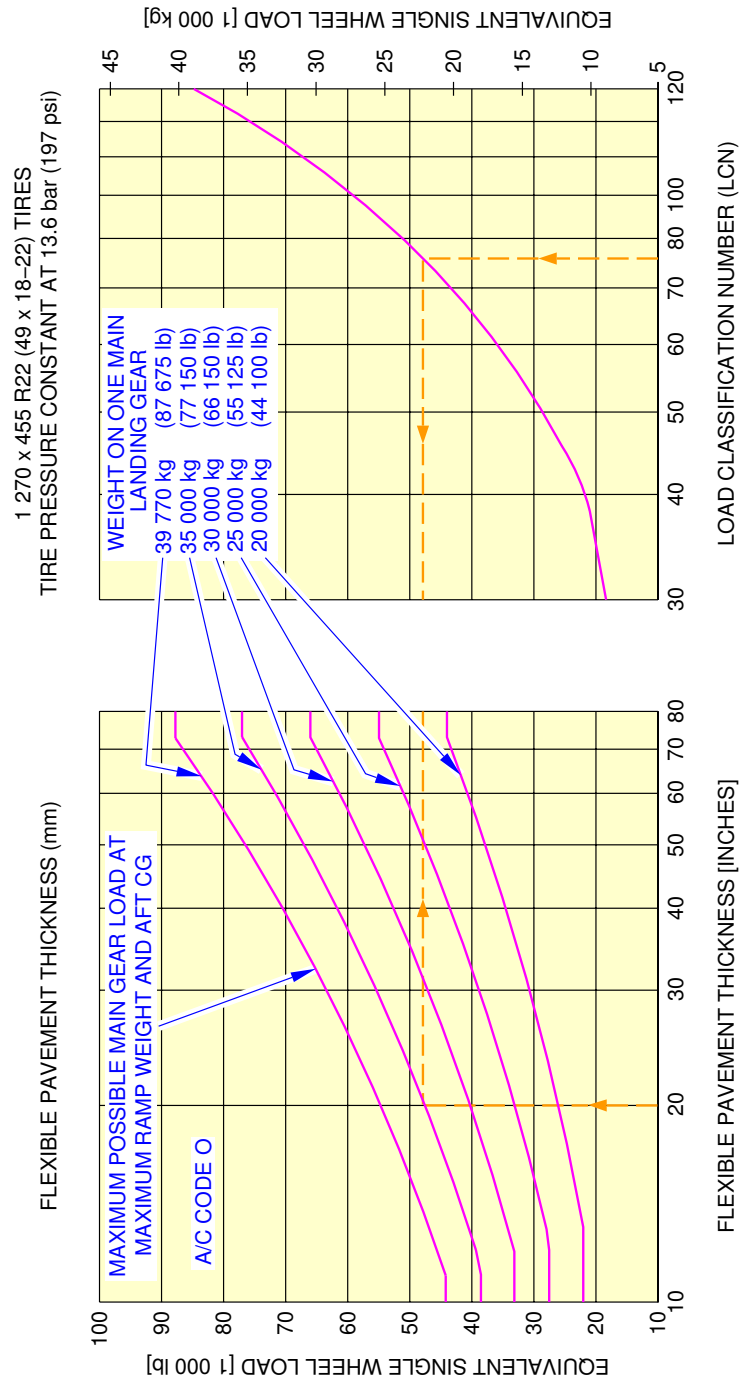

N_AC_070601_1_1200101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 10

****ON A/C A321-100**

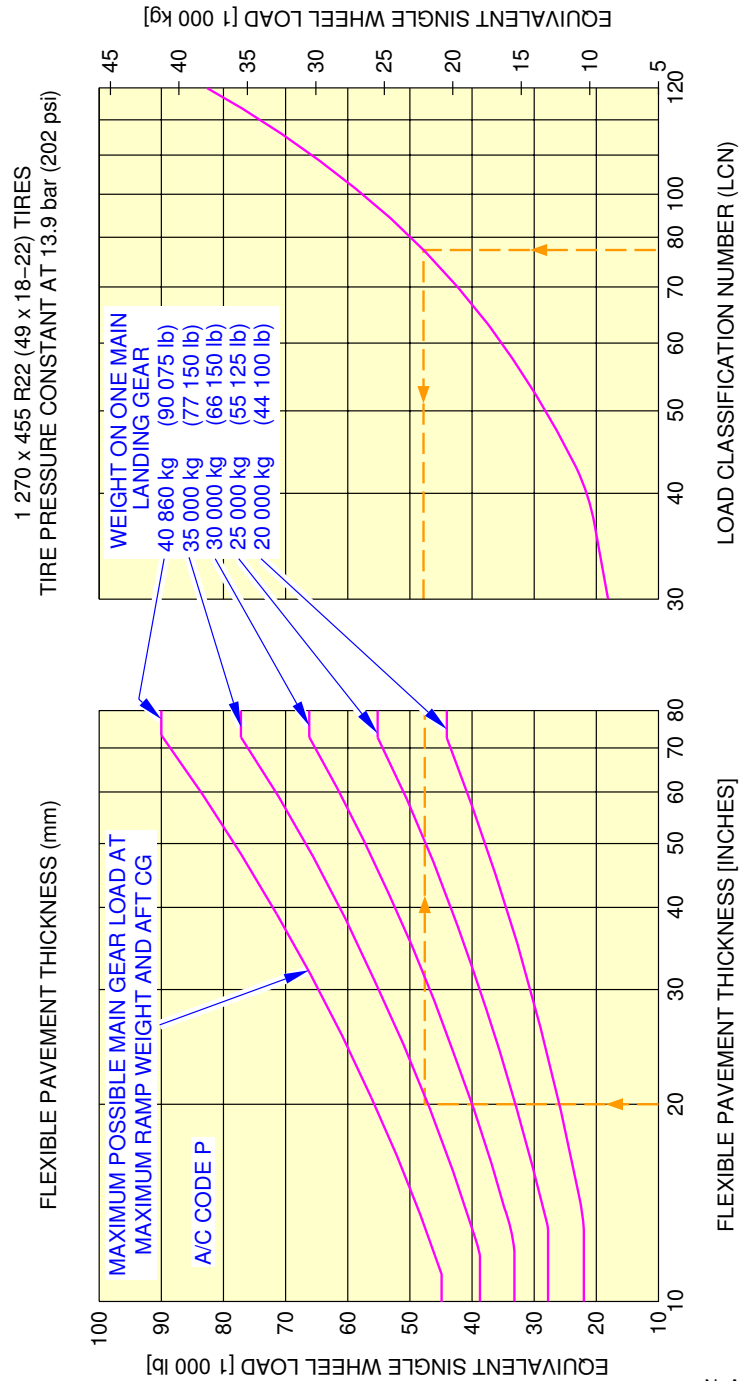


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN
ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1210101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 11

****ON A/C A321-200**

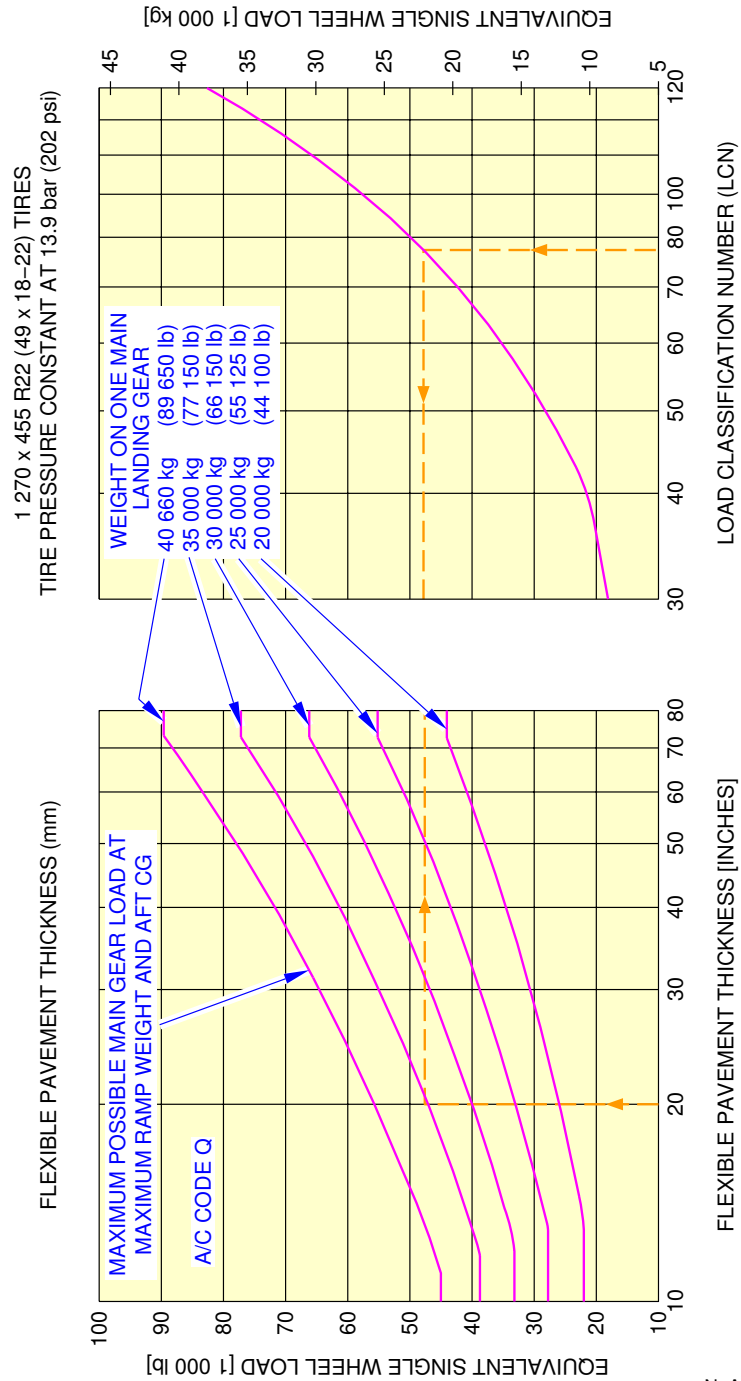


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1220101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 12

****ON A/C A321-200**

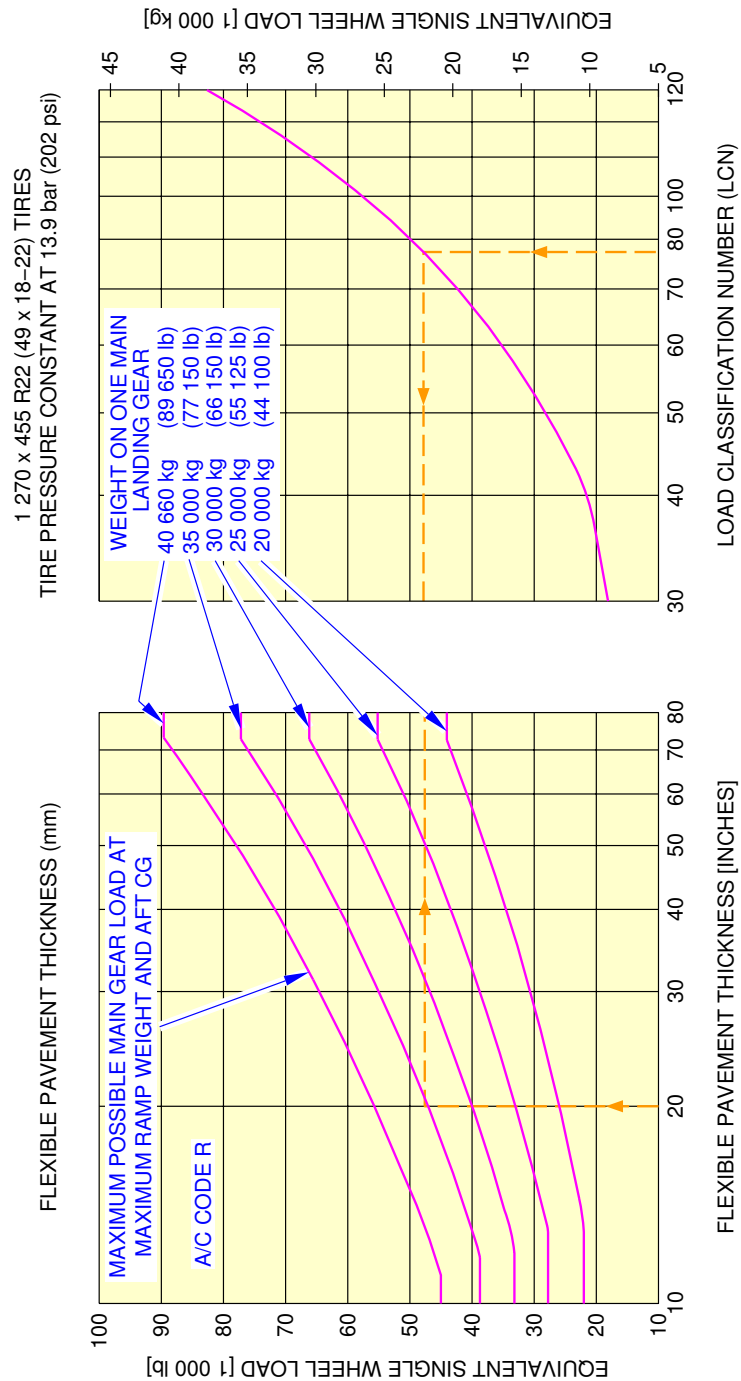


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1230101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 13

****ON A/C A321-200**

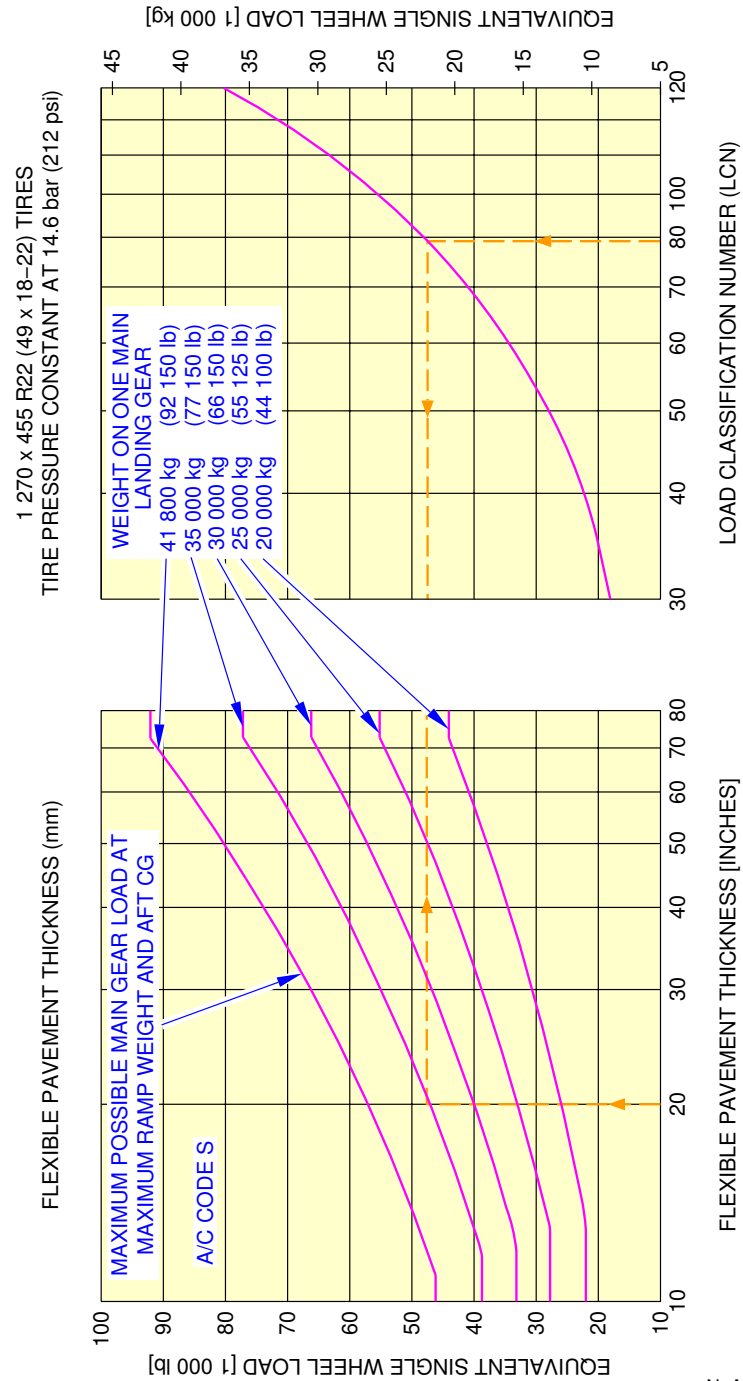


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1240101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 14

****ON A/C A321-100**

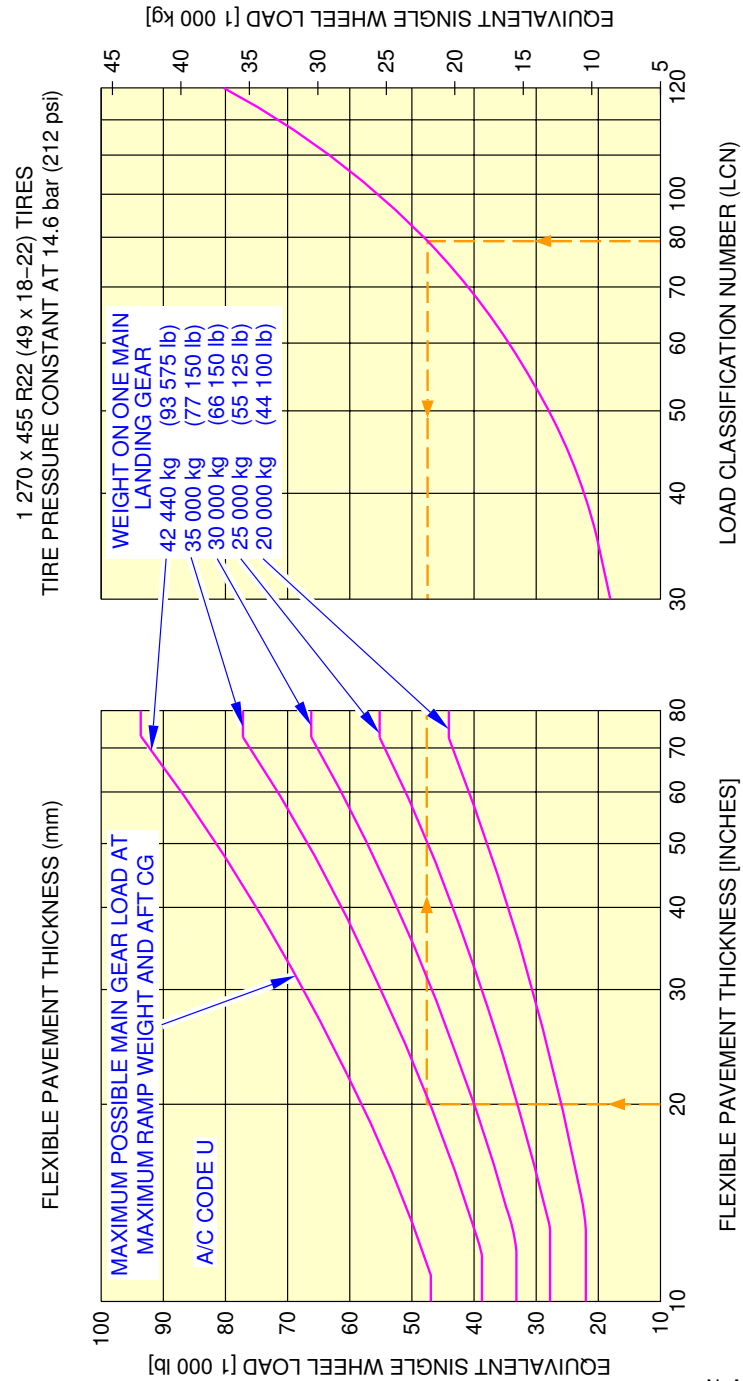


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN
ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1250101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 15

****ON A/C A321-200**

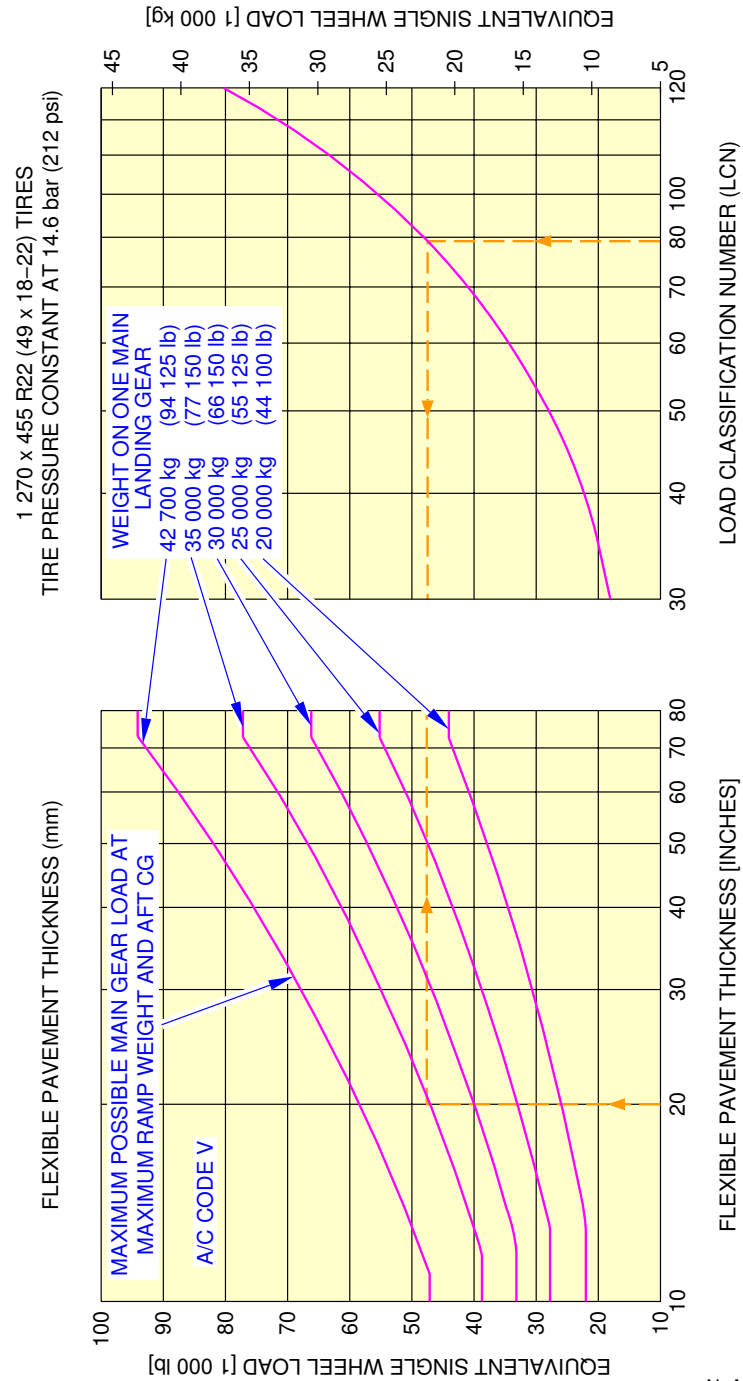


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN
ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1260101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 16

****ON A/C A321-200**

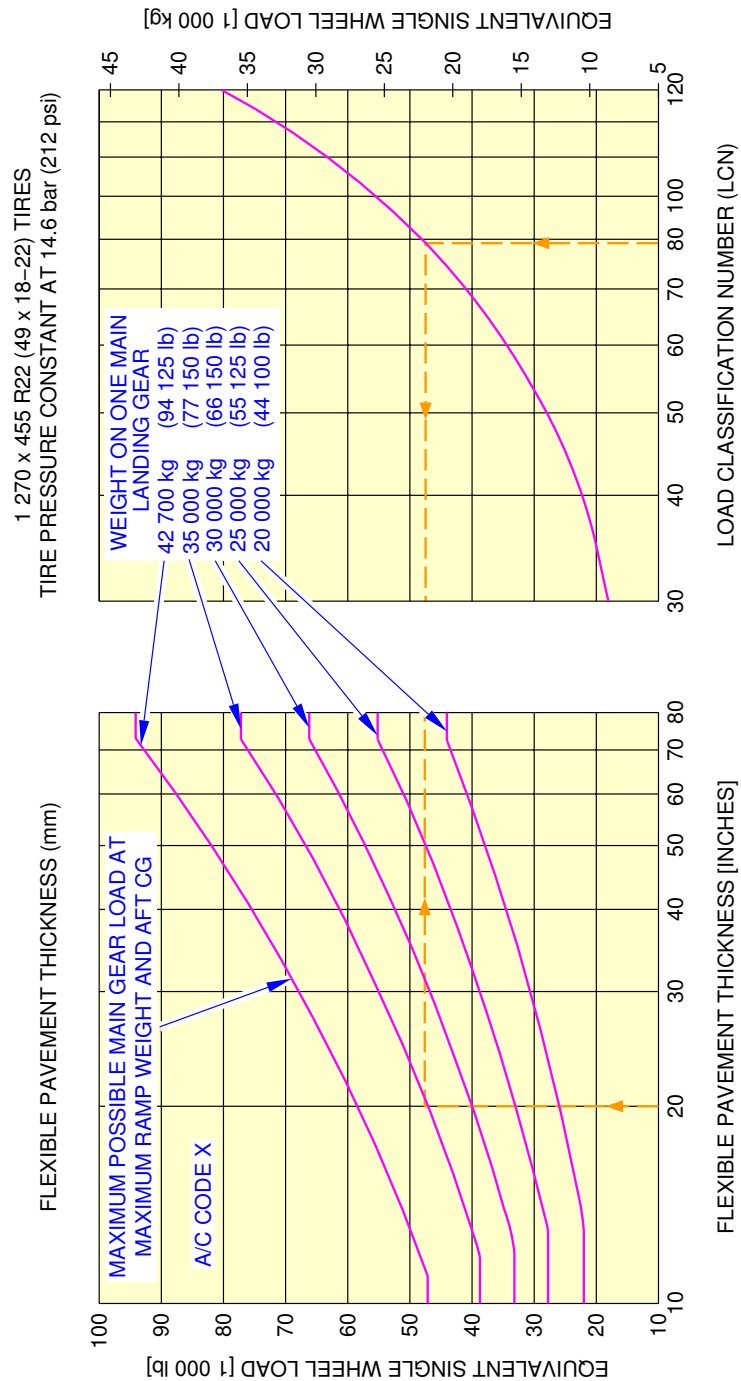


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN
ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1270101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 17

****ON A/C A321-200**

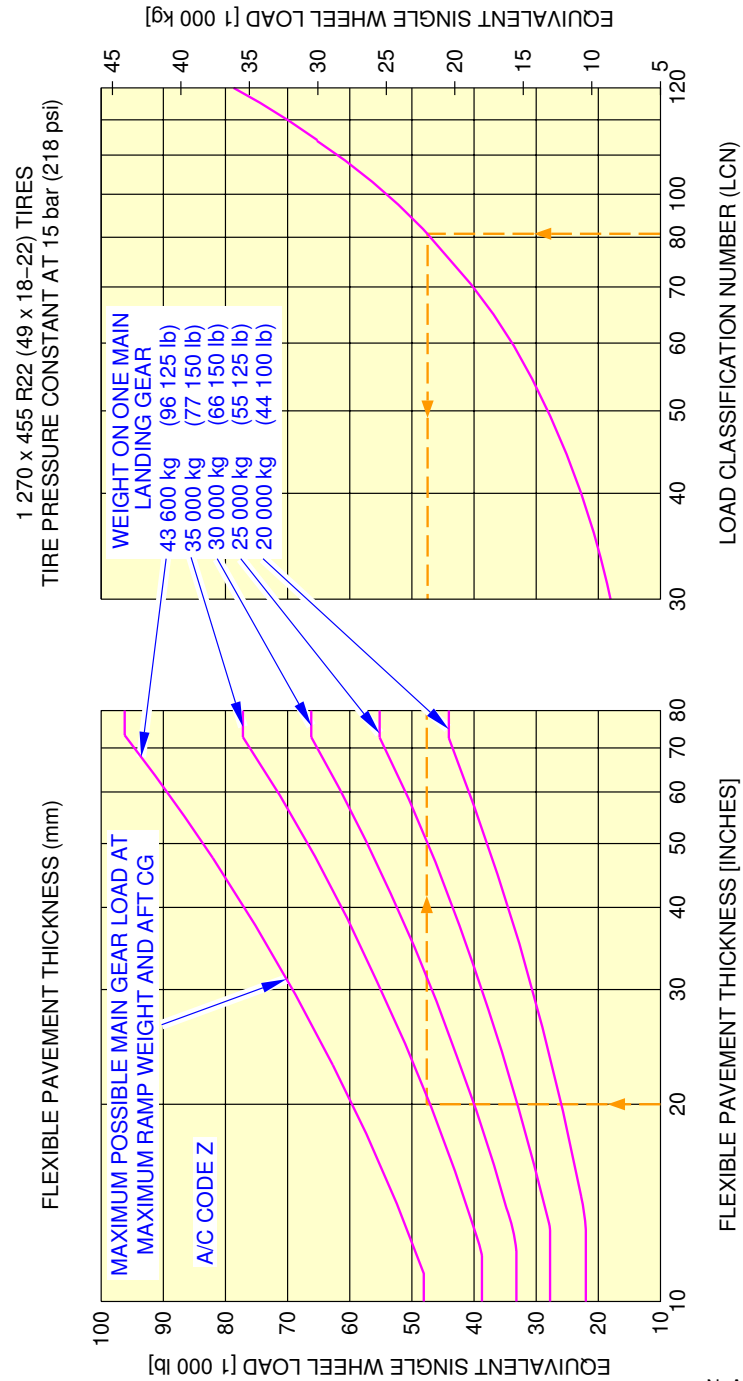


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1280101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 18

****ON A/C A321-200**

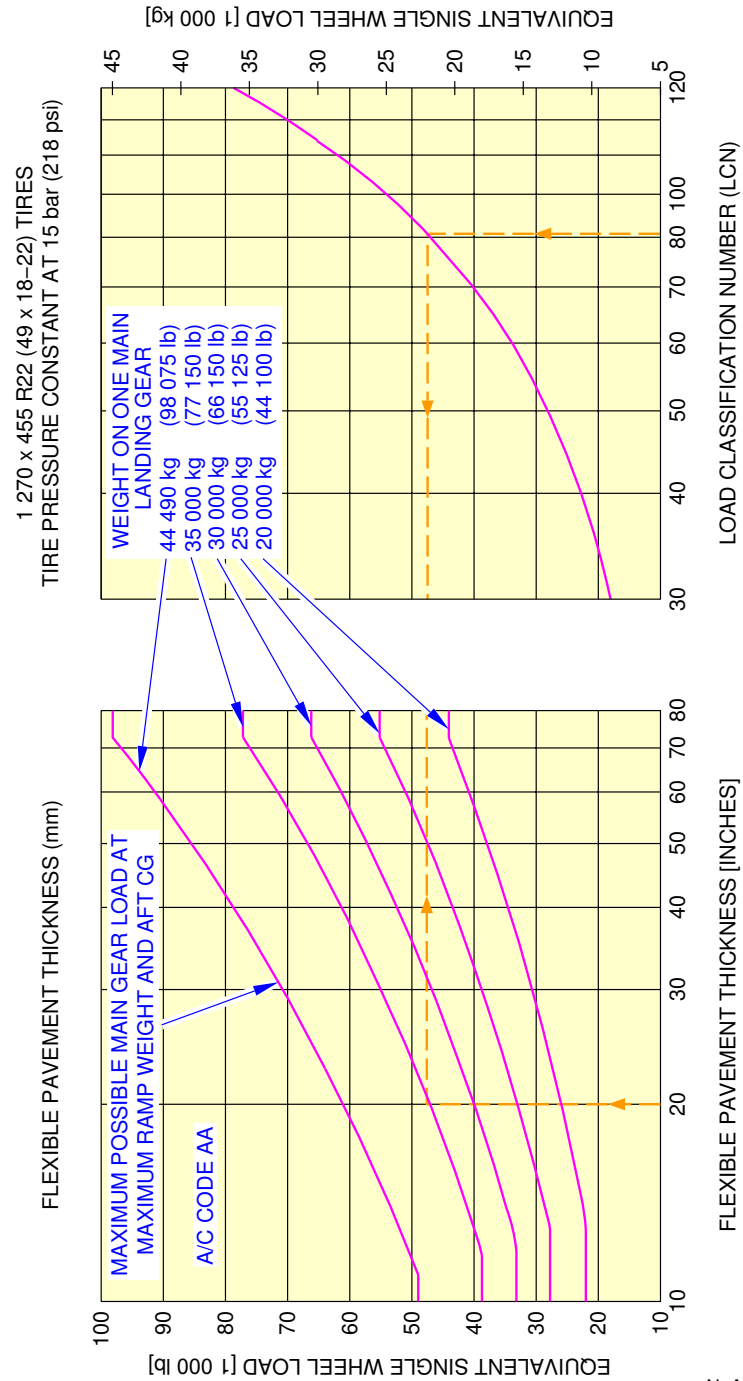


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN
ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1290101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 19

****ON A/C A321-200**

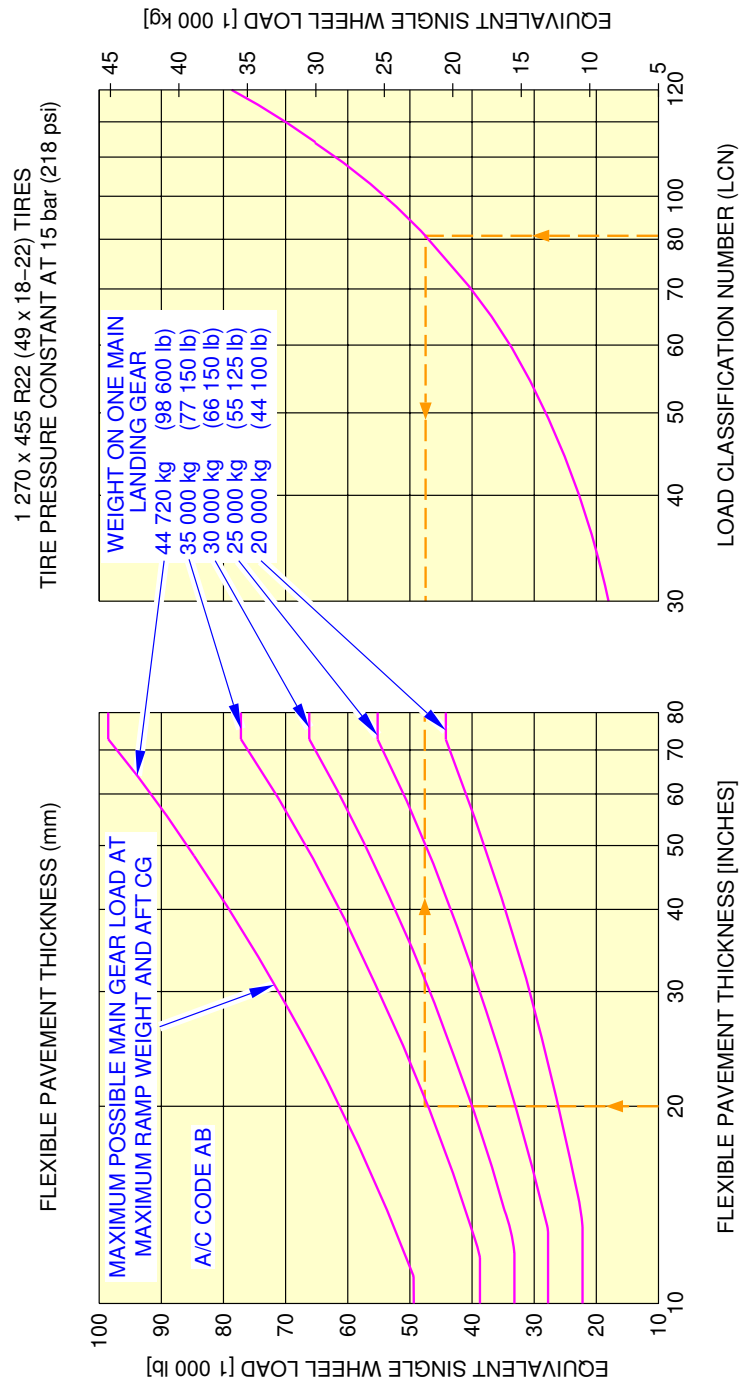

NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070601_1_1300101_01_00

Flexible Pavement Requirements - LCN Conversion
FIGURE 20

7-7-0 Rigid Pavement Requirements - Portland Cement Association Design Method

****ON A/C A321-100 A321-200**

Rigid Pavement Requirements - Portland Cement Association Design Method

1. General

In order to determine a particular Rigid Pavement Thickness, the Subgrade Modulus (k), the allowable working stress and the weight on one Main Landing Gear must be known.

In the example shown in Section 7-7-1 Rigid Pavement Requirements (PCA), A/C Code C for:

- a "k" value of 80 MN/m³ (300 lbf/in³)
- an allowable working stress of 31.6 kgf/cm² (450 lbf/in²)
- the load on one MLG of 30 000 kg (66 150 lb).

For these conditions, the Rigid Pavement Thickness is 24.9 cm (9.8 in).

7-7-1 Rigid Pavement Requirements - Portland Cement Association Design Method


****ON A/C A321-100 A321-200**

Rigid Pavement Requirements - Portland Cement Association Design Method

1. This section gives Rigid Pavement Requirements.

I NOTE : For A/C Code definition, refer to chapter 7-1-0.

****ON A/C A321-100**

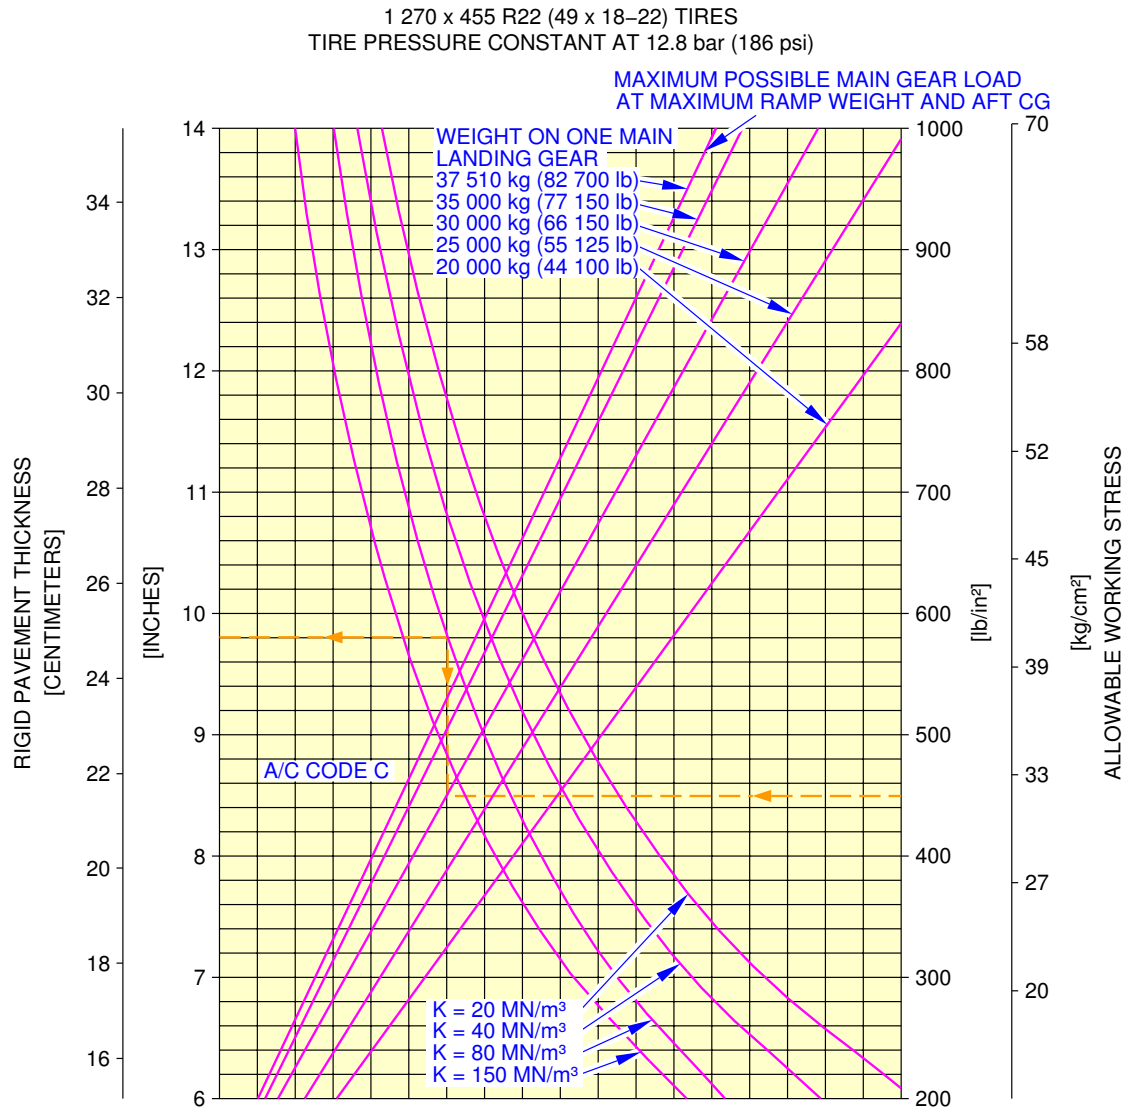


NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
 $K = 80 \text{ MN/m}^3$ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1090101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 1

****ON A/C A321-200**

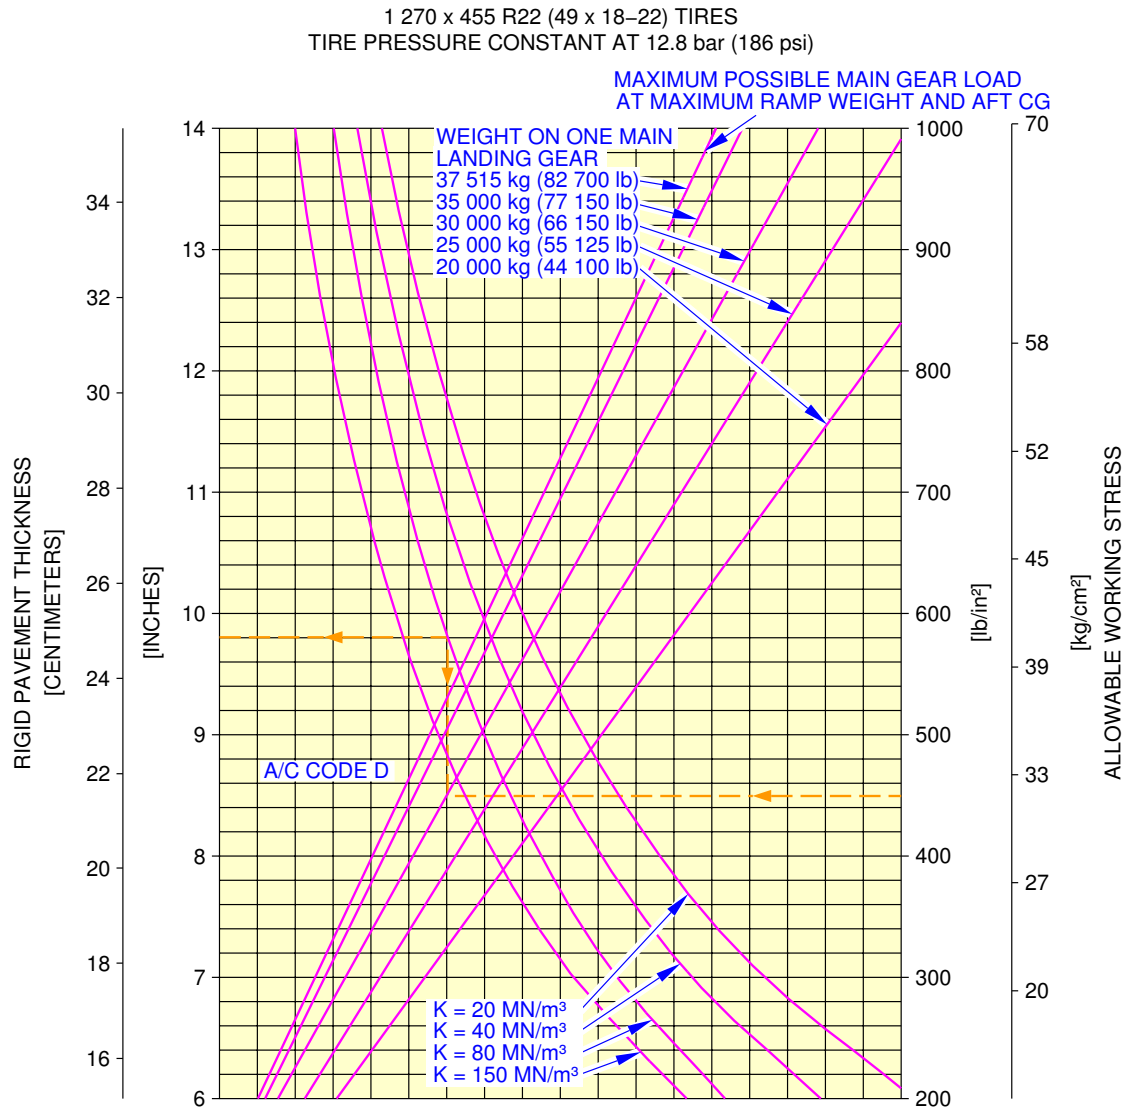


NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
 $K = 80 \text{ MN/m}^3$ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1100101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 2

****ON A/C A321-100**

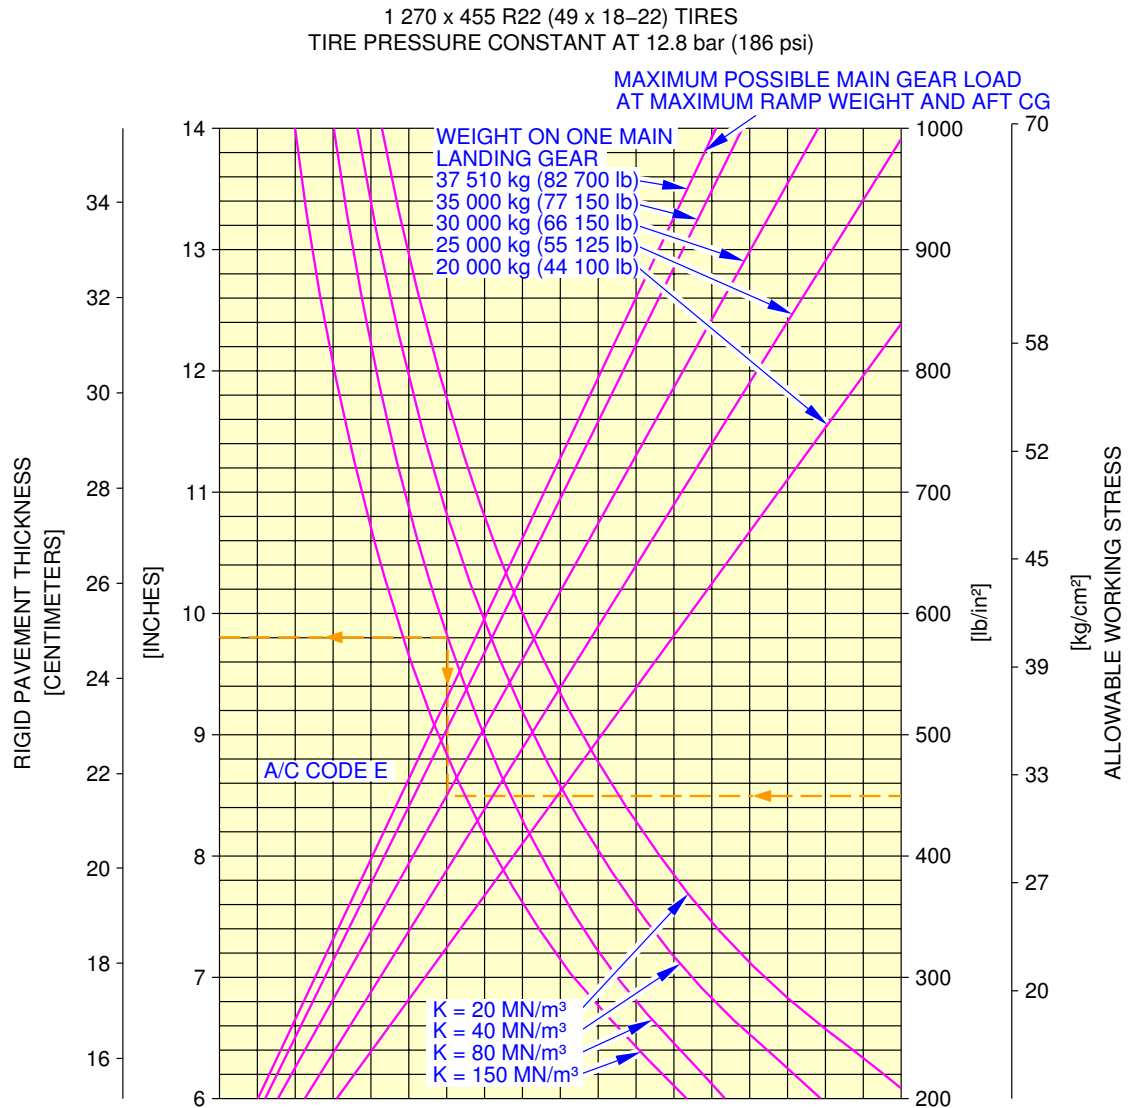


NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
K = 80 MN/m³ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1110101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 3

****ON A/C A321-100**

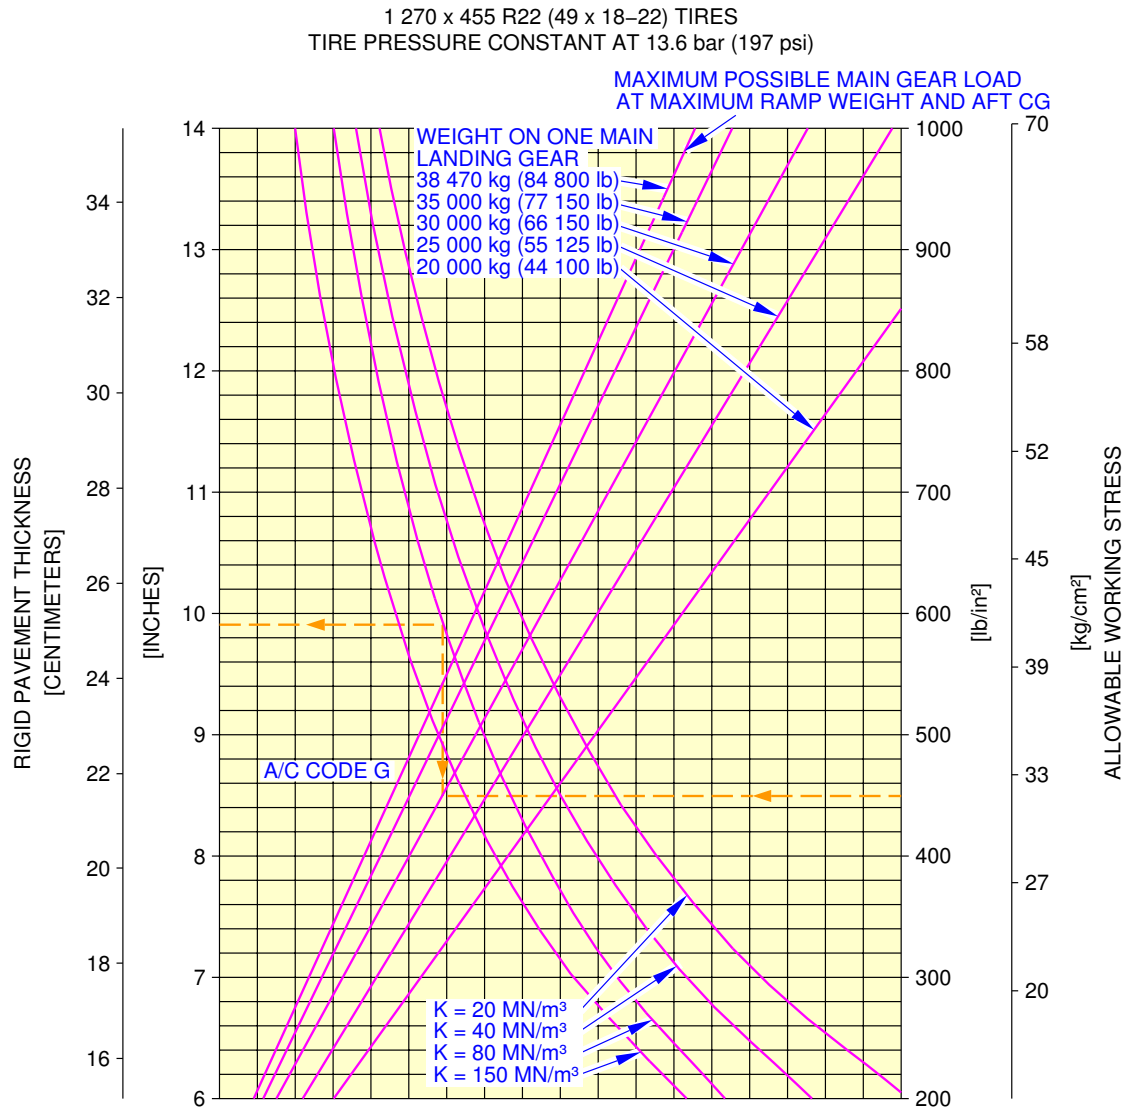


NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
 $K = 80 \text{ MN/m}^3$ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1120101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 4

****ON A/C A321-200**

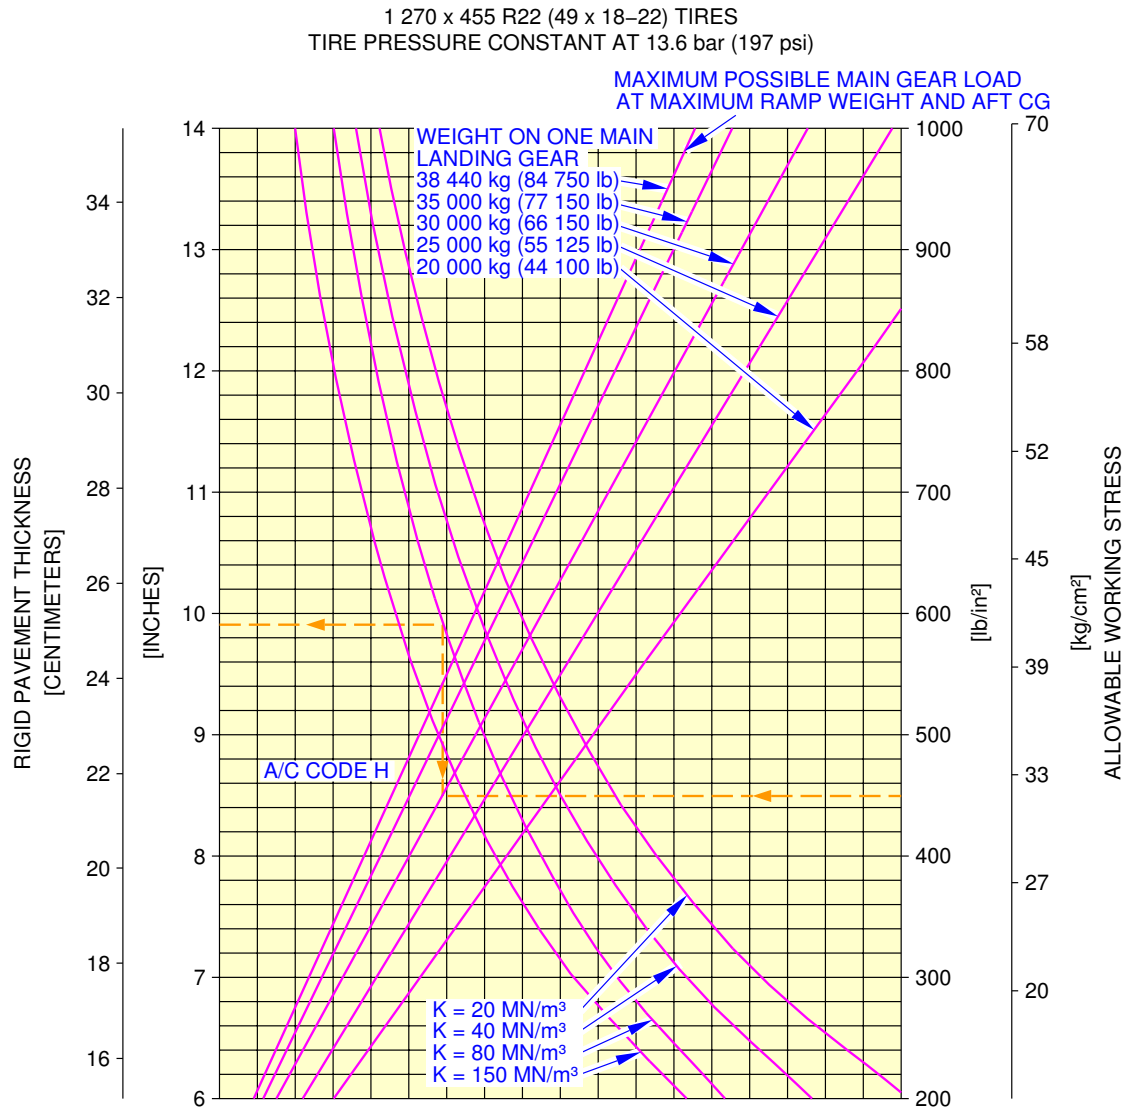


NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
K = 80 MN/m³ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1130101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 5

****ON A/C A321-100**

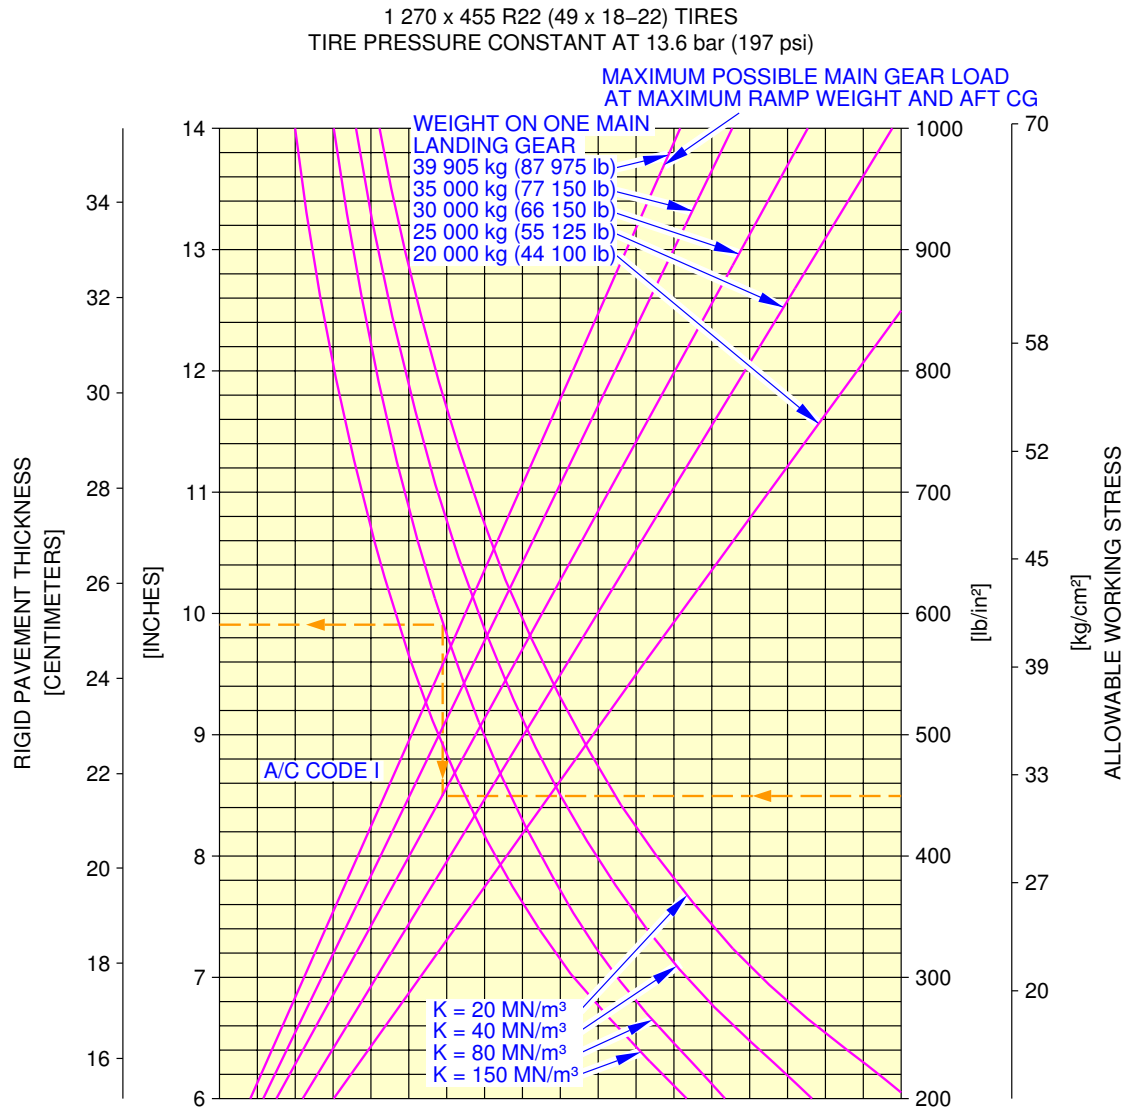


NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
K = 80 MN/m³ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1140101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 6

****ON A/C A321-200**

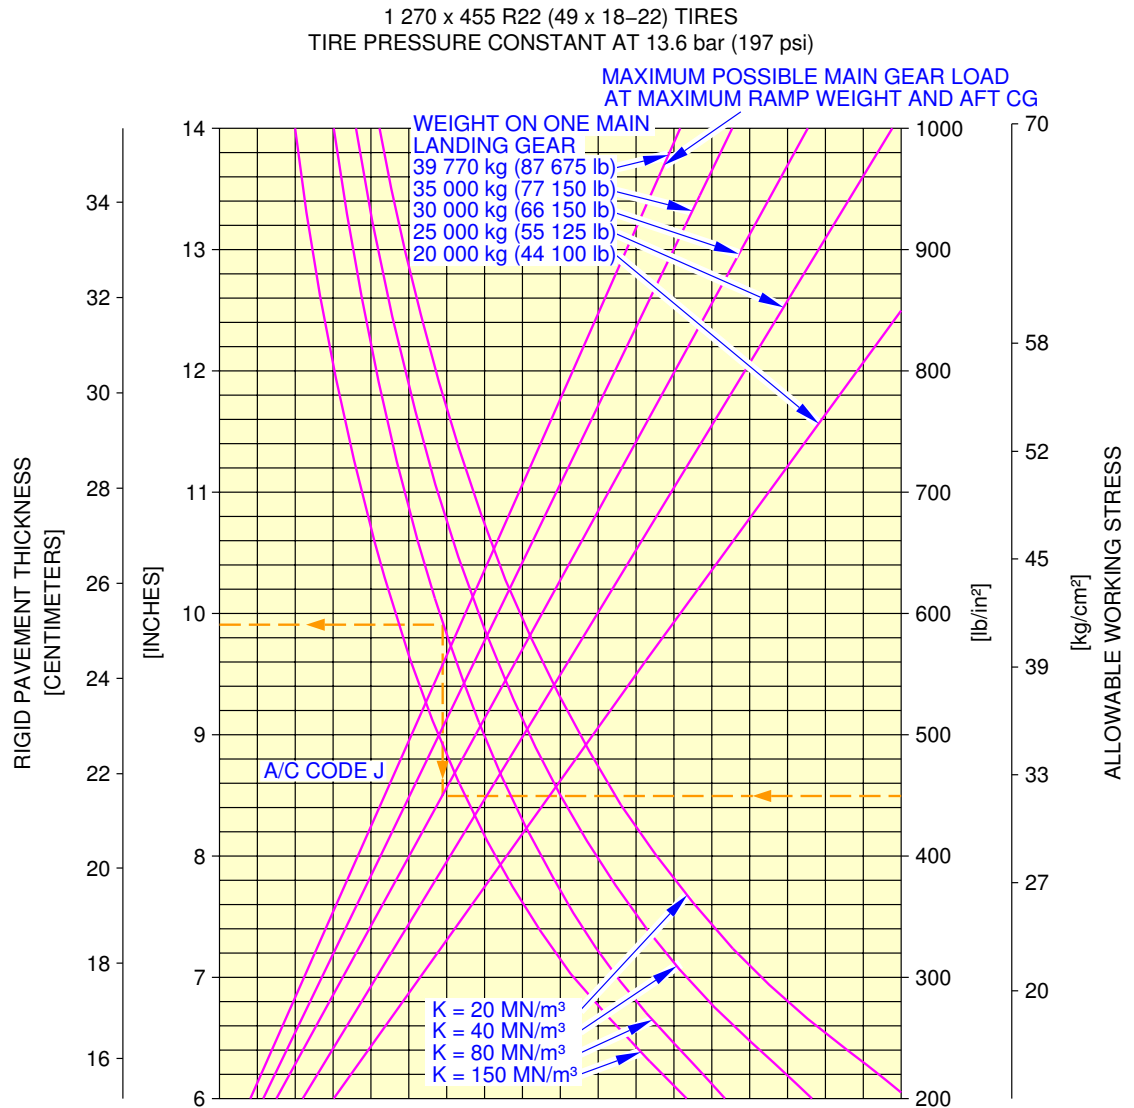


NOTE:
THE VALUES OBTAINED BY USING THE MAXIMUM LOAD REFERENCE LINE AND ANY VALUES FOR K ARE EXACT. FOR LOADS LESS THAN MAXIMUM, THE CURVES ARE EXACT FOR $K = 80 \text{ MN/m}^3$ BUT DEVIATE SLIGHTLY FOR ANY OTHER VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE AIRPORT PAVEMENTS" AND "COMPUTER PROGRAM FOR AIRPORT PAVEMENT DESIGN - PROGRAM PDILB" PORTLAND CEMENT ASSOCIATION

N_AC_070701_1_1150101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 7

****ON A/C A321-100**

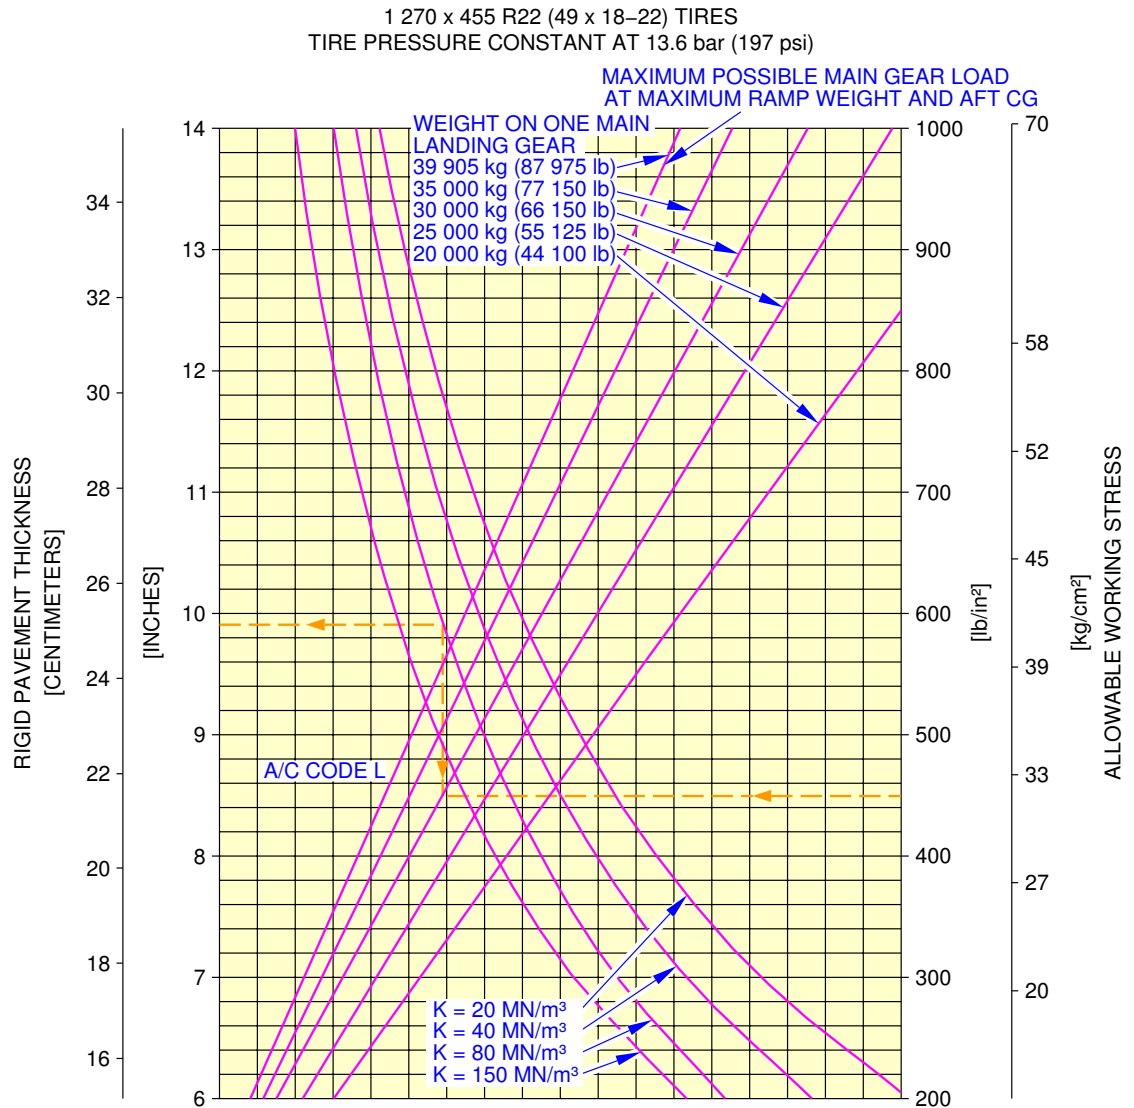


NOTE:
THE VALUES OBTAINED BY USING THE MAXIMUM LOAD REFERENCE LINE AND ANY VALUES FOR K ARE EXACT. FOR LOADS LESS THAN MAXIMUM, THE CURVES ARE EXACT FOR K = 80 MN/m³ BUT DEVIATE SLIGHTLY FOR ANY OTHER VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE AIRPORT PAVEMENTS" AND "COMPUTER PROGRAM FOR AIRPORT PAVEMENT DESIGN – PROGRAM PDILB" PORTLAND CEMENT ASSOCIATION

N_AC_070701_1_1160101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 8

****ON A/C A321-100**

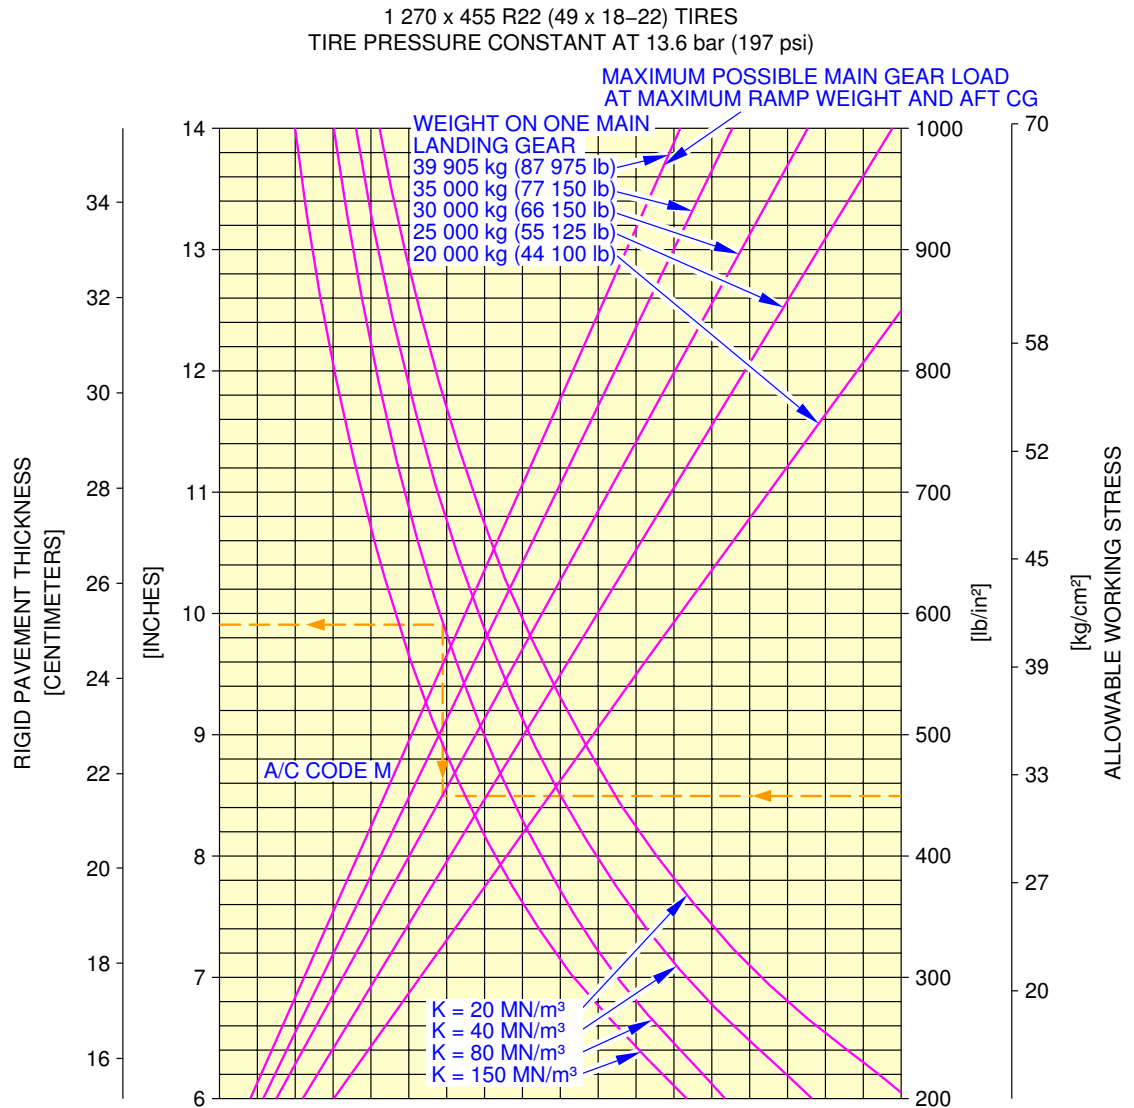


NOTE:
THE VALUES OBTAINED BY USING THE MAXIMUM LOAD REFERENCE LINE AND ANY VALUES FOR K ARE EXACT. FOR LOADS LESS THAN MAXIMUM, THE CURVES ARE EXACT FOR $K = 80 \text{ MN/m}^3$ BUT DEVIATE SLIGHTLY FOR ANY OTHER VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE AIRPORT PAVEMENTS" AND "COMPUTER PROGRAM FOR AIRPORT PAVEMENT DESIGN – PROGRAM PDILB" PORTLAND CEMENT ASSOCIATION

N_AC_070701_1_1170101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 9

****ON A/C A321-200**

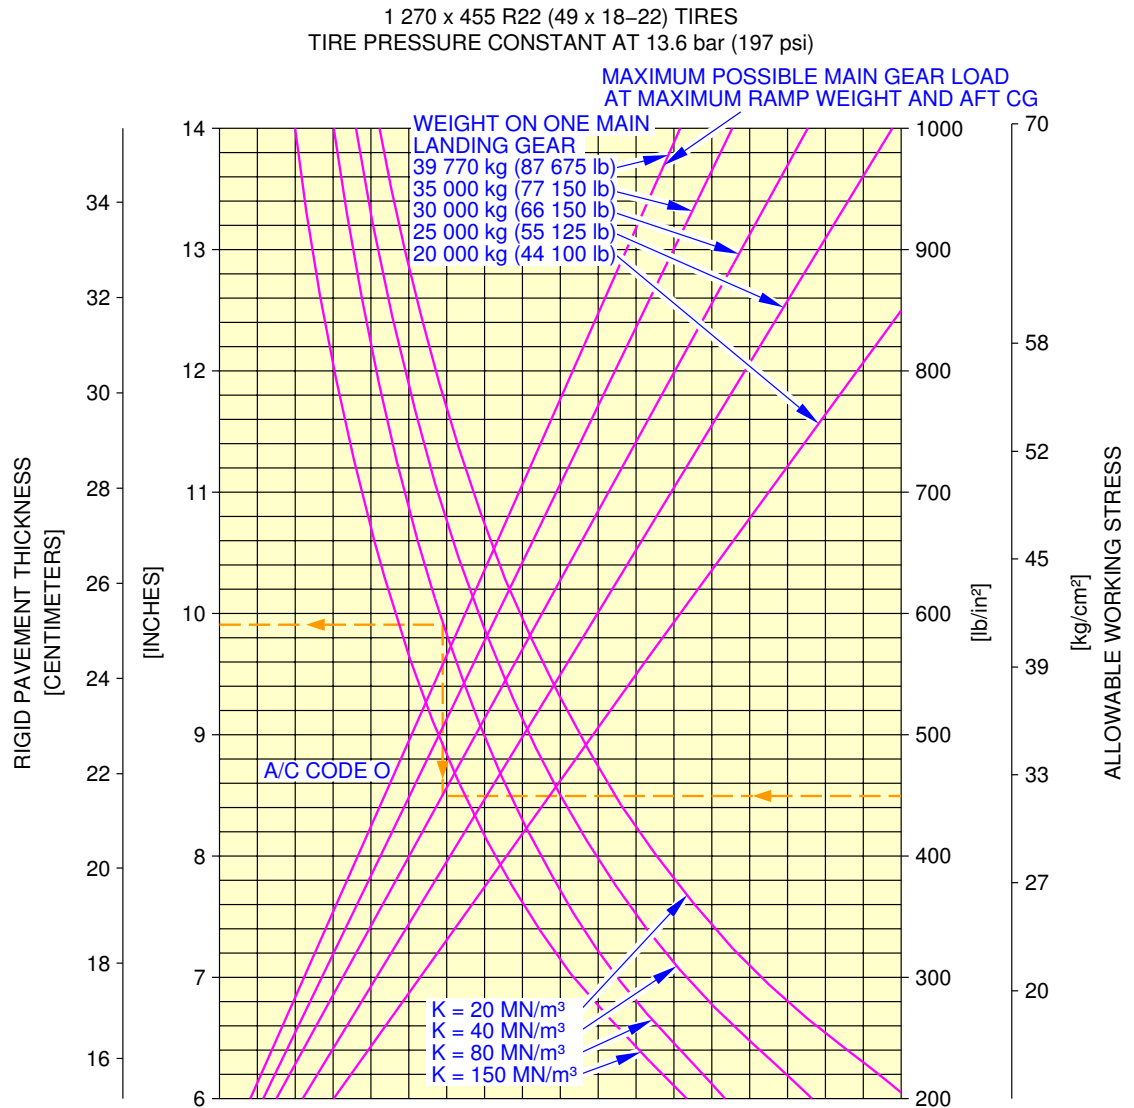


NOTE:
THE VALUES OBTAINED BY USING THE MAXIMUM LOAD REFERENCE LINE AND ANY VALUES FOR K ARE EXACT. FOR LOADS LESS THAN MAXIMUM, THE CURVES ARE EXACT FOR $K = 80 \text{ MN/m}^3$ BUT DEVIATE SLIGHTLY FOR ANY OTHER VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE AIRPORT PAVEMENTS" AND "COMPUTER PROGRAM FOR AIRPORT PAVEMENT DESIGN – PROGRAM PDILB" PORTLAND CEMENT ASSOCIATION

N_AC_070701_1_1180101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 10

****ON A/C A321-100**

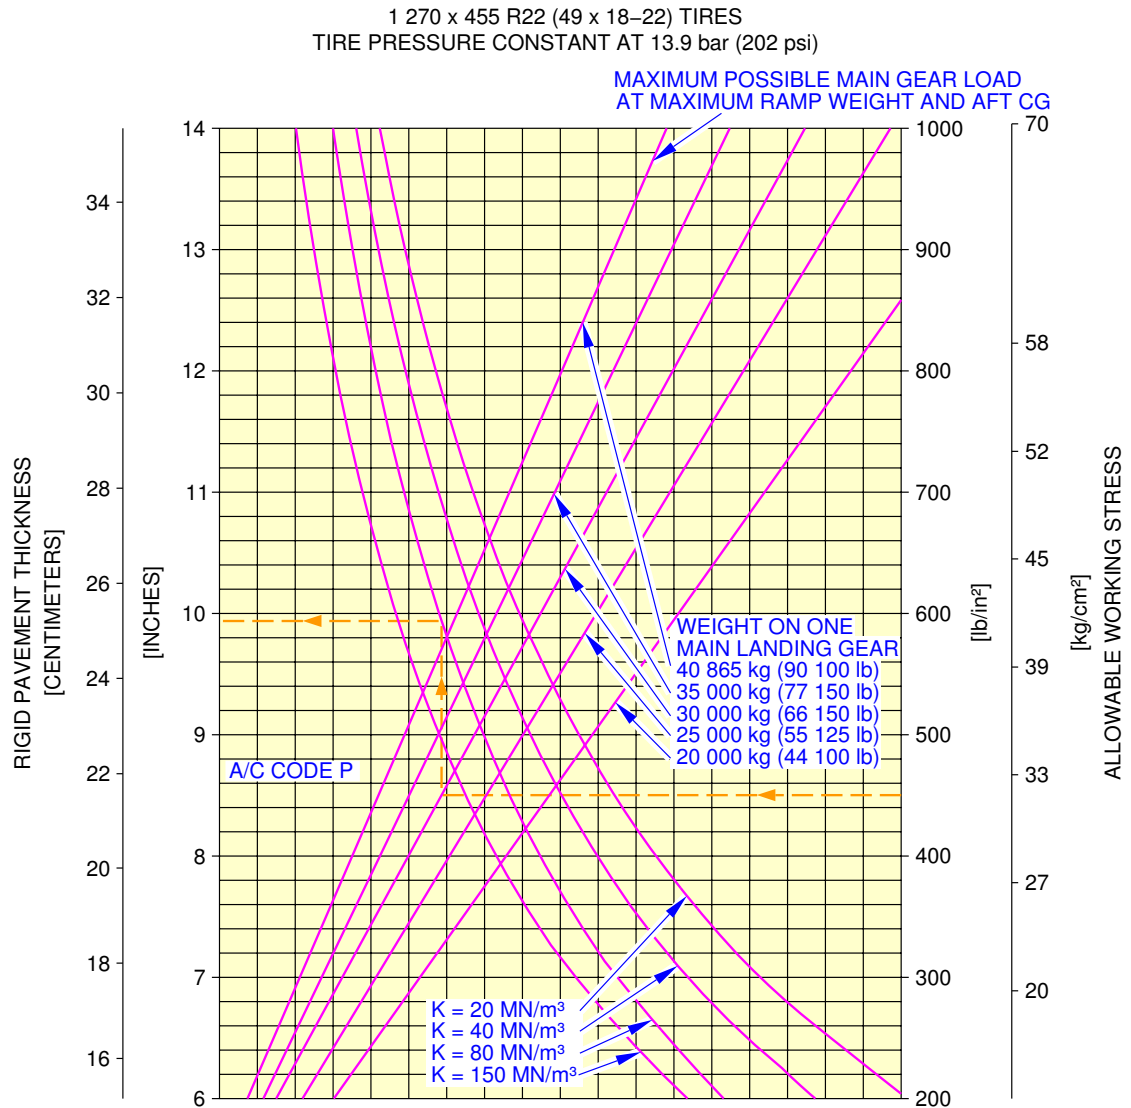


NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
 $K = 80 \text{ MN/m}^3$ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1190101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 11

****ON A/C A321-200**

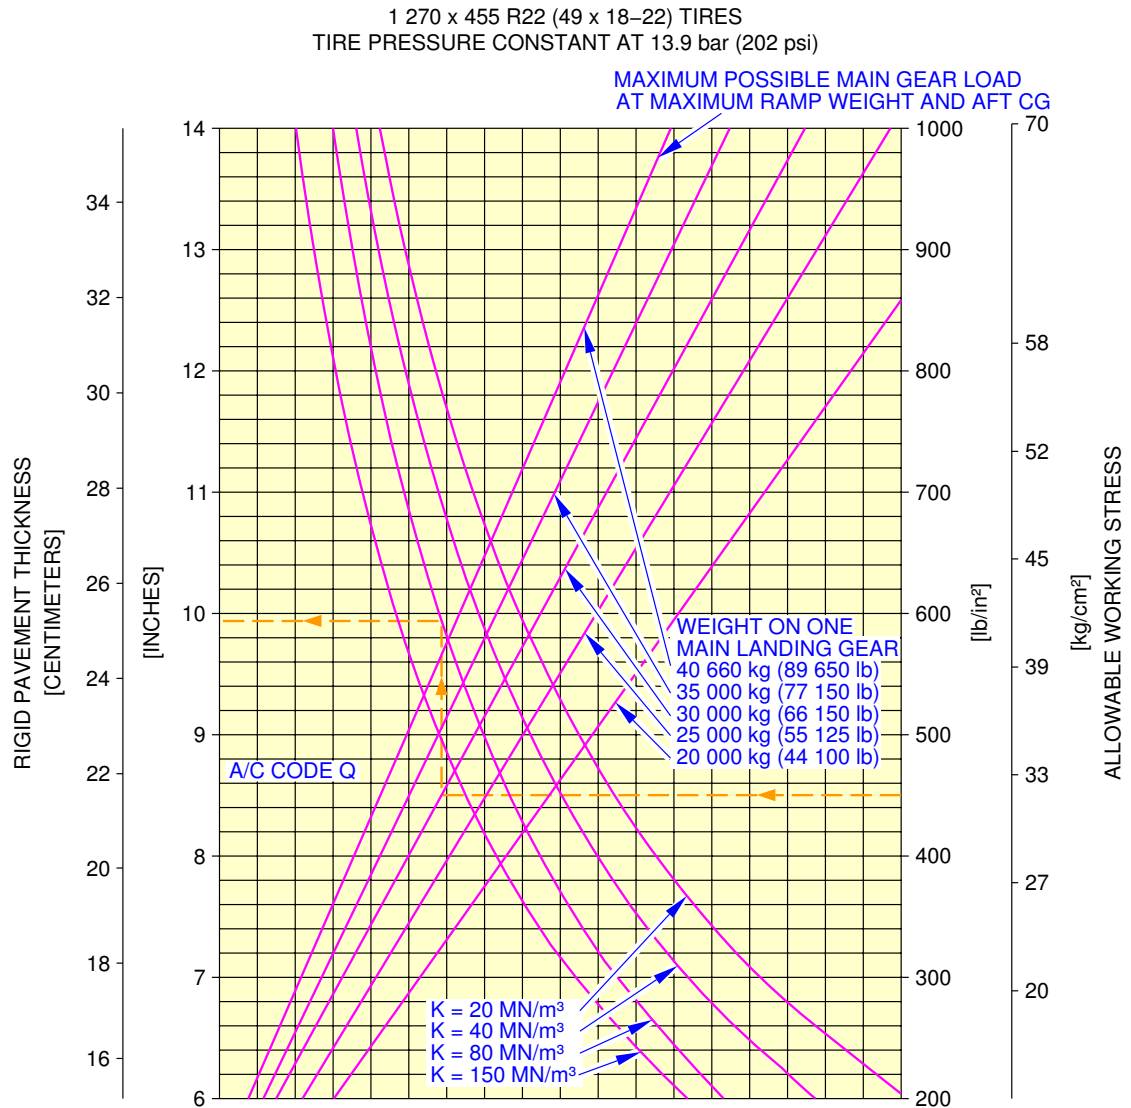


NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
 $K = 80 \text{ MN/m}^3$ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1200101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 12

****ON A/C A321-200**

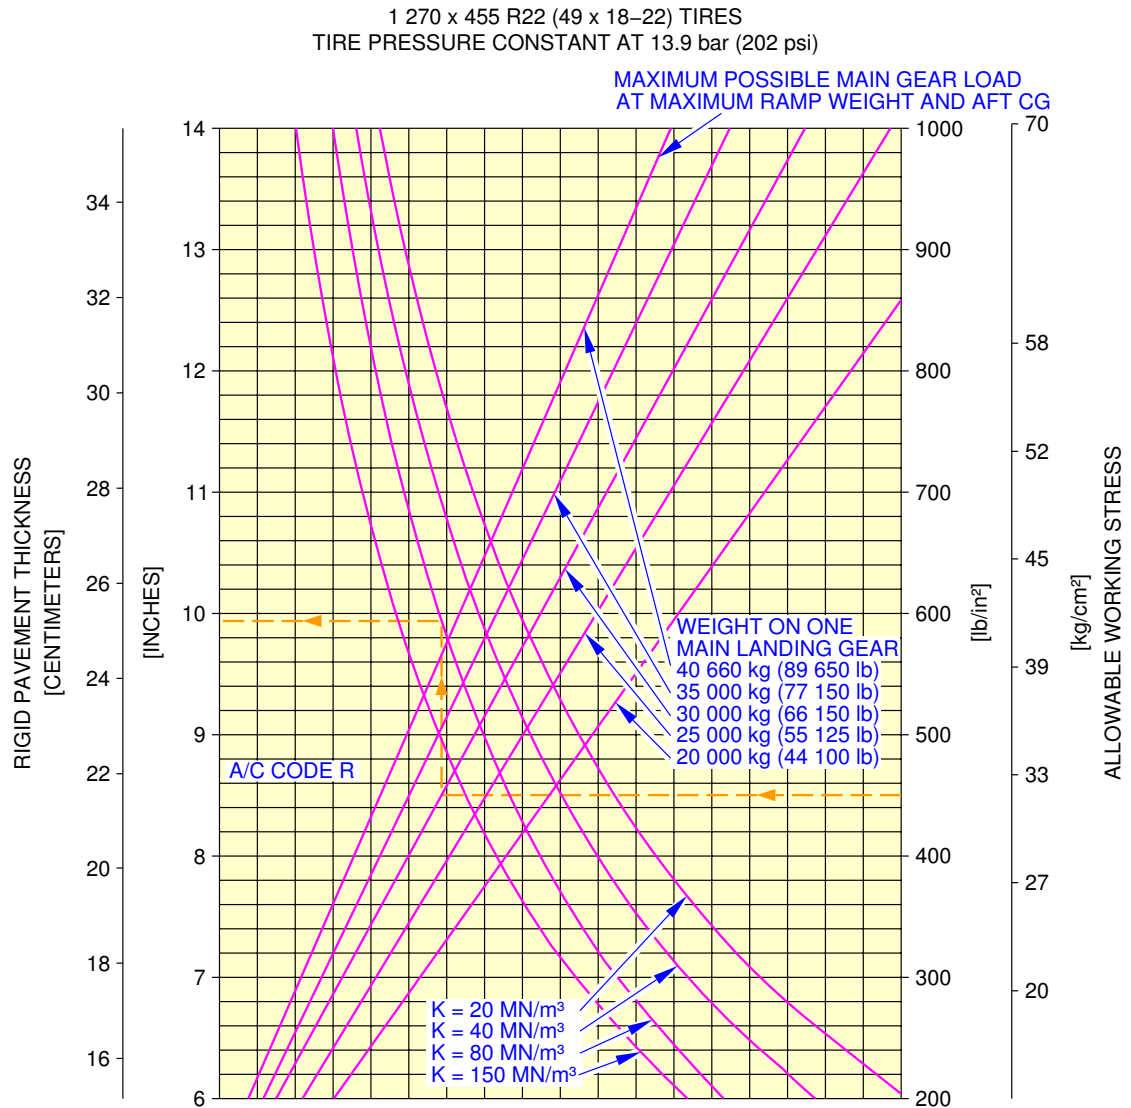


NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
 $K = 80 \text{ MN/m}^3$ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1210101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 13

****ON A/C A321-200**

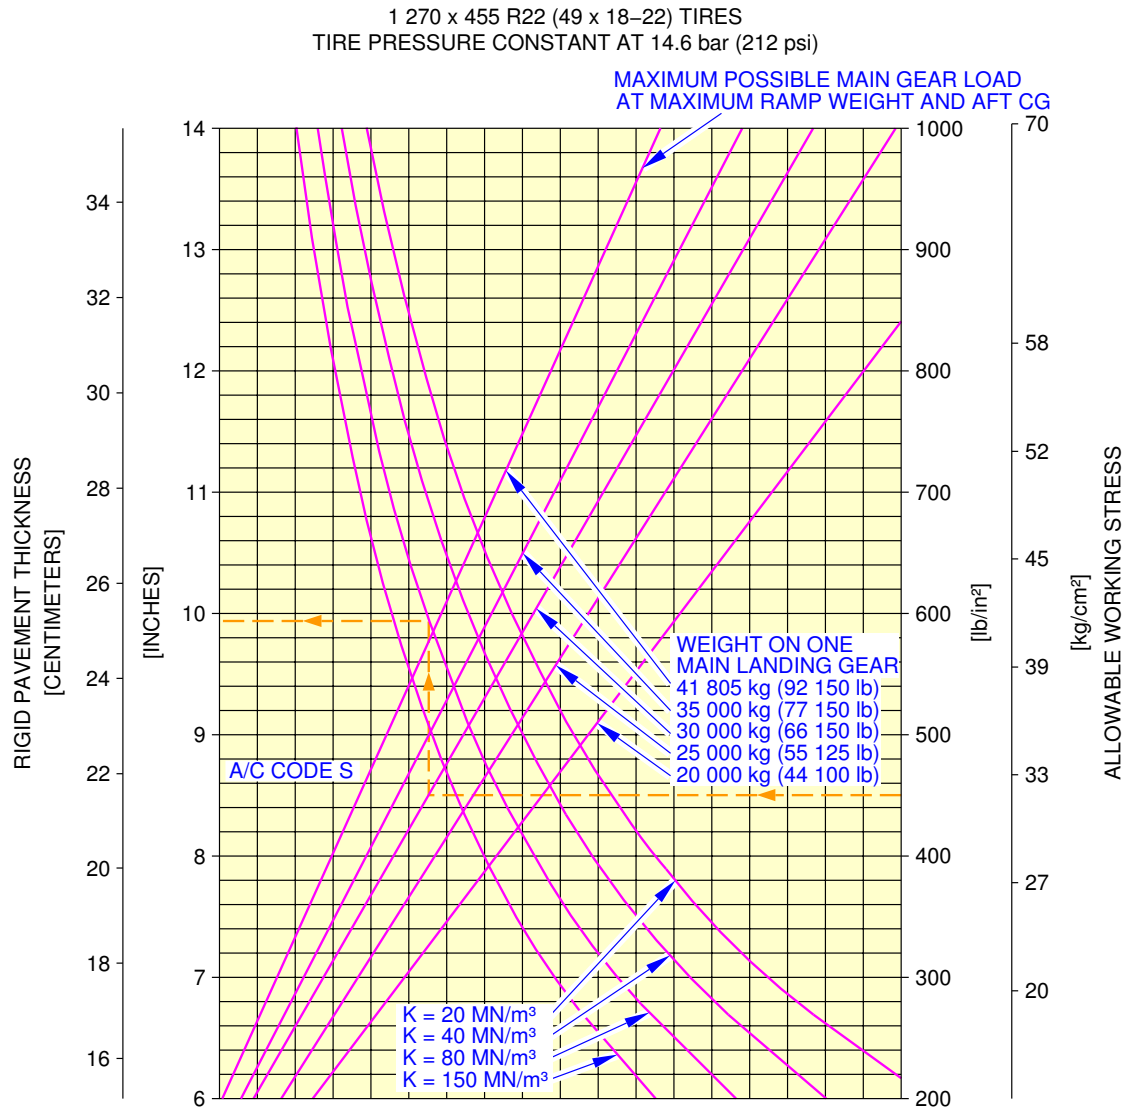


NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
 $K = 80 \text{ MN/m}^3$ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1220101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 14

****ON A/C A321-100**

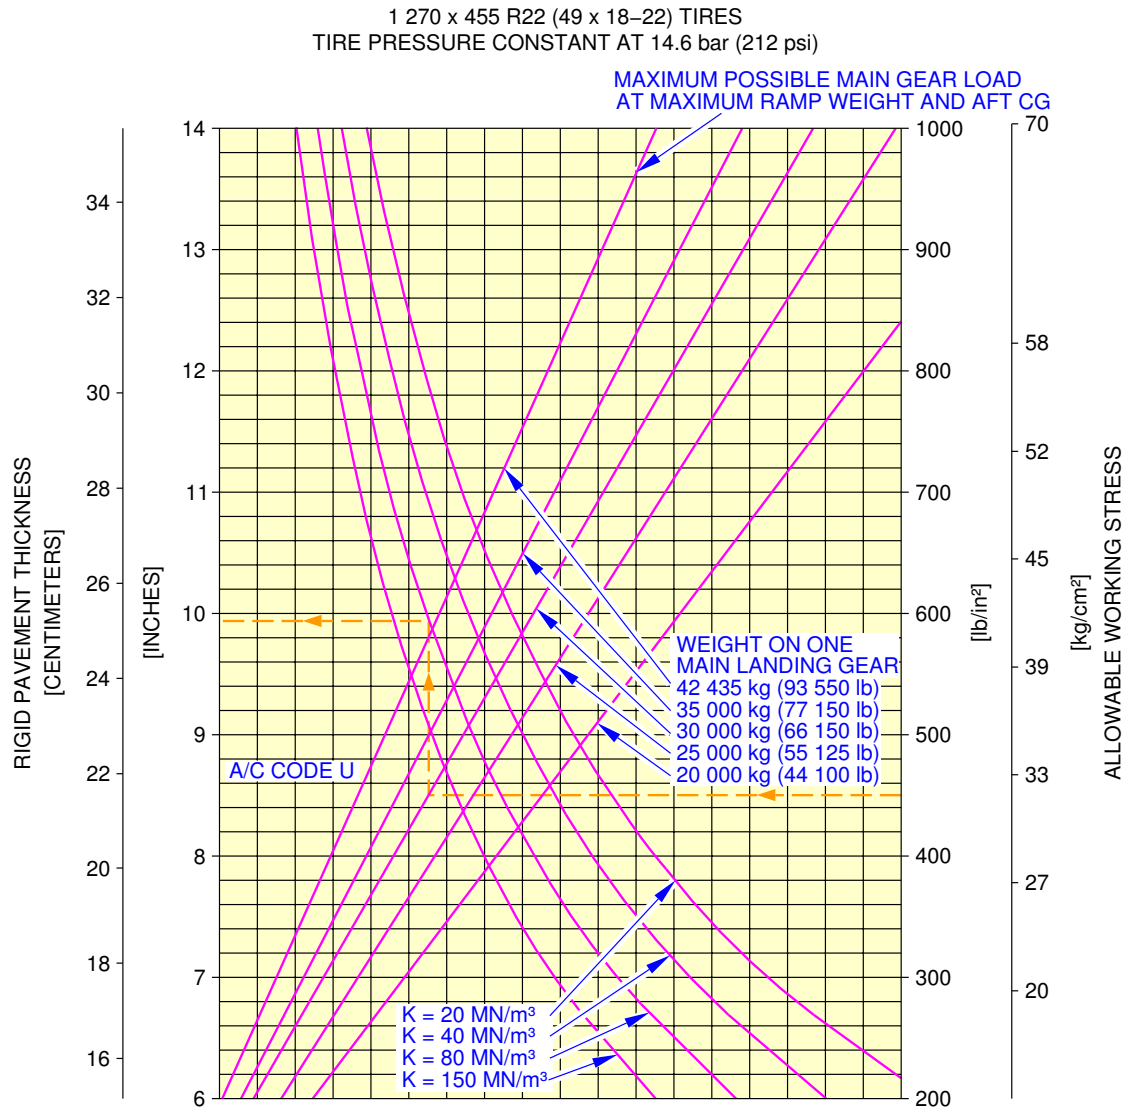


NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
 $K = 80 \text{ MN/m}^3$ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1230101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 15

****ON A/C A321-200**

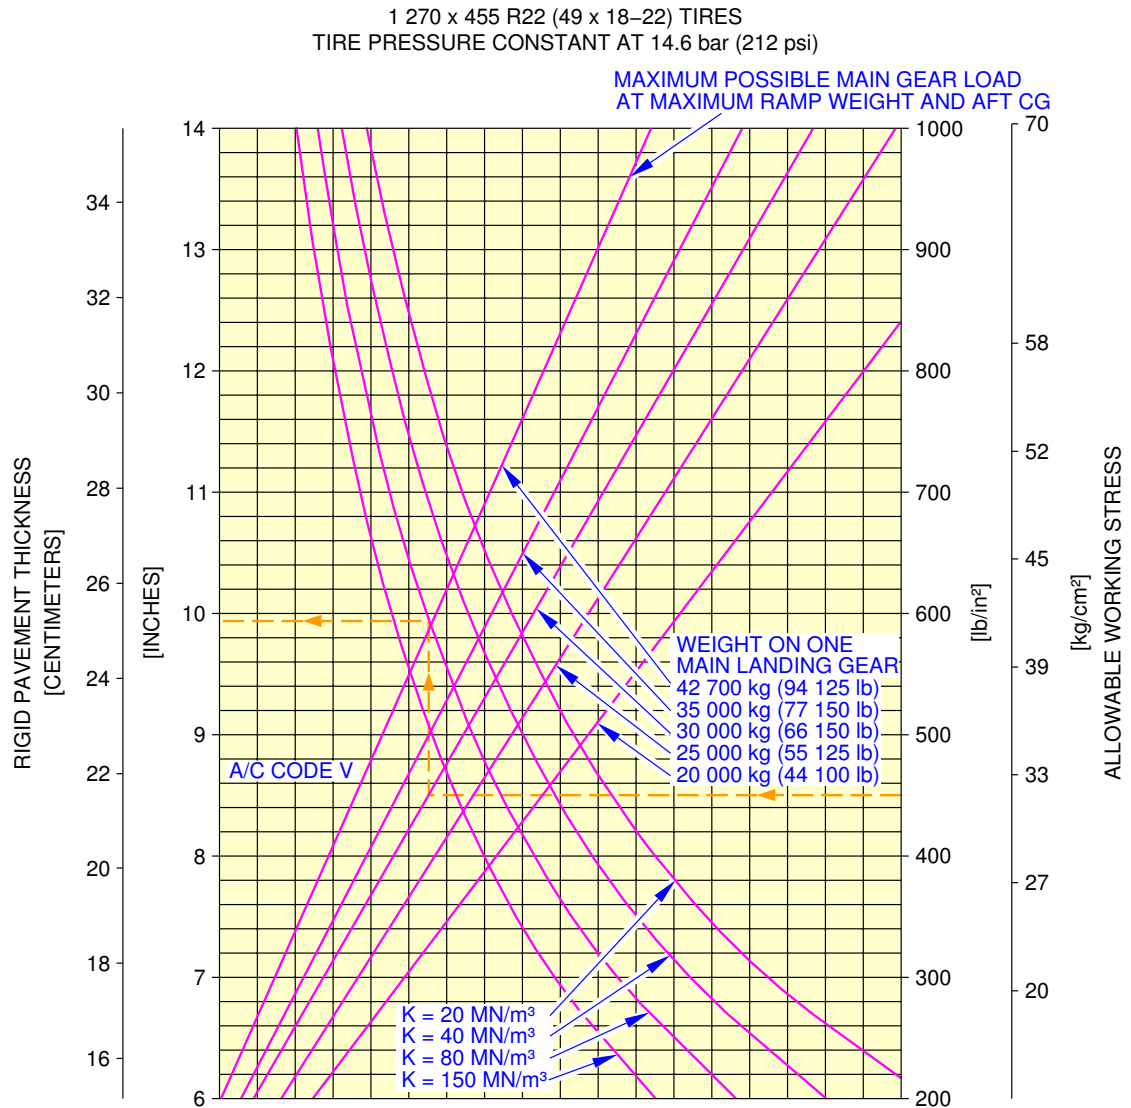


NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
 $K = 80 \text{ MN/m}^3$ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1240101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 16

****ON A/C A321-200**

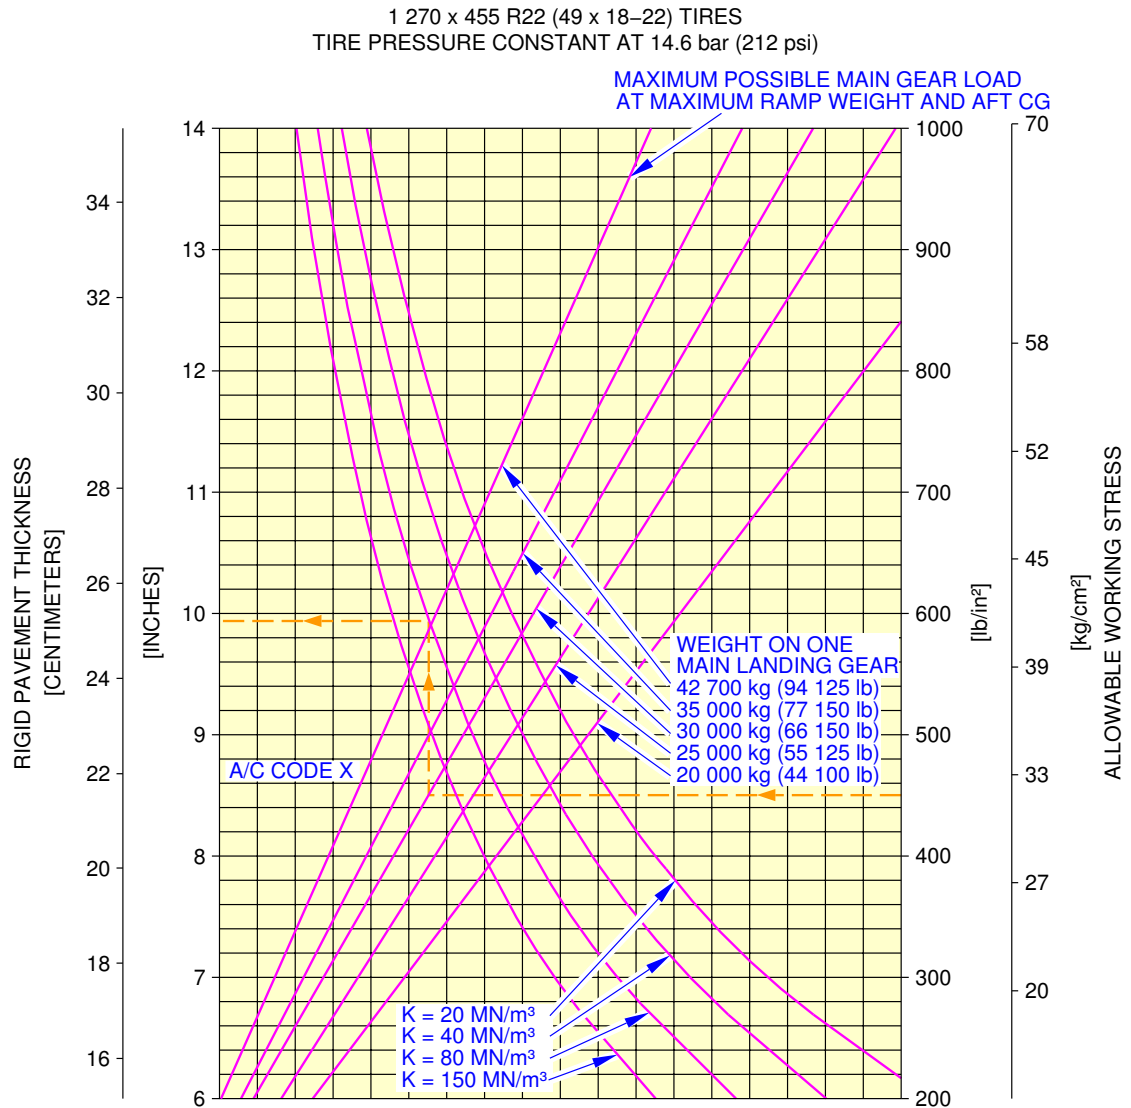


NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
 $K = 80 \text{ MN/m}^3$ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1250101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 17

****ON A/C A321-200**

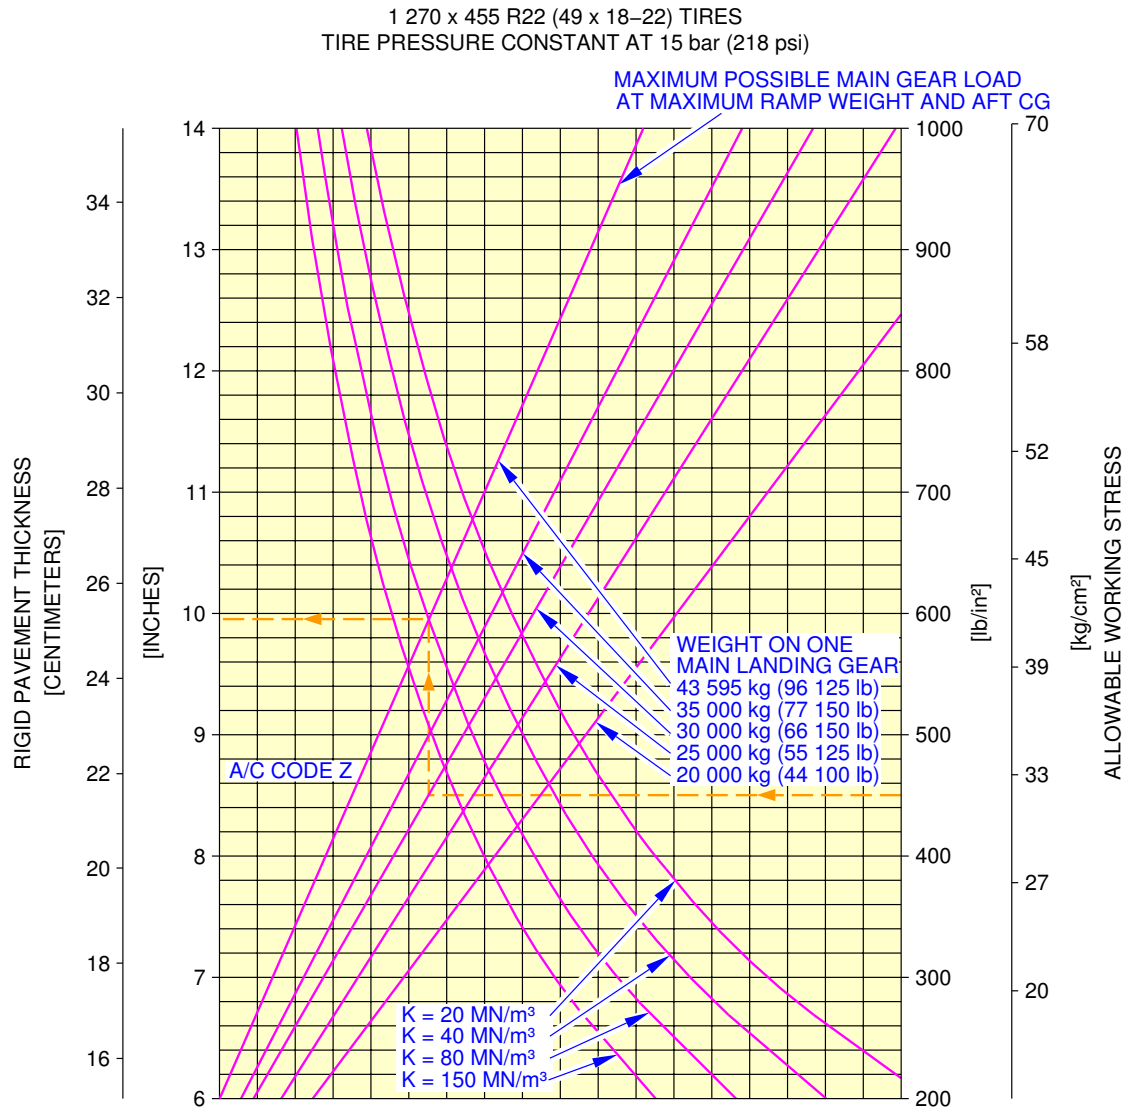


NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
K = 80 MN/m³ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1260101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 18

****ON A/C A321-200**

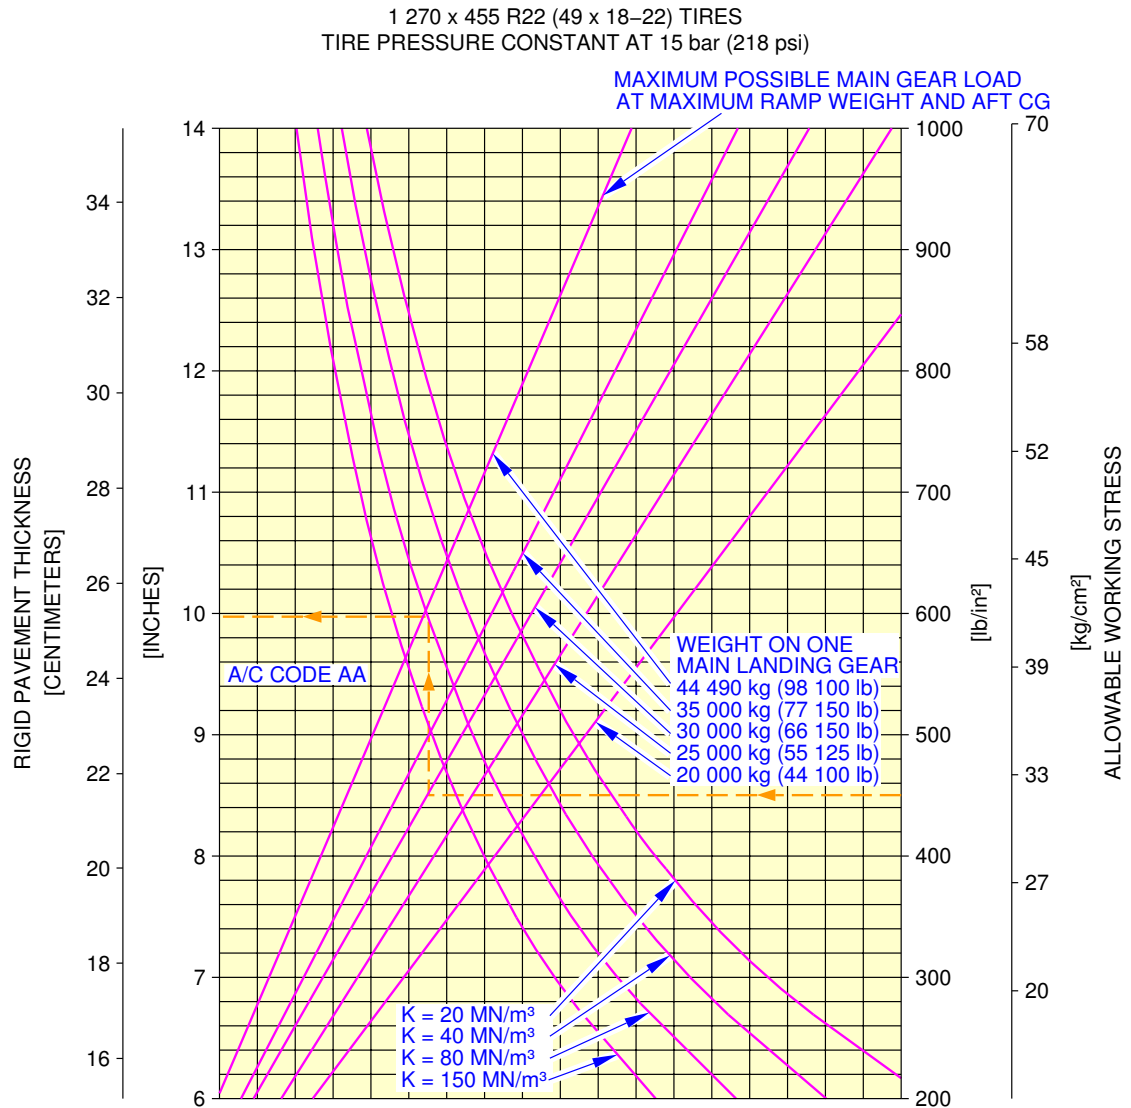


NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
K = 80 MN/m³ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1270101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 19

****ON A/C A321-200**

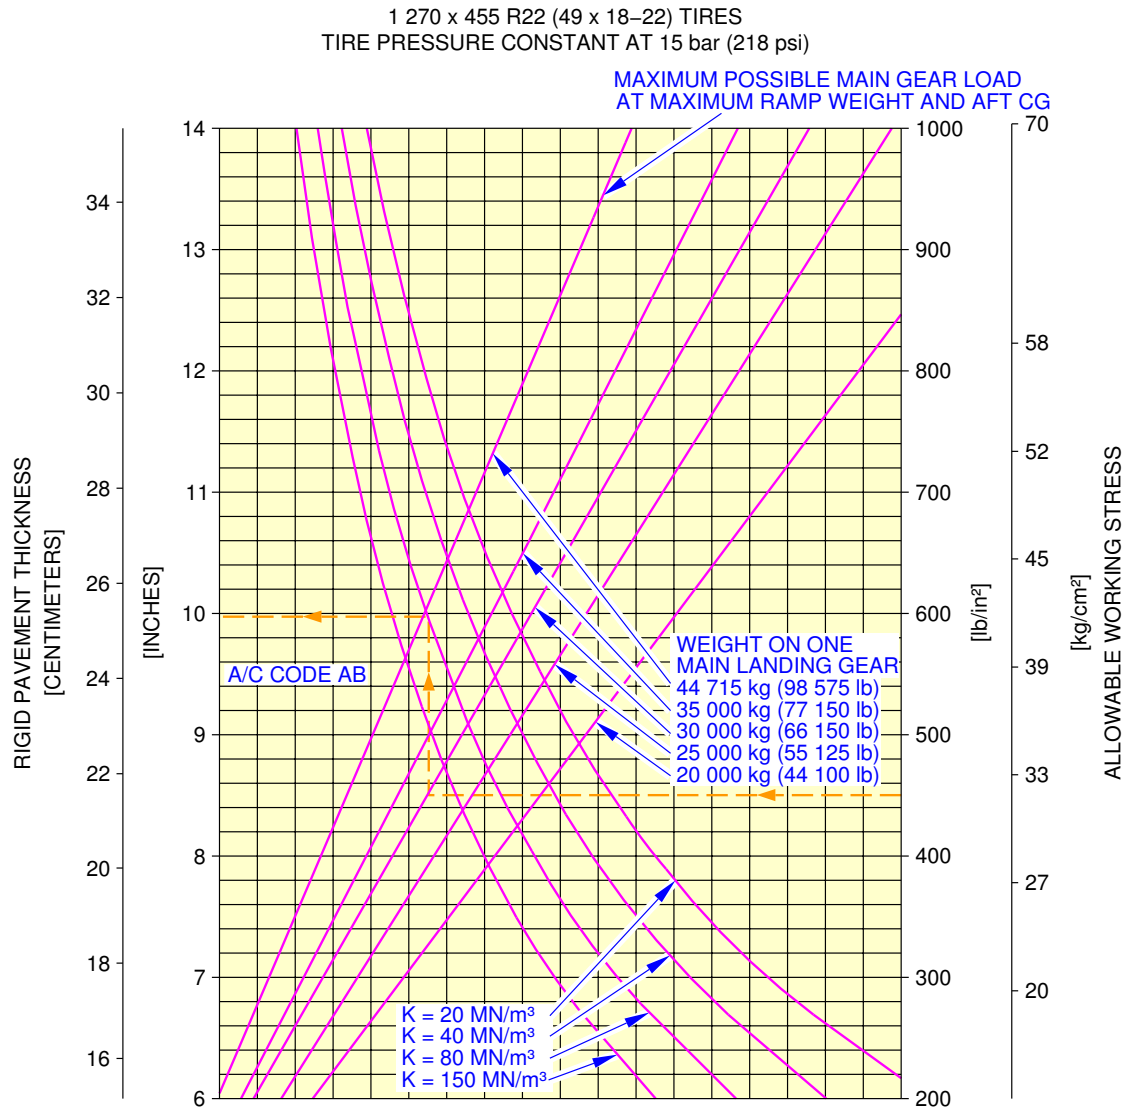

NOTE:
THE VALUES OBTAINED BY
USING THE MAXIMUM LOAD
REFERENCE LINE AND ANY
VALUES FOR K ARE EXACT. FOR
LOADS LESS THAN MAXIMUM,
THE CURVES ARE EXACT FOR
K = 80 MN/m³ BUT DEVIATE
SLIGHTLY FOR ANY OTHER
VALUES OF K

REFERENCE:
"DESIGN OF CONCRETE
AIRPORT PAVEMENTS" AND
"COMPUTER PROGRAM FOR
AIRPORT PAVEMENT DESIGN –
PROGRAM PDILB" PORTLAND
CEMENT ASSOCIATION

N_AC_070701_1_1280101_01_00

Rigid Pavement Requirements (PCA)
FIGURE 20

7-8-0 Rigid Pavement Requirements - LCN Conversion

****ON A/C A321-100 A321-200**

Rigid Pavement Requirements - LCN Conversion

1. General

In order to determine the airplane weight that can be accommodated on a particular Rigid Pavement, both the LCN of the pavement and the Radius of Relative Stiffness (L) must be known.

In the example shown in Section 7-8-2 Rigid Pavement Requirements - LCN Conversion, A/C Code C for:

The Radius of Relative Stiffness is shown at 30 inches with an LCN of 78.3.

For these conditions, the weight on one Main Landing Gear is 35 000 kg (77 150 lb).



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

7-8-1 Radius of Relative Stiffness

****ON A/C A321-100 A321-200**

Radius of Relative Stiffness

1. This section gives Radius of Relative Stiffness.

****ON A/C A321-100 A321-200**

RADIUS OF RELATIVE STIFFNESS (L)
VALUES IN INCHES

$$L = \sqrt[4]{\frac{Ed^3}{12(1-\mu^2)k}} = 24.1652 \sqrt[4]{\frac{d^3}{k}}$$

WHERE E = Young's Modulus = 4×10^6 psi
k = Subgrade Modulus, lbf/in³
d = Rigid Pavement Thickness, inches
 μ = Poisson's Ratio = 0.15

d	k=75	k=100	k=150	k=200	k=250	k=300	k=350	k=400	k=550
6.0	31.48	29.30	26.47	24.63	23.30	22.26	21.42	20.72	19.13
6.5	33.43	31.11	28.11	26.16	24.74	23.64	22.74	22.00	20.31
7.0	35.34	32.89	29.72	27.65	26.15	24.99	24.04	23.25	21.47
7.5	37.22	34.63	31.29	29.12	27.54	26.32	25.32	24.49	22.61
8.0	39.06	36.35	32.85	30.57	28.91	27.62	26.58	25.70	23.74
8.5	40.88	38.04	34.37	31.99	30.25	28.91	27.81	26.90	24.84
9.0	42.67	39.71	35.88	33.39	31.58	30.17	29.03	28.08	25.93
9.5	44.43	41.35	37.36	34.77	32.89	31.42	30.23	29.24	27.00
10.0	46.18	42.97	38.83	36.14	34.17	32.65	31.42	30.39	28.06
10.5	47.90	44.57	40.28	37.48	35.45	33.87	32.59	31.52	29.11
11.0	49.60	46.16	41.71	38.81	36.71	35.07	33.75	32.64	30.14
11.5	51.28	47.72	43.12	40.13	37.95	36.26	34.89	33.74	32.16
12.0	52.94	49.27	44.52	41.43	39.18	37.44	36.02	34.84	32.17
12.5	54.59	50.80	45.90	42.72	40.40	38.60	37.14	35.92	33.17
13.0	56.22	52.32	47.27	43.99	41.61	39.75	38.25	36.99	34.16
13.5	57.83	53.82	48.63	45.26	42.80	40.89	39.35	38.06	35.14
14.0	59.43	55.31	49.98	46.51	43.98	42.02	40.44	39.11	36.12
14.5	61.02	56.78	51.31	47.75	45.16	43.15	41.51	40.15	37.08
15.0	62.59	58.25	52.63	48.98	46.32	44.26	42.58	41.19	38.03
15.5	64.15	59.70	53.94	50.20	47.47	45.36	43.64	42.21	38.98
16.0	65.69	61.13	55.24	51.41	48.62	46.45	44.70	43.23	39.92
16.5	67.23	62.56	56.53	52.61	49.75	47.54	45.74	44.24	40.85
17.0	68.75	63.98	57.81	53.80	50.88	48.61	46.77	45.24	41.78
17.5	70.26	65.38	59.08	54.98	52.00	49.68	47.80	46.23	42.70
18.0	71.76	66.78	60.34	56.15	53.11	50.74	48.82	47.22	43.61
19.0	74.73	69.54	62.84	58.48	55.31	52.84	50.84	49.17	45.41
20.0	77.66	72.27	65.30	60.77	57.47	54.91	52.84	51.10	47.19
21.0	80.55	74.96	67.74	63.04	59.62	56.96	54.81	53.01	48.95
22.0	83.41	77.63	70.14	65.28	61.73	58.98	56.75	54.89	50.69
23.0	86.24	80.26	72.52	67.49	63.83	60.98	58.68	56.75	52.41
24.0	89.04	82.86	74.87	69.68	65.90	62.96	60.58	58.59	54.11
25.0	91.81	85.44	77.20	71.84	67.95	64.92	62.46	60.41	55.79

N_AC_070801_1_0040101_01_00

Radius of Relative Stiffness
(Reference: Portland Cement Association)
FIGURE 1

7-8-2 Rigid Pavement Requirements - LCN Conversion


****ON A/C A321-100 A321-200**

Rigid Pavement Requirements - LCN Conversion

1. This section gives Rigid Pavement Requirements - LCN Conversion.

I NOTE : For A/C Code definition, refer to chapter 7-1-0.

****ON A/C A321-100**

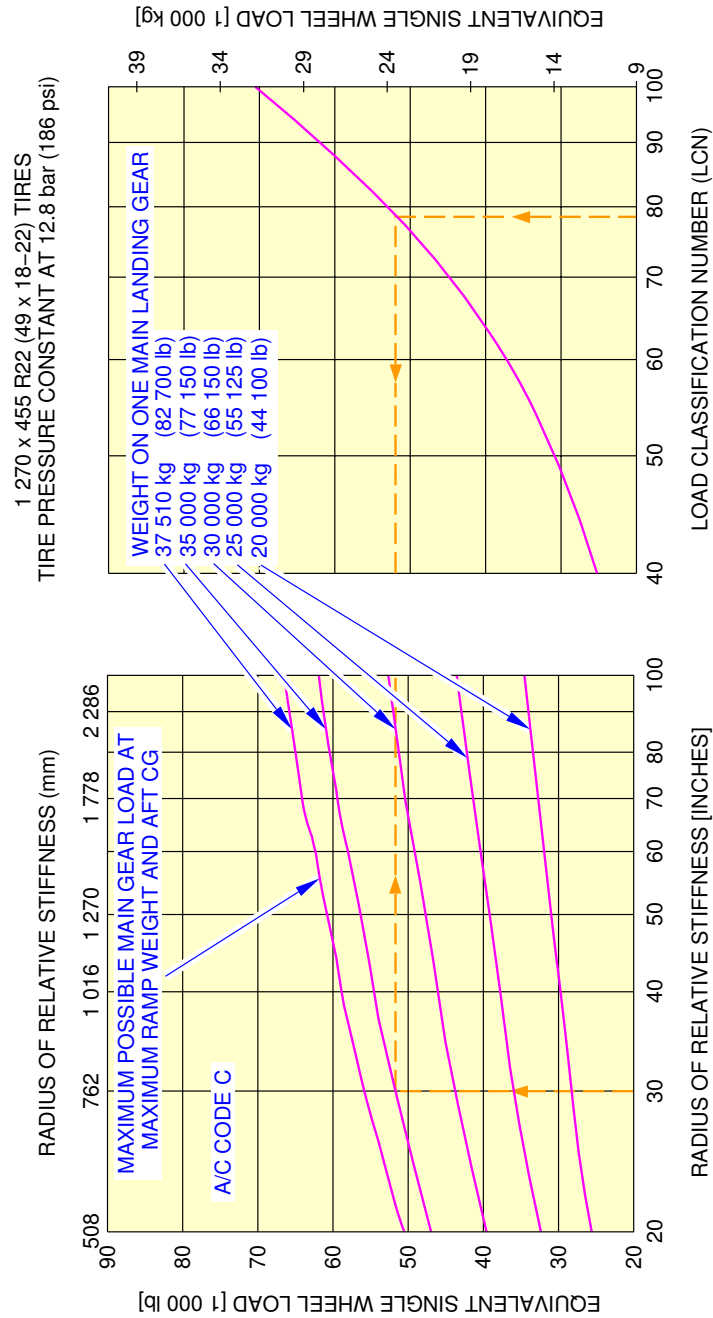


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070802_1_1110101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 1


****ON A/C A321-200**

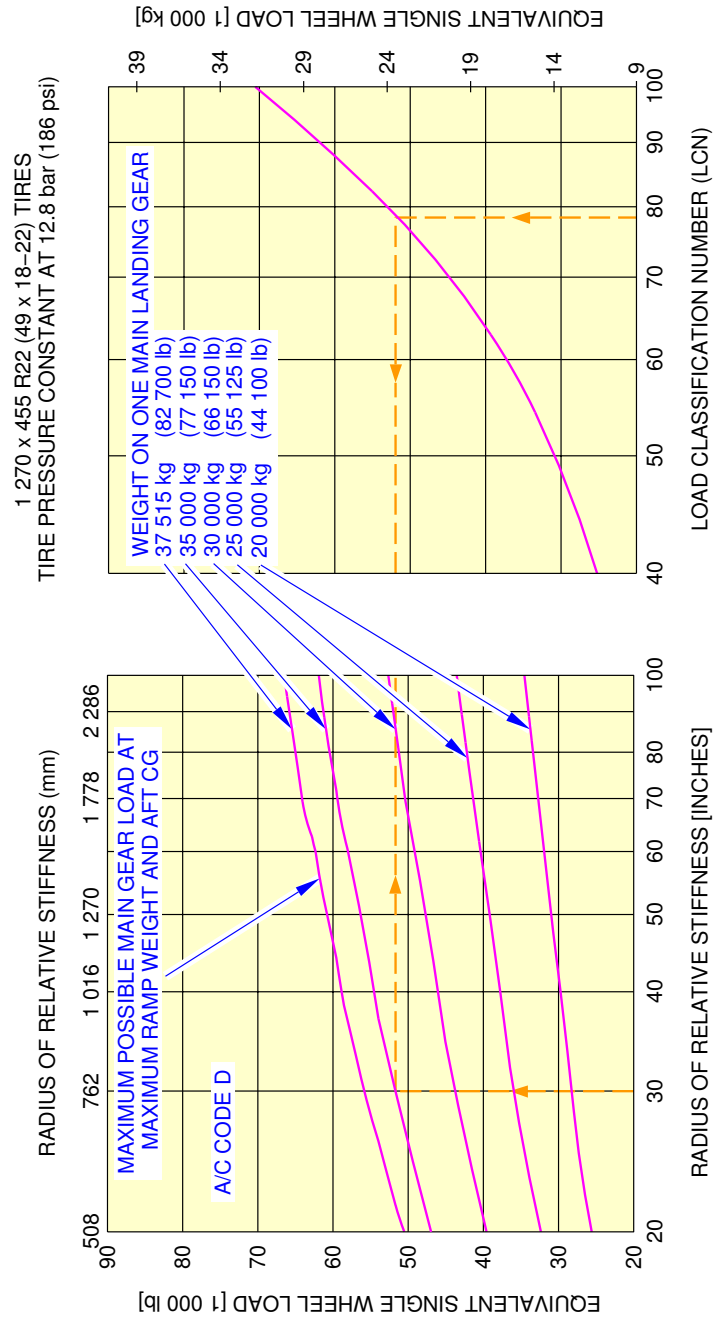

N_AC_070802_1_1120101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 2

****ON A/C A321-100**

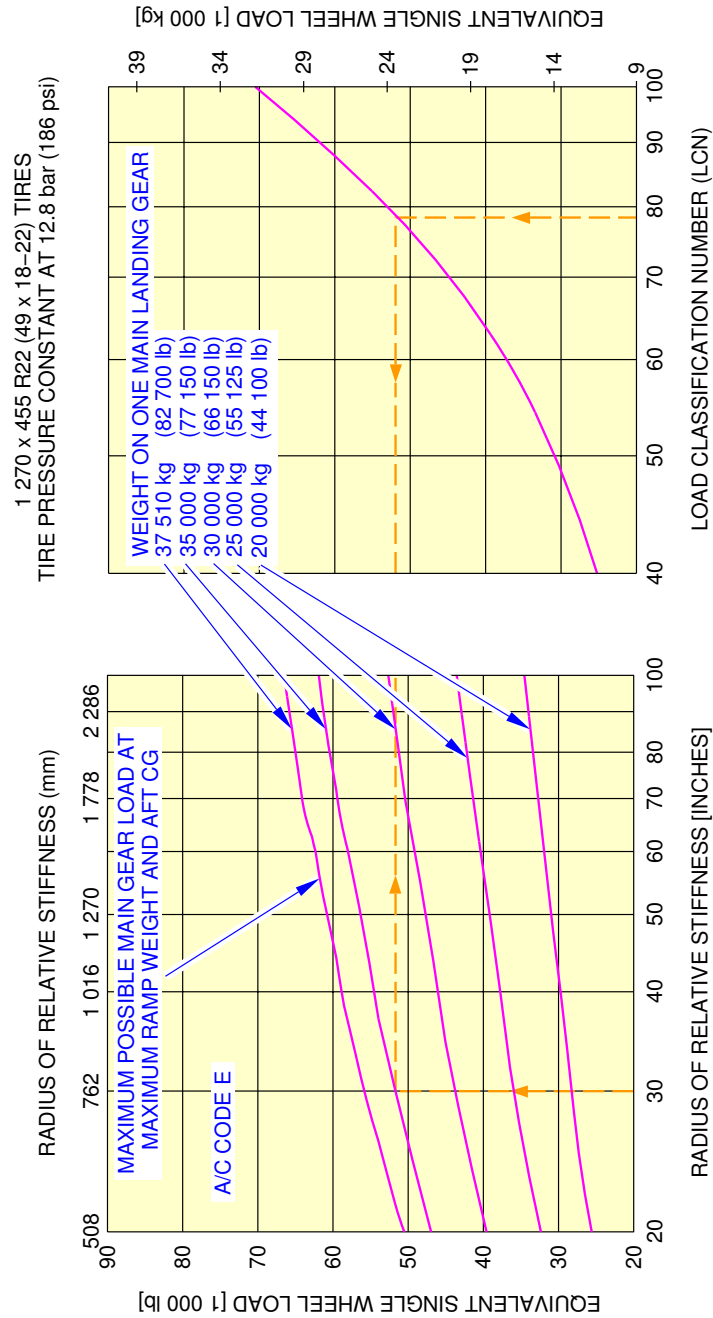


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070802_1_1130101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 3


****ON A/C A321-100**

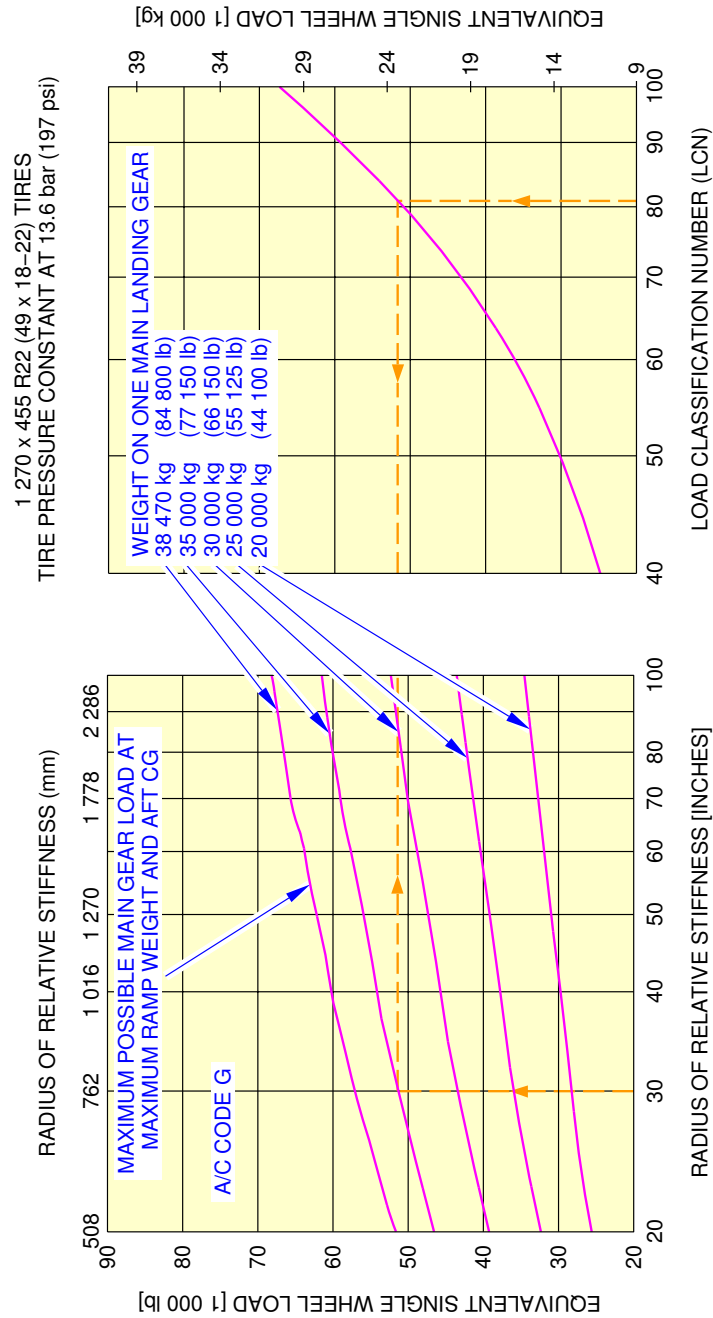

N_AC_070802_1_1140101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 4


****ON A/C A321-200**

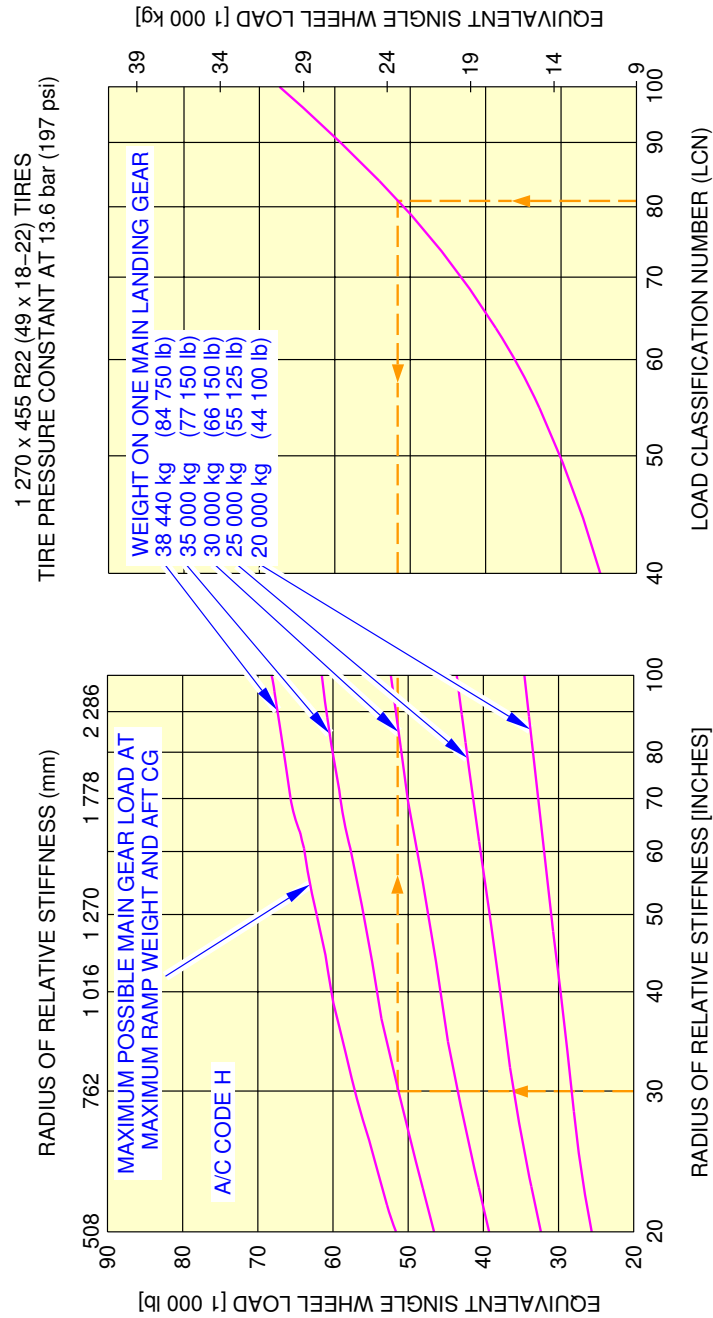

N_AC_070802_1_1150101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 5


****ON A/C A321-100**

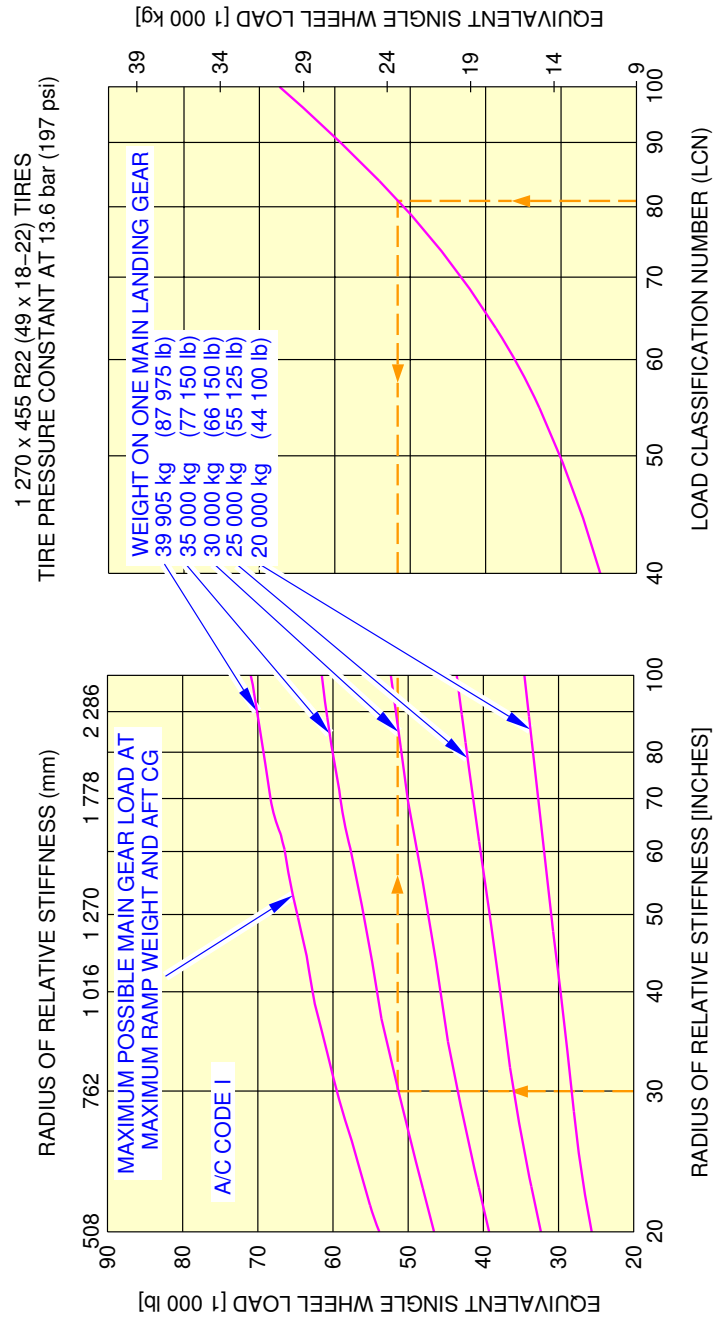

N_AC_070802_1_1160101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 6


****ON A/C A321-200**

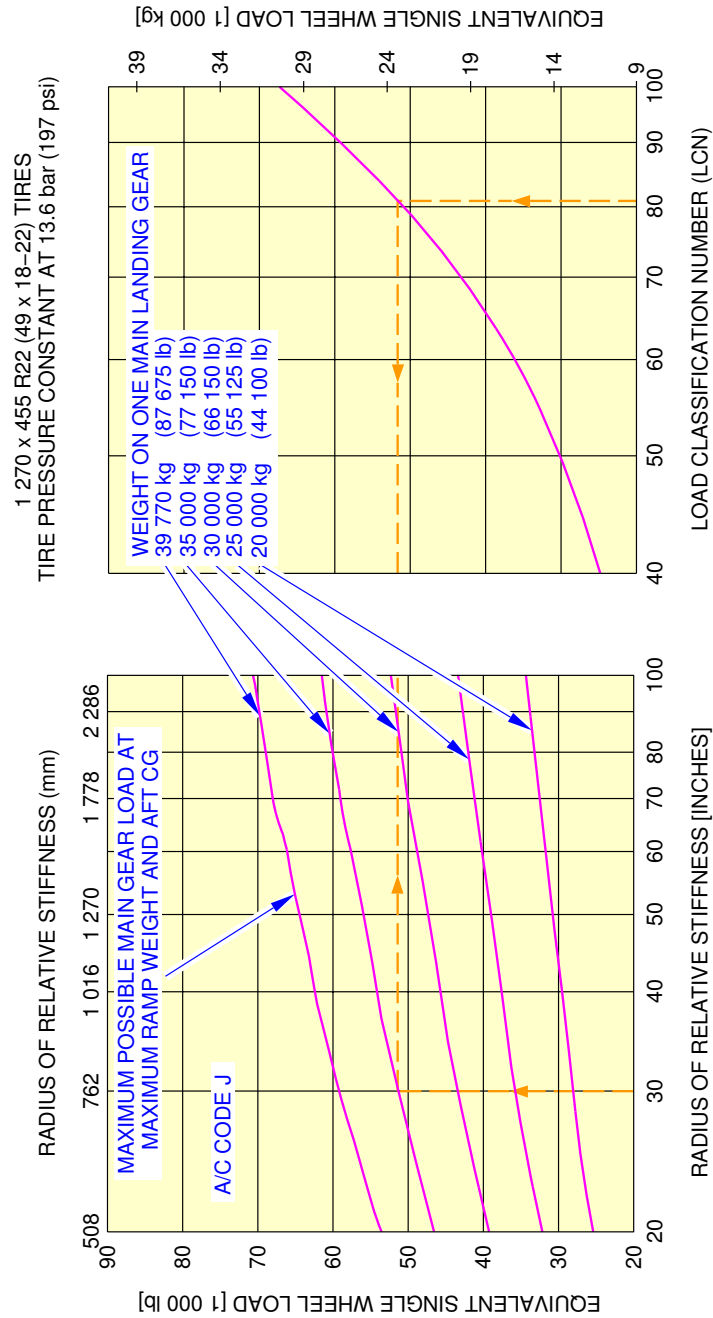

N_AC_070802_1_1170101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 7


****ON A/C A321-100**

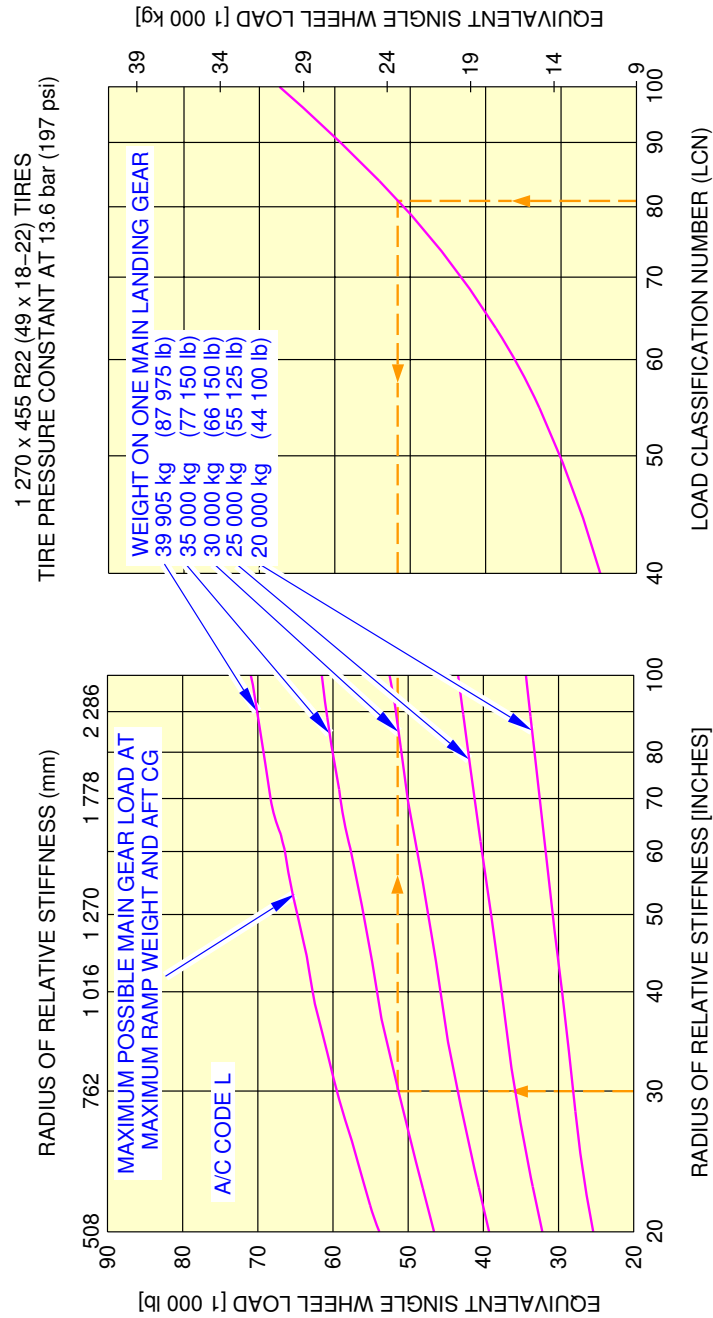

N_AC_070802_1_1180101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 8


****ON A/C A321-100**

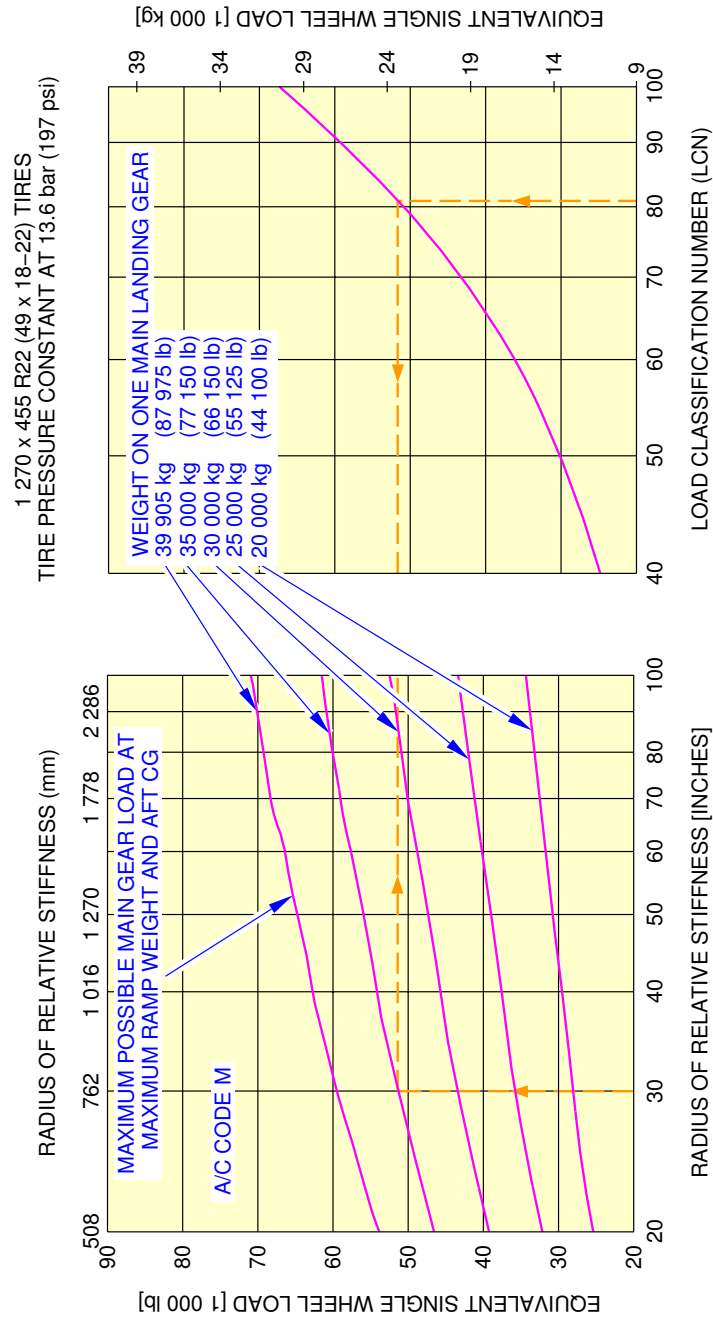

N_AC_070802_1_1190101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 9

****ON A/C A321-200**

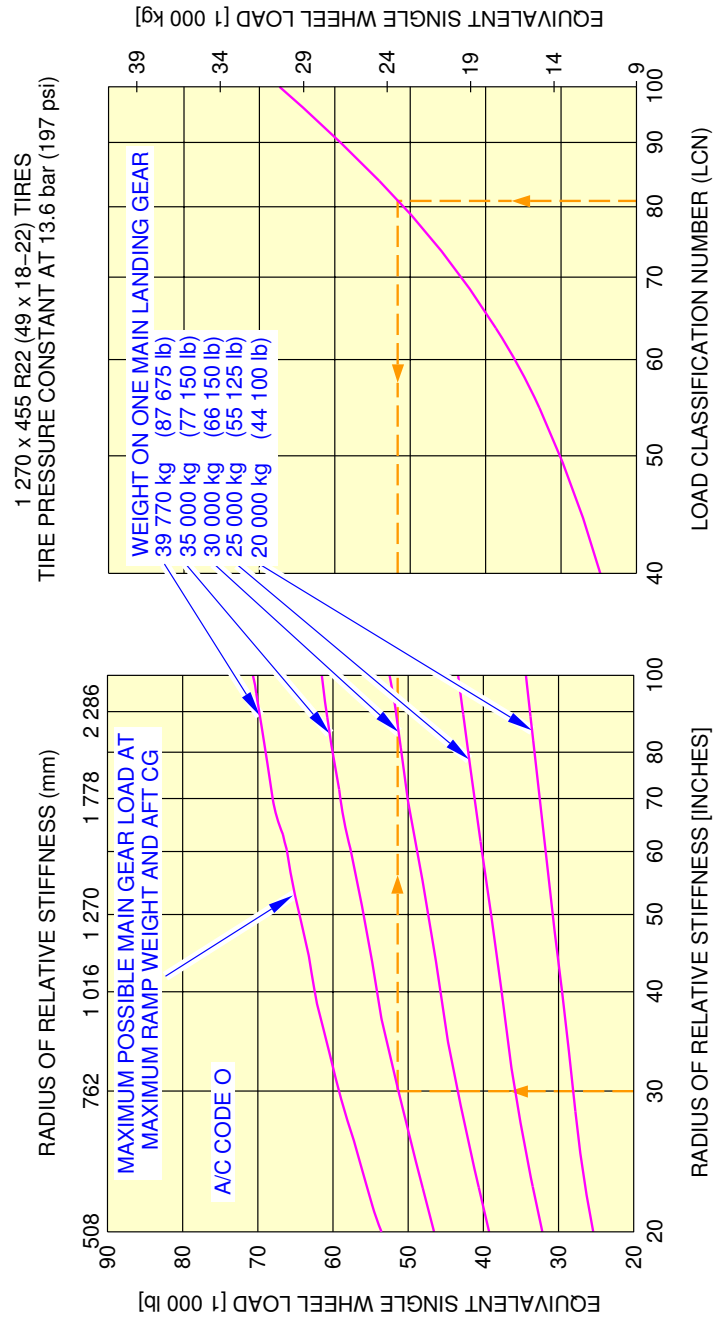


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN
ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070802_1_1200101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 10


****ON A/C A321-100**

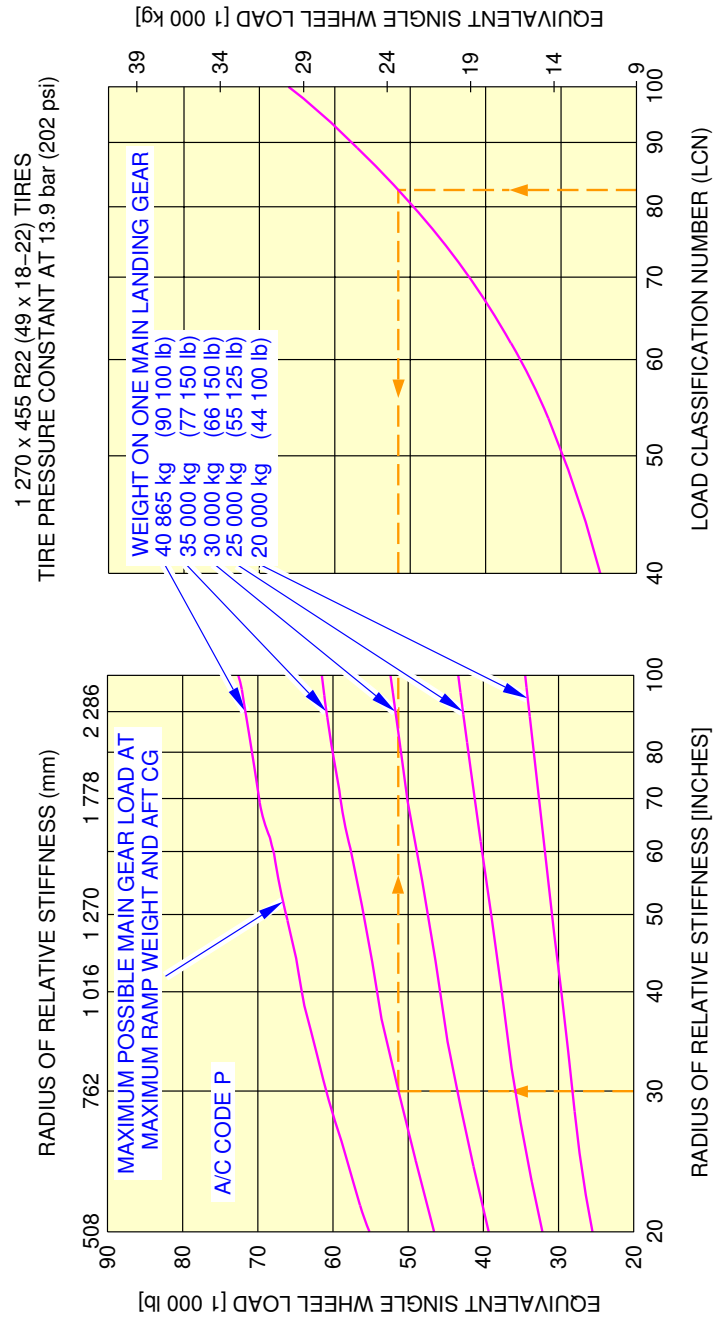

N_AC_070802_1_1210101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 11


****ON A/C A321-200**

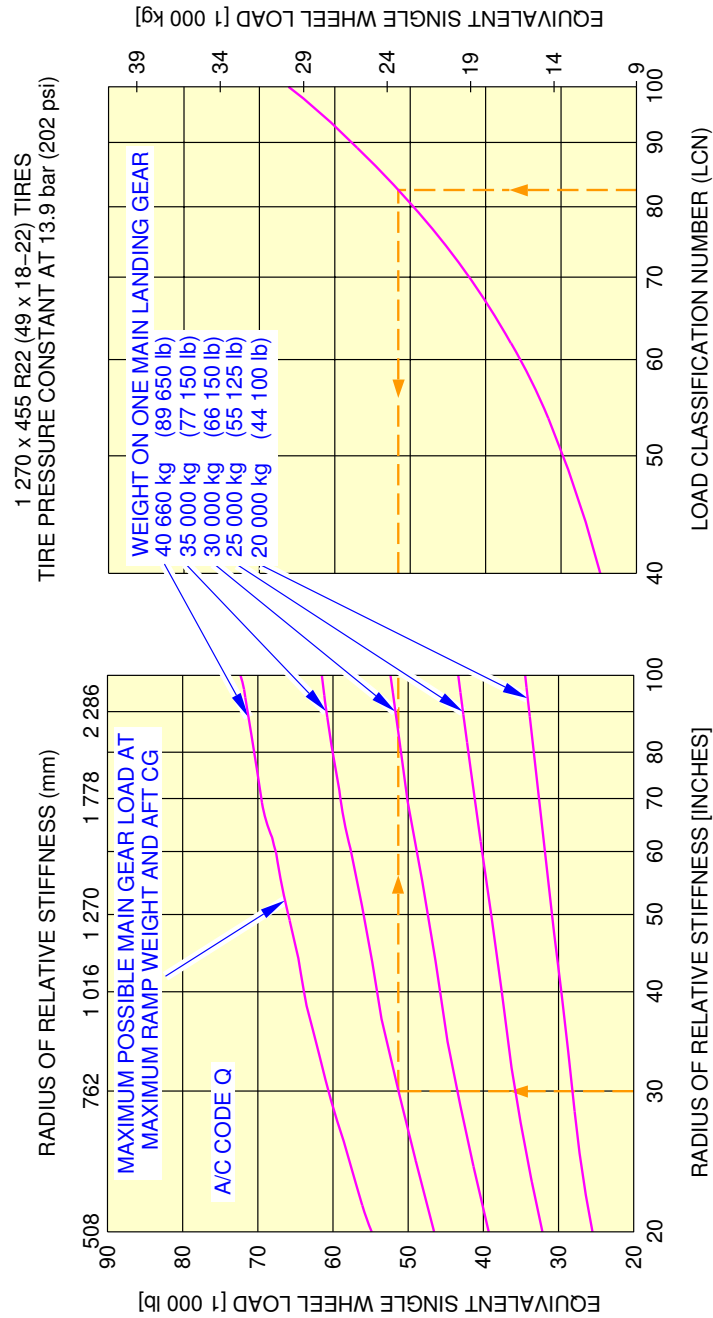

N_AC_070802_1_1220101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 12

****ON A/C A321-200**

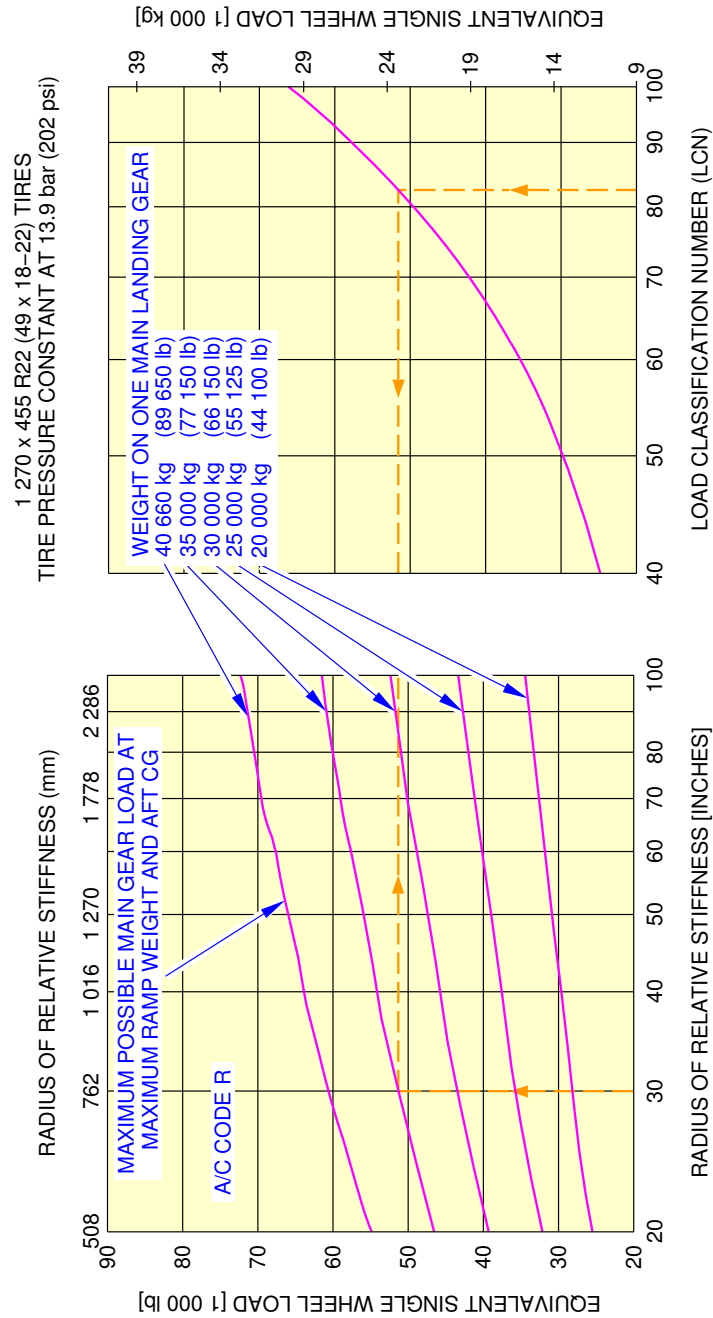


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070802_1_1230101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 13

****ON A/C A321-200**

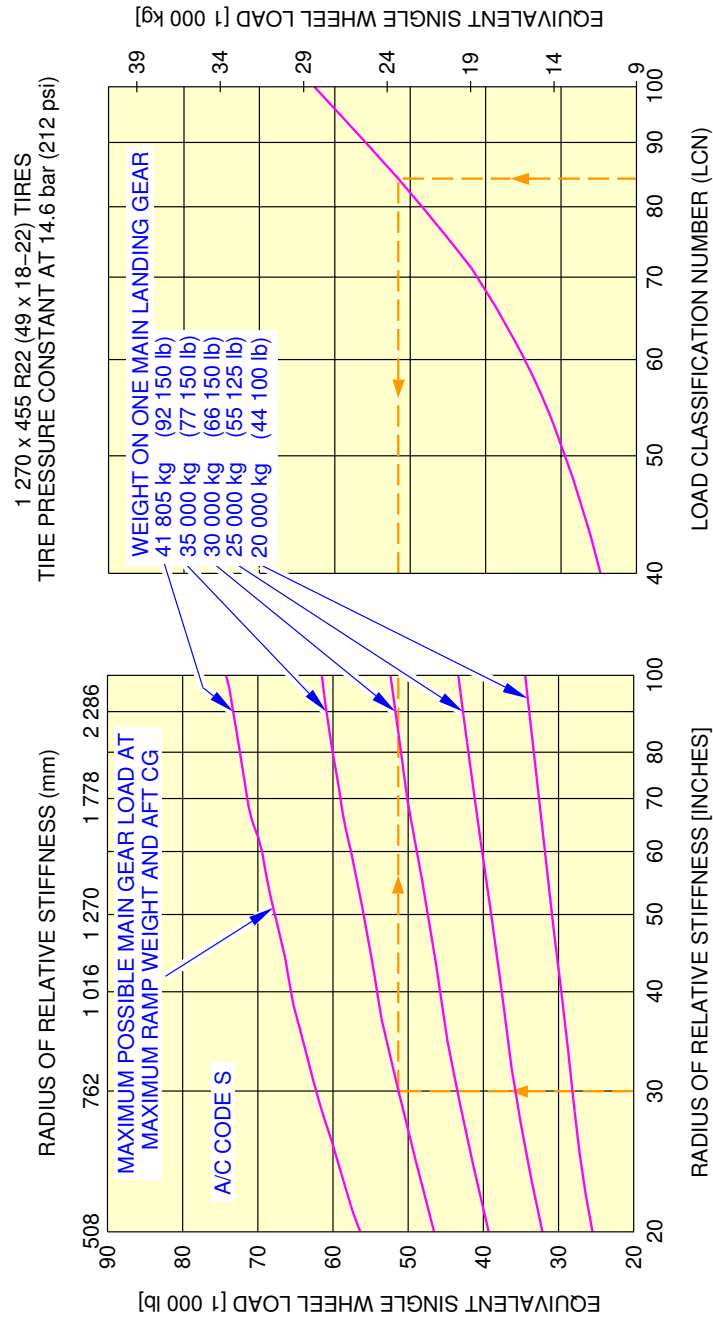


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN
ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070802_1_1240101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 14


****ON A/C A321-100**

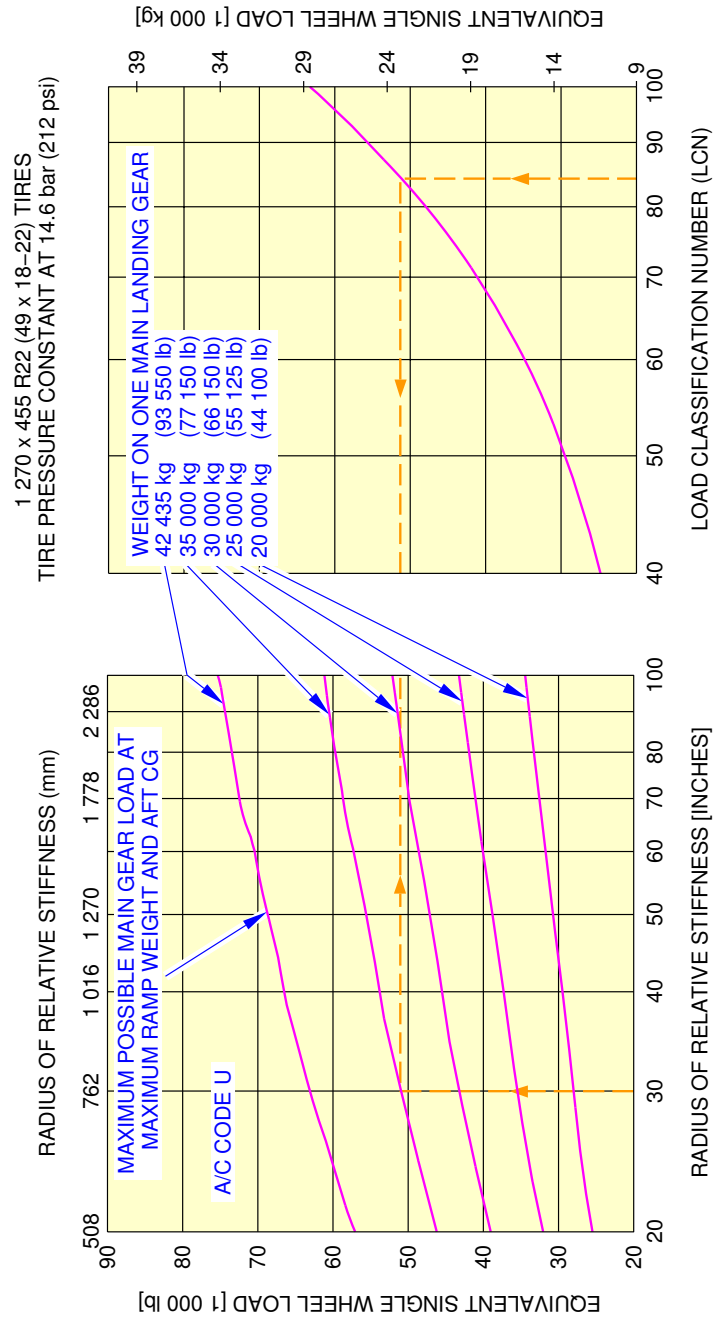

N_AC_070802_1_1250101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 15

****ON A/C A321-200**

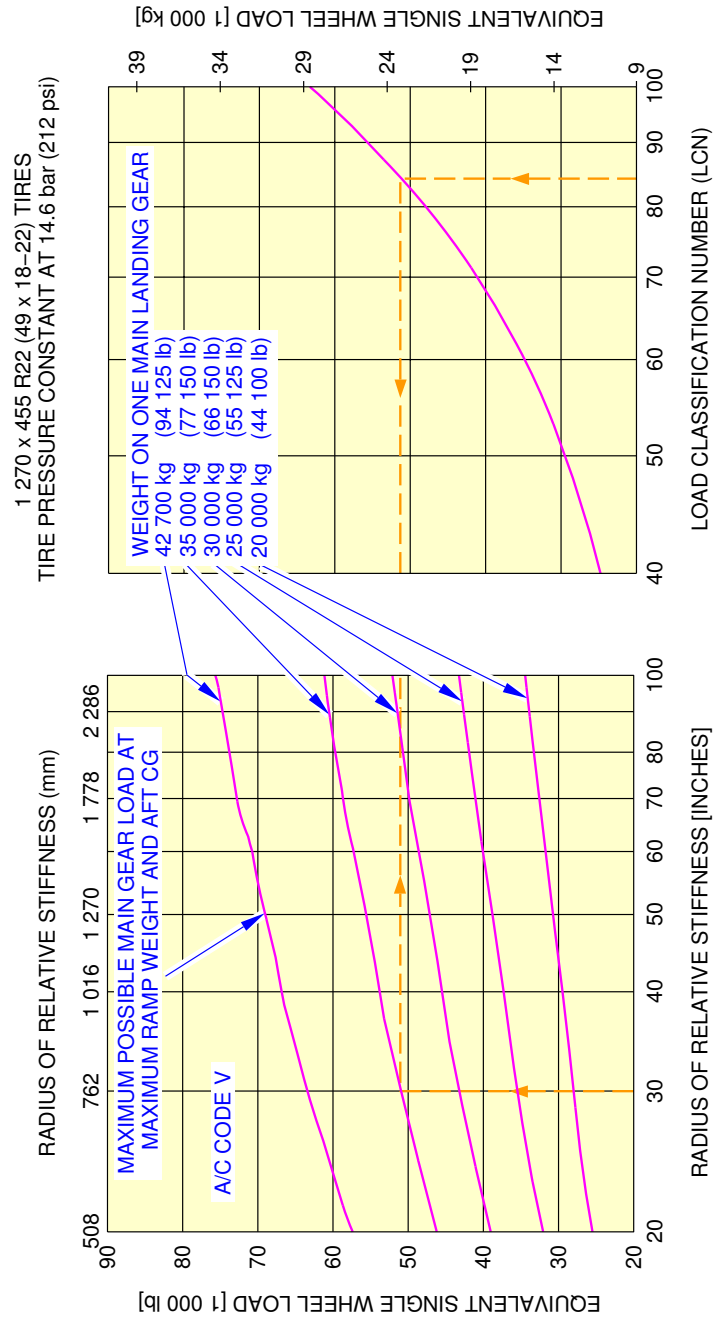


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN
ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070802_1_1260101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 16

****ON A/C A321-200**

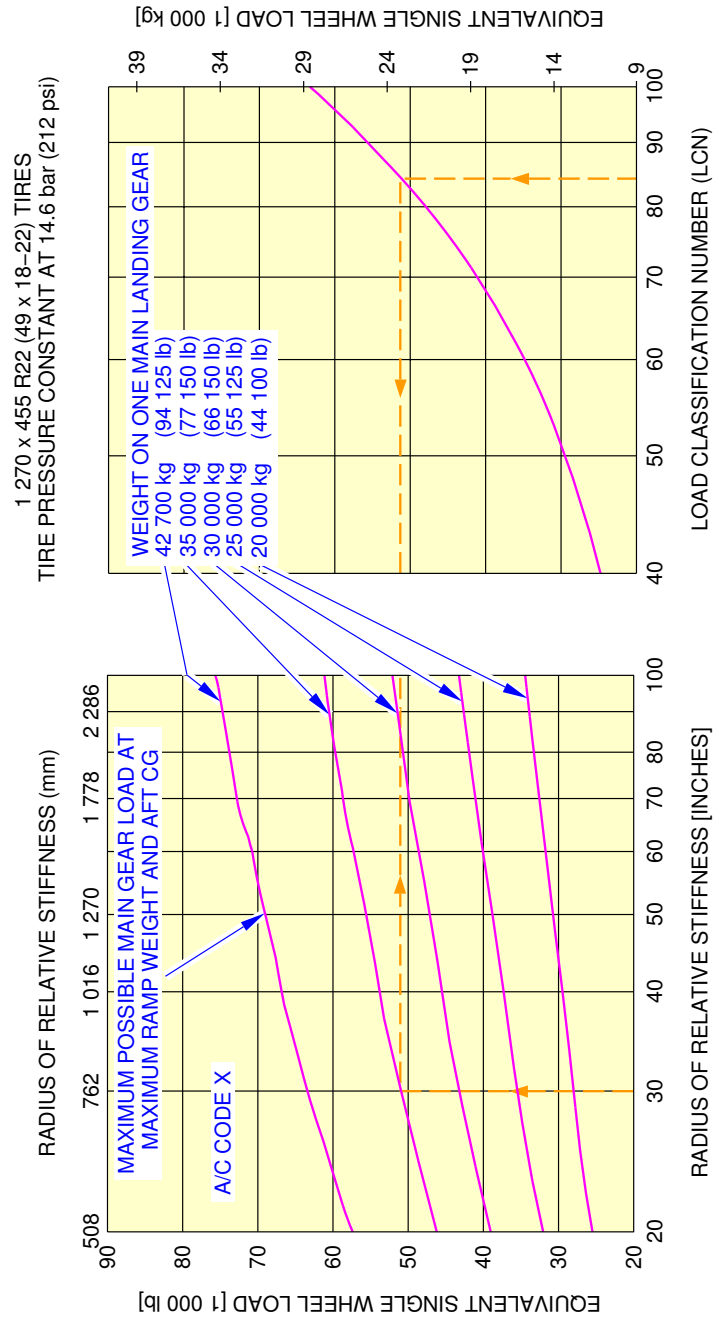


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN
ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070802_1_1270101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 17


****ON A/C A321-200**

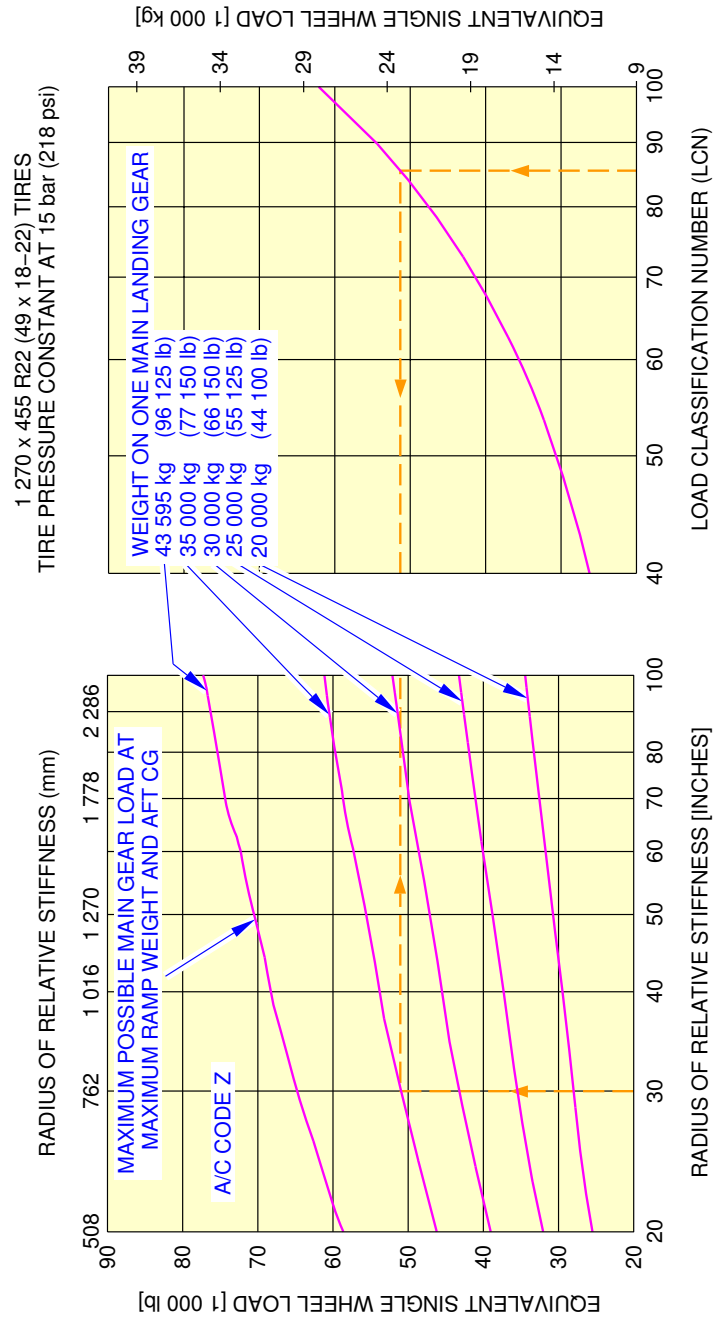

N_AC_070802_1_1280101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 18

****ON A/C A321-200**

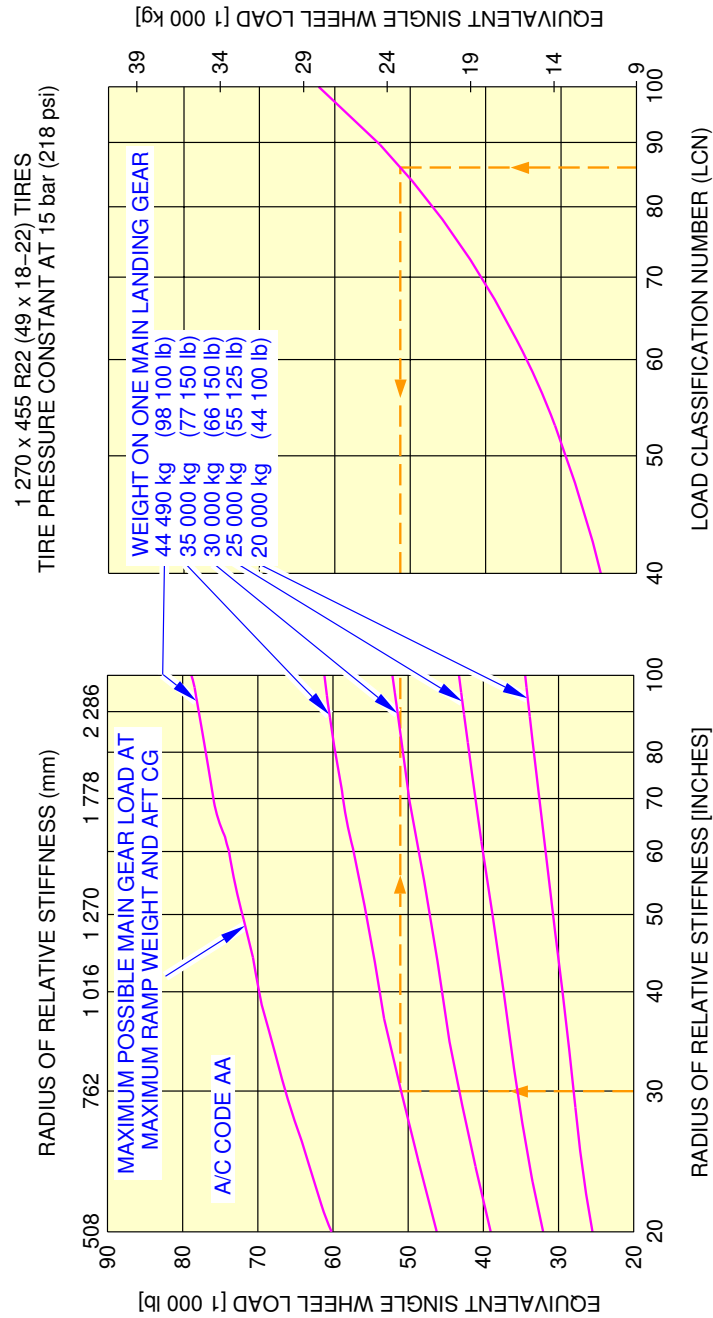


NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN
ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070802_1_1290101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 19

****ON A/C A321-200**

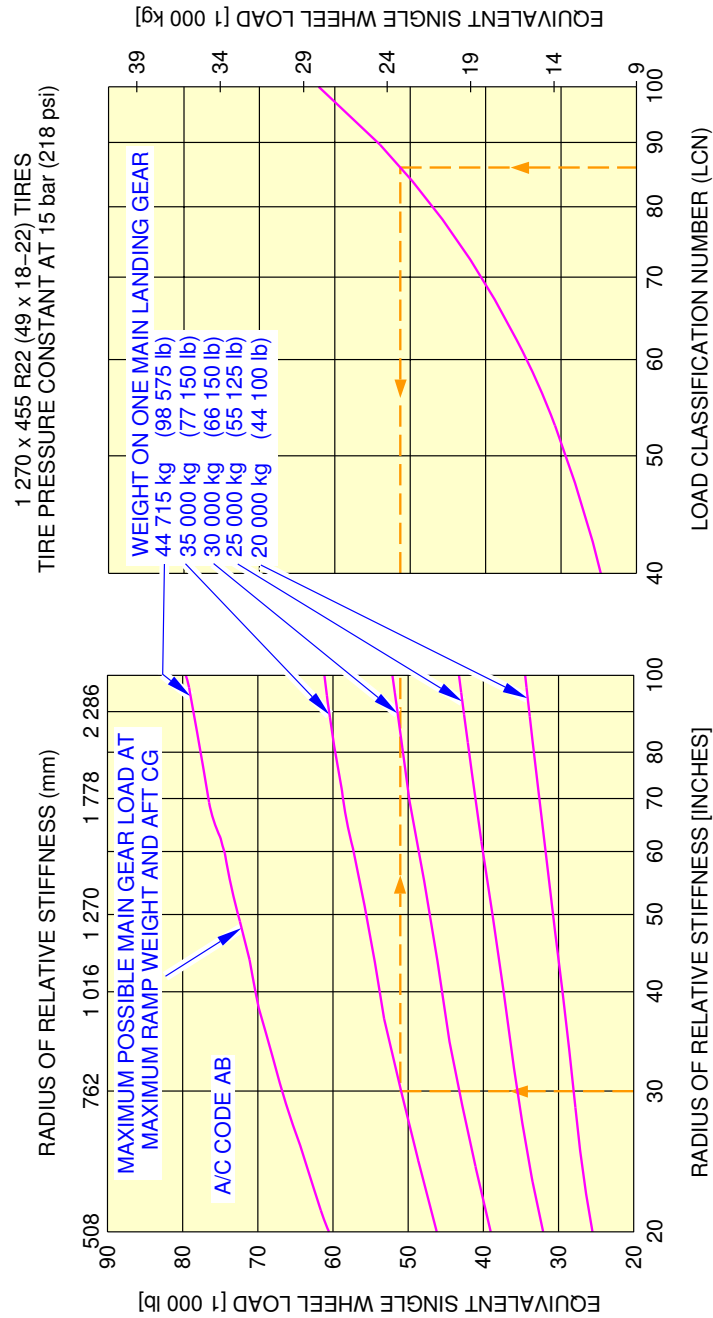

NOTE: EQUIVALENT SINGLE WHEEL LOADS ARE DERIVED BY METHODS SHOWN IN
ICAO AERODROME MANUAL PART 2 PAR 4.1.3 Second Edition 1965

N_AC_070802_1_1300101_01_00

Rigid Pavement Requirements - LCN Conversion
FIGURE 20

7-8-3 Radius of Relative Stiffness (Other values of E and L)

****ON A/C A321-100 A321-200**

Radius of Relative Stiffness (Other values of "E" and "L")

1. General

The table of Section 7-8-1, Radius of Relative Stiffness, presents "L" values based on Young's Modulus (E) of 4 000 000 psi and Poisson's Ratio (μ) of 0.15.

To find "L" values based on other values of "E" and " μ ", see Section 7-8-4.

For example, to find an "L" value based on an "E" of 3 000 000 psi, the "E" factor of 0.931 is multiplied by the "L" value found in the table of Section 7-8-1.

The effect of variations of " μ " on the "L" value is treated in a similar manner.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING


7-8-4 Radius of Relative Stiffness

****ON A/C A321-100 A321-200**

Radius of Relative Stiffness

1. This section gives Radius of Relative Stiffness.

****ON A/C A321-100 A321-200**

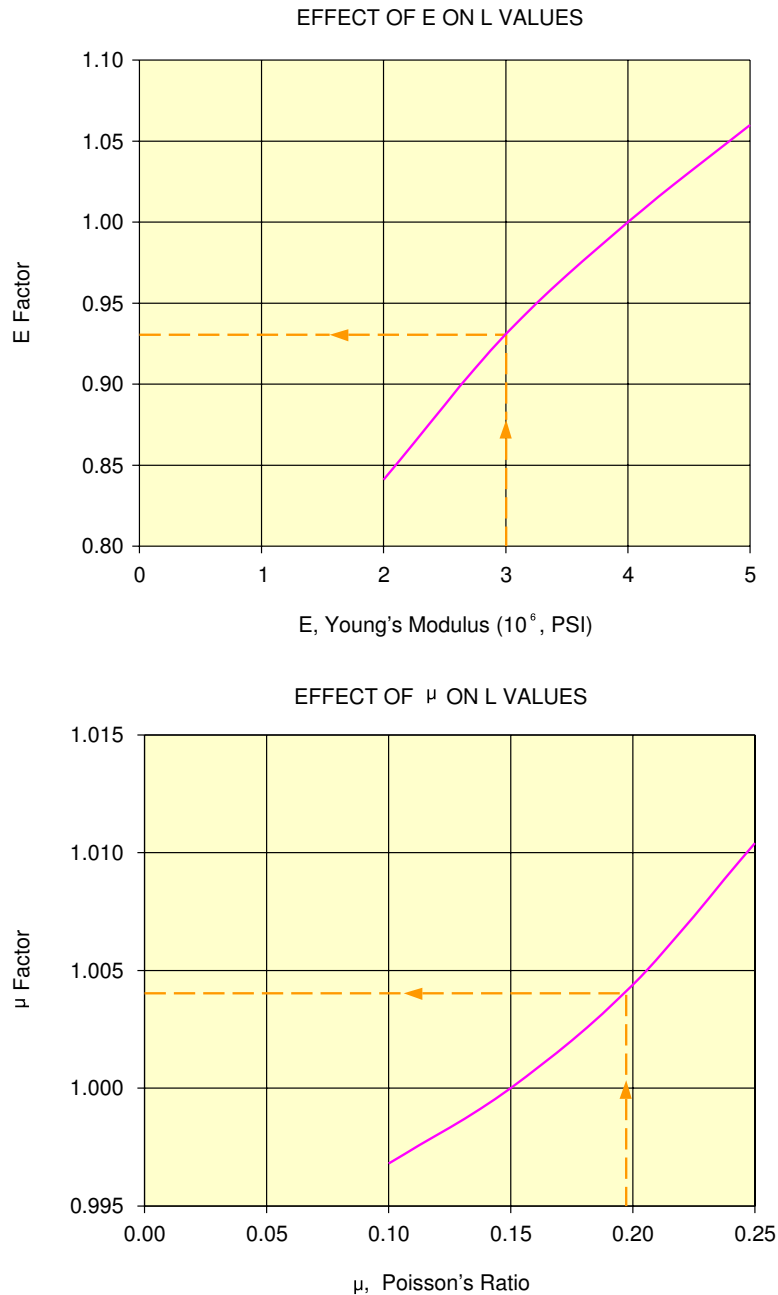

NOTE: BOTH CURVES ON THIS PAGE ARE USED TO ADJUST THE L VALUES OF TABLE 7-8-1

N_AC_070804_1_0040101_01_02

Radius of Relative Stiffness
(Effect E and μ on "L" values)
FIGURE 1

7-9-0 ACN/PCN Reporting System

****ON A/C A321-100 A321-200**

ACN/PCN Reporting System

1. General

To determine the ACN of an aircraft on flexible or rigid pavement, both the aircraft gross weight and the subgrade strength must be known.

In the example shown in Section 7-9-1 Aircraft Classification Number – Flexible Pavement, A/C Code C, for an aircraft gross weight of 65 000 kg (143 300 lb) and low subgrade strength (code C), the ACN for the flexible pavement is 38.3.

In the example shown in Section 7-9-2 Aircraft Classification Number – Rigid Pavement, A/C Code C, for an aircraft gross weight of 65 000 kg (143 300 lb) and medium subgrade strength (code B), the ACN for the rigid pavement is 39.7.


NOTE : An aircraft with an ACN equal to or less than the reported PCN can operate on that pavement, subject to any limitation on the tire pressure.
(Ref.: ICAO Aerodrome Design Manual Part 3, Chapter 1, Second Edition 1983).

7-9-1 Aircraft Classification Number - Flexible Pavement****ON A/C A321-100 A321-200**Aircraft Classification Number - Flexible Pavement

1. This section gives the Aircraft Classification Number - Flexible Pavement.

I NOTE : For A/C Code definition, refer to chapter 7-1-0.


****ON A/C A321-100**

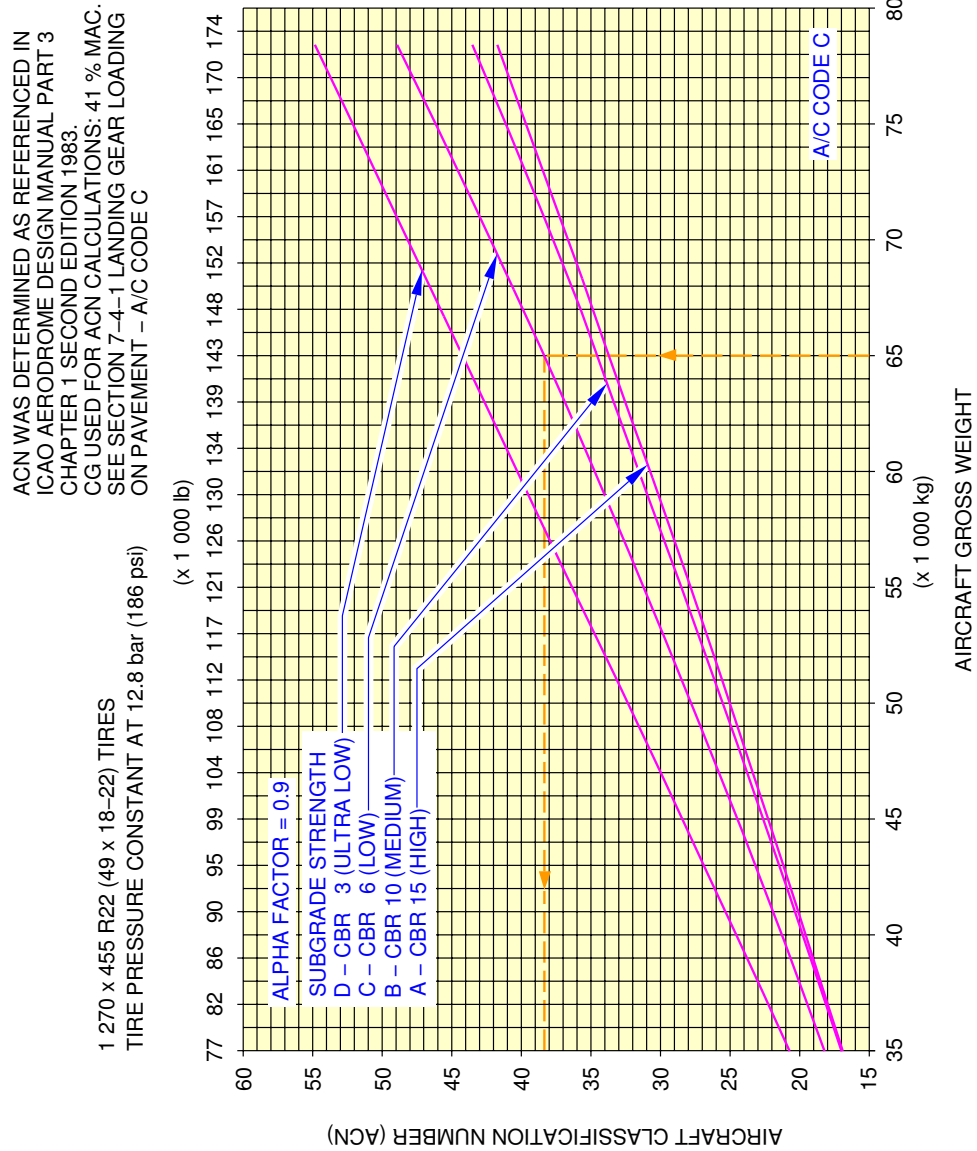

N_AC_070901_1_1230101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 1

**ON A/C A321-200

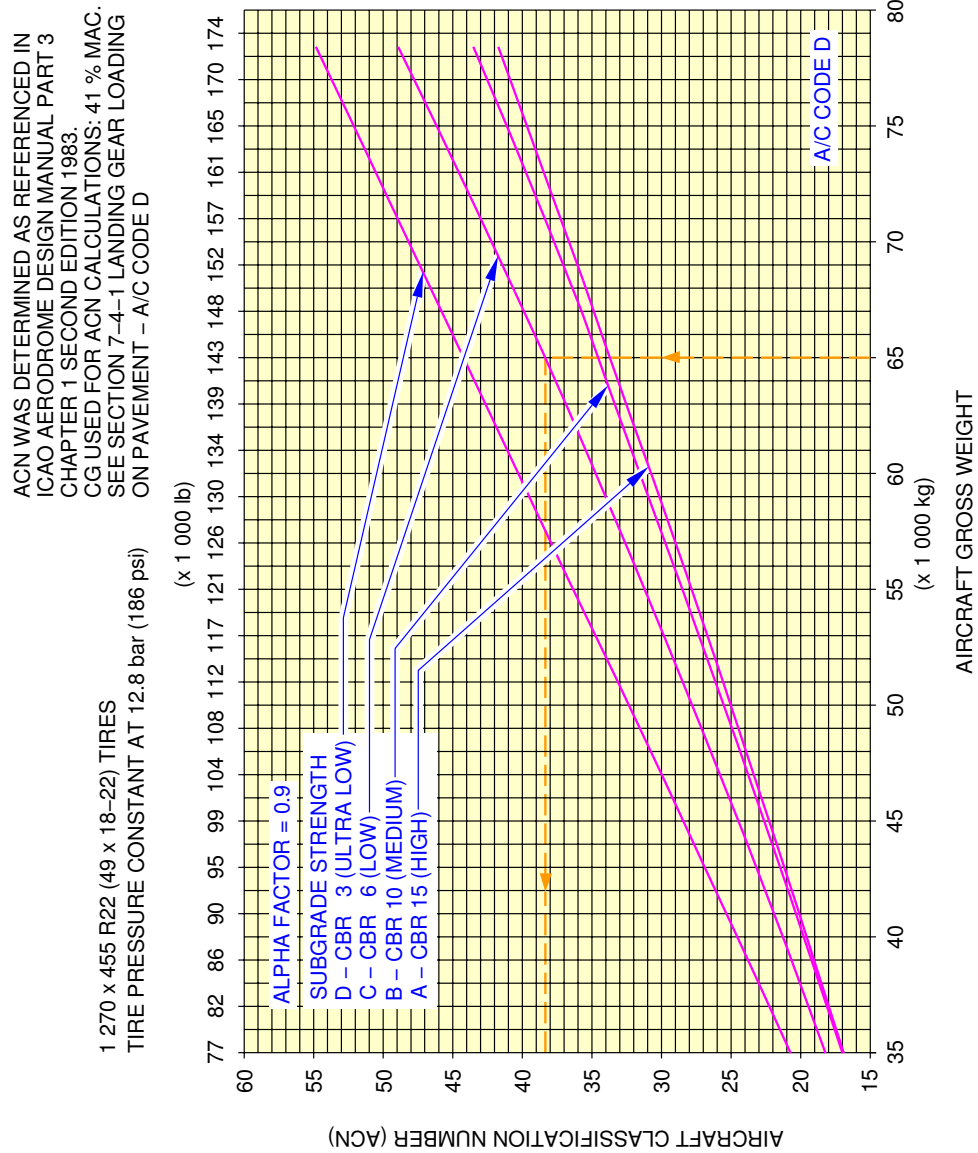

N_AC_070901_1_1240101_01_00


Aircraft Classification Number – Flexible Pavement
FIGURE 2

****ON A/C A321-100**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 41 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT - A/C CODE E

1 270 x 455 R22 (49 x 18-22) TIRES


TIRE PRESSURE CONSTANT AT 12.8 bar (186 psi)

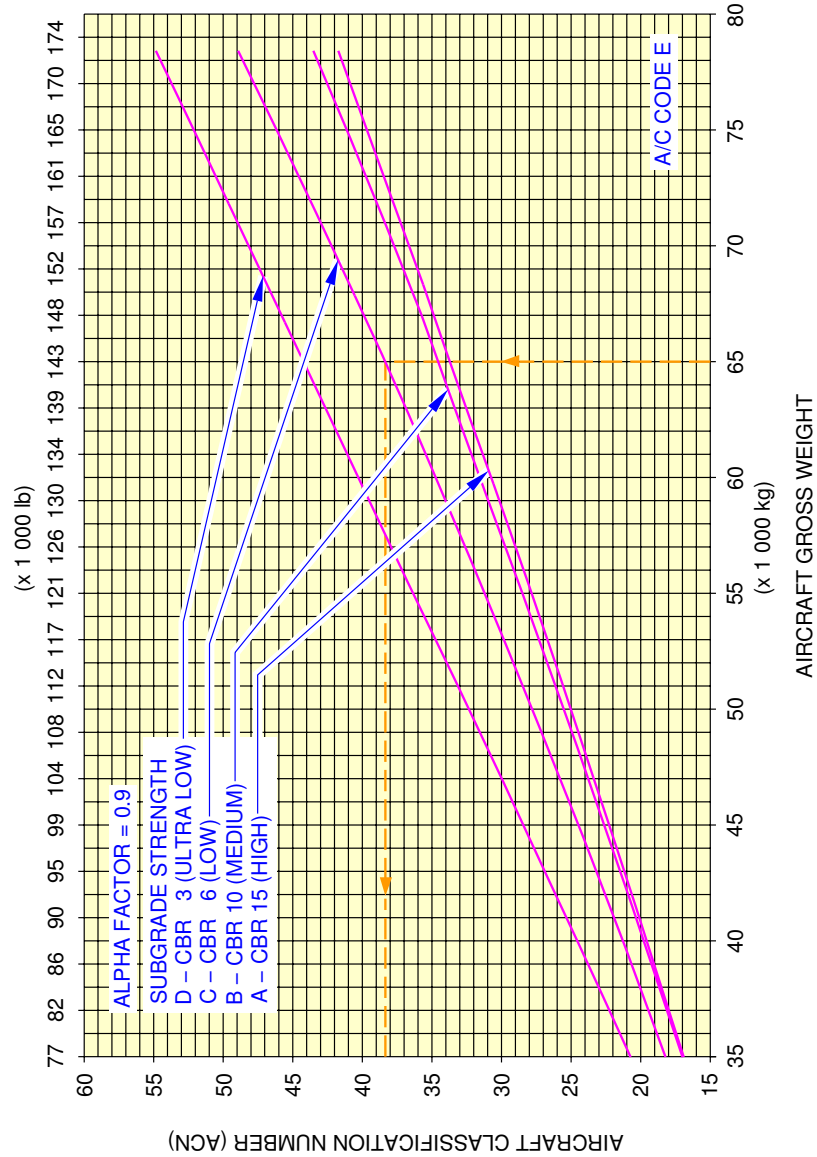

N_AC_070901_1_1250101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 3


**ON A/C A321-100

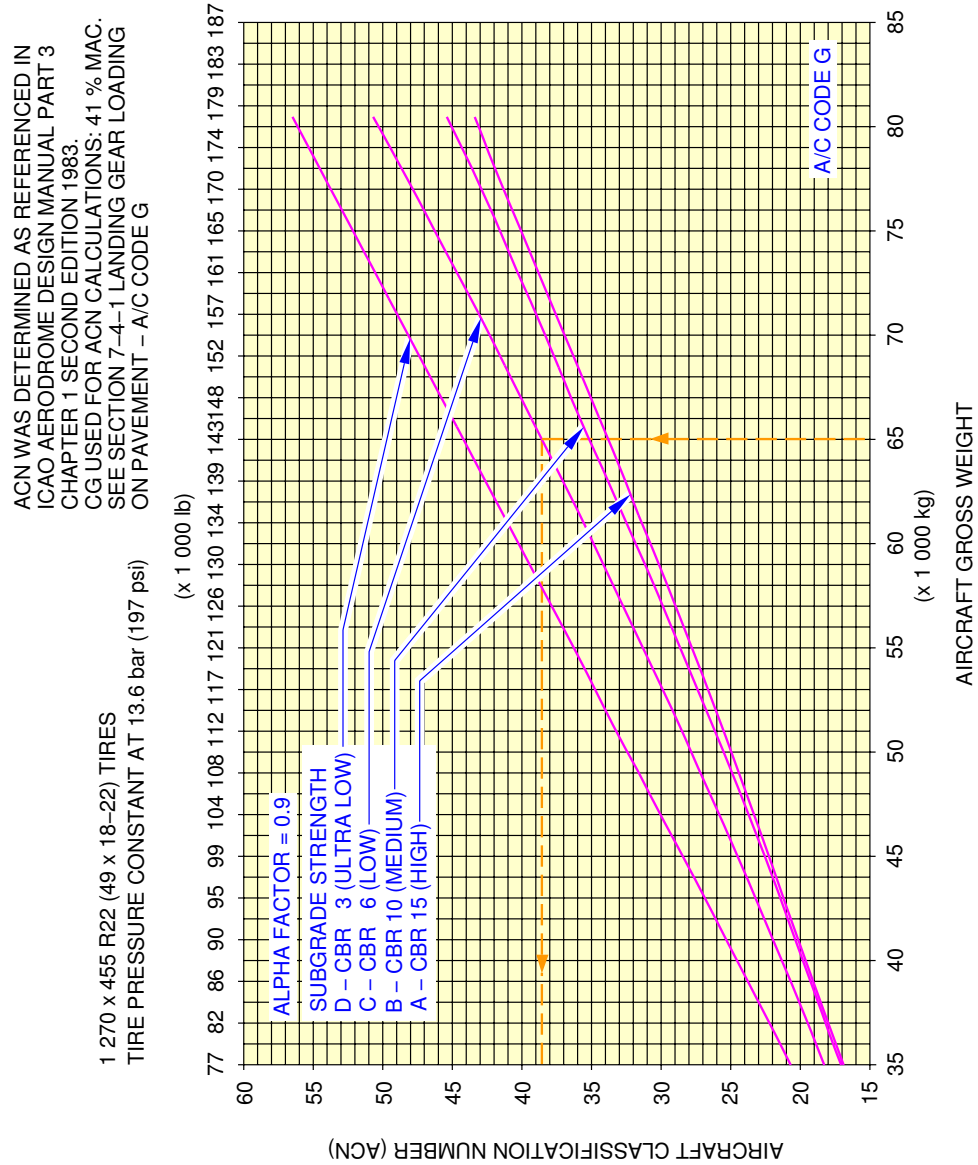

N_AC_070901_1_1260101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 4


**ON A/C A321-200

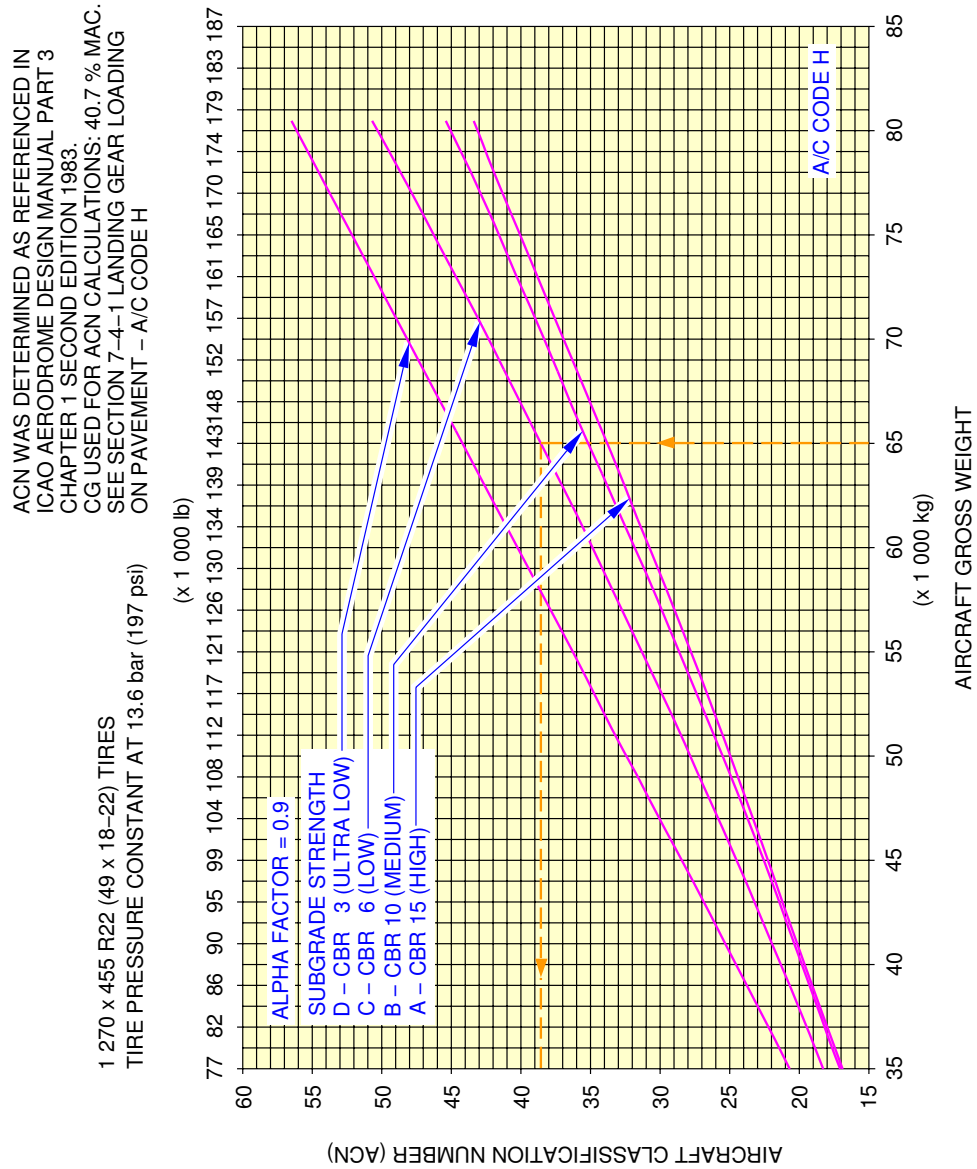

N_AC_070901_1_1270101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 5


****ON A/C A321-100**

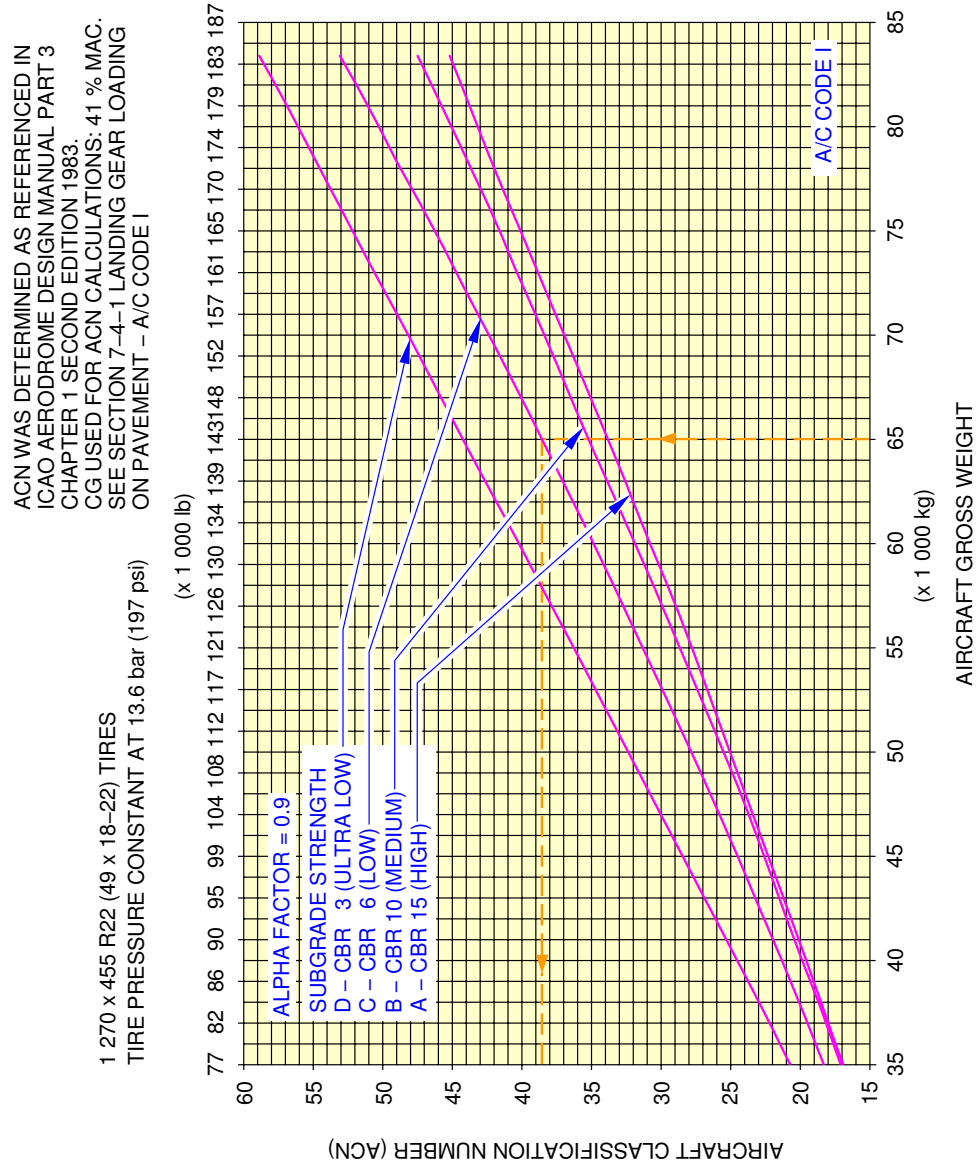

N_AC_070901_1_1280101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 6


**ON A/C A321-200

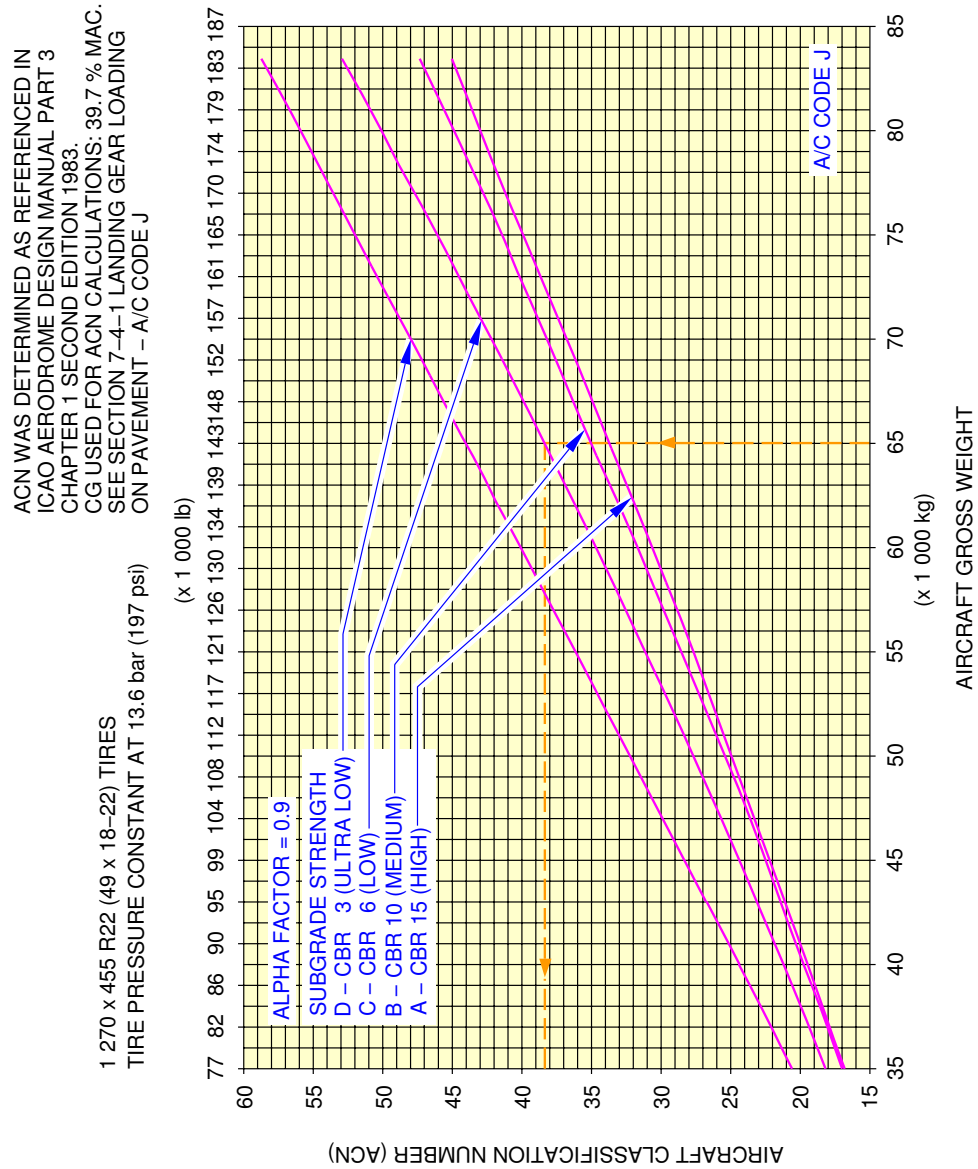

N_AC_070901_1_1290101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 7


**ON A/C A321-100

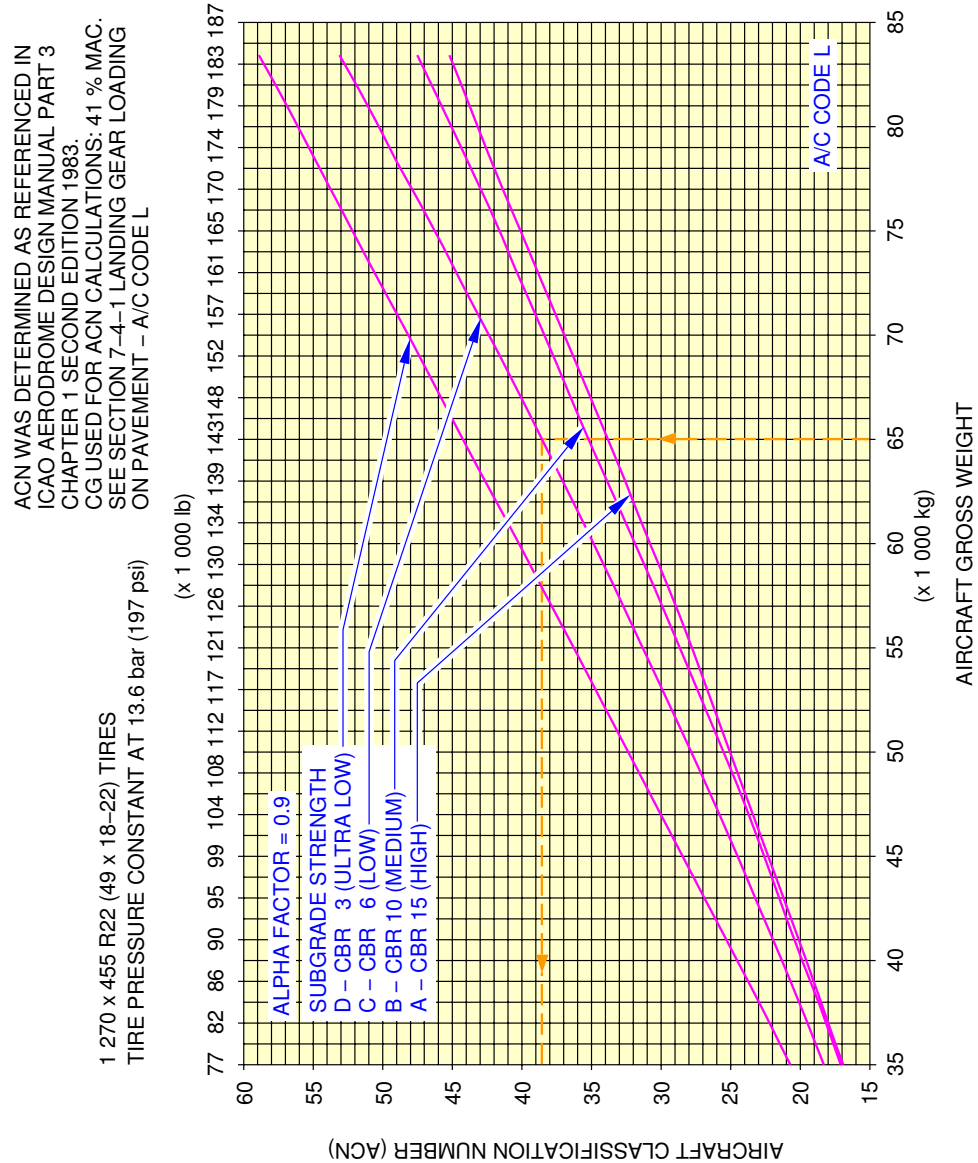

N_AC_070901_1_1300101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 8


**ON A/C A321-100

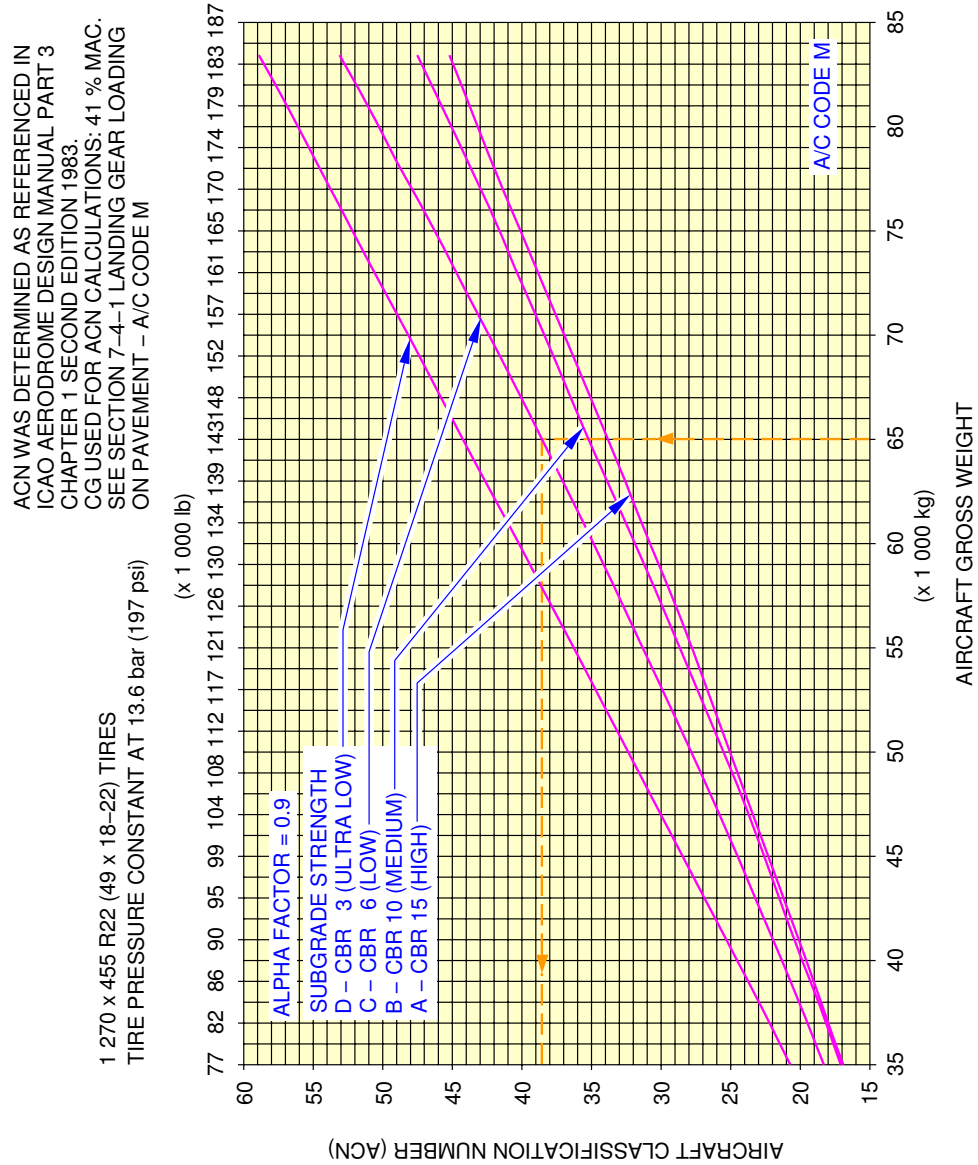

N_AC_070901_1_1310101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 9


**ON A/C A321-200

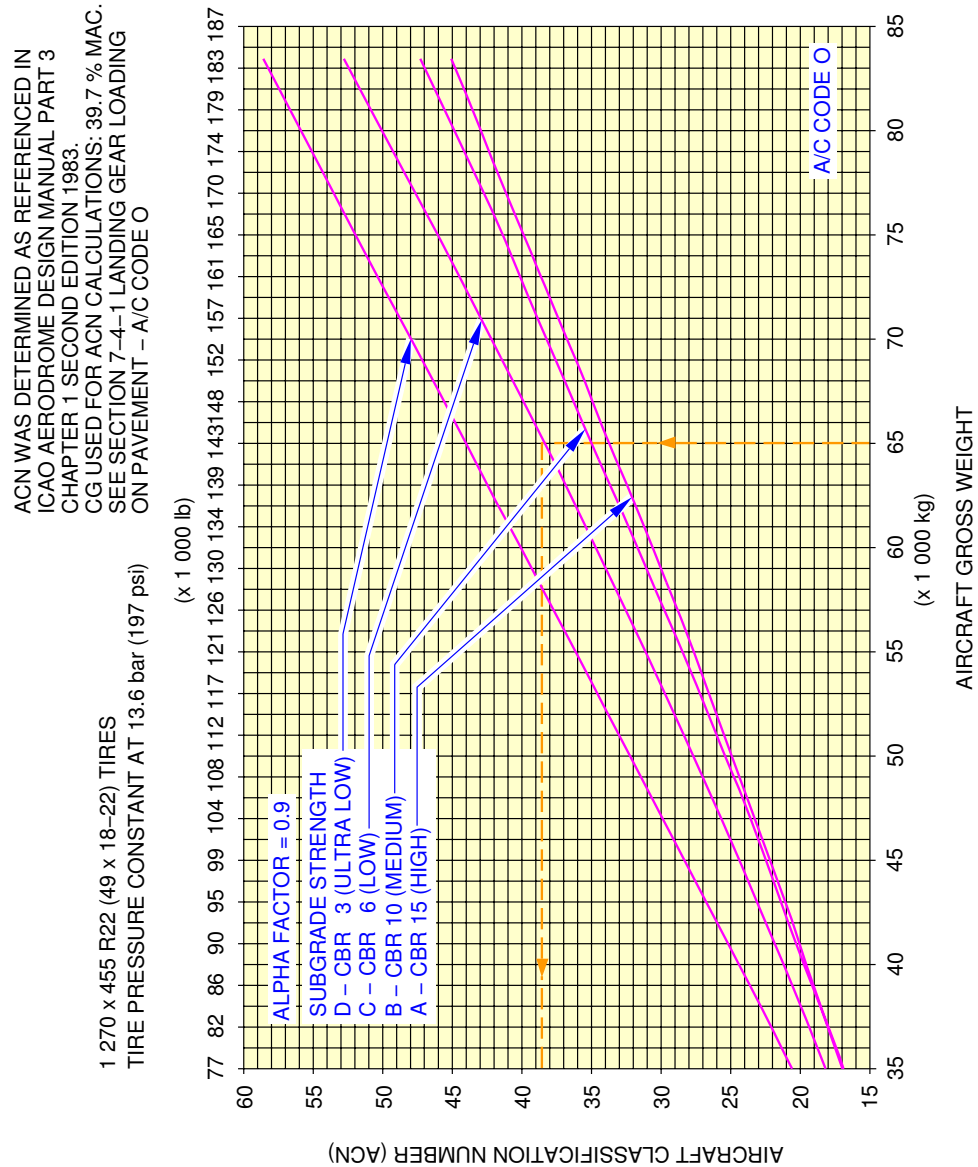

N_AC_070901_1_1320101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 10


**ON A/C A321-100

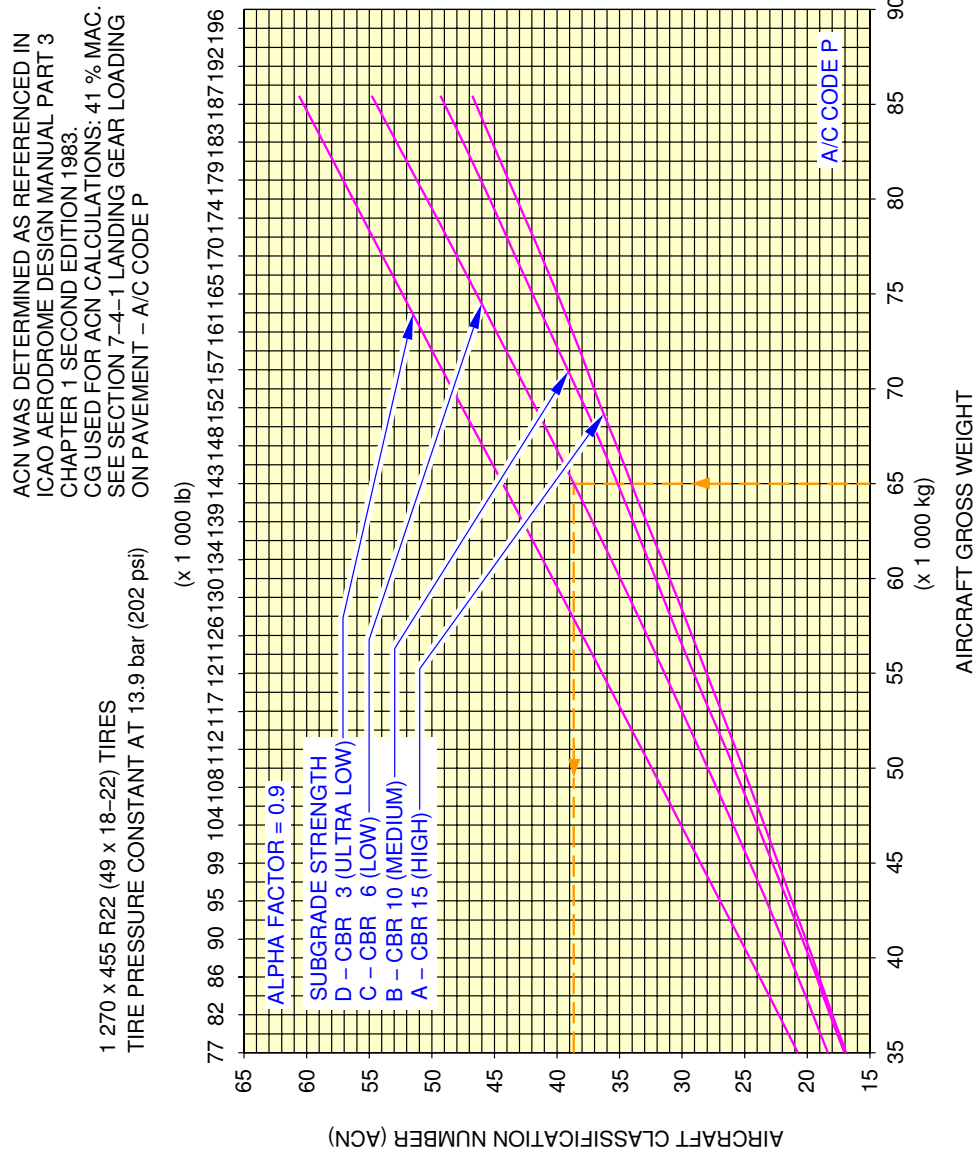

N_AC_070901_1_1330101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 11


**ON A/C A321-200

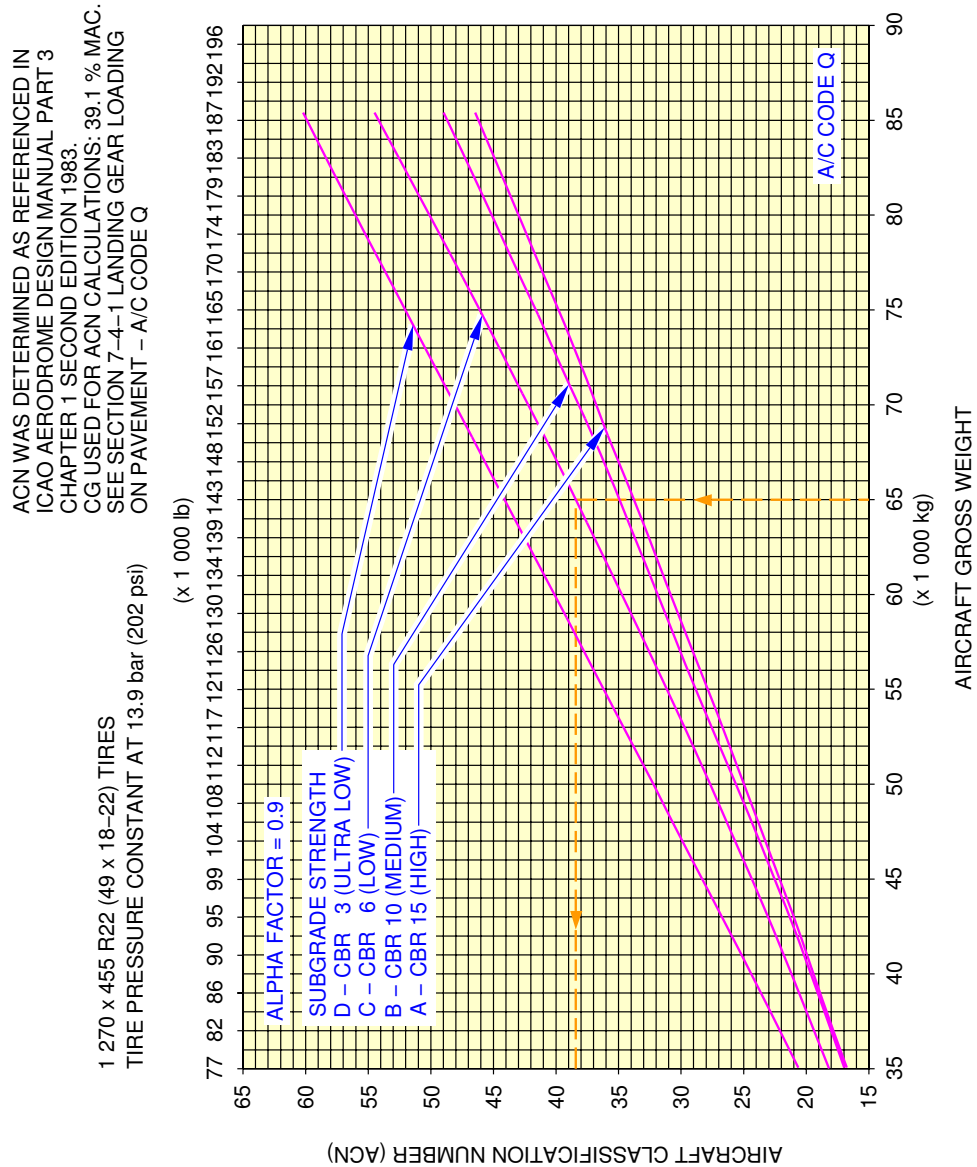

N_AC_070901_1_1340101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 12


**ON A/C A321-200

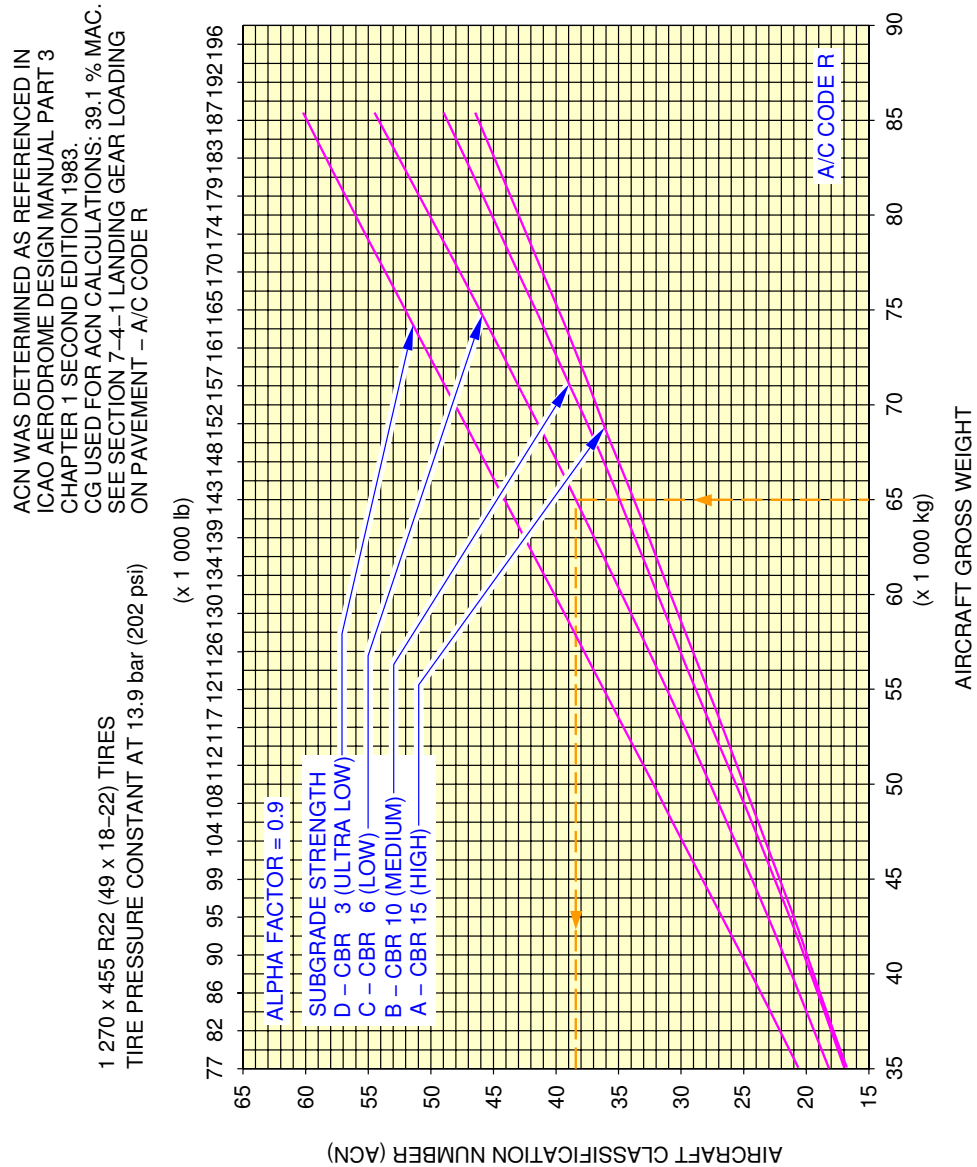

N_AC_070901_1_1350101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 13


**ON A/C A321-200

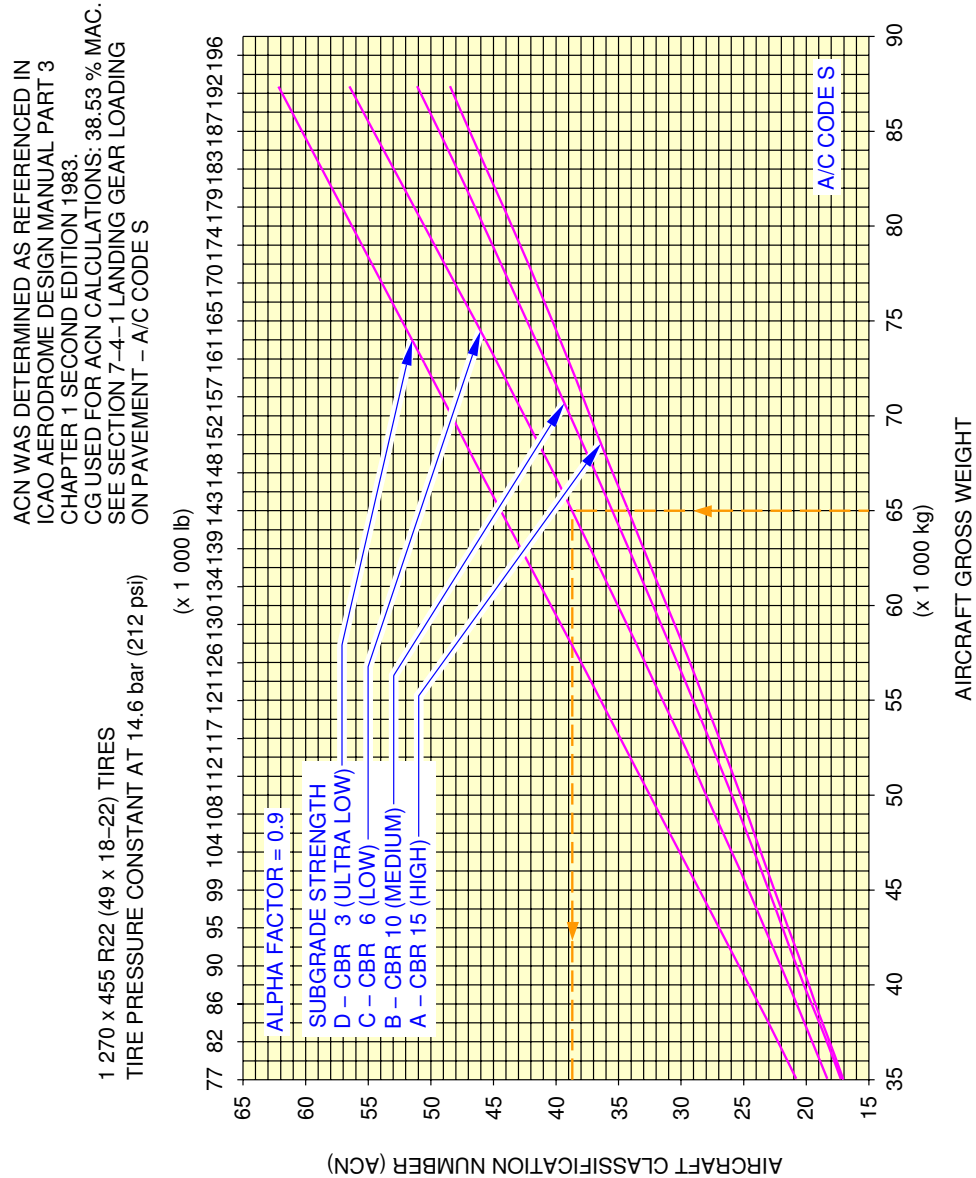

N_AC_070901_1_1360101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 14

**ON A/C A321-100

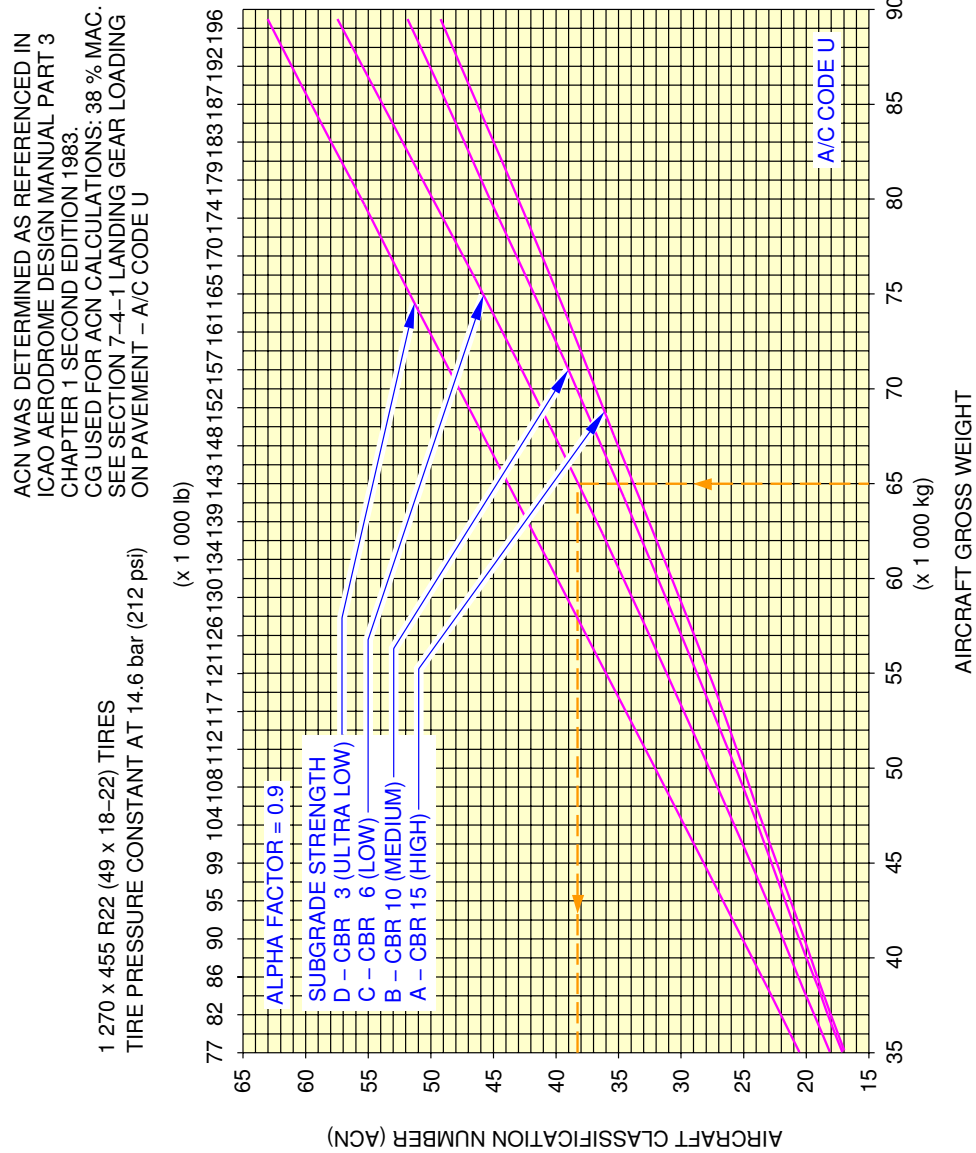

N_AC_070901_1_1370101_01_00


Aircraft Classification Number – Flexible Pavement
FIGURE 15

**ON A/C A321-200

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 38 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT - A/C CODE V

1 270 x 455 R22 (49 x 18-22) TIRES


TIRE PRESSURE CONSTANT AT 14.6 bar (212 psi)

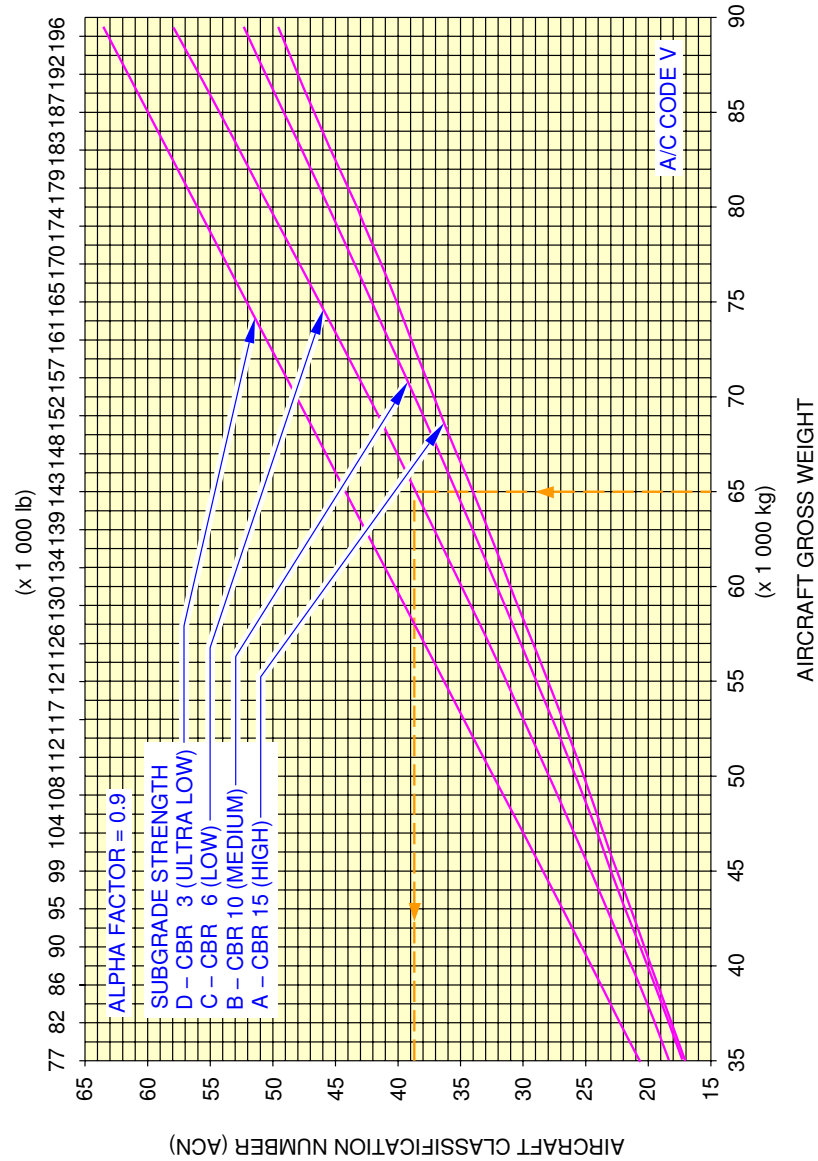

N_AC_070901_1_1380101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 16


**ON A/C A321-200

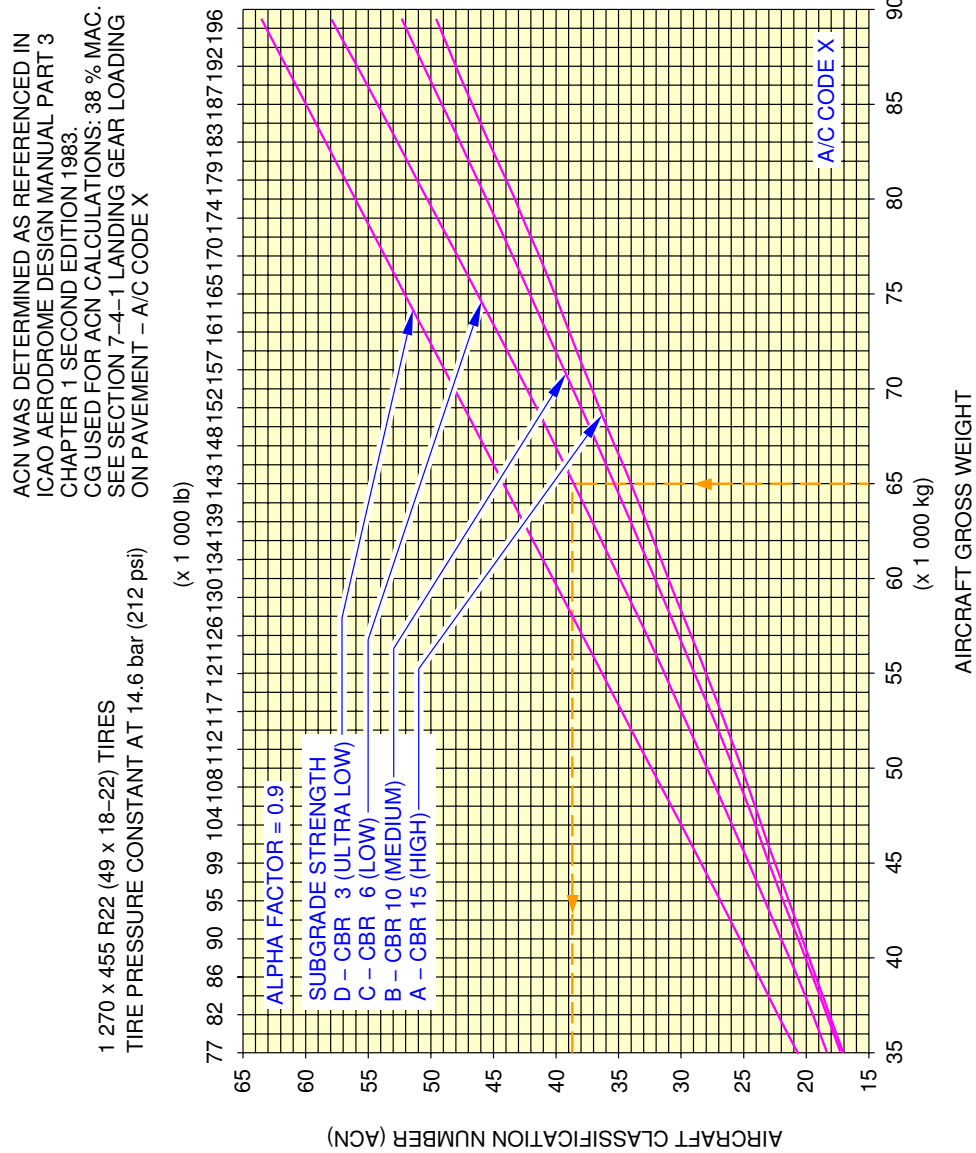

N_AC_070901_1_1390101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 17

**ON A/C A321-200

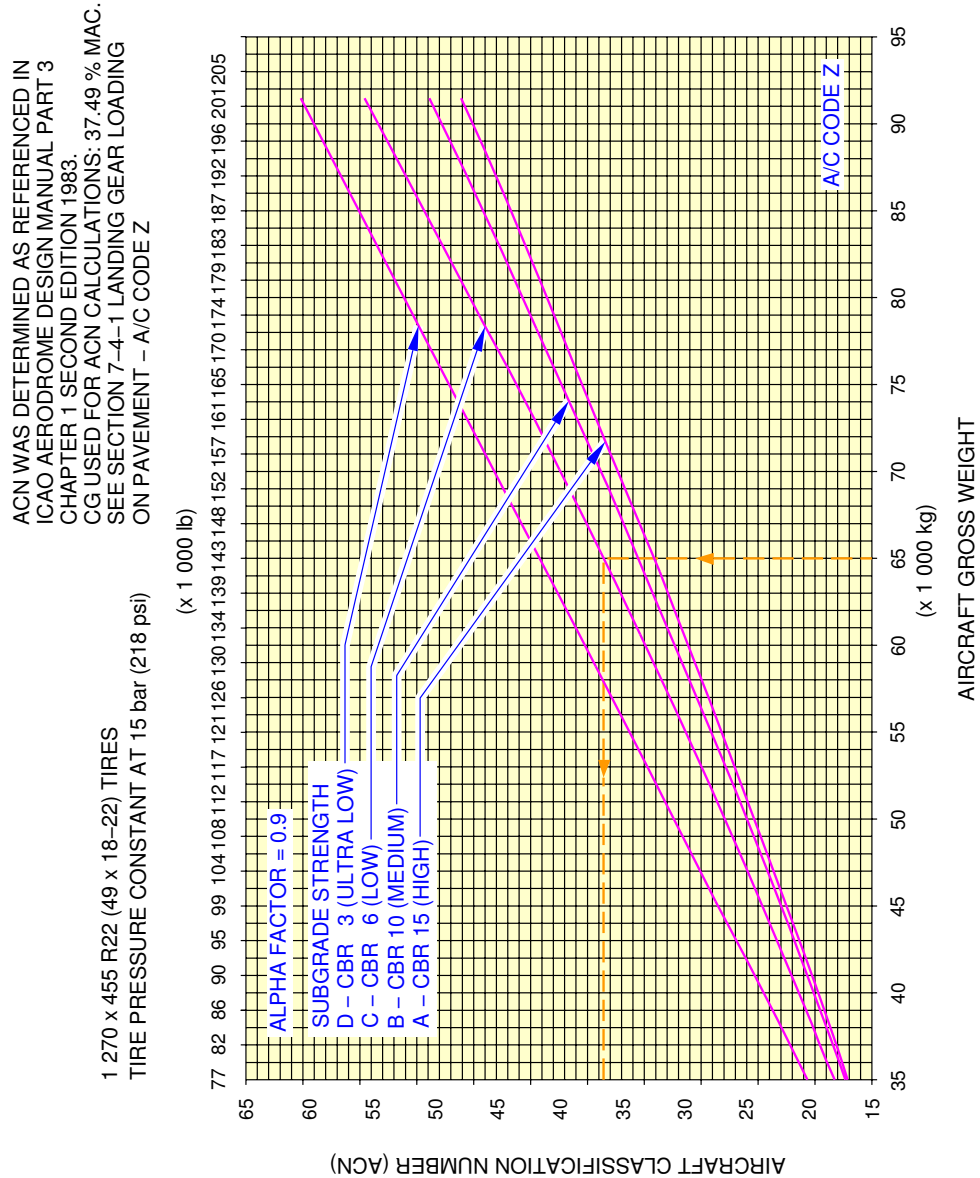


N_AC_070901_1_1400101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 18

****ON A/C A321-200**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 37 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT - A/C CODE AA

1 270 x 455 R22 (49 x 18-22) TIRES
TIRE PRESSURE CONSTANT AT 15 bar (218 psi)

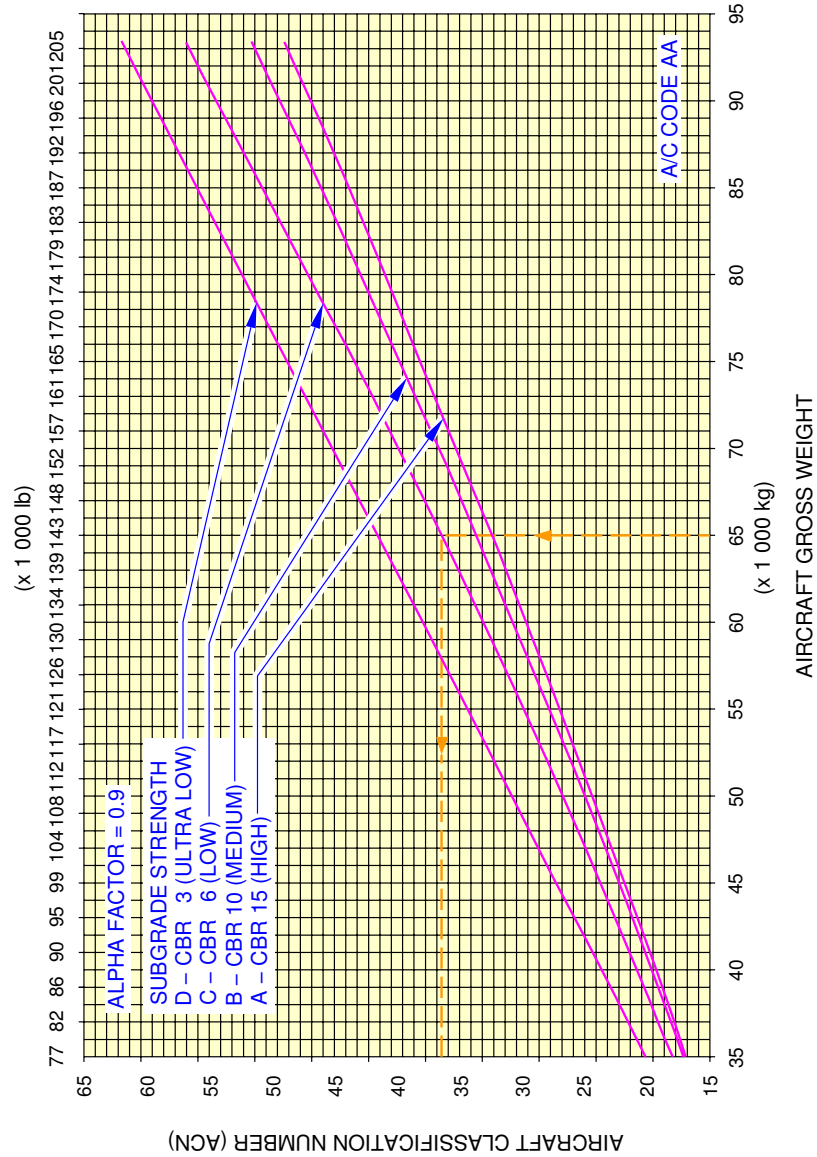


N_AC_070901_1_1410101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 19

****ON A/C A321-200**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 36.88 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT - A/C CODE AB

1 270 x 455 R22 (49 x 18-22) TIRES
TIRE PRESSURE CONSTANT AT 15 bar (218 psi)

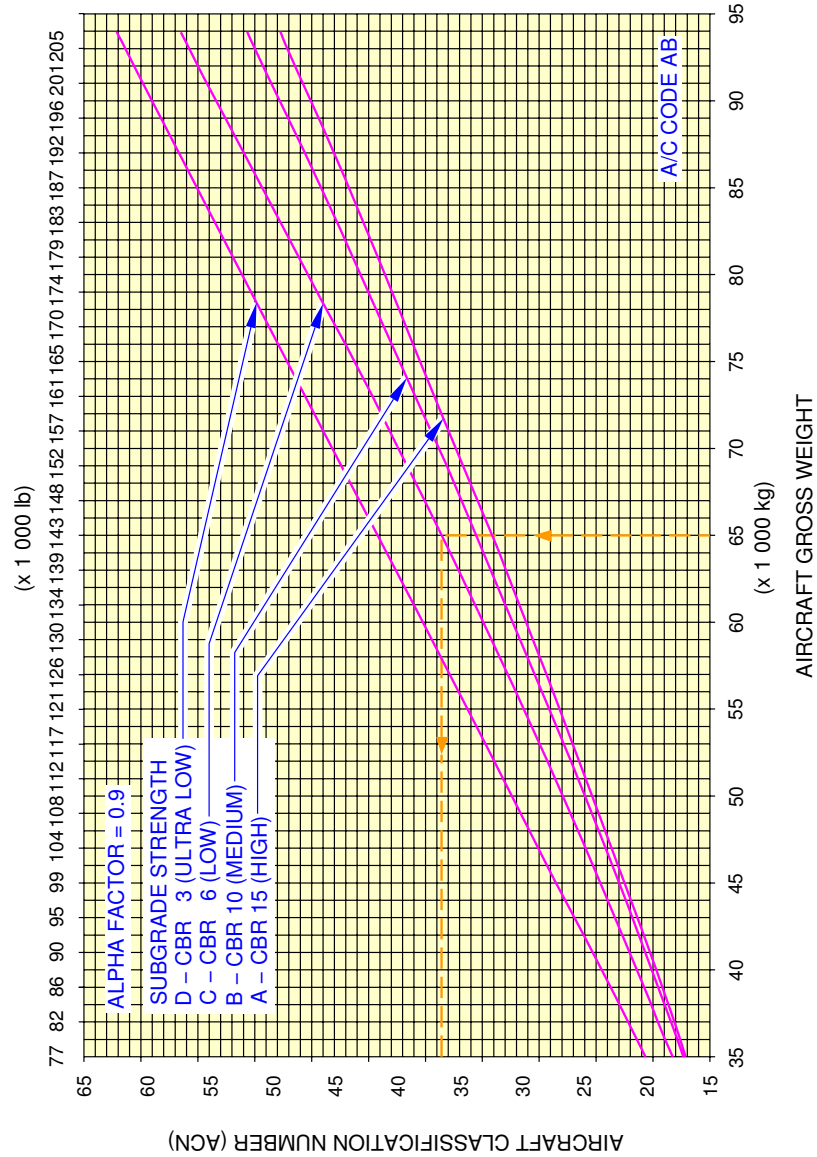

N_AC_070901_1_1420101_01_00

Aircraft Classification Number – Flexible Pavement
FIGURE 20

7-9-2 Aircraft Classification Number - Rigid Pavement****ON A/C A321-100 A321-200**Aircraft Classification Number - Rigid Pavement


1. This section gives the Aircraft Classification Number - Rigid Pavement.

I NOTE : For A/C Code definition, refer to chapter 7-1-0.

****ON A/C A321-100**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 41 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT – A/C CODE C

1 270 x 455 R22 (49 x 18-22) TIRES
TIRE PRESSURE CONSTANT AT 12.8 bar (186 psi)

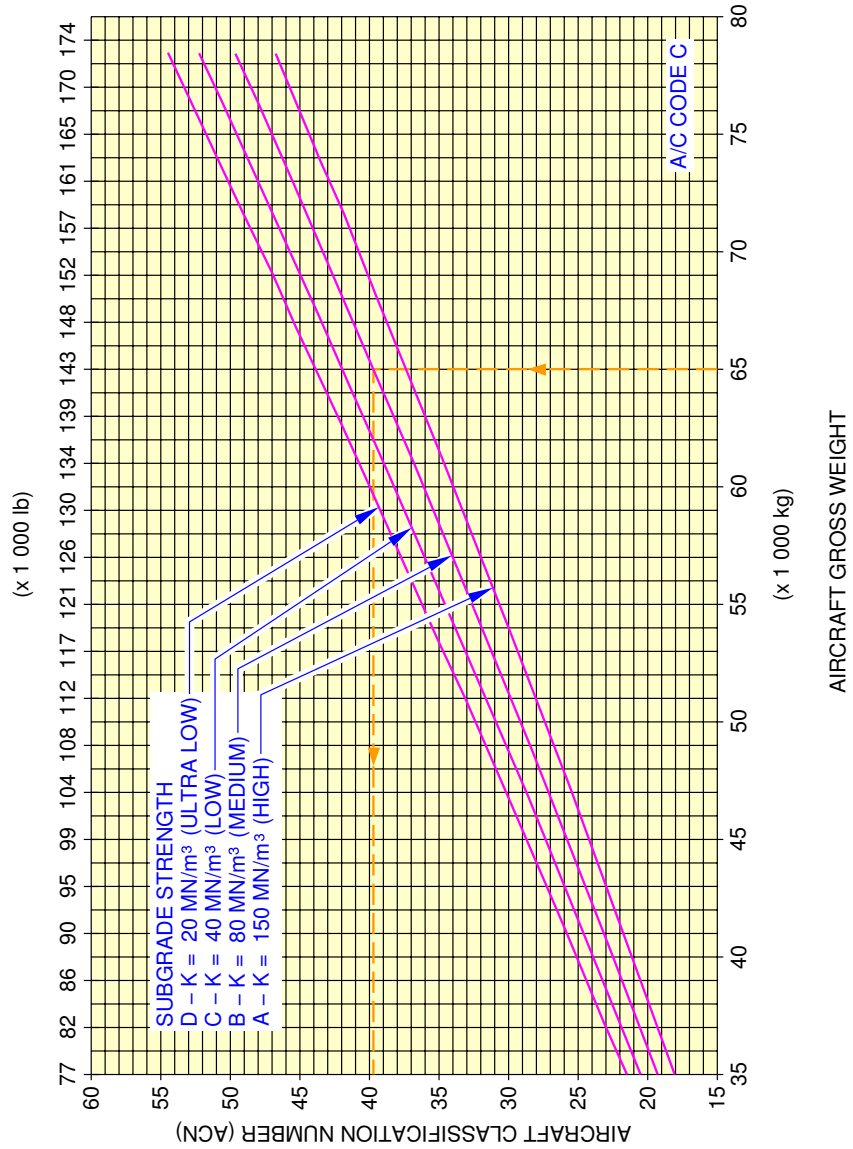


N_AC_070902_1_1640101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 1

****ON A/C A321-200**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 41 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT – A/C CODE D

1 270 x 455 R22 (49 x 18-22) TIRES
TIRE PRESSURE CONSTANT AT 12.8 bar (186 psi)

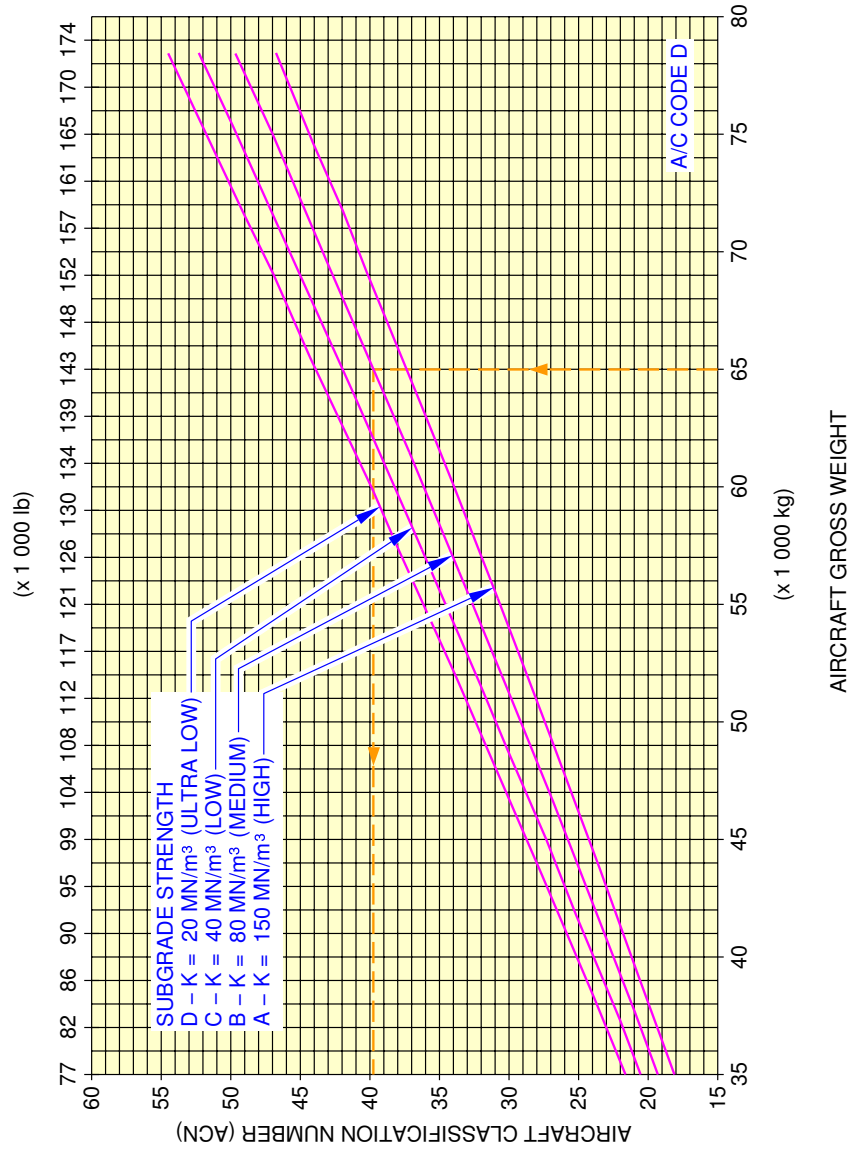


N_AC_070902_1_1650101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 2

****ON A/C A321-100**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 41 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT – A/C CODE E

1 270 x 455 R22 (49 x 18-22) TIRES
TIRE PRESSURE CONSTANT AT 12.8 bar (186 psi)

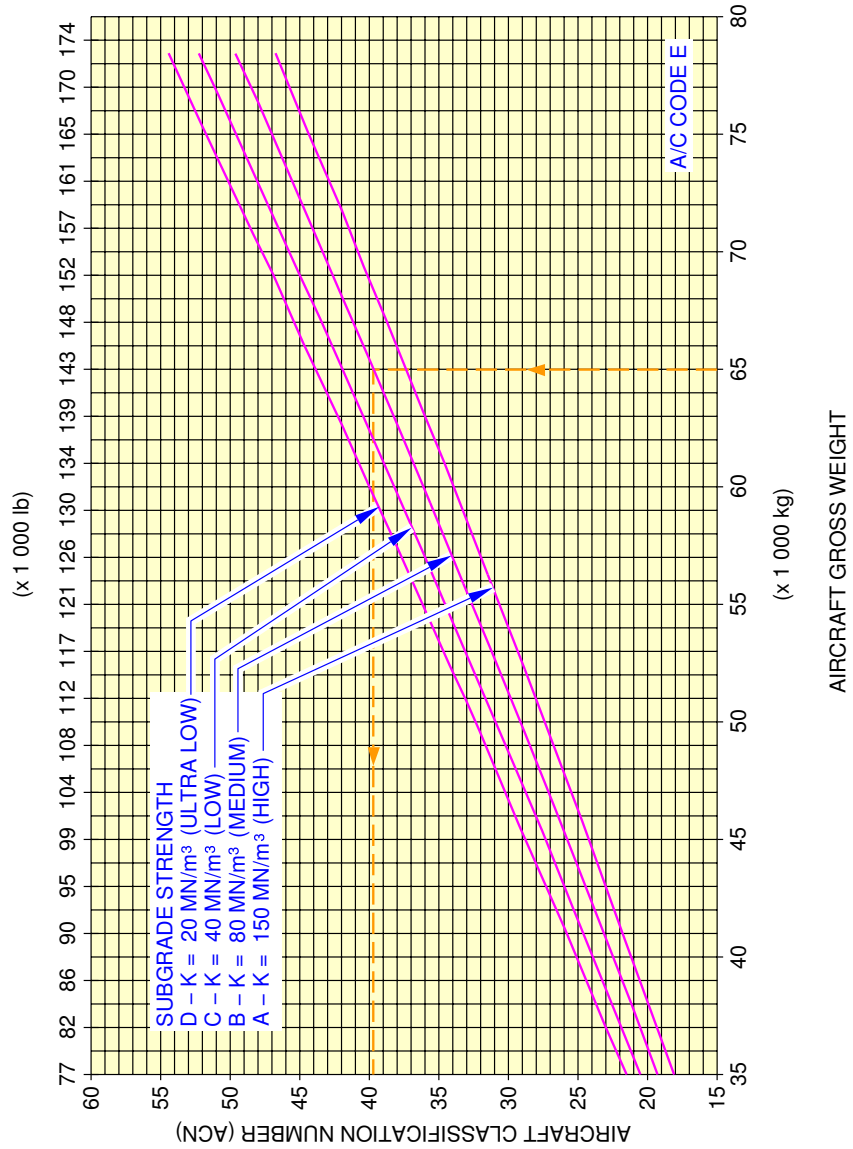


N_AC_070902_1_1660101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 3

****ON A/C A321-100**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 41 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT – A/C CODE G

1 270 x 455 R22 (49 x 18-22) TIRES
TIRE PRESSURE CONSTANT AT 13.6 bar (197 psi)

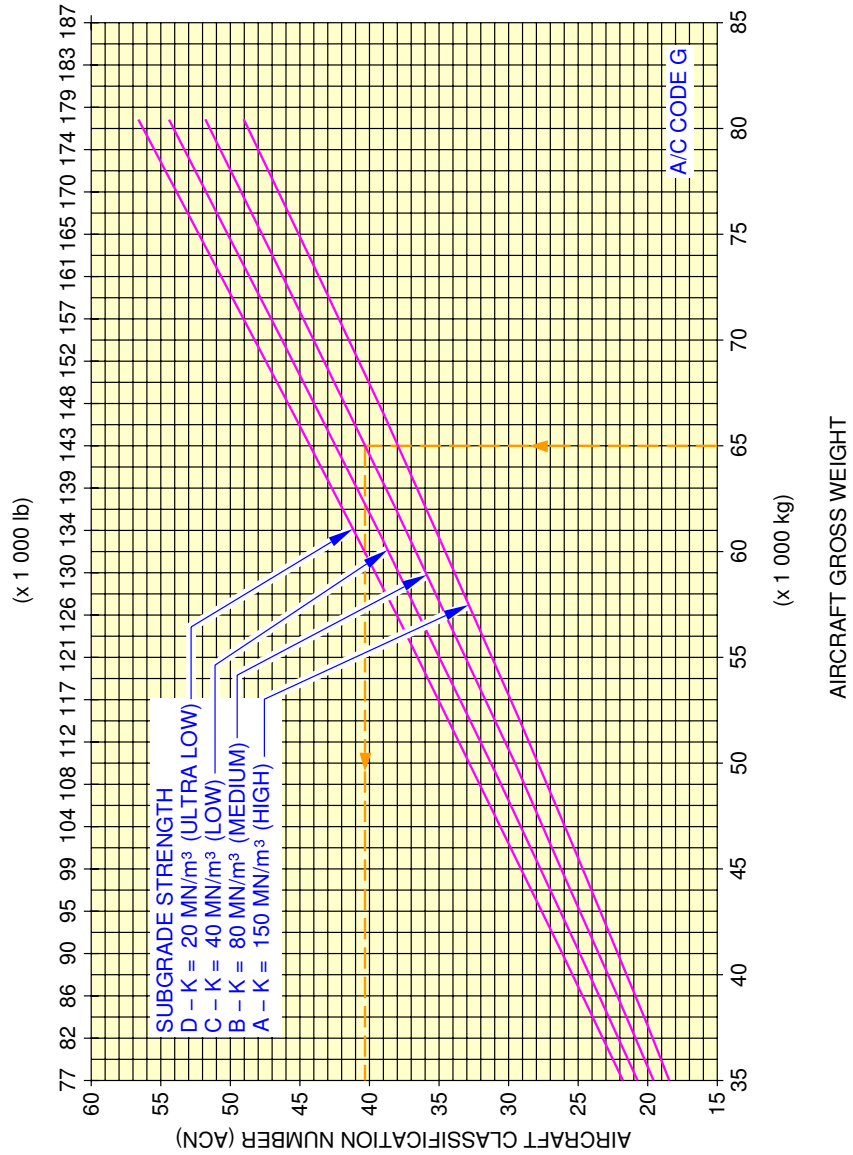


N_AC_070902_1_1670101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 4

**ON A/C A321-200

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 40.7 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT – A/C CODE H

1 270 x 455 R22 (49 x 18-22) TIRES
TIRE PRESSURE CONSTANT AT 13.6 bar (197 psi)

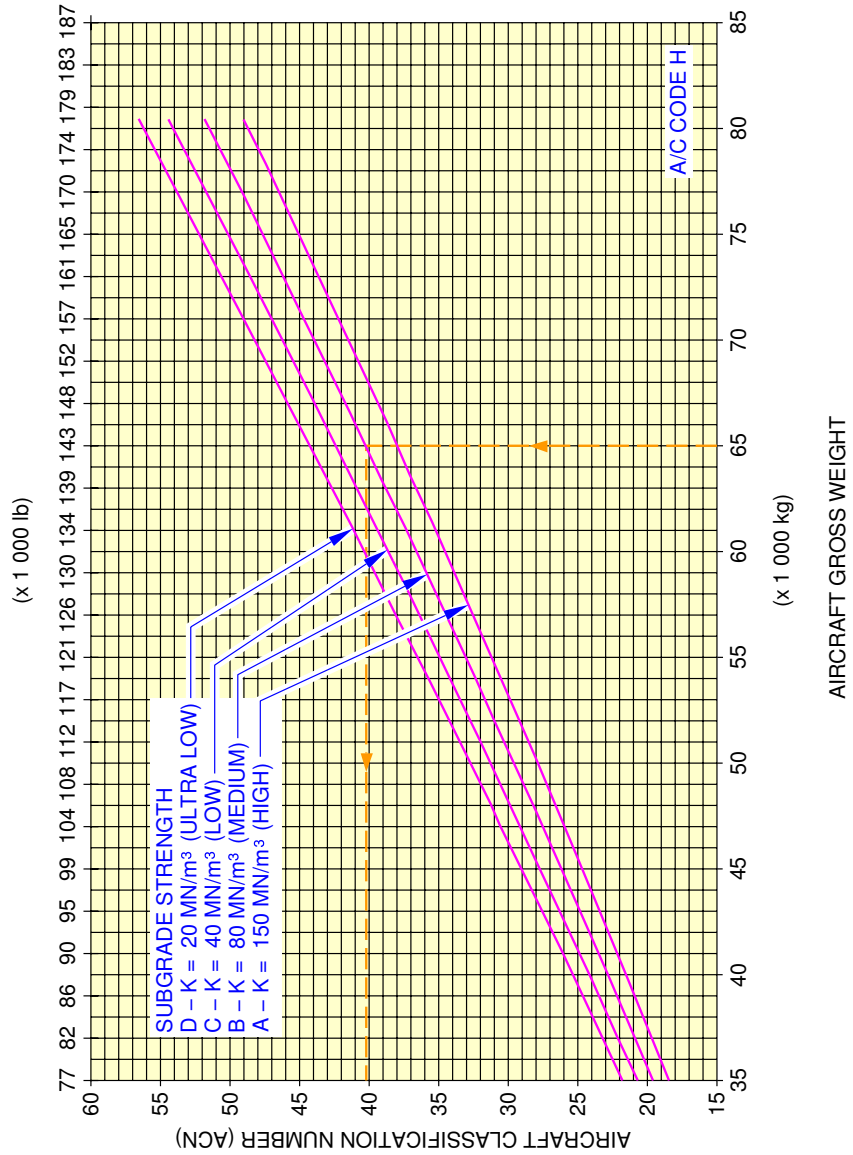


N_AC_070902_1_1680101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 5

****ON A/C A321-100**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 41 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT – A/C CODE I

1 270 x 455 R22 (49 x 18-22) TIRES
TIRE PRESSURE CONSTANT AT 13.6 bar (197 psi)

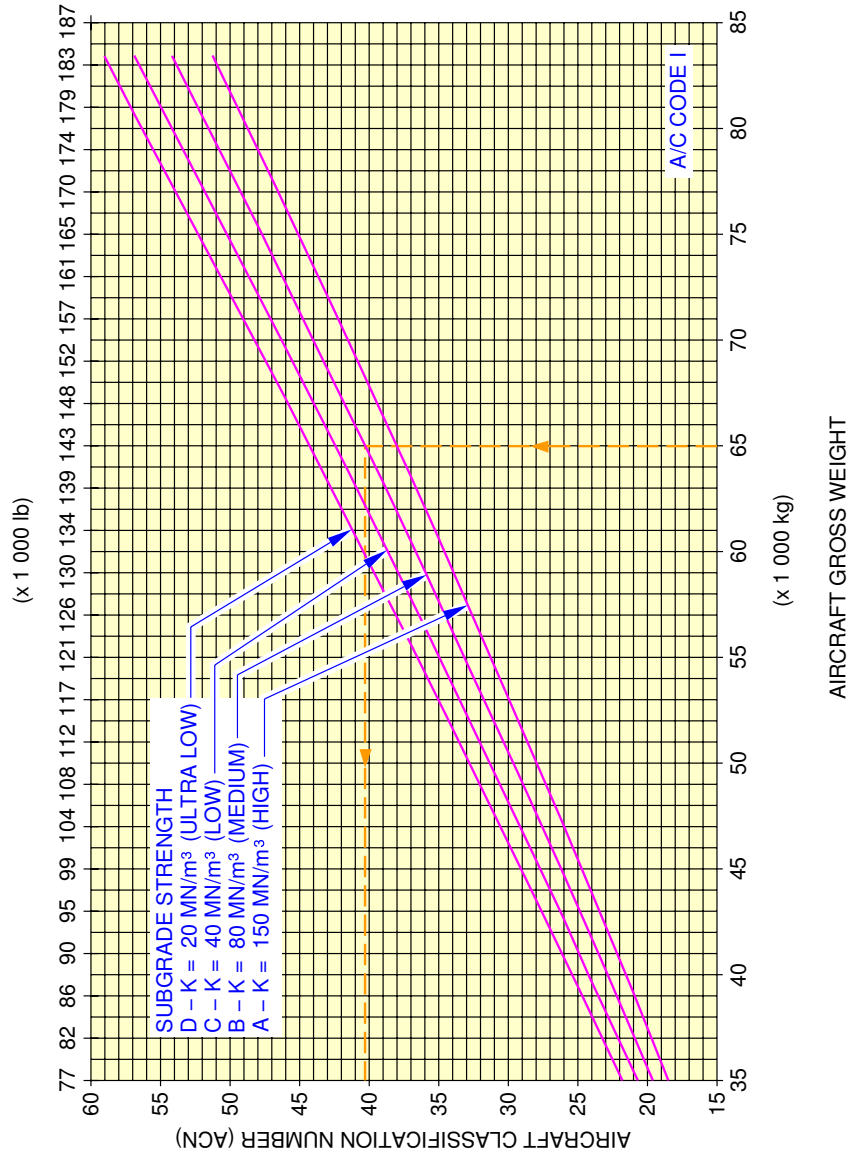


N_AC_070902_1_1690101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 6

****ON A/C A321-200**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 39.7 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT – A/C CODE J

1 270 x 455 R22 (49 x 18-22) TIRES
TIRE PRESSURE CONSTANT AT 13.6 bar (197 psi)

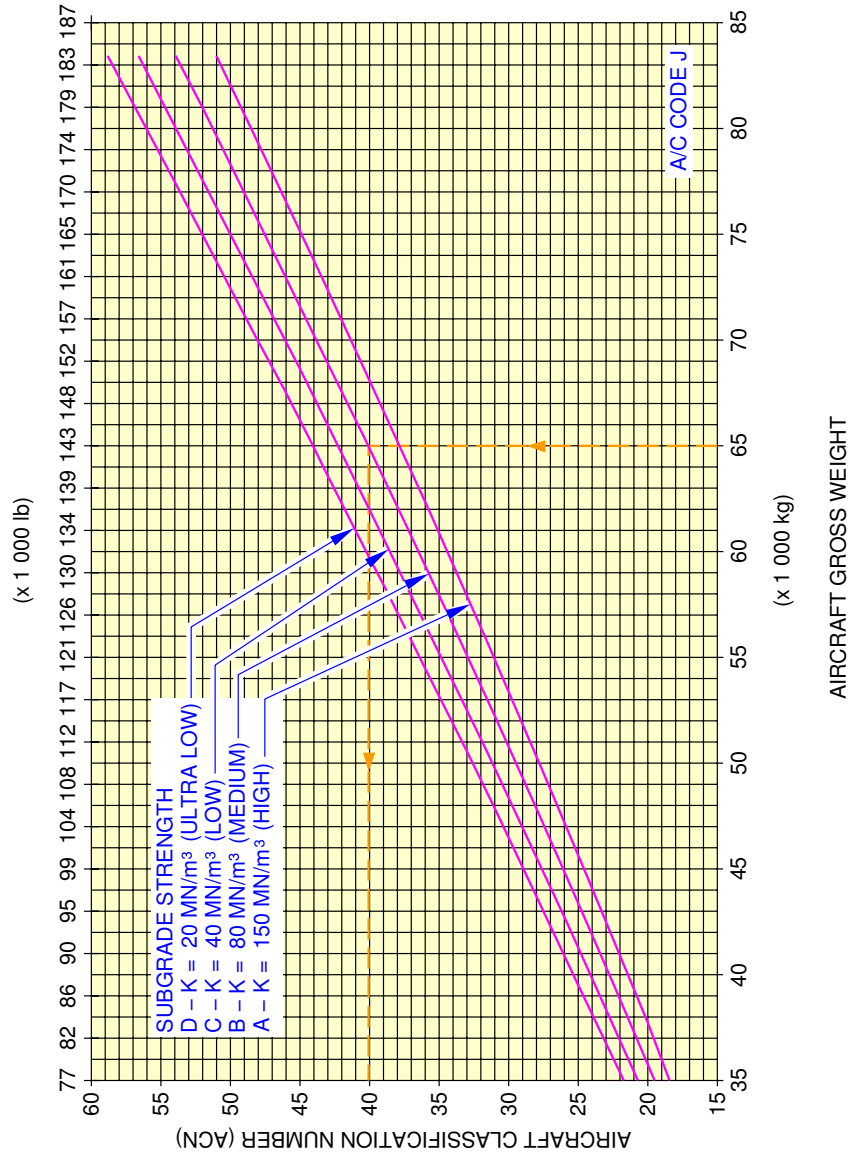


N_AC_070902_1_1700101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 7

****ON A/C A321-100**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 41 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT – A/C CODE L

1 270 x 455 R22 (49 x 18-22) TIRES
TIRE PRESSURE CONSTANT AT 13.6 bar (197 psi)

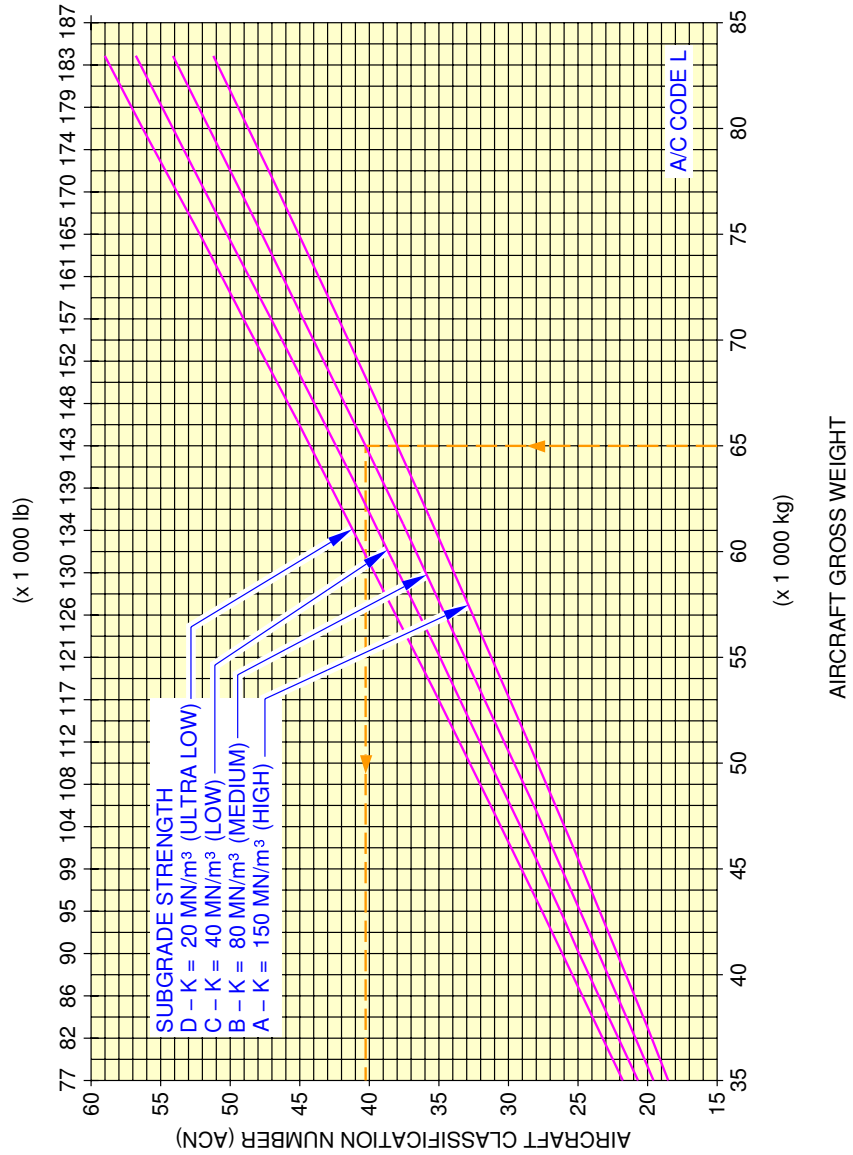


N_AC_070902_1_1710101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 8

****ON A/C A321-100**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 41 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT – A/C CODE M

1 270 x 455 R22 (49 x 18-22) TIRES
TIRE PRESSURE CONSTANT AT 13.6 bar (197 psi)

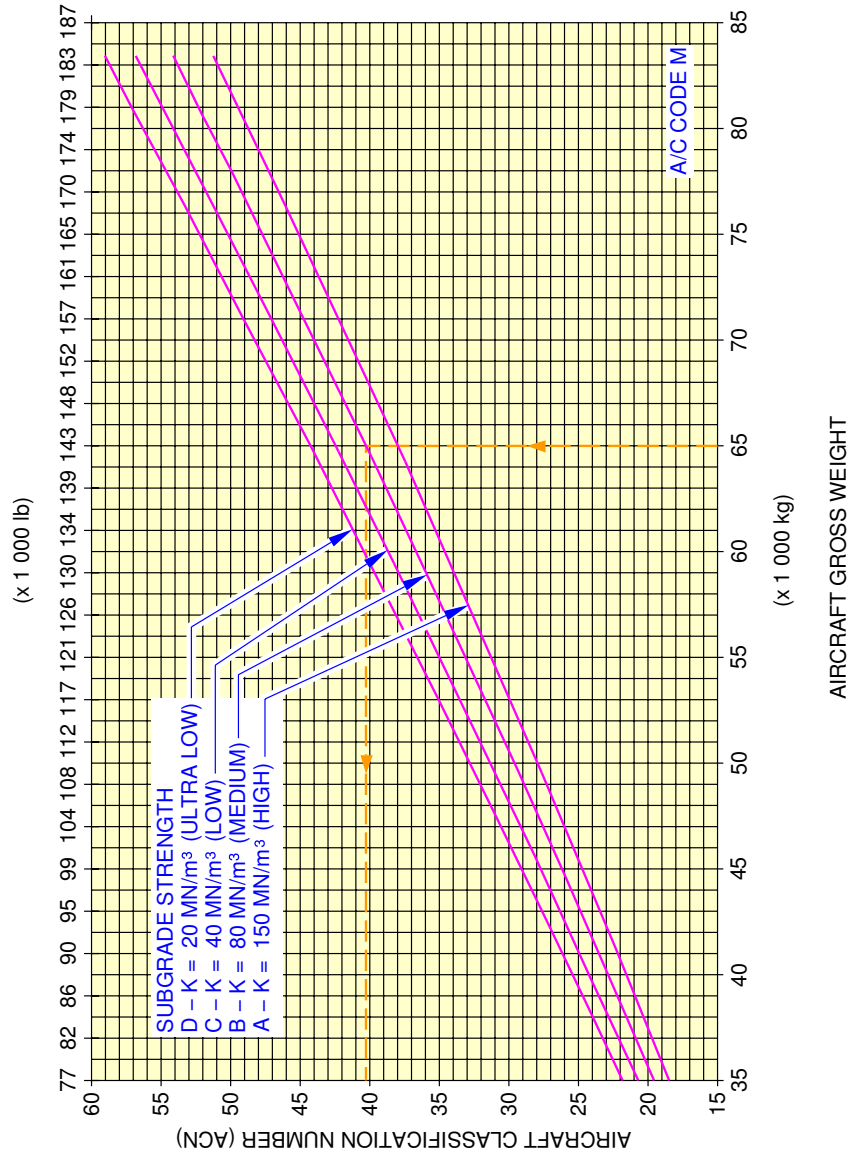


N_AC_070902_1_1720101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 9

****ON A/C A321-200**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 39.7 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT – A/C CODE O

1 270 x 455 R22 (49 x 18-22) TIRES
TIRE PRESSURE CONSTANT AT 13.6 bar (197 psi)

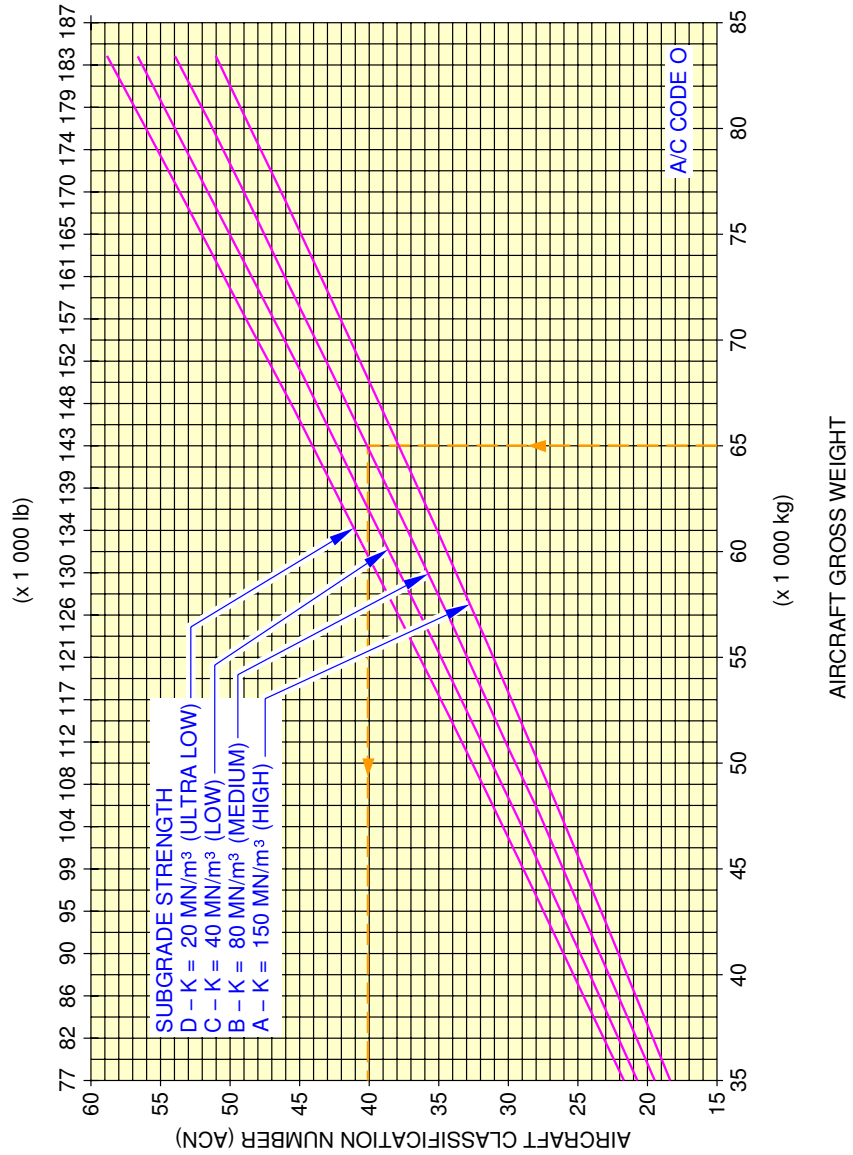

N_AC_070902_1_1730101_01_00


Aircraft Classification Number – Rigid Pavement
FIGURE 10

****ON A/C A321-100**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 41 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT - A/C CODE P

1 270 x 455 R22 (49 x 18-22) TIRES


TIRE PRESSURE CONSTANT AT 13.9 bar (202 psi)

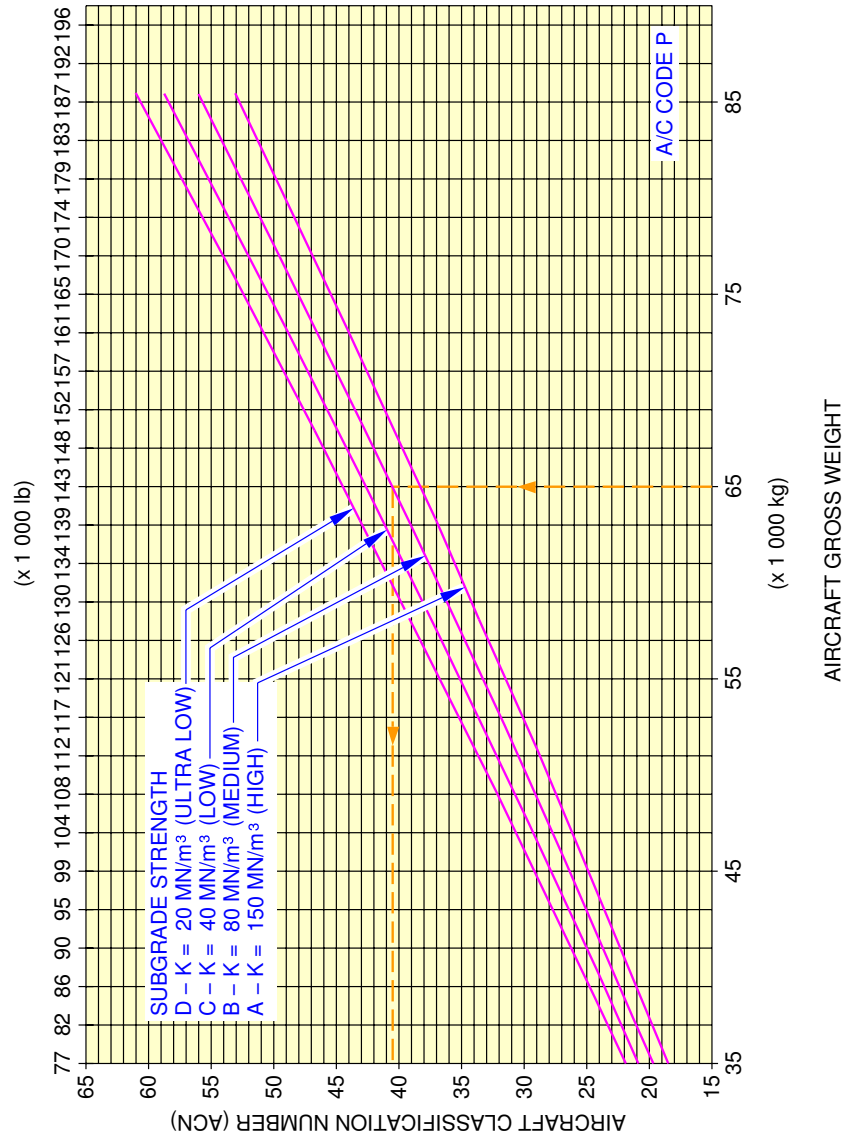

N_AC_070902_1_1740101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 11


**ON A/C A321-200

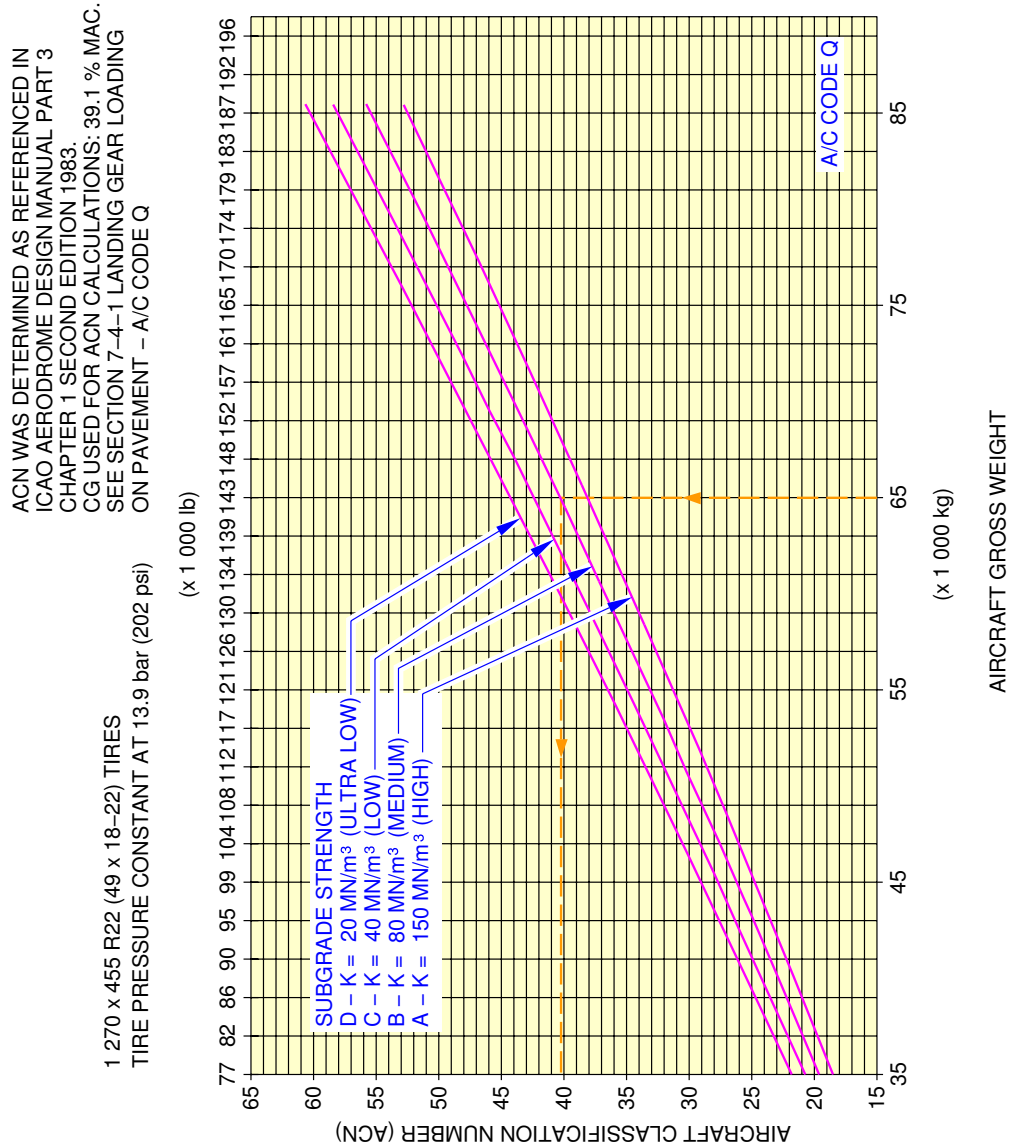

N_AC_070902_1_1750101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 12


****ON A/C A321-200**

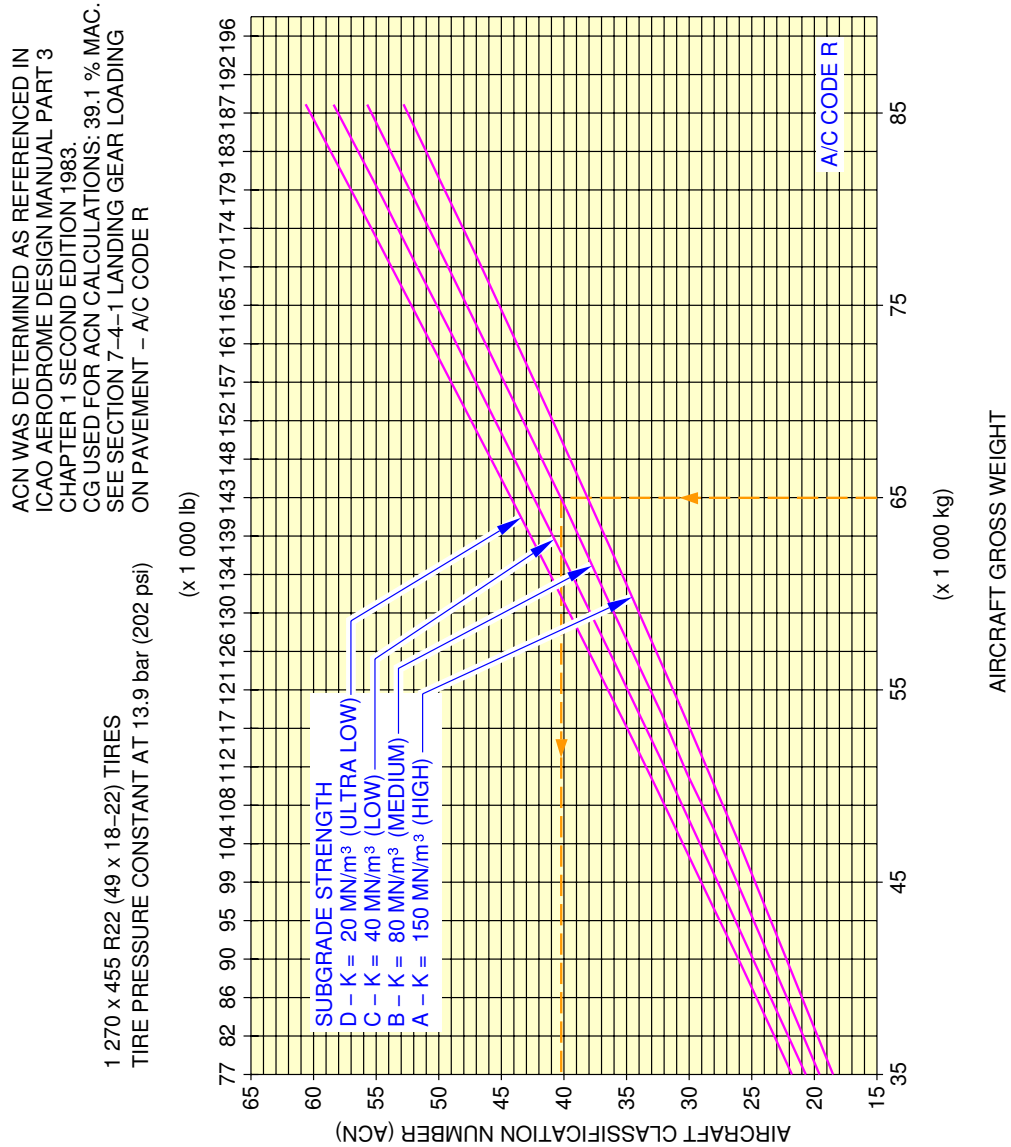

N_AC_070902_1_1760101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 13

****ON A/C A321-200**

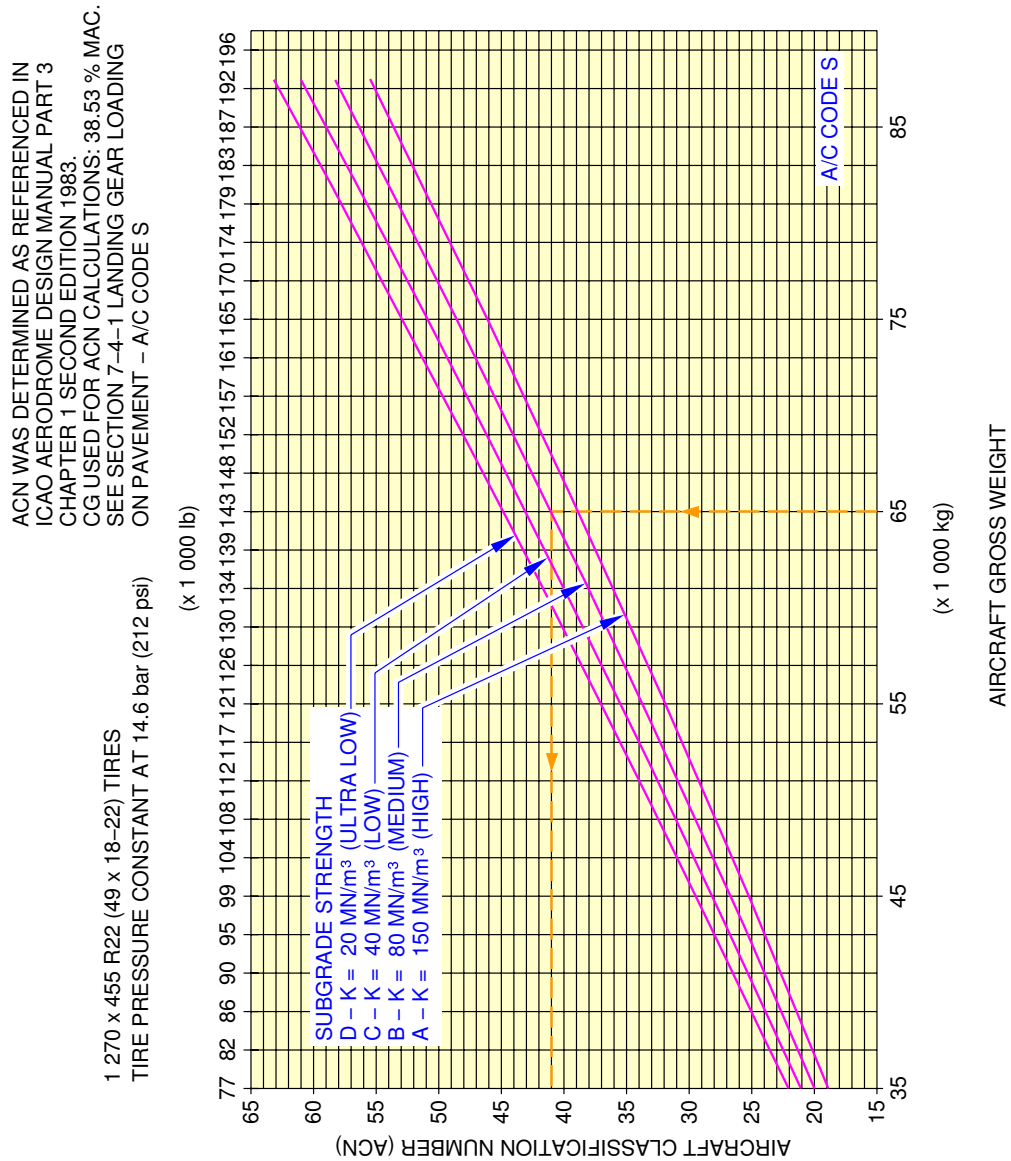

N_AC_070902_1_1770101_01_00


Aircraft Classification Number – Rigid Pavement
FIGURE 14

****ON A/C A321-100**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 38 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT - A/C CODE U

1 270 x 455 R22 (49 x 18-22) TIRES

TIRE PRESSURE CONSTANT AT 14.6 bar (212 psi)

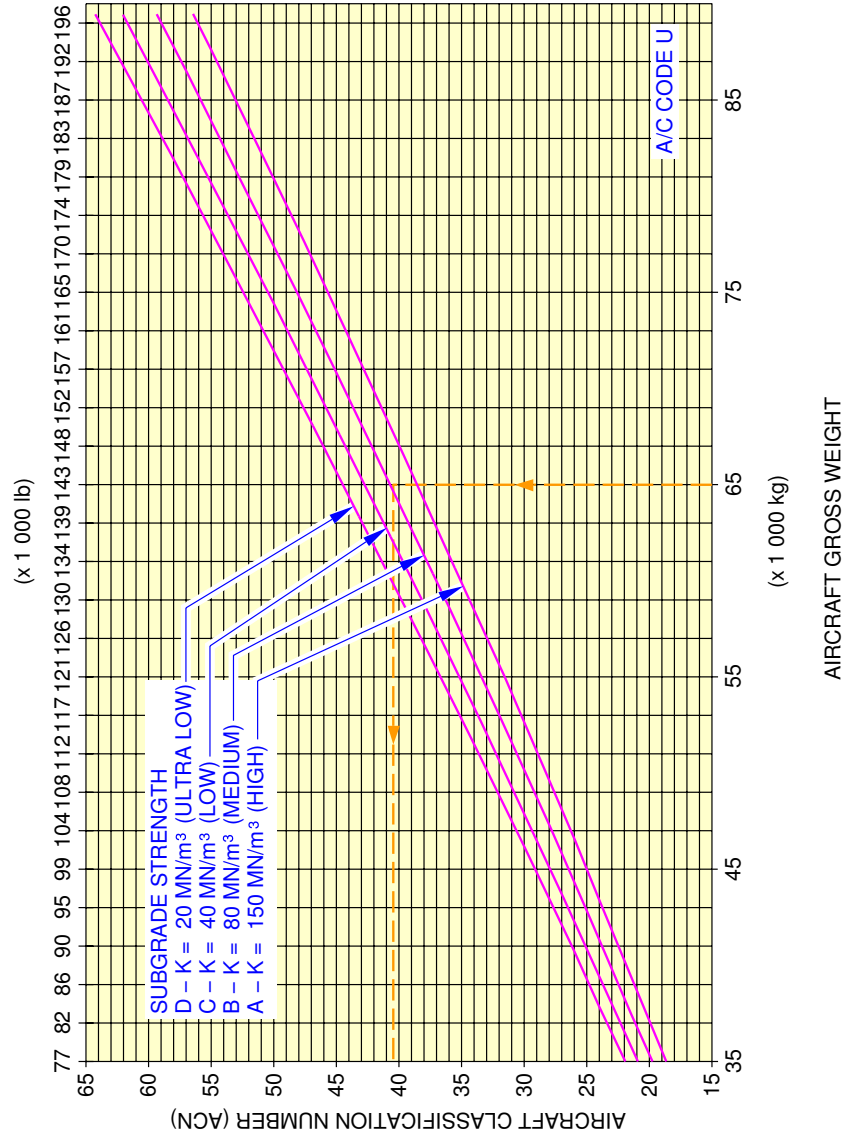


N_AC_070902_1_1780101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 15

**ON A/C A321-200

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 38 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT - A/C CODE V

1 270 x 455 R22 (49 x 18-22) TIRES
TIRE PRESSURE CONSTANT AT 14.6 bar (212 psi)

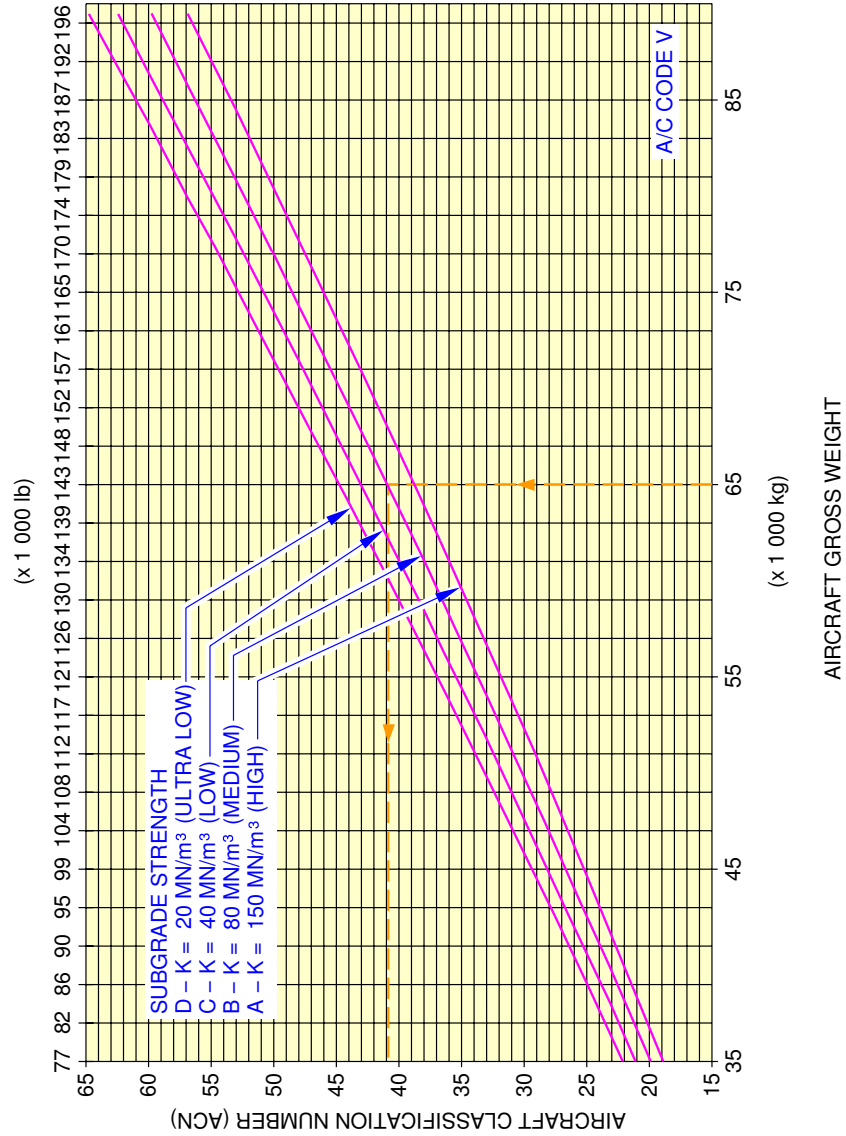


N_AC_070902_1_1790101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 16

****ON A/C A321-200**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 38 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT - A/C CODE X

1 270 x 455 R22 (49 x 18-22) TIRES
TIRE PRESSURE CONSTANT AT 14.6 bar (212 psi)

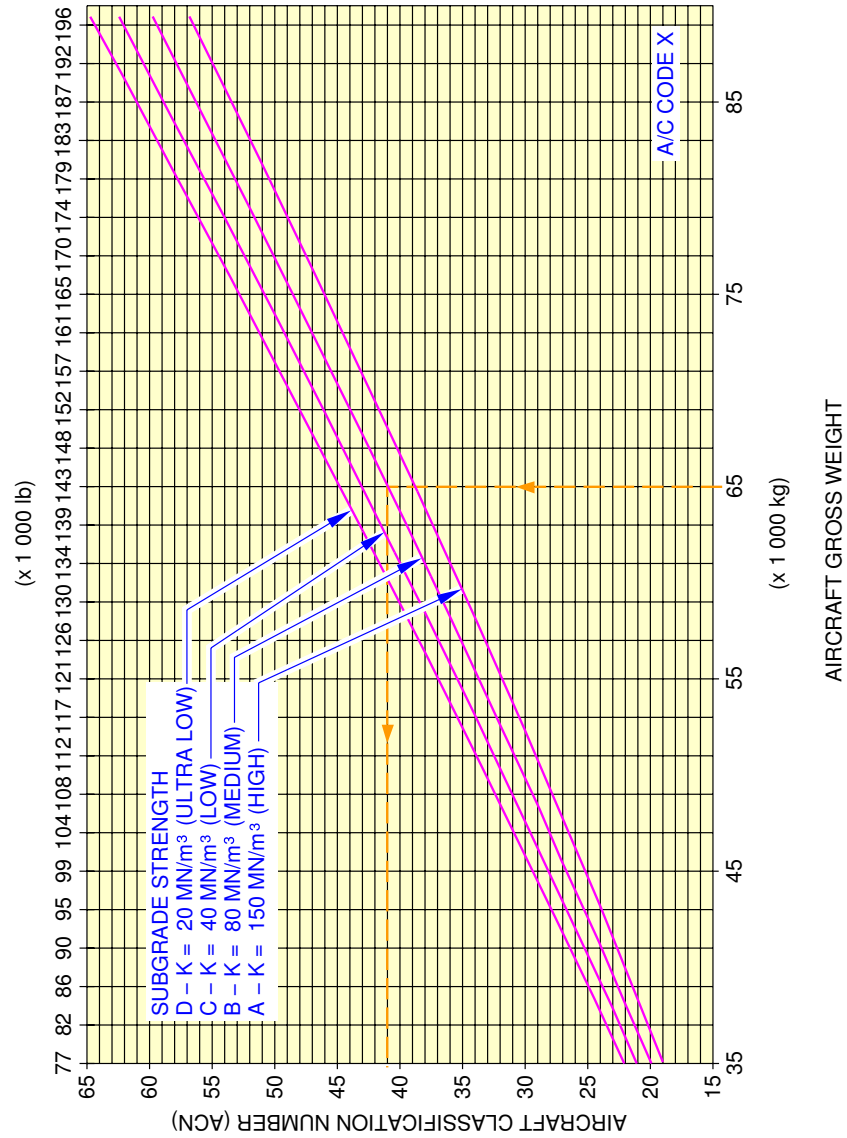


N_AC_070902_1_1800101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 17

****ON A/C A321-200**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 37.49 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT - A/C CODE Z

1 270 x 455 R22 (49 x 18-22) TIRES
TIRE PRESSURE CONSTANT AT 15 bar (218 psi)

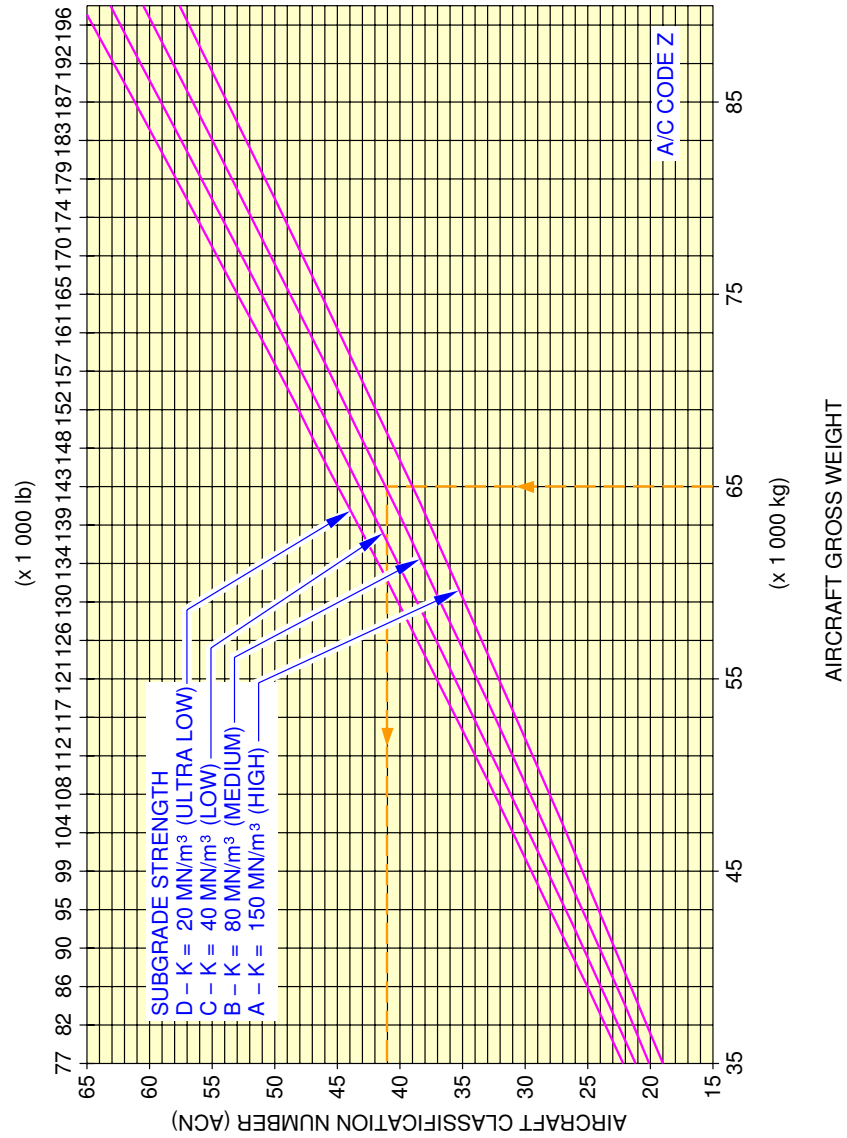

N_AC_070902_1_1810101_01_00


Aircraft Classification Number – Rigid Pavement
FIGURE 18

****ON A/C A321-200**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 37 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT - A/C CODE AA

1 270 x 455 R22 (49 x 18-22) TIRES

TIRE PRESSURE CONSTANT AT 15 bar (218 psi)

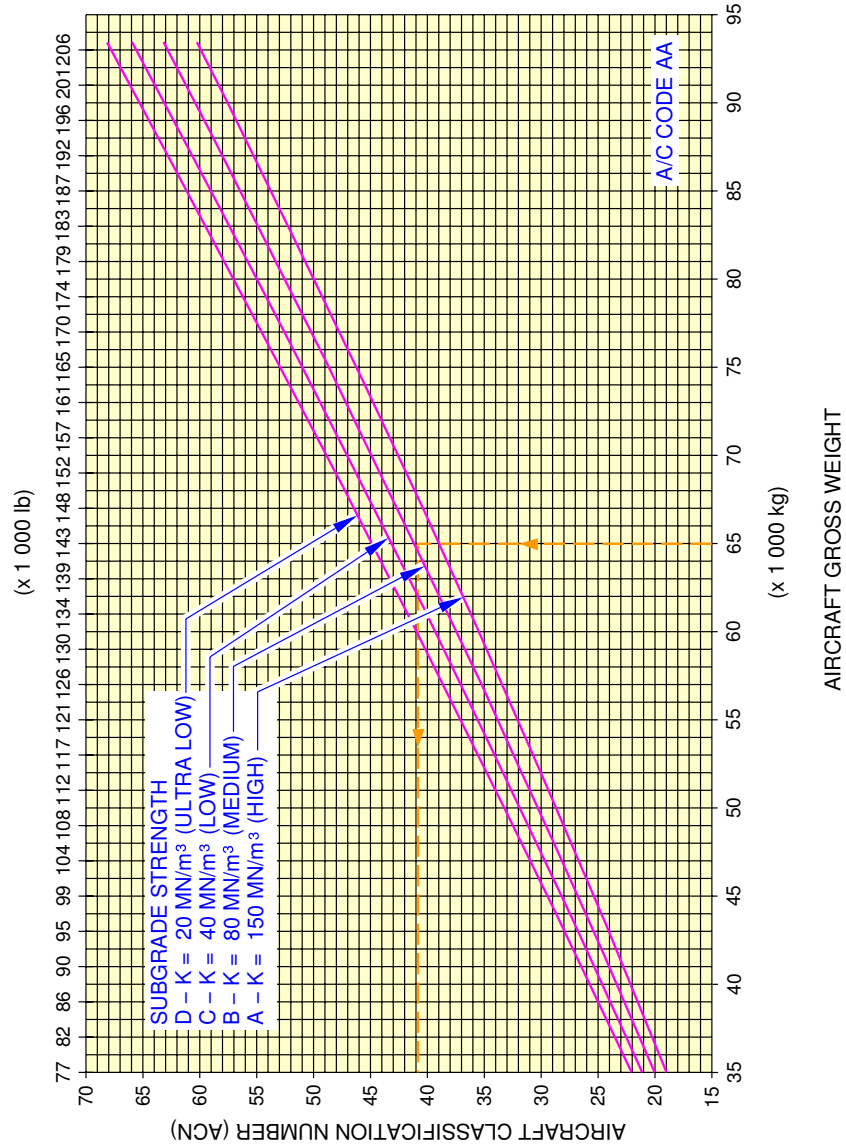

N_AC_070902_1_1820101_01_00


Aircraft Classification Number – Rigid Pavement
FIGURE 19

****ON A/C A321-200**

ACN WAS DETERMINED AS REFERENCED IN
ICAO AERODROME DESIGN MANUAL PART 3
CHAPTER 1 SECOND EDITION 1983.
CG USED FOR ACN CALCULATIONS: 36.88 % MAC.
SEE SECTION 7-4-1 LANDING GEAR LOADING
ON PAVEMENT - A/C CODE AB

1 270 x 455 R22 (49 x 18-22) TIRES

TIRE PRESSURE CONSTANT AT 15 bar (218 psi)

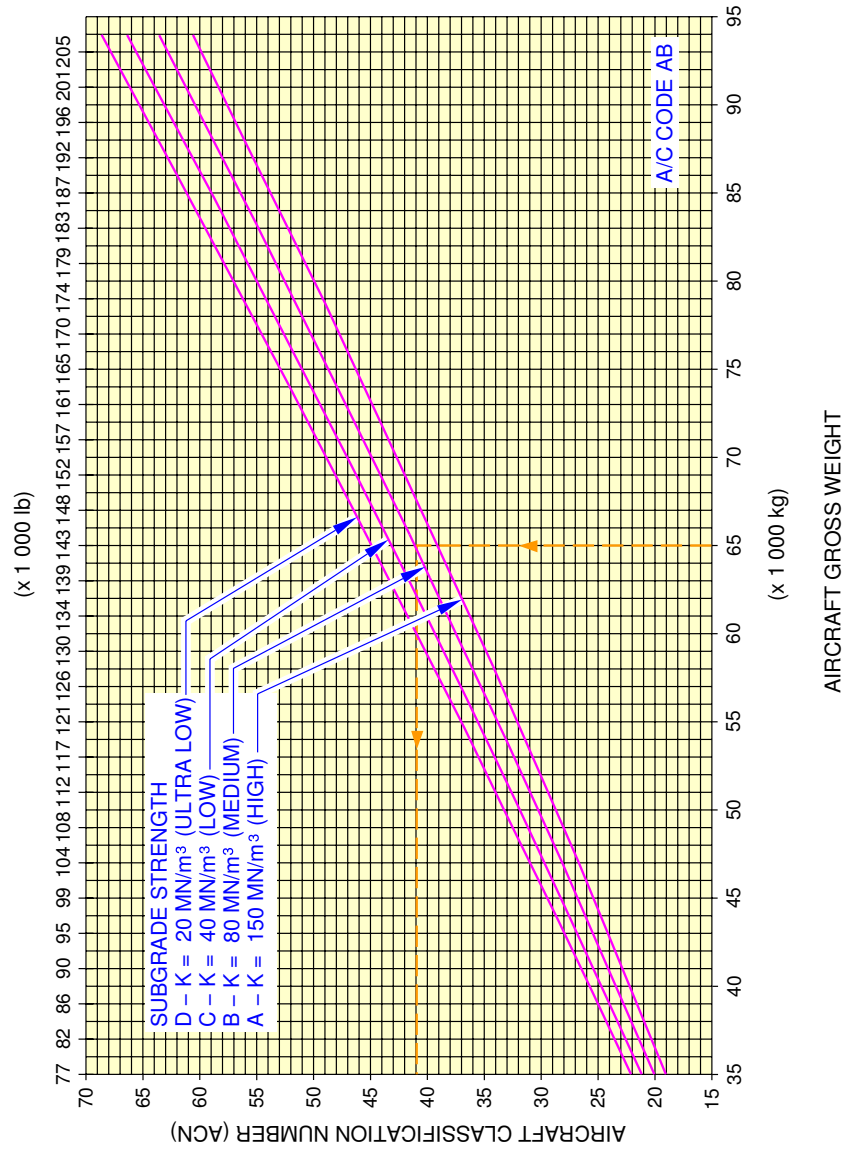

N_AC_070902_1_1830101_01_00

Aircraft Classification Number – Rigid Pavement
FIGURE 20



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

DERIVATIVE AIRPLANES

8-1-0 Possible Future Derivative Airplane

****ON A/C A321-100 A321-200**

Possible Future Derivative Airplane

1. General

Derivative versions of the A321 are planned. All product line airplanes are studied for possible size changes that might be required for fulfilling future airline needs. History has proved that derivative airplanes of a given model can encompass both increases and decreases in linear dimensions and weight.



AIRPLANE CHARACTERISTICS FOR AIRPORT PLANNING

SCALED DRAWINGS


9-1-0 Scaled Drawings

****ON A/C A321-100 A321-200**

Scaled Drawings

1. This section gives scaled drawing of the aircraft.

****ON A/C A321-100 A321-200**

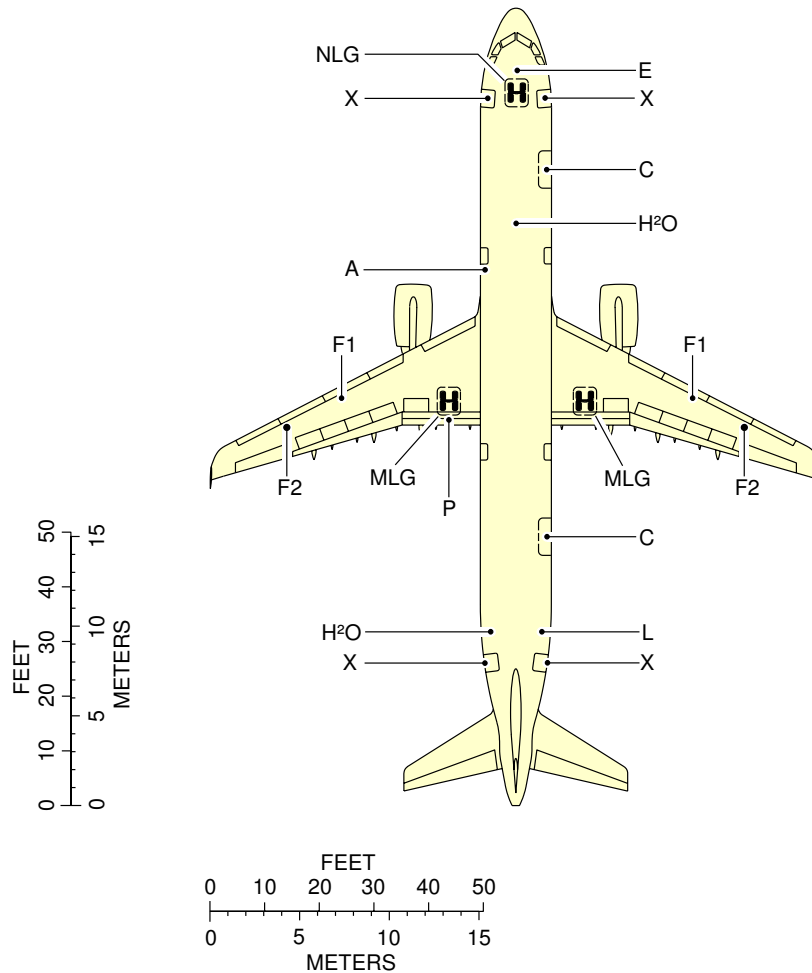

LEGEND:


A	AIR CONDITIONING	L	LAVATORY
C	CARGO COMPT DOOR	MLG	MAIN LANDING GEAR
E	ELECTRICAL	NLG	NOSE LANDING GEAR
F1	FUEL (COUPLING)	P	PNEUMATIC
F2	FUEL (GRAVITY)	X	PASSENGER/CREW DOOR
H ² O	POTABLE WATER		

NOTE: WHEN PRINTING, MAKE SURE TO ADJUST FOR PROPER SCALING.

N_AC_090100_1_0070101_01_03

Scaled Drawing
FIGURE 1

****ON A/C A321-100 A321-200**

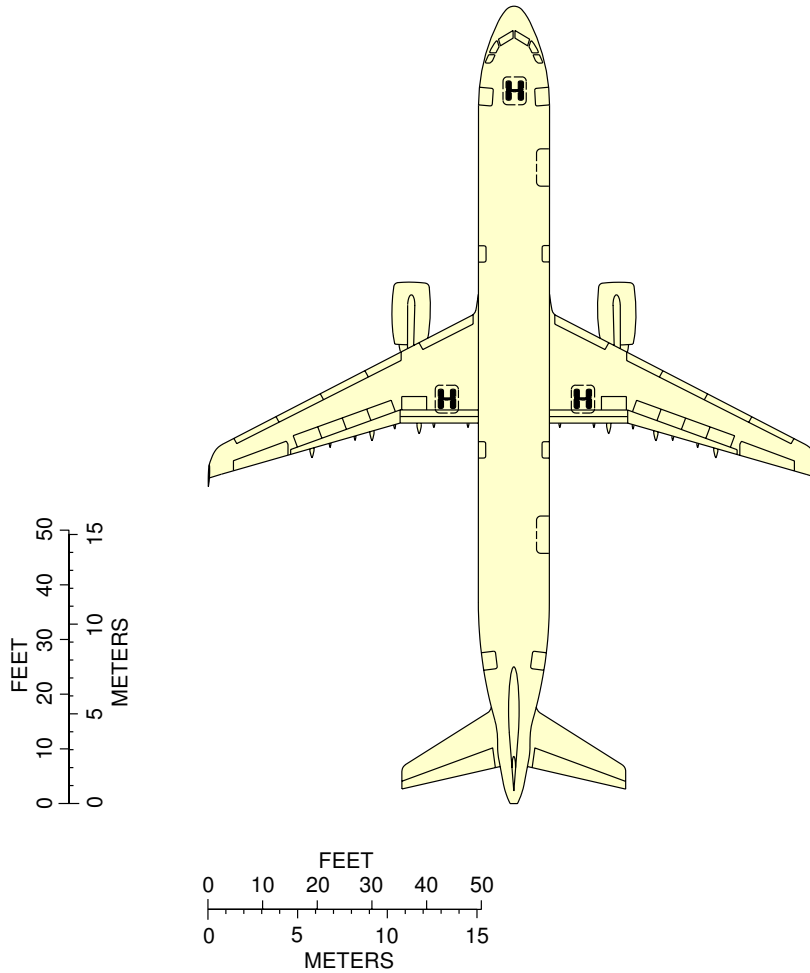

NOTE: WHEN PRINTING, MAKE SURE TO ADJUST FOR PROPER SCALING.

N_AC_090100_1_0080101_01_03

Scaled Drawing
FIGURE 2