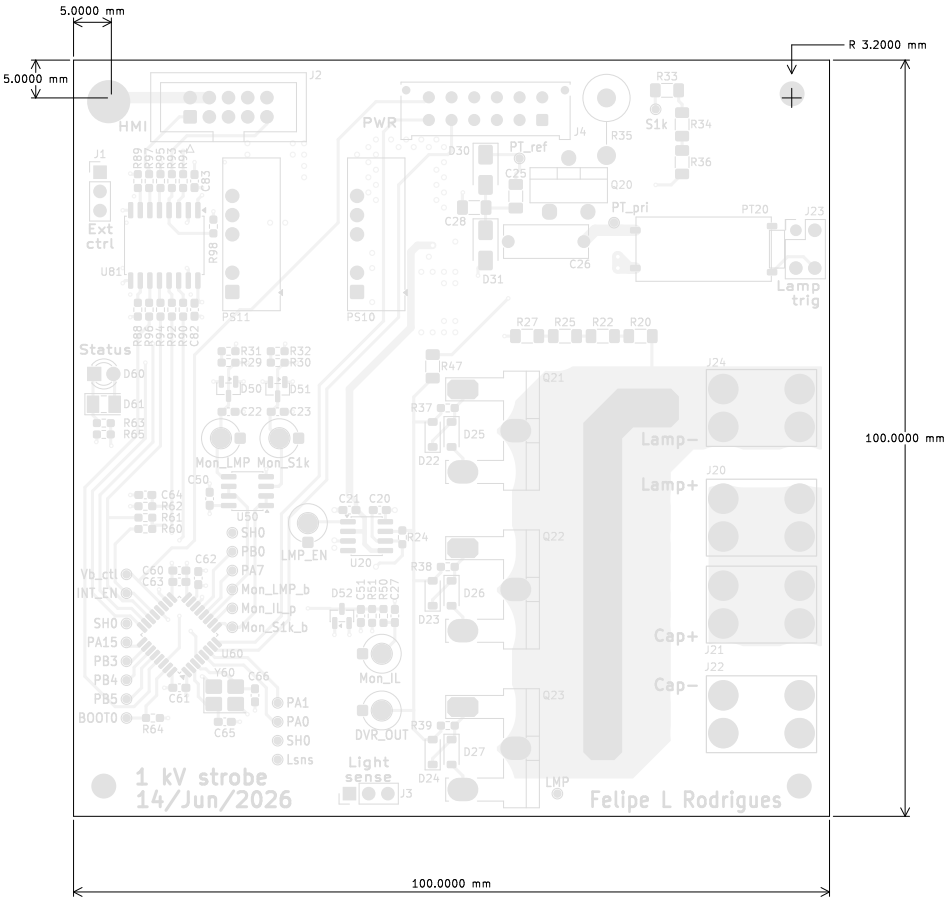


Top Fabrication (Scale 1:1)

[illegible]

1) FABRICATE PER IPC-6012A CLASS 2.

2) OUTLINE DEFINED IN SEPARATE GERBER FILE WITH "Edge_Cuts,GBR" SUFFIX.

DIMENSIONS OF CIRCUMSIZED RECTANGLE SHOWN ON THIS DRAWING ARE FOR REFERENCE ONLY.

3) SEE SEPARATE DRILL FILES WITH ".DRL" SUFFIX FOR HOLE LOCATIONS.

SELECTED HOLE LOCATIONS SHOWN ON THIS DRAWING ARE FOR REFERENCE ONLY.

4) SURFACE FINISH: HAL SNPB

5) SOLDERMASK ON BOTH SIDES OF THE BOARD SHALL BE LPI, COLOR GREEN.

6) SILK SCREEN LEGEND TO BE APPLIED PER LAYER STACKUP USING WHITE NON-CONDUCTIVE EPOXY INK.

7) ALL VIAS ARE TENTED ON BOTH SIDES UNLESS SOLDERMASK OPENED IN GERBER.

8) VENDOR SHOULD FOLLOW ROHS COMPLIANT PROCESS AND Pb FREE FOR MANUFACTURING

9) PCB MATERIAL REQUIREMENTS:

A. FLAMMABILITY RATING MUST MEET OR EXCEED UL94V-0 REQUIREMENTS.

B. Tg 170 C OR EQUIVALENT.

C. EQUIVALENT MATERIAL SHALL BE RoHS COMPLIANT, HALOGEN FREE AND APPROVED BY CHURRASCOD ELECTRONICS.

10) DESIGN GEOMETRY MINIMUM FEATURE SIZES:

BOARD SIZE	100.000 x 100.000 mm
BOARD THICKNESS	2.278 mm
TRACE WIDTH	0.200 mm
TRACE TO TRACE	-0.000 mm
MIN. HOLE (PTH)	0.300 mm
MIN. HOLE (NPTH)	1.000 mm
ANNULAR RING	0.150 mm
COPPER TO HOLE	0.300 mm
COPPER TO EDGE	0.500 mm
HOLE TO HOLE	0.250 mm



Comments:	Company: ChurrasCod Electronics		Variant: PRELIMINARY	Git Hash: 51a5f4e
	Board Name: Main board		Project Name: 1 kV strobe	
Sheet Title: Top Fabrication (Scale 1:1)	File Name: Strobe_main.kicad_pcb	Designer: FR	Date: 2024-04-13	Revision: 1.0.0+ (Unreleased)
Sheet Path:		Reviewer:	Size: A3	Sheet: 1 of 10