


Main board Fabrication Document

Top Fabrication (Scale 1:1)

Layer Stack Legend


	Material	Layer	Thickness	Dielectric	Type	Gerber
		F.Paste			Paste Mask	
		F.Silkscreen		Direct Printing	Legend	GBR
		F.Mask	0.02mm	Solder Resist	Solder Mask	GBR
	Copper	F.Cu (Sig, PWR)	0.07mm (2.00oz)		Signal	GBR
	Prepreg		0.1mm	FR4_7628	Dielectric	
	Copper	In1.Cu (GND)	0.035mm (1.00oz)		Plane	GBR
	Core		1.828mm	FR4	Dielectric	
	Copper	In2.Cu (Sig, PWR)	0.035mm (1.00oz)		Plane	GBR
	Prepreg		0.1mm	FR4_7628	Dielectric	
	Copper	B.Cu (Sig, PWR)	0.07mm (2.00oz)		Signal	GBR
		B.Mask	0.02mm	Solder Resist	Solder Mask	GBR
		B.Silkscreen		Direct Printing	Legend	GBR
		B.Paste			Paste Mask	

Total thickness: 2.278mm
Note: external layer thicknesses are specified after plating

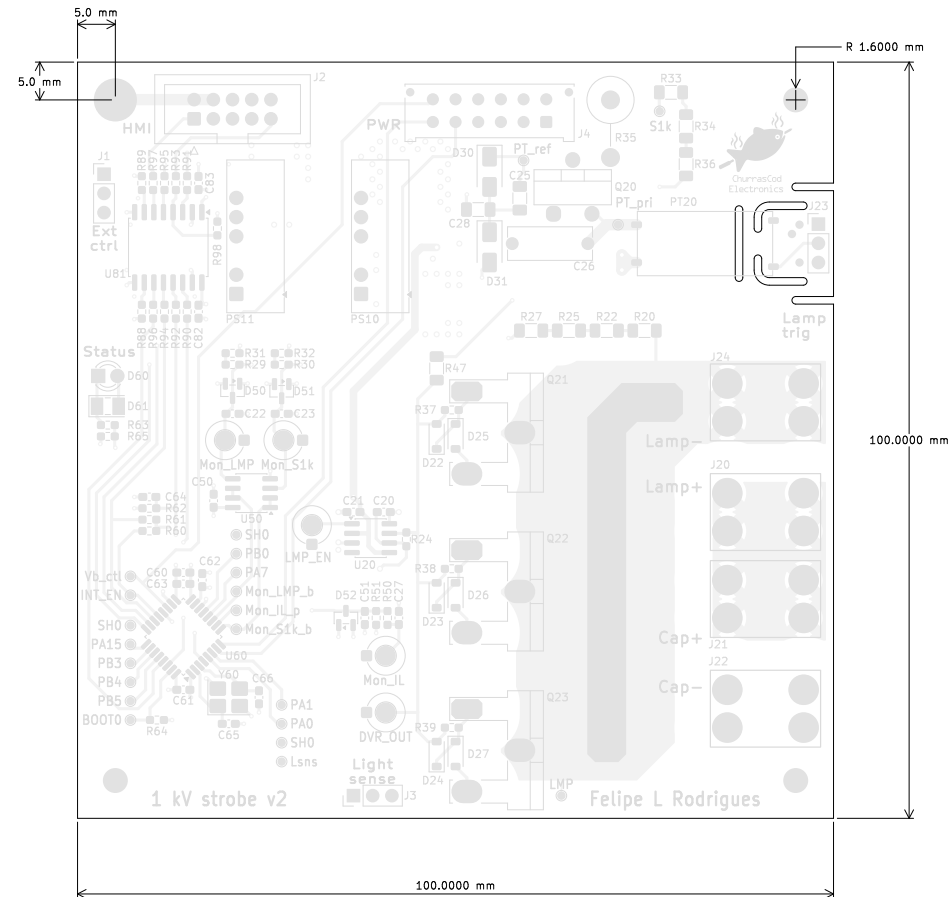

FABRICATION NOTES (UNLESS OTHERWISE SPECIFIED)

- 1) FABRICATE PER IPC-6012A CLASS 2.
- 2) OUTLINE DEFINED IN SEPARATE GERBER FILE WITH "Edge_Cuts,GBR" SUFFIX.
- DIMENSIONS OF CIRCUMSIZED RECTANGLE SHOWN ON THIS DRAWING ARE FOR REFERENCE ONLY.
- 3) SEE SEPARATE DRILL FILES WITH ".DRL" SUFFIX FOR HOLE LOCATIONS.
- SELECTED HOLE LOCATIONS SHOWN ON THIS DRAWING ARE FOR REFERENCE ONLY.
- 4) SURFACE FINISH: HAL SNPB
- 5) SOLDERMASK ON BOTH SIDES OF THE BOARD SHALL BE LPI, COLOR GREEN.
- 6) SILK SCREEN LEGEND TO BE APPLIED PER LAYER STACKUP USING WHITE NON-CONDUCTIVE EPOXY INK.
- 7) ALL VIAS ARE TENTED ON BOTH SIDES UNLESS SOLDERMASK OPENED IN GERBER.
- 8) VENDOR SHOULD FOLLOW ROHS COMPLIANT PROCESS AND Pb FREE FOR MANUFACTURING
- 9) PCB MATERIAL REQUIREMENTS:
- A. FLAMMABILITY RATING MUST MEET OR EXCEED UL94V-0 REQUIREMENTS.
- B. Tg 170 C OR EQUIVALENT.
- C. EQUIVALENT MATERIAL SHALL BE RoHS COMPLIANT, HALOGEN FREE AND APPROVED BY CHURRASCOE ELECTRONICS.
- 10) DESIGN GEOMETRY MINIMUM FEATURE SIZES:
- | | |
|------------------|--------------------|
| BOARD SIZE | 100.00 × 100.00 mm |
| BOARD THICKNESS | 2.278 mm |
| TRACE WIDTH | 0.200 mm |
| TRACE TO TRACE | -0.000 mm |
| MIN. HOLE (PTH) | 0.300 mm |
| MIN. HOLE (NPTH) | 1.000 mm |
| ANNULAR RING | 0.150 mm |
| COPPER TO HOLE | 0.300 mm |
| COPPER TO EDGE | 0.500 mm |
| HOLE TO HOLE | 0.250 mm |



Comments:	Company: ChurrasCod Electronics		Variant: CHECKED	Git Hash: cc1dc77
	Board Name: Main board		Project Name: 1 kV strobe	
Sheet Title: Top Fabrication (Scale 1:1)	File Name: Strobe_main.kicad_pcb	Designer: FR	Date: 2024-04-13	Revision: 2.0.0+ (Unreleased)
Sheet Path:		Reviewer:	Size: A3	Sheet: 1 of 10