


Main board Fabrication Document

Top Fabrication (Scale 1:1)

Layer Stack Legend

| Material     | Layer             | Thickness        | Dielectric      | Type        | Gerber |
|--------------|-------------------|------------------|-----------------|-------------|--------|
| F.Paste      |                   |                  |                 | Paste Mask  |        |
| F.Silkscreen |                   |                  |                 | Legend      | GBR    |
| F.Mask       |                   | 0.02mm           | Solder Resist   | Solder Mask | GBR    |
| Copper       | F.Cu (Sig, PWR)   | 0.07mm (2.00oz)  |                 | Signal      | GBR    |
| Prepreg      |                   | 0.1mm            | FR4_7628        | Dielectric  |        |
| Copper       | In1.Cu (GND)      | 0.035mm (1.00oz) |                 | Plane       | GBR    |
| Core         |                   | 1.828mm          | FR4             | Dielectric  |        |
| Copper       | In2.Cu (Sig, PWR) | 0.035mm (1.00oz) |                 | Plane       | GBR    |
| Prepreg      |                   | 0.1mm            | FR4_7628        | Dielectric  |        |
| Copper       | B.Cu (Sig, PWR)   | 0.07mm (2.00oz)  |                 | Signal      | GBR    |
| B.Mask       |                   | 0.02mm           | Solder Resist   | Solder Mask | GBR    |
| B.Silkscreen |                   |                  | Direct Printing | Legend      | GBR    |
| B.Paste      |                   |                  |                 | Paste Mask  |        |

Total thickness: 2.278mm  
Note: external layer thicknesses are specified after plating

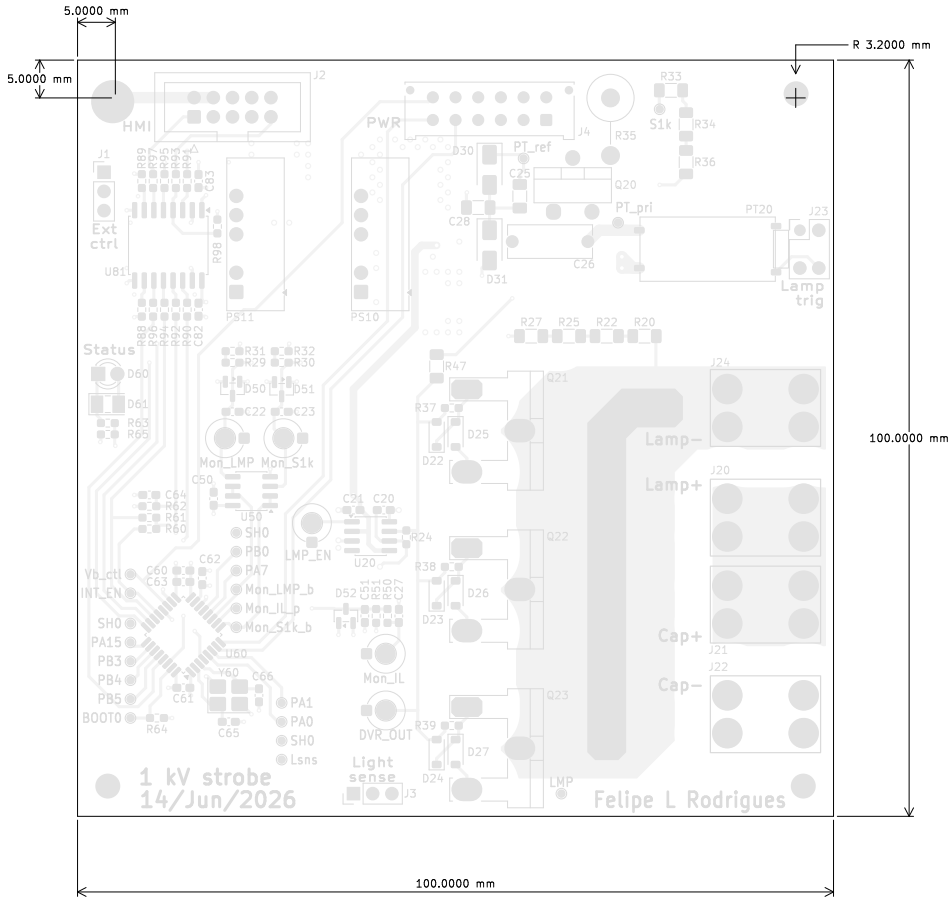

- FABRICATION NOTES (UNLESS OTHERWISE SPECIFIED)
- 1) FABRICATE PER IPC-6012A CLASS 2.
  - 2) OUTLINE DEFINED IN SEPARATE GERBER FILE WITH "Edge\_Cuts,GBR" SUFFIX.  
  
DIMENSIONS OF CIRCUMSIZED RECTANGLE SHOWN ON THIS DRAWING ARE FOR REFERENCE ONLY.
  - 3) SEE SEPARATE DRILL FILES WITH ".DRL" SUFFIX FOR HOLE LOCATIONS.  
  
SELECTED HOLE LOCATIONS SHOWN ON THIS DRAWING ARE FOR REFERENCE ONLY.
  - 4) SURFACE FINISH: HAL SNPB
  - 5) SOLDERMASK ON BOTH SIDES OF THE BOARD SHALL BE LPI, COLOR GREEN.
  - 6) SILK SCREEN LEGEND TO BE APPLIED PER LAYER STACKUP USING WHITE NON-CONDUCTIVE EPOXY INK.
  - 7) ALL VIAS ARE TENTED ON BOTH SIDES UNLESS SOLDERMASK OPENED IN GERBER.
  - 8) VENDOR SHOULD FOLLOW ROHS COMPLIANT PROCESS AND Pb FREE FOR MANUFACTURING
  - 9) PCB MATERIAL REQUIREMENTS:  
  
A. FLAMMABILITY RATING MUST MEET OR EXCEED UL94V-0 REQUIREMENTS.  
B. Tg 170 C OR EQUIVALENT.  
C. EQUIVALENT MATERIAL SHALL BE RoHS COMPLIANT, HALOGEN FREE AND APPROVED BY CHURRASCOD ELECTRONICS.
  - 10) DESIGN GEOMETRY MINIMUM FEATURE SIZES:  
  
BOARD SIZE 100.000 x 100.000 mm  
BOARD THICKNESS 2.278 mm  
TRACE WIDTH 0.200 mm  
TRACE TO TRACE -0.000 mm  
MIN. HOLE (PTH) 0.300 mm  
MIN. HOLE (NPTH) 1.000 mm  
ANNULAR RING 0.150 mm  
COPPER TO HOLE 0.300 mm  
COPPER TO EDGE 0.500 mm  
HOLE TO HOLE 0.250 mm



|             |                                             |                                     |                              |                                  |
|-------------|---------------------------------------------|-------------------------------------|------------------------------|----------------------------------|
| Comments:   | Company:<br>ChurrasCod Electronics          |                                     | Variant:<br>PRELIMINARY      | Git Hash:<br>8a917a0             |
|             | Board Name:<br>Main board                   |                                     | Project Name:<br>1 kV strobe |                                  |
|             | Sheet Title:<br>Top Fabrication (Scale 1:1) | File Name:<br>Strobe_main.kicad_pcb | Designer:<br>FR              | Date:<br>2024-04-13              |
| Sheet Path: |                                             | Reviewer:                           | Size:<br>A3                  | Revision:<br>1.0.0+ (Unreleased) |
|             |                                             |                                     | Sheet:<br>1 of 10            |                                  |