

PROJNAME

Table of contents

1	1 kV strobe
2	System_overview
3	Block_diagram
4	
5	\${SHEET_NAME_5}
6	\${SHEET_NAME_6}
7	\${SHEET_NAME_7}
8	\${SHEET_NAME_8}

Change history

1.0.0	07/10/2026	First release
1.0.0	08/10/2026	Fix R1234 value due to issue xyz etc etc etc. Update C14 to 10 nF to reduce roll-off frequency.
1.0.0	TBD	TBD
1.0.0	TBD	TBD
1.0.0	TBD	TBD
1.0.0	TBD	TBD
1.0.0	TBD	TBD
1.0.0	TBD	TBD
1.0.0	TBD	TBD
1.0.0	TBD	TBD
1.0.0	TBD	TBD

ERC FAILURE

CHECK FAILED — SEE ERC REPORT


System overview



File: System_overview.kicad_sch



PROJNAME		Sheet: Root	
		File: ktest.kicad_sch	
Notes	Rev: 0.0.1		Drwn: FLR
	Mat: Concept		Rev'd: FLR
	Date: 2026-10-06		RLs'd: FLR
	Dwg: NA		Size: A4
		Generated with KiCad	Page: 1/6

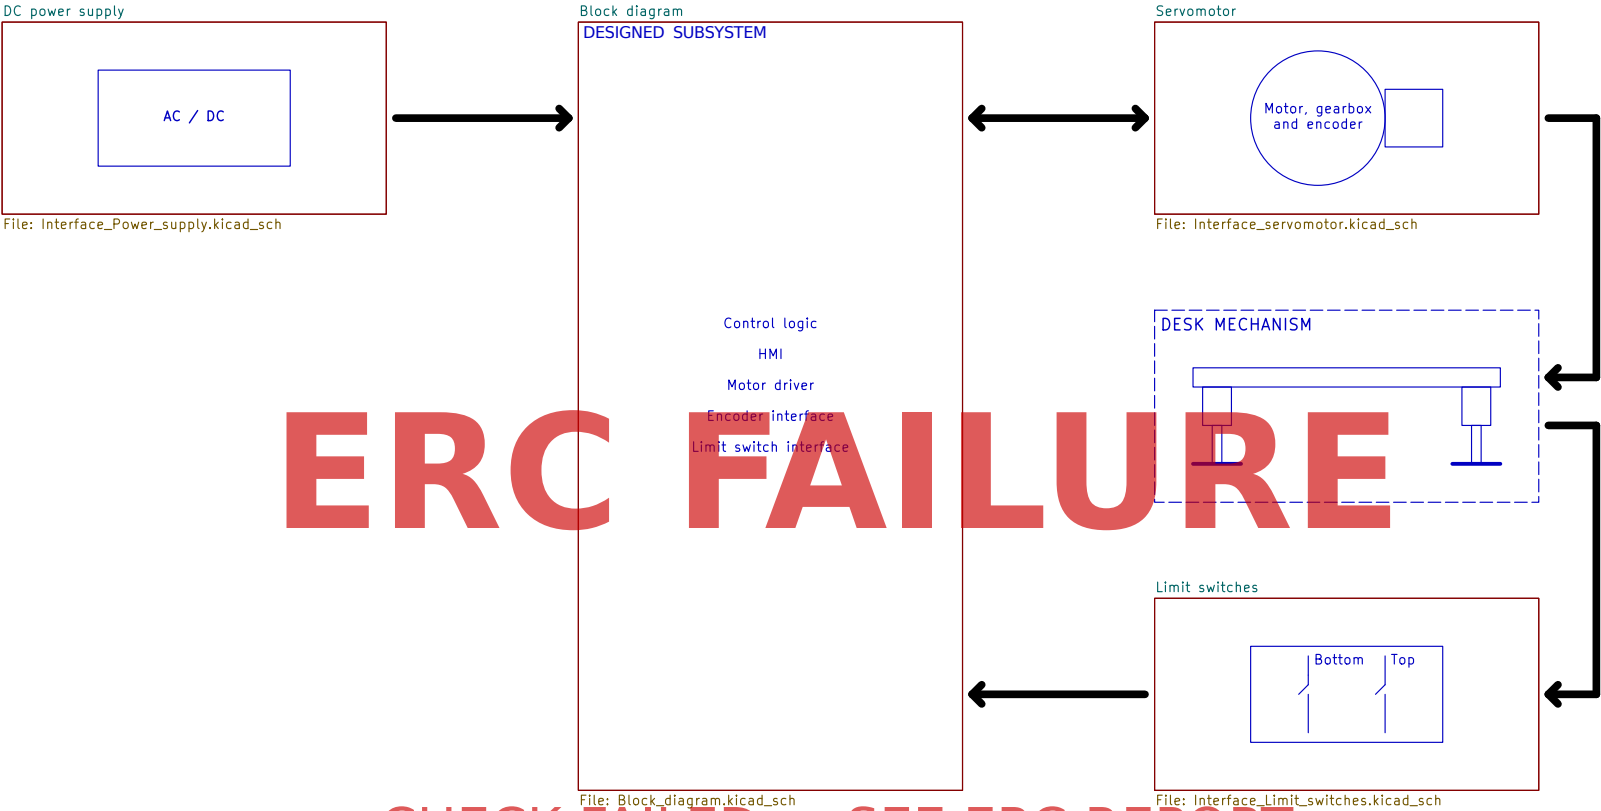

ERC FAILURE

CHECK FAILED — SEE ERC REPORT

This sheet shows the overall system and the interfaces to external components.
External components are shown for system context only and are not part of this schematic.
Only the "DESIGNED SUBSYSTEM" is covered by this schematic.

Return to front sheet



PROJNAME		Sheet: System overview	
Notes		File: System_overview.kicad_sch	
Rev:	Drwn: FLR	Mat: Concept	Rev'd: FLR
Date:	RLs'd: FLR	Dwg: NA	Size: A4
Generated with KiCad		Page: 2/6	

ERC FAILURE

CHECK FAILED — SEE ERC REPORT

[Return to front sheet](#)



PROJNAME

Notes

Sheet: Block diagram

File: Block_diagram.kicad_sch

Rev: Concept
Mat: Concept

Date:

Dwg: NA

Generated with KiCad

Drwn: FLR
Rev'd: FLR
Rls'd: FLR

Size: A4

Page: 3/6

Interface specification

Barrel connector (Dell type, with ID pin)

Pin

- 1 Supply - 19.5 V, 3 A (inner shell)
- 2 ID (internal pin)
- 3 GND (outer shell)
- SH Shield

ERC FAILURE

CHECK FAILED — SEE ERC REPORT

Return to front sheet



PROJNAME

Notes

Sheet: DC power supply

File: Interface_Power_supply.kicad_sch

Rev:

Mat: Concept

Date:

Dwg: NA

Generated with KiCad

Drwn: FLR

Rev'd: FLR

RLs'd: FLR

Size: A4

Page: 10/6

Interface specification

JST B6B-XH-A / JST XHP-6 connector

Pin	Description
1	Encoder B output (VCC)
2	Encoder A output (VCC)
3	GND
4	VCC (3.3 - 5V)
5	Motor B (3 A, 12-24 V)
6	Motor A (3 A, 12-24 V)

ERC FAILURE

CHECK FAILED — SEE ERC REPORT



PROJNAME	Sheet: Servomotor	
	File: Interface_servomotor.kicad_sch	
	Rev:	Drwn: FLR
	Mat: Concept	Rev'd: FLR
	Date:	RLs'd: FLR
Notes	Dwg: NA	Size: A4
	Generated with KiCad	Page: 11/6

Interface specification

JST B4B XH A / JST XHP-4 connector

- Pin Description
- 1 Bottom limit switch (Normally open, switch closes to GND)
 - 2 GND
 - 3 GND
 - 4 Top limit switch (Normally open, switch closes to GND)

ERC FAILURE

CHECK FAILED — SEE ERC REPORT

Return to front sheet



PROJNAME	Sheet: Limit switches	
	File: Interface_Limit_switches.kicad_sch	
	Rev:	Drwn: FLR
	Mat: Concept	Rev'd: FLR
	Date:	RLs'd: FLR
Notes	Dwg: NA	Size: A4
	Generated with KiCad	Page: 12/6