

Desk controller


Table of contents

- 1 [Root_sch](#)
- 2 [System_overview](#)
- 3 [Interface_Power_supply](#)
- 4 [Interface_servomotor](#)
- 5 [Interface_Limit_switches](#)
- 6 [Block_diagram](#)
- 7 [DCDC_converter_3V3](#)
- 8 [Microcontroller](#)
- 9 [Servomotor_interface](#)
- 10 [Limit_switch_interface](#)
- 11 [Display](#)
- 12

Change history

1.0.0	07/10/2026	First release
1.0.0	08/10/2026	Fix R1234 value due to issue xyz etc etc etc. Update C14 to 10 nF to reduce roll-off frequency.
1.0.0	TBD	TBD
1.0.0	TBD	TBD
1.0.0	TBD	TBD
1.0.0	TBD	TBD
1.0.0	TBD	TBD
1.0.0	TBD	TBD
1.0.0	TBD	TBD
1.0.0	TBD	TBD

System overview



File: System_overview.kicad_sch




Desk controller

Notes

This is a comment 1 field - potentially not used
This is a comment 2 field - potentially not used
This is a comment 3 field - potentially not used
This is a comment 4 field - potentially not used

Sheet: Root	
File: ktest.kicad_sch	
Rev: 0.0.1	Drwn: FLR
Mat: Concept	Rev'd: FLR
Date: 2026-10-06	RLs'd: FLR
Dwg: NA	Size: A4
Generated with KiCad	Page: 1/11

System overview

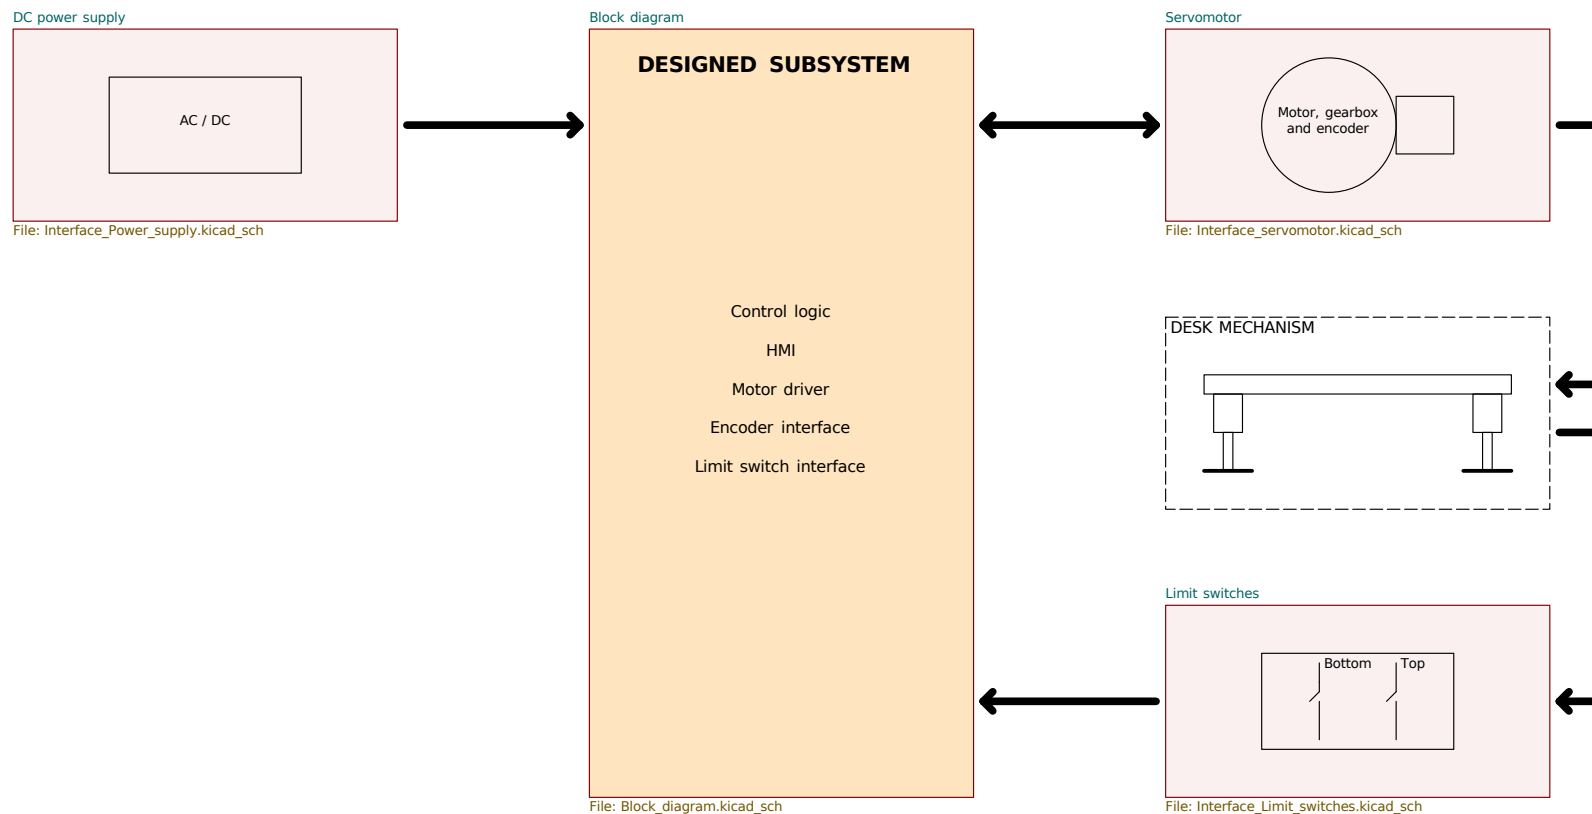

This sheet shows the overall system and the interfaces to external components.
External components are shown for system context only and are not part of this schematic.
Only the "DESIGNED SUBSYSTEM" is covered by this schematic.

[Return to front sheet](#)



Desk controller

Notes

Sheet: System overview

File: System_overview.kicad_sch

Rev: FLR

Mat: Concept

Date:

Dwg: NA

Generated with KiCad

Drwn: FLR

Rev'd: FLR

RLs'd: FLR

Size: A4

Page: 2/11

DC power supply

Interface specification

Barrel connector (Dell type, with ID pin)

- Pin
- 1 Supply - 19.5 V, 3 A (inner shell)
 - 2 ID (internal pin)
 - 3 GND (outer shell)
 - SH Shield

[Return to front sheet](#)



Desk controller	Sheet: DC power supply	
	File: Interface_Power_supply.kicad_sch	
	Rev:	Drwn: FLR
	Mat: Concept	Rev'd: FLR
	Date:	RLs'd: FLR
Notes	Dwg: NA	Size: A4
	Generated with KiCad	Page: 3/11

Servomotor

Interface specification

JST B6B-XH-A / JST XHP-6 connector

Pin	Description
1	Encoder B output (VCC)
2	Encoder A output (VCC)
3	GND
4	VCC (3.3 - 5V)
5	Motor B (3 A, 12-24 V)
6	Motor A (3 A, 12-24 V)

[Return to front sheet](#)



Desk controller

Notes

Sheet: Servomotor	
File: Interface_servomotor.kicad_sch	
Rev:	Drwn: FLR
Mat: Concept	Rev'd: FLR
Date:	RLs'd: FLR
Dwg: NA	Size: A4
Generated with KiCad	Page: 4/11

Limit switches

Interface specification

JST B4B XH A / JST XHP-4 connector

Pin Description

- 1 Bottom limit switch (Normally open, switch closes to GND)
- 2 GND
- 3 GND
- 4 Top limit switch (Normally open, switch closes to GND)

[Return to front sheet](#)




Desk controller

Notes

Sheet: Limit switches			
File: Interface_Limit_switches.kicad_sch			
Rev:	Drwn: FLR		
Mat: Concept	Rev'd: FLR		
Date:	RLs'd: FLR		
Dwg: NA	Size: A4		
Generated with KiCad	Page: 5/11		

Block diagram

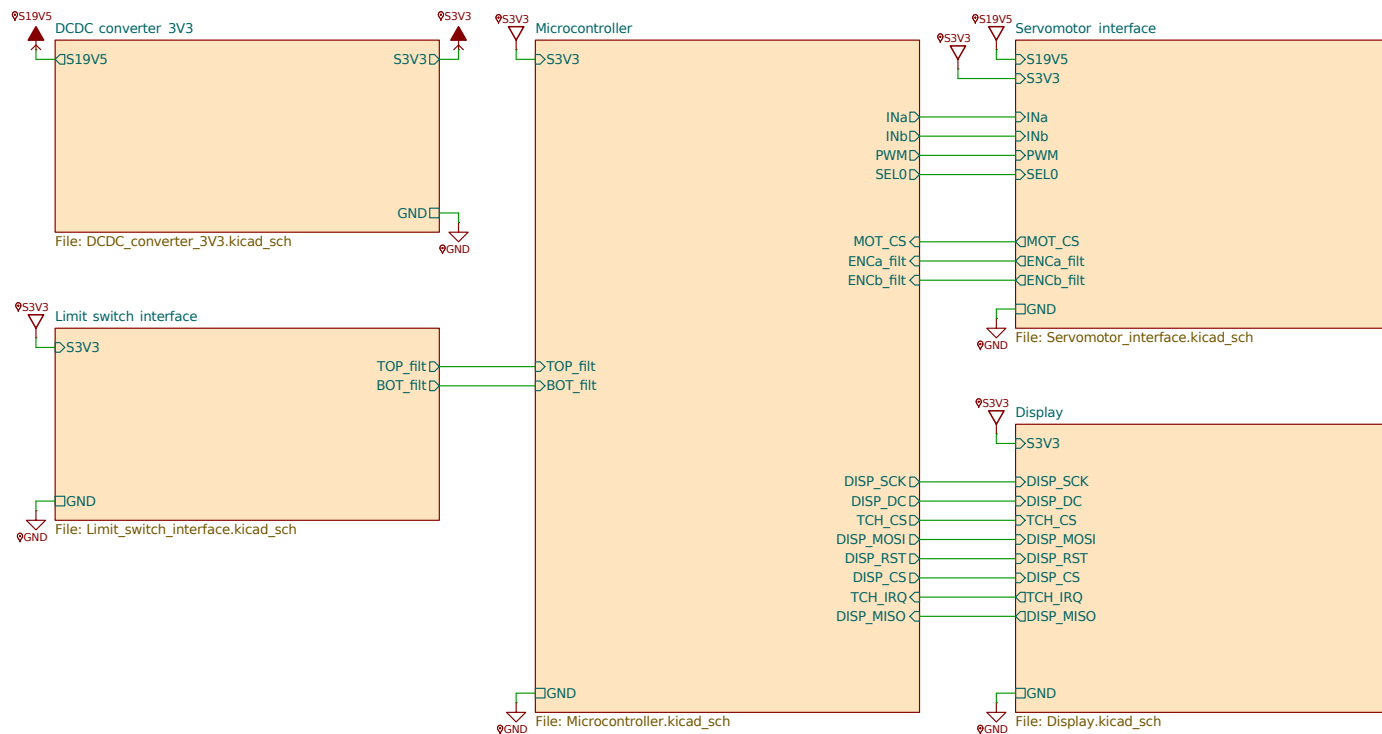

[Return to front sheet](#)






Desk controller

Notes

Sheet: Block diagram	
File: Block_diagram.kicad_sch	
Rev:	Drwn: FLR
Mat: Concept	Rev'd: FLR
Date:	RLs'd: FLR
Dwg: NA	Size: A4
Generated with KiCad	Page: 6/11

DCDC converter 3V3

Block interface

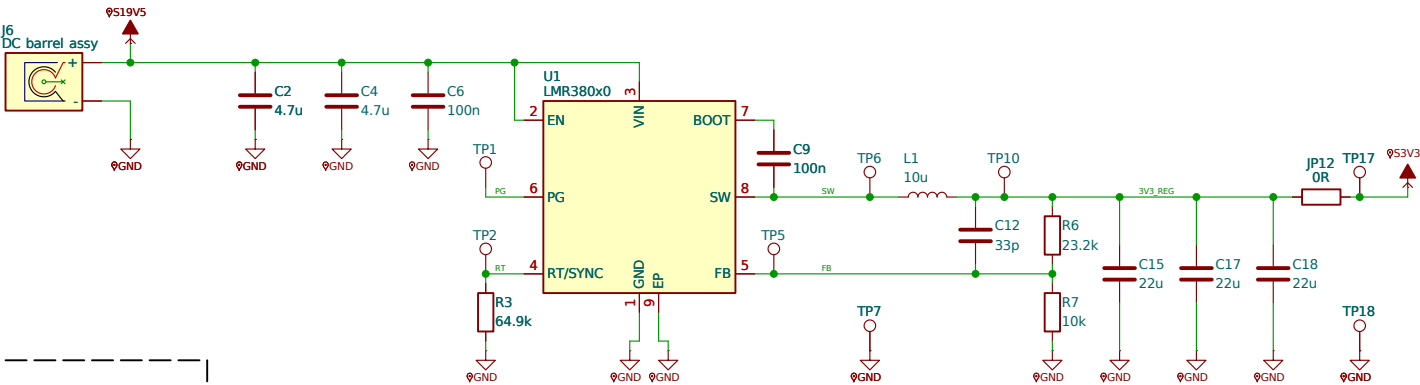



J8 is fitted to a small "standalone" PCB which will then be soldered into the "main" PCB. This standalone PCB + connector are what make the "DC barrel assy" used in J6 position.

[Return to front sheet](#)




Desk controller	Sheet: DCDC converter 3V3	
	File: DCDC_converter_3V3.kicad_sch	
	Rev:	Drwn: FLR
	Mat: Concept	Rev'd: FLR
	Date:	Rs'd: FLR
Notes	Dwg: NA	Size: A4
	Generated with KiCad	Page: 7/11

Block interface

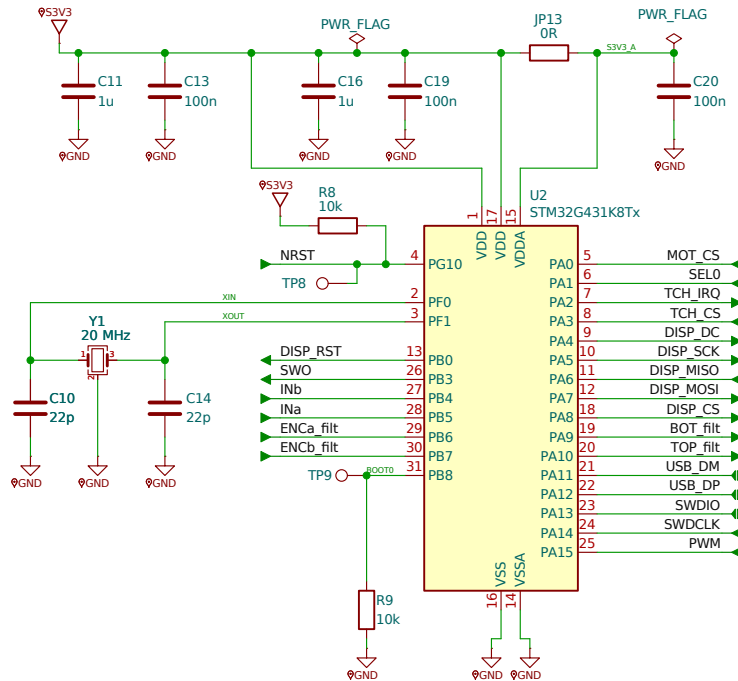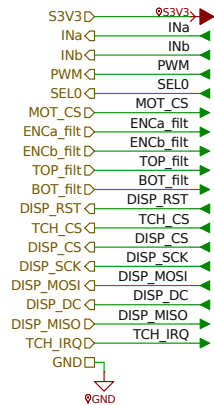


Microcontroller

USB interface (serial comms port)

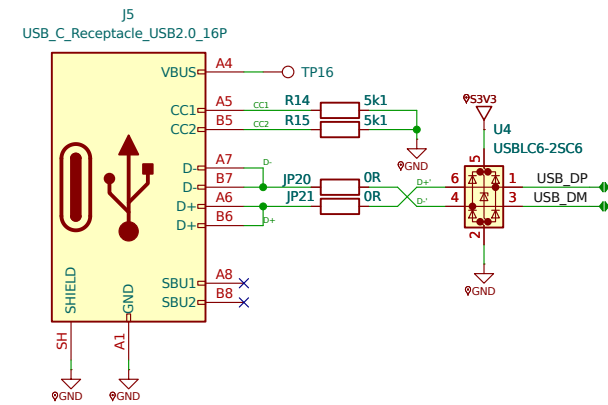

SWD header

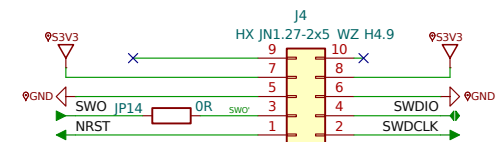

[Return to front sheet](#)






Desk controller

Notes

Sheet: Microcontroller
File: Microcontroller.kicad_sch

Rev:	Drwn: FLR
Mat: Concept	Rev'd: FLR
Date:	RLs'd: FLR
Dwg: NA	Size: A4
Generated with KiCad	Page: 8/11

Servomotor interface

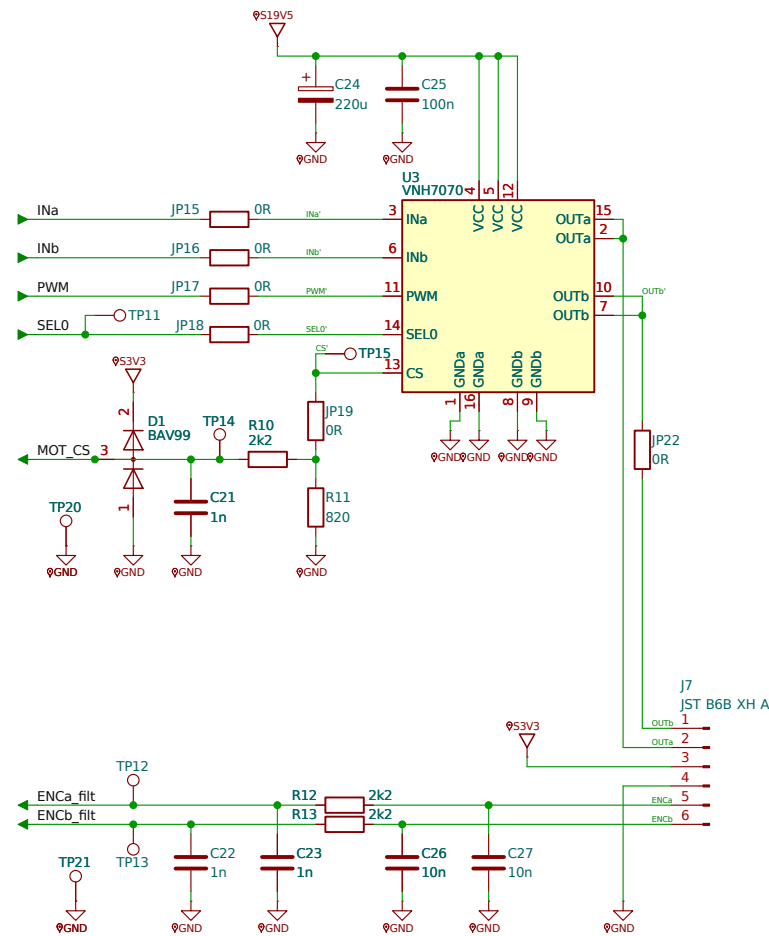

[Return to front sheet](#)



Desk controller

Notes

Sheet: Servomotor interface

File: Servomotor_interface.kicad_sch


Rev:	Drwn: FLR
------	-----------

Mat: Concept	Rev'd: FLR
--------------	------------


Date: Rls'd: FLR

Dwg: NA	Size: A4
---------	----------

Block interface



Limit switch interface

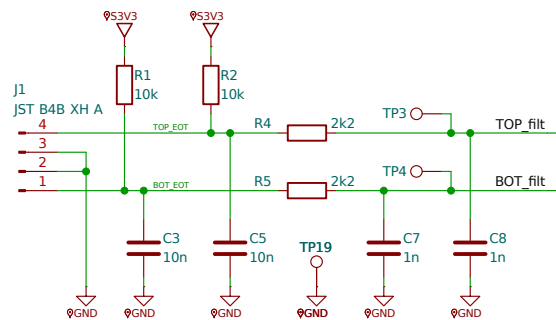

[Return to front sheet](#)



Desk controller

Notes

Sheet: Limit switch interface

File: Limit_switch_interface.kicad_sch

Rev:

Mat: Concept

Date:

Dwg: NA

Generated with KiCad

Drwn: FLR



Rev'd: FLR

RLs'd: FLR

Size: A4

Page: 10/11

Block interface

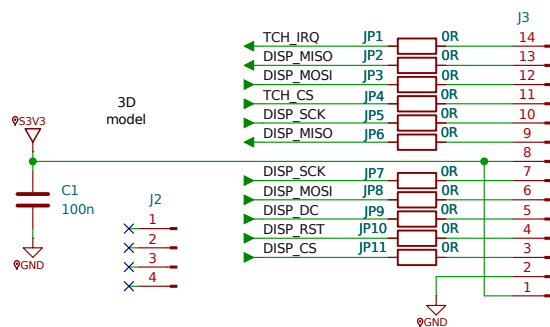

TFT1
TFT_2.4in_320x240



The display will not be directly soldered to the PCB. Instead, generic 2.54 mm pitch sockets J2 and J3 will be used as connectors.

[Return to front sheet](#)



Desk controller

Notes

Sheet: Display
File: Display.kicad_sch

Rev:	Drwn: FLR
Mat: Concept	Rev'd: FLR
Date:	RLs'd: FLR
Dwg: NA	Size: A4
Generated with KiCad	Page: 11/11