General Settings

Bypass

Global bypass, when pressed, the signal is routed directly from the inputs to the outputs.

Value Range : Enabled/Disabled
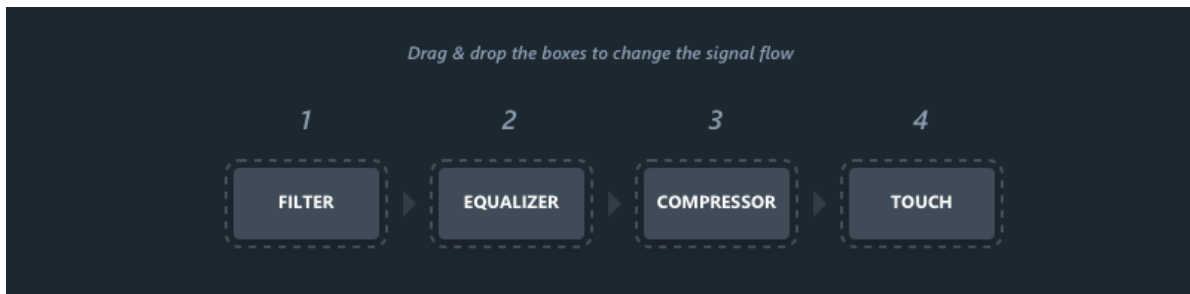
Default Value : Disabled

Skin

The look of the EVO Channel user interface.

Value Range : Light/Dark

Default Value : Light

Flow

Flow allow you to change the order of the modules in EVO Channel. Simply drag and drop a module to set your perfect signal flow.