

Capsule Sensing Pressure Gauge (CG)

Capsule (CG) model process pressure gauges are designed to meet the stringent demands of low pressure measurements in tough conditions. These are built with special consideration for high corrosive resistance and offer a long product life.

The CG model pressure gauge with capsule type element is used to measure small positive and negative pressure in gaseous media. The element consists of two diaphragms welded together. When subjected to pressure, the diaphragm capsule element expands by a precise amount. This expansion is converted by a movement into the rotary motion of the pointer.

The use of corrosion resistant material such as high grade stainless steel for both the casing and the measurement system makes this pressure gauge best suited to operate in an adverse environment and with corrosive media.

The welded design coupled with a modular construction system allows for best-in-class ingress protection (upto IP-67 standard), also offers a long and stable service life of the gauge with tried and tested safety features adhering to EN 837-3 standard.



Industrial Applications

- Chemical and fertiliser
- Petrochemical
- Thermal, nuclear and hydroelectric power stations
- Pharmaceutical
- Food processing
- Water treatment plants
- Iron and steel
- Rubber moulding / processing plants
- Hydraulics and pneumatics
- Sugar
- Refineries
- Hydraulic power packs
- Cryogenics

Available in

Nominal sizes	4"(100 mm) & 6"(150 mm)
Ranges	0 – 250 mmWc upto 6000 mmWc

Special Features


- Compliance to latest EN837-3
- Overpressure limit 125 % of FSD
- Ingress protection to IP 67
- Accuracy class $\pm 1.6\%$ of FS
- Stainless steel casing
- Socket to case - TIG argon welded

Standard Product Specifications	
Standards	Description
Reference Standard	EN 837 - 3
Mounting	Direct bottom
Connection	½" NPT (M)
Case and Bezel	SS 304
Capsule	SS 316
Socket	SS 316L
Movement	SS 304
Dial	Aluminum, white background with black marking
Pointer	Aluminum, black color micrometer with zero adjustable
Accuracy	±1.6% of FS (standard)
Overpressure limit	As per EN standard
	125% of maximum scale value,
Window	Toughened glass
Protection	IP 67
Blow off disc and filling plug	Neoprene
Gasket	Silicon
Ambient temperature	-25°C to +65°C
Process temperature	Max. 65°C
Technical specifications, MOC are subject to change without prior notice	

Standard Pressure Range			
Code	mmWc (Code - X)	Code	Mbar
AO	0 + 250	AO	0 + 250
AP	0 + 400	AP	0 + 400
AQ	0 + 600	AQ	0 + 600
AY	0 + 1000	AY	0 + 1000
AZ	0 + 1600	AZ	0 + 1600
BA	0 + 2500	BA	0 + 2500
BB	0 + 4000	BB	0 + 4000
BC	0 + 6000	BC	0 + 6000
DU	-250 + 0	DW	-600 + 0
DV	-400 + 0	DY	-100 + 150
DW	-600 + 0	EQ	-500 + 500
DX	-200 + 400	ES	-1000 + 0
DY	-100 + 150		
DZ	-400 + 600		
EM	-600 + 400		
EQ	-500 + 500		
ES	-1000 + 0		

Mounting Options


Direct Bottom

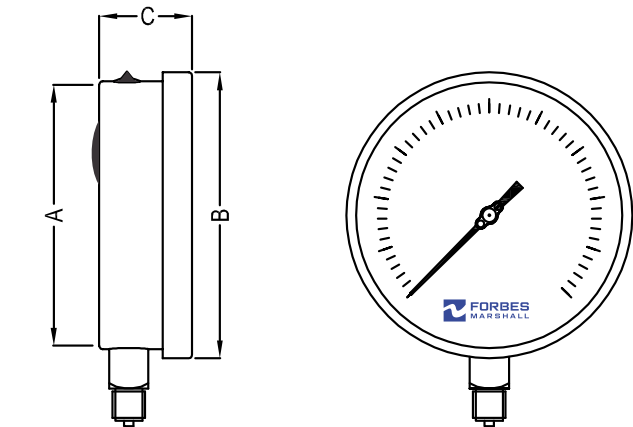

→ Parameters

	A	B	C
Dial Size ↓	100	Ø100	Ø110
	150	Ø150	Ø160


Lower Back

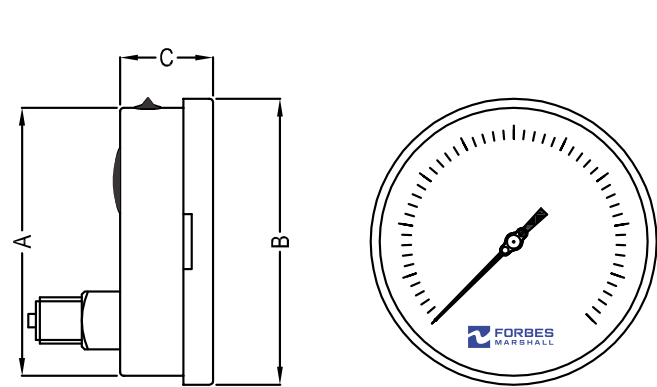

→ Parameters

	A	B	C
Dial Size ↓	100	Ø100	Ø110
	150	Ø150	Ø160


Surface Bottom

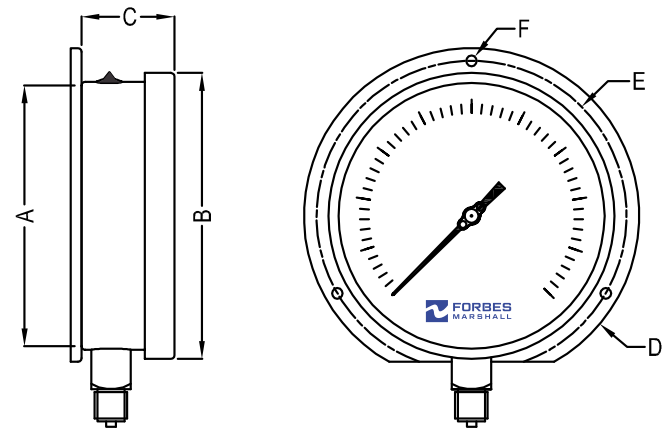

→ Parameters

	A	B	C	D	E	F
Dial Size ↓	100	Ø100	Ø110	48.5	Ø134	Ø118
	150	Ø150	Ø160	50	Ø186	Ø168


Lower Back Panel

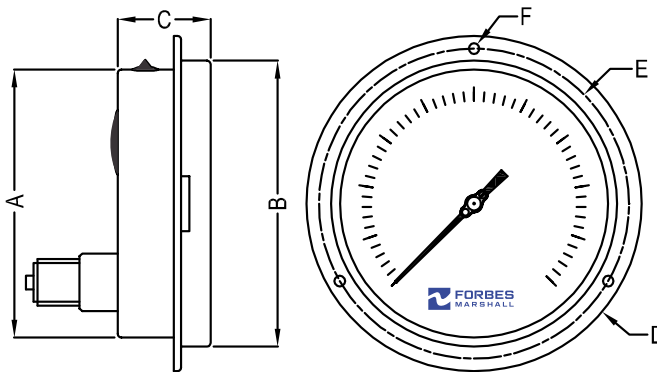

→ Parameters

	A	B	C	D	E	F
Dial Size ↓	100	Ø100	Ø110	48.5	Ø134	Ø118
	150	Ø150	Ø160	50	Ø186	Ø168

Center Back Flush

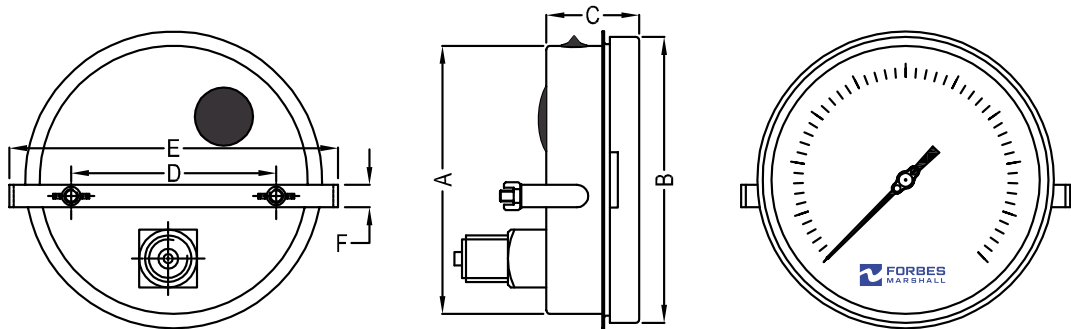

→ Parameters

	A	B	C	D	E	F
Dial Size ↓	100	Ø100	Ø110	48.5	72.5	116
	150	Ø150	Ø160	50	106	158.5

Ordering Information

Model	CG	**	*	*	*	*	**	*
Dial Size								
100 mm (4")	E							
150 mm (6")	F							
Mountings								
Direct bottom	1							
Lower back	2							
Surface bottom	4							
Lower back panel	5							
Lower back flush	6							
Connection Size								
1/4"	A							
3/8"	B							
1/2"	C							
M20X1.5P	1							
Connection type								
NPT (M)	A							
BSP (M)	B							
BSPT (M)	C							
Metric thread (M)	M							
Range								
Refer to Std. Pressure Range Table								
Engineering Unit**								
mm/Wc	X							
mBar	Y							

Configuration Generation Code

Case and Bezel	****
SS304 (Std.)	
SS316	
Capsule and Socket	
SS316 (standard)	
Movement	
SS304 (standard)	
Pointer	
Micrometer pointer (standard)	
Knife Edge Pointer	
Window	
Toughened glass (standard)	
Safety laminated Shatterproof glass	
Optional Features	
Mirror scale dial	
Custom designed dial	
SS tag plate	
Tag marking on dial	
Tests and Certificates	
Five point calibration certificate (standard)	
Oxygen service (for dry version)	
NABL traceability certificates	
CE marking (As Per PED (97/23/EC))	
Material test certificates for wetted parts	
Helium leak test	
NACE conformity for wetted parts	
Special requirement – please specify	

Ordering example : CGF1CAAPX-XXXX (standard)



Forbes Marshall
Krohne Marshall
Forbes Marshall Arca
Codel International
Forbes Solar
Forbes Vyncke
Forbes Marshall Steam Systems

Plot No. A-19/2 & T-4/2, I.D.A
Nacharam, Hyderabad - 500 076
Tel : +91-40-27179223, 27171909,
27170732
Fax : +91-40-27173235

Email : sales-gauges@forbesmarshall.com, ccmidc@forbesmarshall.com

All contents herein are the property of Forbes Marshall Private Limited ("FMPL") or Forbes Marshall Steam Systems Private Limited ("FMSSPL"), as the case may be, and having protection under the intellectual property rights. Any reproduction, distribution or disclosure without prior written permission is prohibited. Information in this document is subject to change without notice.

B-85, Phase II, Chakan Indl Area
Sawardari, Chakan, Tal. Khed
Dist. Pune - 410 501. INDIA
Tel : 91(0)2135-393400

A-34/35, MIDC H Block
Pimpri, Pune - 411 018. INDIA.
Tel : 91(0)20-27442020, 39851199
Fax : 91(0)20-27442040

CIN No.: U28996PN1985PTC037806
www.forbesmarshall.com