

General Purpose Pressure Gauge (GP)

The General Purpose (GP) Pressure Gauge model has a modular design.

Built with corrosion resistant high grade stainless steel, it is suitable for operation with corrosive media in adverse environments.

The glycerin filling allows smooth movement of the pointer under impulsing and fluctuating operations. This ensures good readability even in extreme load and vibrating conditions. Glycerin not only provides lubrication but also provides protection against wear and tear of the gauge's internal gear assembly.

The welded design coupled with modular construction system allows for best-in-class ingress protection (upto IP-67 standard), also offers a long and stable service life of the gauge with tried and tested safety features such as vent plug adhering to EN 837-1 Standard.



Available In

Nominal sizes	2 1/2" (63mm) & 4" (100 mm)
Ranges	0-0.6 Kg/Sq.cm to 0-700 Kg/Sq.cm

Special Features

Compliance to latest EN837-1

Standard ranges : 0-0.6 Kg/Sq.cm to 0-700 Kg/Sq.cm

Overpressure limit 125 % of FSD

Ingress protection to IP67

Accuracy class $\pm 1.6\%$ of FS

Stainless steel casing

Dry or liquid filled version

Socket to case - TIG argon welded

Industrial Applications

Chemical and fertiliser

Petrochemical

Thermal, nuclear and hydroelectric power stations

Pharmaceutical

Food processing

Water treatment plants

Iron and steel

Rubber moulding / processing plants

Hydraulics and pneumatics

Sugar

Refineries


Hydraulic power packs

Cryogenics

Standard Product Specifications	
Specifications	Description
Reference standard	EN 837 - 1
Mounting	Direct bottom
Connection	1/4" NPT (M)
Case & Bezel	SS 304 (bayonet type bezel)
Bourdon	SS 316
Socket	SS 316
Movement	SS 304
Dial	Aluminum, white background with black marking
Pointer	Aluminum, black color fixed pointer
Accuracy	±1.6% of FS (standard)
Overpressure limit	As per EN standard
	From 0 to 100 Kg/Sq.cm, 125% of maximum scale value
	From 100 to 600 Kg/Sq.cm, 115% of maximum scale value
Window	Plain glass
Protection	IP67 - 2 ½" model
	IP 65 - 4" model
Filling Plug / vent plug	Neoprene
gasket	Silicon
Ambient temperature	-25°C to 65°C
Process temperature	Max. 200°C (for dry gauge)
	Max. 65°C (for glycerin filled gauges)

Mounting Options


Direct Bottom

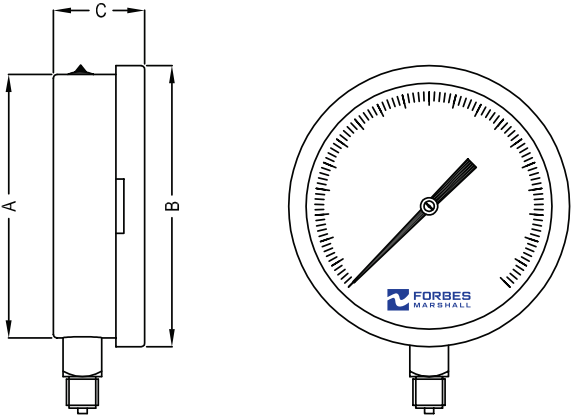

→ Parameters

Dial Size	A	B	C
63	Ø61	Ø70	33
100	Ø100	Ø110	35


Surface Bottom

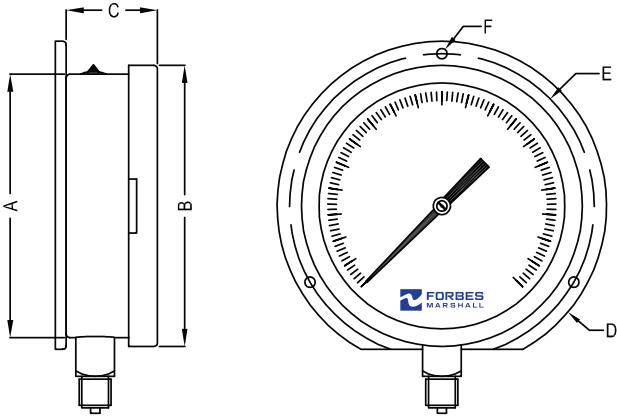

→ Parameters

Dial Size	A	B	C	D	E	F
63	Ø61	Ø70	33	Ø86	Ø75	Ø6
100	Ø100	Ø110	35	Ø134	Ø118	Ø6


Center Back Flush Mounting

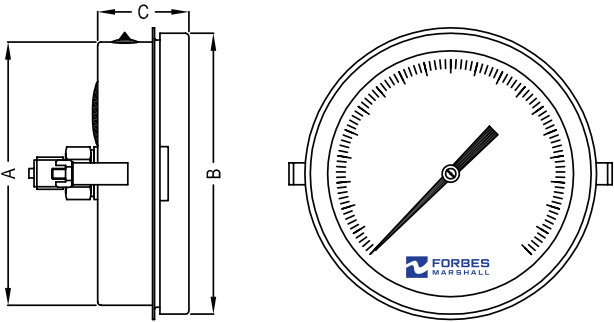

→ Parameters

Dial Size	A	B	C
63	Ø61	Ø70	33
100	Ø100	Ø110	35


Center Back

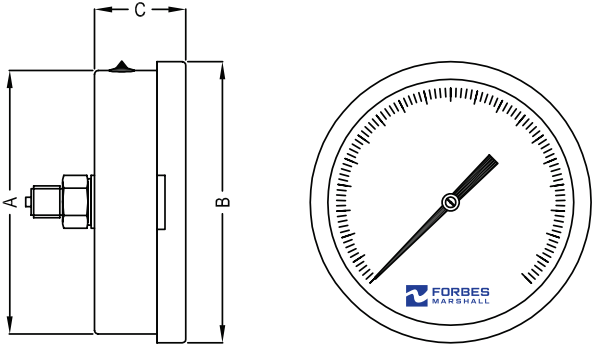

→ Parameters

Dial Size	A	B	C
63	Ø61	Ø70	33
100	Ø100	Ø110	35

Center Back Panel Mounting

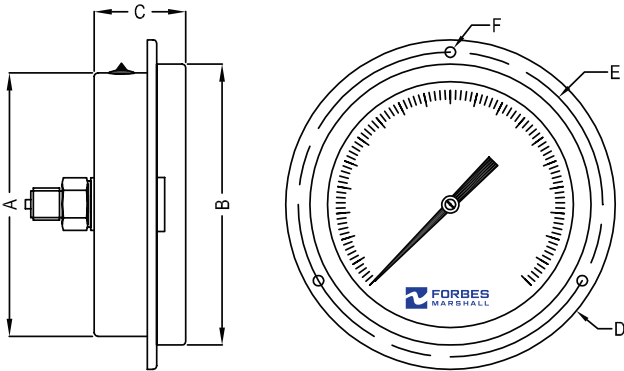

→ Parameters

Dial Size	A	B	C	D	E	F
63	Ø61	Ø70	33	Ø86	Ø75	Ø6
100	Ø100	Ø110	35	Ø134	Ø118	Ø6

Standard Pressure Ranges

Code	Kg/Sq.cm (Code A)	Bar (Code B)	Code	KPA (Code C)
AA	-1 + 0	-1 + 0	AR	-100 + 0
AB	0 + 0.6	0 + 0.6	AL	0 + 60
AC	0 + 1	0 + 1	AM	0 + 100
AD	0 + 1.6	0 + 1.6	AN	0 + 160
AE	0 + 2.5	0 + 2.5	AO	0 + 250
AF	0 + 4	0 + 4	AP	0 + 400
AG	0 + 6	0 + 6	AQ	0 + 600
AH	0 + 10	0 + 10	AY	0 + 1000
AI	0 + 16	0 + 16	AZ	0 + 1600
AJ	0 + 25	0 + 25	BA	0 + 2500
AK	0 + 40	0 + 40	BB	0 + 4000
AL	0 + 60	0 + 60	BC	0 + 6000
AM	0 + 100	0 + 100	BD	0 + 10000
AN	0 + 160	0 + 160	BE	0 + 16000
AO	0 + 250	0 + 250	BF	0 + 25000
AP	0 + 400	0 + 400	BG	0 + 40000
AQ	0 + 600	0 + 600	BH	0 + 60000

Code	Dual Scale in Hg+Psi/mmHg +Kg/Sq.cm (Code H)	Dual Scale in Hg+Psi/Kg/Sq.c (Code J)	Code	Dual Scale in Hg+Psi/Kg/Sq.cm (Code J)	Dual Scale Bar & Psi (Code K)
DC	-30 + 20/-760 + 1.5	-30 + 20/-760 + 1.5	FA	-30 + 20/-1 + 1.5	-30 + 20/-1 + 1.5
DD	-30 + 42/-760 + 3.0	-30 + 42/-760 + 3.0	FB	-30 + 42/-1 + 3.0	-30 + 42/-1 + 3.0
DE	-30 + 70/-760 + 5.0	-30 + 70/-760 + 5.0	FC	-30 + 70/-1 + 5.0	-30 + 70/-1 + 5.0
DF	-30 + 85/-760 + 6.0	-30 + 85/-760 + 6.0	FD	-30 + 85/-1 + 6.0	-30 + 85/-1 + 6.0
DG	-30 + 100/-760 + 7.0	-30 + 100/-760 + 7.0	FE	-30 + 100/-1 + 7.0	-30 + 100/-1 + 7.0
DH	-30 + 125/-760 + 9.0	-30 + 125/-760 + 9.0	FF	-30 + 125/-1 + 9.0	-30 + 125/-1 + 9.0
DI	-30 + 210/-760 + 15.0	-30 + 210/-760 + 15.0	FG	-30 + 210/-1 + 15.0	-30 + 210/-1 + 15.0
DJ	-30 + 340/-760 + 24.0	-30 + 340/-760 + 24.0	FH	-30 + 340/-1 + 24.0	-30 + 340/-1 + 24.0

Code	Dual Scale in Kg/Sq.cm/Psi (Code D)	Dual Scale Bar+Psi (Code E)
BI	-1 + 0/-15 + 0	-1 + 0/-15 + 0
BJ	0 + 0.6/0 + 9	0 + 0.6/0 + 9
BK	0 + 1/0 + 15	0 + 1/0 + 15
BL	0 + 1.6/0 + 23	0 + 1.6/0 + 23
BM	0 + 2.5/0 + 36	0 + 2.5/0 + 36
BN	0 + 4/0 + 60	0 + 4/0 + 60
BO	0 + 6.0/0 + 86	0 + 6.0/0 + 86
BP	0 + 10/0 + 150	0 + 10/0 + 150
BQ	0 + 16.0/0 + 230	0 + 16.0/0 + 230
BR	0 + 25/0 + 350	0 + 25/0 + 350
BS	0 + 40/0 + 600	0 + 40/0 + 600
BT	0 + 60/0 + 850	0 + 60/0 + 850
BU	0 + 100/0 + 1500	0 + 100/0 + 1500
BV	0 + 160/0 + 2300	0 + 160/0 + 2300
BW	0 + 250/0 + 3560	0 + 250/0 + 3560
BX	0 + 400/0 + 5670	0 + 400/0 + 5670
BY	0 + 600/0 + 8550	0 + 600/0 + 8550

Code	Dual Scale in Kg/Sq.cm/Psi (Code D)	Dual Scale Bar & Psi (Code E)
BZ	0 + 2.0/0 + 30	0 + 2.0/0 + 30
CA	0 + 4.2/0 + 60	0 + 4.2/0 + 60
CB	0 + 7.0/0 + 100	0 + 7.0/0 + 100
CC	0 + 14.0/0 + 200	0 + 14.0/0 + 200
CD	0 + 21.0/0 + 300	0 + 21.0/0 + 300
CE	0 + 28.0/0 + 400	0 + 28.0/0 + 400
CF	0 + 42.0/0 + 600	0 + 42.0/0 + 600
CG	0 + 70.0/0 + 1000	0 + 70.0/0 + 1000
CH	0 + 140/0 + 2000	0 + 140/0 + 2000
CI	0 + 210/0 + 3000	0 + 210/0 + 3000
CJ	0 + 280/0 + 4000	0 + 280/0 + 4000
CK	0 + 420/0 + 6000	0 + 420/0 + 6000
CL	0 + 700/0 + 10000	0 + 700/0 + 10000

Ordering Information

Configuration Generation Code

Model		GP	**	*	*	*	*	**	*					
Dial Size														
63 mm	D													
100 mm	E													
Mountings														
Direct bottom	1													
Center back	3													
Surface bottom	4													
Center back panel mounting	7													
Center back flush mounting	8													
Connection Size														
1/4"	A													
3/8" only available in 4" dial size	B													
Connection type														
NPT (M)	A													
BSP (M)	B													
Range														
Refer to Std. pressure range table														
Engineering Unit														
Kg/sq.cm	A													
Bar	B													
Kpa	C													
Dual scale Kg/sq.cm-Psi	D													
Dual scale Bar-Psi	E													
Case and bezel														
SS304 (standard)														
Bourdon and Socket														
SS316 (standard)														
SS316L														
Movement														
SS304 (standard)														
Pointer														
Fixed pointer (standard)														
Knife edge pointer														
Window														
Plain glass (standard)														
Tests and Certificates														
Five point calibration certificate (standard)														
Oxygen service (for dry version and 63 mm dial)														
Special requirement – please specify														
Optional Features														
Epoxy painted case and bezel														
SS tag plate														
Case filling – glycerin upto 65°C														
Custom designed dial														
Case filling – silicon oil -40°C to 200°C														

Ordering example : GPD1AAAHB-0000 (standard)



Forbes Marshall
Krohne Marshall
Forbes Marshall Arca
Codel International
Forbes Solar
Forbes Vyncke
Forbes Marshall Steam Systems

Plot No. A-19/2 & T-4/2, I.D.A
Nacharam, Hyderabad - 500 076
Tel : +91-40-27179223, 27171909,
27170732
Fax : +91-40-27173235

Email : sales-gauges@forbesmarshall.com, ccmidc@forbesmarshall.com

© All rights reserved. Any reproduction or distribution in part or as a whole without written permission of Forbes Marshall Pvt Ltd, its associate companies or its subsidiaries ("FM Group") is prohibited.
Information, designs or specifications in this document are subject to change without notice. Responsibility for suitability, selection, installation, use, operation or maintenance of the product(s) rests solely with the purchaser and/or user. The contents of this document are presented for informational purposes only. FM Group disclaims liabilities or losses that may be incurred as a consequence of the use of this information.

B-85, Phase II, Chakan Indl Area
Sawardari, Chakan, Tal. Khed
Dist. Pune - 410 501. INDIA
Tel : 91(0)2135-393400

A-34/35, MIDC H Block
Pimpri, Pune - 411 018. INDIA.
Tel : 91(0)20-27442020, 39851199
Fax : 91(0)20-27442040

CIN No.: U28996PN1985PTC037806

www.forbesmarshall.com