

FMPT-012 Industrial Pressure Transmitter

Strain Gauge

The FMPT-012 series utilises strain gauge sensor chip technology to provide reliable pressure measurement across a wide industrial pressure range of 0-50 bar to 0-2000 bar. The compact and robust design ensures suitability for process control, machine construction, laboratory testing, and quality assurance applications.

General Features

- Universal input with various industrial-standard signal outputs.
- Selected stock maintained for reduced lead times.
- High accuracy measurement: factory-calibrated, no field adjustment required.



Key Specifications

Pressure Range	0-50 bar to 0-2000 bar
Accuracy	0.5% F.S.
Output	4-20 mA (2-wire)
Housing	D22/23/26/38 mm

Industries & Applications


- Mechanical engineering and machine construction.
- Hydraulics and level measurement.
- Gas tank and pipeline pressure monitoring.
- Industrial process control and test equipment.
- General industrial applications.

Source datasheet verified against: PT124B/G-210.

General Specifications — FMPT-012 (Strain Gauge)

Parameter	Specification
Model	FMPT-012
Pressure Range	0-50 bar to 0-2000 bar
Accuracy	0.5% F.S.; 1% F.S.
Non-linearity	$\leq 0.2\%$ F.S.
Repeatability / Reliability	$\leq 0.2\%$ F.S.
Output Signal	4-20 mA, 0-10 V, 0-5 V, 0.5-4.5 V; 1.5 mV/V, 2 mV/V (millivolt output variant)
Supply Voltage	24 VDC (mA/voltage outputs) 5 VDC (0.5-4.5 V) 10 VDC (mV/V outputs)
Operating Temperature	-20C to +80C
Compensated Temperature Range	0C to +75C
Overload Pressure	150% F.S.
Wetted Parts Material	Stainless Steel (SS304 or SS316)
Electrical Connector	Hirschmann (DIN) M12, 4-pin 5-pin Gland Cable Direct Cable
Process Connection	G1/4 G1/2 1/2 NPT 1/4 NPT M12x1.5 (custom on request)
Housing Shell Diameter	D22 mm D23 mm D26 mm D38 mm (optional)

Dimensional Reference

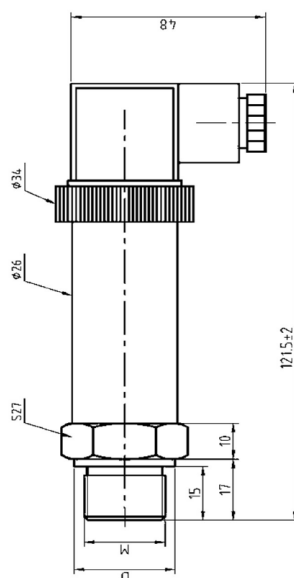

Note: The dimensions shown are for reference only. Various process connectors results in change of dimensional data.

FMPT-212 Compact Pressure Transmitter

Diffused Silicon

The FMPT-212 series employs a diffused silicon core sensor chip to deliver high-precision, high-stability pressure measurement. Specially designed for industrial applications requiring elevated accuracy, the transmitter's compact, robust construction makes it suitable for process control, machine construction, laboratory measurement, and quality testing equipment.

General Features

- Various industrial-standard signal outputs available, including RS485.
- Selected stock maintained for reduced lead times.
- High-accuracy measurement; factory-calibrated, no field adjustment required.
- Compact design with optional housing diameters.



Key Specifications

Pressure Range	-1 to 0 to +400 bar
Accuracy	0.5% F.S.
Output	4-20 mA (2-wire)
Housing	D23/26/38 mm

Industries & Applications


- Mechanical engineering and machine construction.
- Hydraulics and level measurement.
- Gas tank pressure monitoring.
- Industrial test and control systems.
- General industrial applications.

Source datasheet verified against: PT124B/G-212.

General Specifications — FMPT-212 (Diffused Silicon)

Parameter	Specification
Model	FMPT-212
Pressure Range	-1 to 0 to +400 bar
Accuracy	0.5% F.S.; 0.25% F.S.; 0.1% F.S.
Non-linearity	$\leq 0.2\%$ F.S.
Repeatability / Reliability	$\leq 0.2\%$ F.S.
Output Signal	4-20 mA, 0-10 V, 0-5 V, 1-5 V, RS485, 0.5-4.5 V; 1.5 mV/V, 2 mV/V (millivolt output variant)
Supply Voltage	24 VDC (mA/voltage/RS485 outputs) 5 VDC (0.5-4.5 V) 10 VDC (mV/V outputs)
Operating Temperature	-20°C to +80°C
Compensated Temperature Range	0°C to +75°C
Overload Pressure	150% F.S.
Wetted Parts Material	Stainless Steel (SS304 or SS316)
Electrical Connector	Hirschmann (DIN) M12, 4-pin 5-pin 6-pin Gland Cable Fly Leads/1/2 NPT
Process Connection	G1/4 G1/2 1/2 NPT 1/4 NPT M12x1.5 (custom on request)
Housing Shell Diameter	D23 mm D26 mm D38 mm (optional)

Dimensional Reference

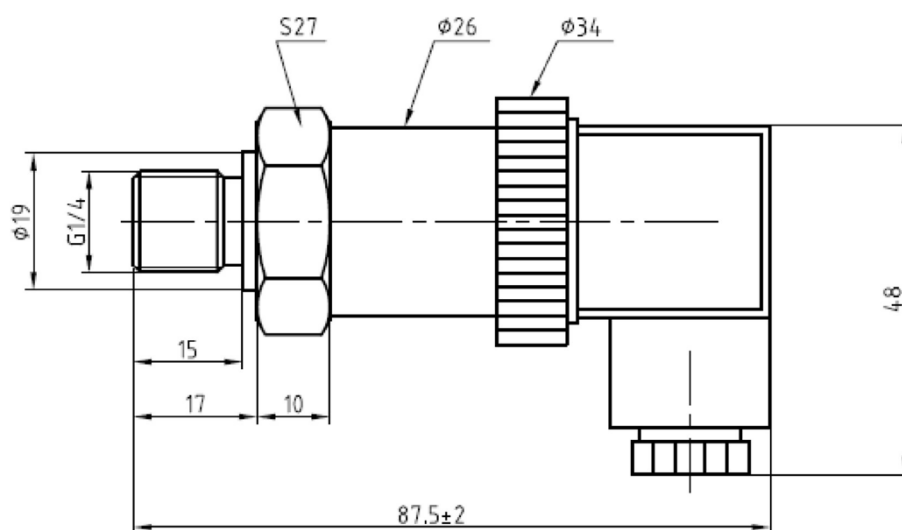

Note: The dimensions shown are for reference only. Various process connectors results in change of dimensional data.

FMPT-412 Flush Diaphragm Pressure Transmitter

Flush Diaphragm

The FMPT-412 flush diaphragm pressure transmitter is specifically designed for the measurement of viscous fluids or media containing particulates that would otherwise clog the pressure port of a standard industrial transmitter. All wetted parts are manufactured from stainless steel and hermetically welded, ensuring exceptional chemical resistance and long-term reliability.

General Features

- Flush diaphragm design eliminates pressure port clogging.
- Pressure range: 0 to 16 bar through 0 to 700 bar.
- Excellent corrosion resistance; wetted parts hermetically welded.
- Compact housing with high-quality construction.



Key Specifications

Pressure Range	0-16 bar to 0-700 bar
Accuracy	0.25% / 0.5% F.S.
Output	4-20 mA (2-wire)
Housing	D22/23/26/38 mm

Industries & Applications


- Mechanical engineering and general industry.
- Hydraulics and pneumatics.
- Food and beverage processing.
- Chemical and pharmaceutical processing.
- Applications with viscous, slurry, or particulate-laden media.

Source datasheet verified against: PT124B/G-214 (flush diaphragm variant).

General Specifications — FMPT-412 (Flush Diaphragm)

Parameter	Specification
Model	FMPT-412
Pressure Range	0-16 bar to 0-700 bar
Accuracy	0.25% F.S.; 0.5% F.S.
Non-linearity	$\leq 0.2\%$ F.S.
Repeatability / Reliability	$\leq 0.05\%$ F.S.
Output Signal	4-20 mA (2-wire), 0-10 V, 0-5 V, 0.5-4.5 V; 1.5 mV/V, 2 mV/V (millivolt output variant)
Supply Voltage	24 (12-36) VDC (mA/voltage outputs) 5 VDC (0.5-4.5 V) 10 VDC (mV/V outputs)
Operating Temperature	-20°C to +85°C
Compensated Temperature Range	0°C to +70°C
Overload Pressure	150% F.S.
Wetted Parts Material	Stainless Steel or Hardening Aluminium, hermetically welded
Electrical Connector	Hirschmann (DIN) M12, 4-pin Bendix connector Cable 5-pin (custom design)
Process Connection	G1/2 1/2 BSP 1/2 NPT M22 (custom on request)
Housing Shell Diameter	D22 mm D23 mm D26 mm D38 mm (optional)

Dimensional Reference

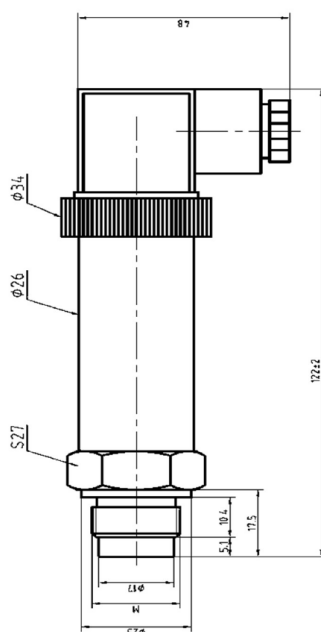

Note: The dimensions shown are for reference only. Various process connectors results in change of dimensional data.

FMPT-612 Pressure Transmitter with LED Display

LED Display

The FMPT-612 adopts advanced electron ceramic technology to deliver exceptional overload resistance, high impact resistance, excellent linearity, and long-term stability. A wide operating temperature range and inherent corrosion resistance make this transmitter suitable for demanding environments across defence, energy, and process industries.

General Features

- Pressure range: -1 to 0 to +2000 bar.
- Local LED display for on-site process indication.
- Advanced ceramics sensor technology for superior durability.
- High accuracy, stable performance, and low temperature drift.
- Overload resistance and high impact resistance with excellent linearity.



Key Specifications

Pressure Range	-1 to 0 to +2000 bar
Accuracy	0.5% F.S.
Output	4-20 mA (2-wire)
Display	Local LED

Industries & Applications


- Defence industry and scientific research.
- Space industry and aerospace applications.
- Petroleum and chemical industry.
- Electric power generation and utilities.
- Marine and oceanographic applications.

Source datasheet verified against: PT124B-216.

General Specifications — FMPT-612 (LED Display)

Parameter	Specification
Model	FMPT-612
Pressure Range	-1 to 0 to +2000 bar
Accuracy	0.5% F.S.
Non-linearity	$\leq 0.2\%$ F.S.
Repeatability / Reliability	$\leq 0.05\%$ F.S.
Output Signal	4-20 mA (2-wire); fault-alarm output optional
Supply Voltage	24 (12-36) VDC, amplified signal
Operating Temperature	-40C to +80C
Compensated Temperature Range	0C to +70C
Overload Pressure	150% F.S.
Wetted Parts Material	Stainless Steel
Electrical Connector	Hirschmann (Big DIN)
Process Connection	G1/4 G1/2 1/2 NPT 1/4 NPT M12x1.5 (custom on request)

Dimensional Reference

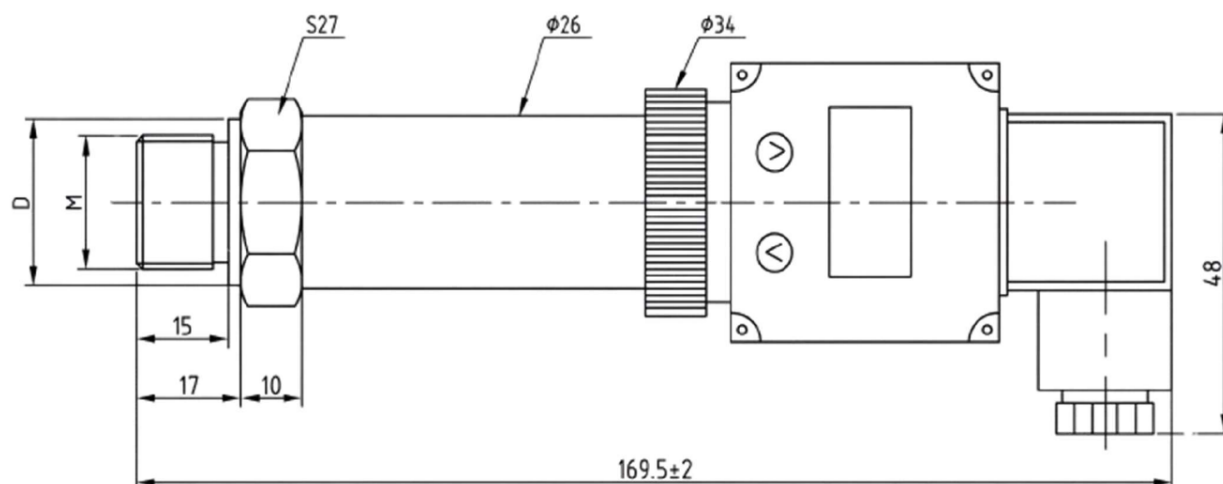

Note: The dimensions shown are for reference only. Various process connectors results in change of dimensional data.

FMPT-712 Pressure Transmitter with Sanitary Clamp

Sanitary Clamp

The FMPT-712 series pressure transmitter features a clamp-style hygienic profile specifically designed for pressure measurement and control in clean, aseptic conditions and applications prone to blockage. An optional integrated LED display enables local process indication. The transmitter is intended to meet the requirements of food, pharmaceutical, and chemical processing environments.

General Features

- Pressure range: -1 to 0 to +45 bar.
- Clamp-profile sanitary design suitable for aseptic applications.
- Various industrial-standard signal outputs available.
- High accuracy and high stability.
- Optional integrated LED display for local indication.



Key Specifications

Pressure Range	-1 to 0 to +45 bar
Accuracy	0.5% F.S.
Output	4-20 mA (2-wire)
Process Conn.	1"/1.5"/2" tri-clamp


Industries & Applications

- Process engineering.
- Chemical industry.
- Food and beverage processing.
- Pharmaceutical and biotechnology facilities.
- Paper and pulp industry.

General Specifications — FMPT-712 (Sanitary Clamp)

Parameter	Specification
Model	FMPT-712
Pressure Range	-1 to 0 to +45 bar
Accuracy	0.5% F.S.
Non-linearity	$\leq 0.2\%$ F.S.
Repeatability / Reliability	$\leq 0.05\%$ F.S.
Output Signal	4-20 mA (2-wire)
Supply Voltage	24 VDC
Operating Temperature	-40C to +80C
Compensated Temperature Range	0C to +70C
Overload Pressure	150% F.S.
Wetted Parts Material	Stainless Steel or Hardened Aluminium
Electrical Connector	Hirschmann (DIN)
Process Connection	1" 1.5" 2" tri-clamp (custom on request)

Dimensional Reference

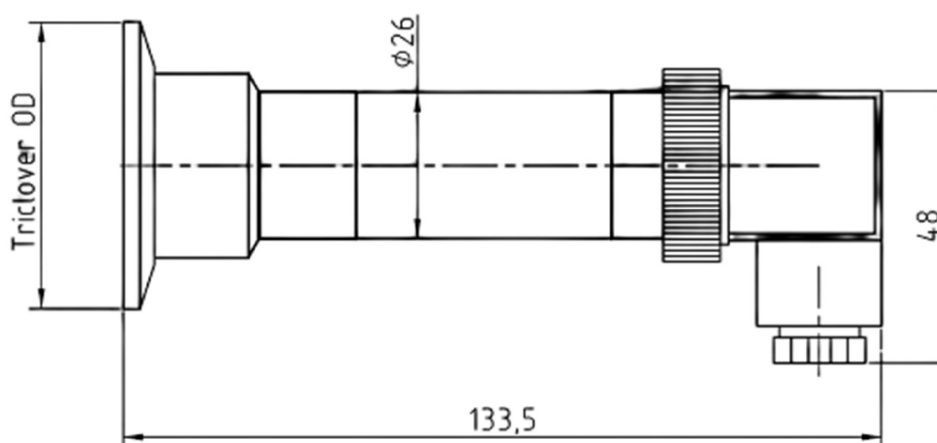

Note: The dimensions shown are for reference only. Various process connectors results in change of dimensional data.

FMPT-812 High-Temperature Industrial Pressure Transmitter

Cooling Element

The FMPT-812 series has been specifically designed to serve industrial pressure measurement applications with elevated process temperature requirements; an integrated cooling element permits medium temperatures up to 150C. The compact and robust construction ensures suitability for process control, machine construction, laboratory measurement, and quality and materials testing equipment.

General Features

- Pressure range: -1 to 0 to +1000 bar.
- Integrated cooling element for medium temperatures up to 150C.
- Various industrial-standard signal outputs available.
- High-accuracy measurement; factory-calibrated, no field adjustment required.



Key Specifications

Pressure Range	-1 to 0 to +1000 bar
Accuracy	0.5% F.S.
Operating Temp.	up to +150C
Output	4-20 mA (2-wire)

Industries & Applications

- Mechanical engineering and machine construction.
- Hydraulics and level measurement.
- Gas tank and pipeline pressure monitoring.
- High-temperature process applications.
- General industrial applications.


Source datasheet verified against: PT124B-218.

General Specifications — FMPT-812 (Cooling Element)

Parameter	Specification
Model	FMPT-812
Pressure Range	-1 to 0 to +1000 bar
Accuracy	0.5% F.S.
Non-linearity	$\leq 0.2\%$ F.S.
Repeatability / Reliability	$\leq 0.05\%$ F.S.
Output Signal	4-20 mA (2-wire), 0-5 V, 0.5-4.5 V (3-wire)
Supply Voltage	24 (12-36) VDC, amplified signal
Operating Temperature	-20C to +150C (with integrated cooling element)
Compensated Temperature Range	0C to +70C
Overload Pressure	150% F.S.
Wetted Parts Material	Stainless Steel or Hardening Aluminium
Electrical Connector	Hirschmann (DIN) M12, 4-pin Bendix connector Cable
Process Connection	G1/4 G1/2 1/2 NPT 1/4 NPT M12x1.5 (custom on request)

Dimensional Reference

Dimension

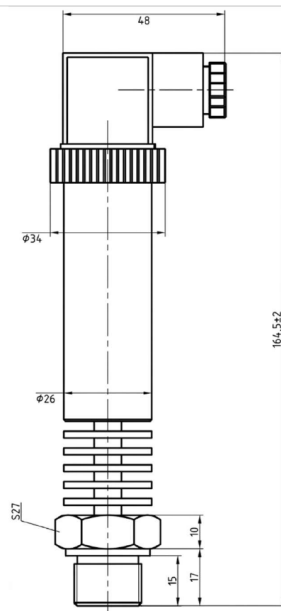

Note: The dimensions shown are for reference only. Various process connectors results in change of dimensional data.