

ThermoWells (TW)

Thermowells in conductive materials are used to separate the thermometer from the media. A thermowell is particularly recommended for applications in high pressure media. In addition, Thermowells protect the thermometers from aggressive media and facilitate replacement of the thermometer without disturbing the media or process.

An extensive range of standard versions is available for a variety of applications. In addition, thermowells are available in special materials and in customised dimensions.

Special Features

Screw fitted and welded versions

For aggressive media

Various standard materials : copper alloys, steel and stainless steel

Large selection of standard versions available

Special process connections as required

Special materials and dimensions as required

Industrial Applications

Pharmaceutical industries

Chemical and petrochemical industries

Process engineering


Food industries

Refineries




Construction of Threaded Bar Stock Thermo-well

Straight

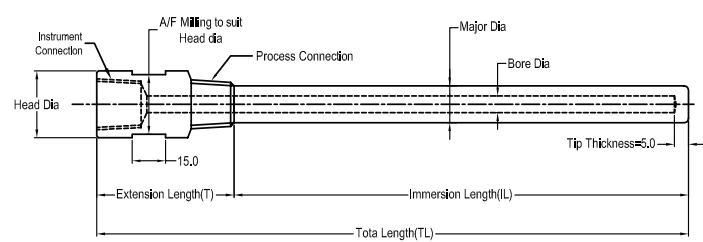


Construction of Flanged End Bar Stock Thermo-well


Straight

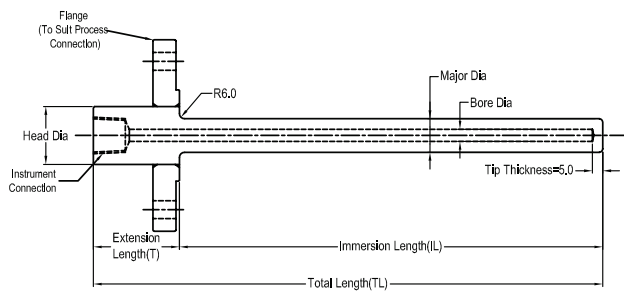


Full - Tapered

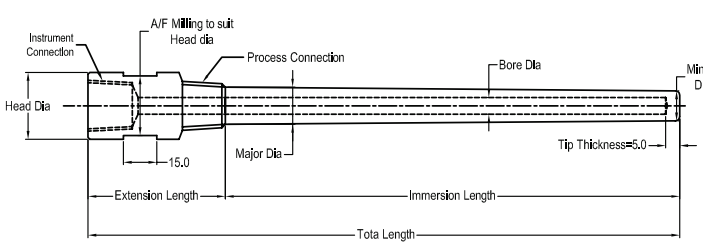


Full - Tapered

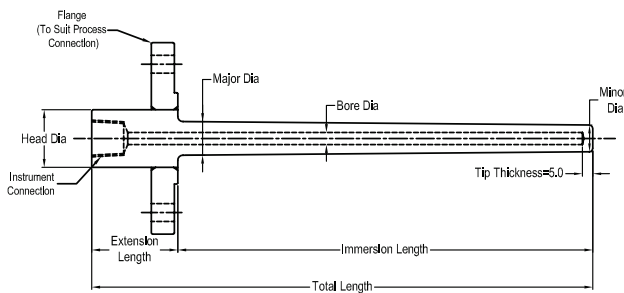


Partial-Tapered

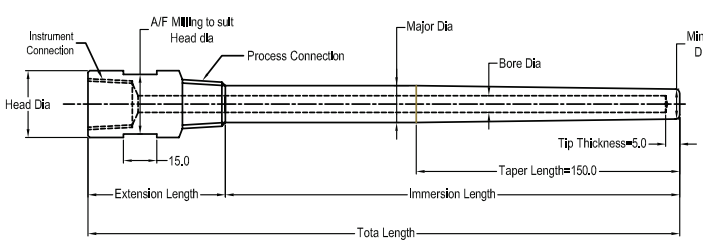


Partial-Tapered

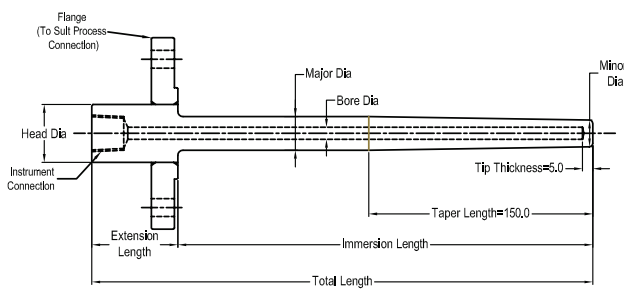

Threaded Fabricated Thermowell (Hex Headed) - Straight

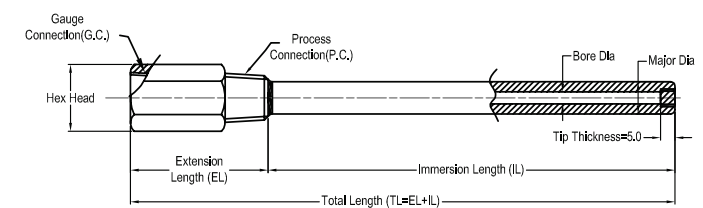

Flanged Fabricated Thermowell - Tapered

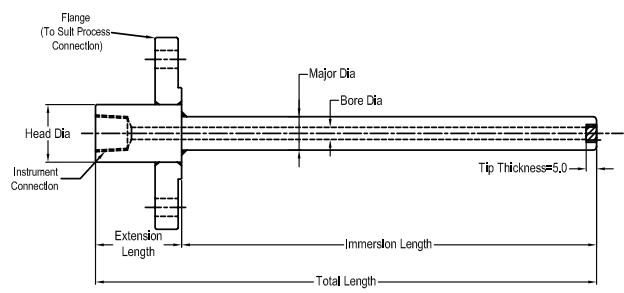

Ordering Information

** * * * * * * * * * *

Model	
Thermowell bar stock – screwed	TS
Thermowell bar stock – flanged	TF
Thermowell fabricated – screwed	FT
Thermowell fabricated – flanged	FF

Construction	
Partial taper	P
Stepped	R
Straight	S
Full taper	T

Instrument Connection Size	
M20 x 1.5P	M
3/8"	B
1/2"	C
1"	E

Instrument Connection Type	
NPT(F)	D
BSP(F)	E
BSPT(F)	F
Metric thread (F)	M

Process Connection Size	
M20 x 1.5P	M
M33 x 2P	N
3/8"	B
1/2"	C
1"	E
1 1/2"	G
2"	H
Not required	Z

Process Connection Type	
NPT(M)	A
BSP(M)	B
BSPT(M)	C
Metric thread (M)	M
#150RF	D
#300RF	E
#600RF	F
#150FF	P
#300FF	Q
#900RTJ	T
Weld-In type	Y

Extension Length	
50 mm (std.)	1
80 mm	2
100 mm	5
150 mm	9
Customized extension length	Z

Immersion Length	
As per requirement (below thread/flange)	

Minor Diameter	
16 mm	A
18 mm	B
22 mm	C
28 mm	E
24 mm	F
26 mm	G
12 mm	I
14 mm	J
Not required	X

Major Diameter	
16 mm	A
18 mm	B
22 mm	C
28 mm	E
24 mm	F
26 mm	G
Customised major diameter	Z

Bore Diameter	
7 mm	A
9 mm	B
11 mm	C
13 mm	E
15 mm	F
Customized bore diameter	Z

Head Size & Type	
25 mm round headed with spanner slots	A
25 mm hex headed	O
28 mm round headed with spanner slots	B
28 mm hex headed	F
36 mm round headed with spanner slots	J
36 mm hex headed	K
45 mm round headed with spanner slots	N
45 mm hex headed	P
Customized head size and type	Z

Note : please specify in case of any special requirements.

Configuration Generation Code

<table border="1"><thead><tr><th>Thermowell - Material of Construction</th></tr></thead><tbody><tr><td>SS 316</td></tr><tr><td>SS 304</td></tr><tr><td>SS 316L</td></tr><tr><td>Monel 400</td></tr><tr><td>SS 310</td></tr></tbody></table>	Thermowell - Material of Construction	SS 316	SS 304	SS 316L	Monel 400	SS 310	<table border="1"><thead><tr><th>Optional Features</th></tr></thead><tbody><tr><td>Thermowell taper/step length – starting from 150 mm to 800 mm</td></tr><tr><td>Sleeves – hastelloy C (1 mm thick)</td></tr></tbody></table>	Optional Features	Thermowell taper/step length – starting from 150 mm to 800 mm	Sleeves – hastelloy C (1 mm thick)				
Thermowell - Material of Construction														
SS 316														
SS 304														
SS 316L														
Monel 400														
SS 310														
Optional Features														
Thermowell taper/step length – starting from 150 mm to 800 mm														
Sleeves – hastelloy C (1 mm thick)														
<table border="1"><thead><tr><th>Flange - Material of Construction</th></tr></thead><tbody><tr><td>SS 316</td></tr><tr><td>SS 304</td></tr><tr><td>SS 316L</td></tr></tbody></table>	Flange - Material of Construction	SS 316	SS 304	SS 316L	<table border="1"><thead><tr><th>Tests and Certificates</th></tr></thead><tbody><tr><td>IBR</td></tr><tr><td>Radiography</td></tr><tr><td>Ultrasonic testing</td></tr><tr><td>Dye penetration testing</td></tr><tr><td>NACE confirmity for wetted parts</td></tr><tr><td>NABL traceability certificate</td></tr><tr><td>Material test certificate for wetted parts</td></tr><tr><td>Special requirement – please specify</td></tr></tbody></table>	Tests and Certificates	IBR	Radiography	Ultrasonic testing	Dye penetration testing	NACE confirmity for wetted parts	NABL traceability certificate	Material test certificate for wetted parts	Special requirement – please specify
Flange - Material of Construction														
SS 316														
SS 304														
SS 316L														
Tests and Certificates														
IBR														
Radiography														
Ultrasonic testing														
Dye penetration testing														
NACE confirmity for wetted parts														
NABL traceability certificate														
Material test certificate for wetted parts														
Special requirement – please specify														

Ordering example : TSSCDCABAAXA1-XXXX (standard selection)



Forbes Marshall
Krohne Marshall
Forbes Marshall Arca
Codel International
Forbes Solar
Forbes Vyncke
Forbes Marshall Steam Systems

Plot No. A-19/2 & T-4/2, I.D.A
Nacharam, Hyderabad - 500 076
Tel : +91-40-27179223, 27171909,
27170732
Fax : +91-40-27173235

Email : sales-gauges@forbesmarshall.com, ccmidc@forbesmarshall.com

All contents herein are the property of Forbes Marshall Private Limited ("FMPL") or Forbes Marshall Steam Systems Private Limited ("FMSSPL"), as the case may be, and having protection under the intellectual property rights. Any reproduction, distribution or disclosure without prior written permission is prohibited. Information in this document is subject to change without notice.

B-85, Phase II, Chakan Indl Area
Sawardari, Chakan, Tal. Khed
Dist. Pune - 410 501. INDIA
Tel : 91(0)2135-393400

A-34/35, MIDC H Block
Pimpri, Pune - 411 018. INDIA.
Tel : 91(0)20-27442020, 39851199
Fax : 91(0)20-27442040

CIN No.: U28996PN1985PTC037806
www.forbesmarshall.com