

FMTT-612 Isolated Head Mount Smart Temperature Transmitter

General Features


Universal input supports RTD: Pt100, Cu50, Cu100; Thermocouple: K, J, S, R, N. Provides 2-wire 4-20mA output with up to 1200V isolation between input and output. Built-in cold junction compensation ensures high accuracy: 0.1% F.S. for RTD, 0.2% F.S. for TC. Configurable via PC software or Android smartphone. USB cable draws power directly from PC, no separate 24VDC power source required.

Ordering Information

FMTT-612 --- 4-20mA output (programmable via PC or Android smart phone), Isolated version. The configuration can be done via PC software or Android smart phone. Connect the transmitter with PC using the special programming cable provided. The USB cable can draw power directly from the PC, so no separate 24VDC power source is needed. Input and output are isolated up to 1500VAC, making it suitable for applications where galvanic isolation is required.



Dimension

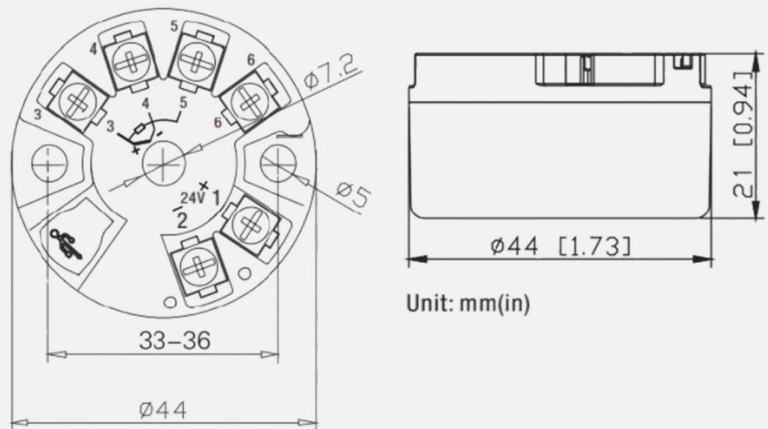

General Features

- Universal input : RTD (Pt100);
: Thermocouple (K, J, S, R, N)
- 2-wire 4-20mA output
- Input configurable via PC software and Android smart phone
- Built-in cold junction compensation
- Can be installed in Form B connection box
- High accuracy: 0.1% for RTD, 0.2% for TC
- USB configuration cable draws power directly from PC (no separate 24 VDC required)
- Surge protection and reverse connection protection
- Up to 1500V isolation between input/output (source)

Industries & Applications

- Chemical & Petrochemical Plants
- Pharmaceutical & Biotechnology Facilities
- Power Generation & Utilities
- Oil & Gas (Upstream, Midstream & Downstream)
- Water & Wastewater Treatment
- Food & Beverage Processing
- Pulp & Paper Industry
- Metals, Cement & Mining
- HVAC & Building Automation
- OEM Machinery & Packaged Skids
- Automation, PLC & DCS Systems
- Refineries & Industrial Utilities
- Renewable Energy Systems

General Specifications – FMTT-612 (Isolated Head Mount Smart Temperature Transmitter)

Model	: FMTT-612
Sensor Type	: RTD: Pt100, Cu50, Cu100 (Pt1000 and WRe custom made)
	: Thermocouple: K, J, S, R, N
Cold End Junction Compensate Range	: -40°C to +80°C
Compensate Accuracy	: ±1°C
Accuracy (Ambient 20°C)	: 0.1% F.S for RTD
	: 0.2% F.S for TC
Temperature Drift	: 0.01% F.S/°C
Response Time	: 1ms to 90% of maximum output
Output Signal	: 4-20mA (2-wire)
Input Break Output Current Value	: 21mA
Power Supply	: 12-35VDC
Load Resistance	: $RL \leq (U_e - 12)/0.021$
Over Range Alarm Value	: IH=20.8mA, IL=3.9mA
Input/Output Isolation Strength	: 1500VAC
Working Temperature	: -40°C to +80°C
EMC Standard	: IEC 61326-1
Input/Output Impedance	: Isolation
Mounting Screws	: M4*2
Measuring Range	: RTD: Pt100: -200~600°C, TC: B: 400~1800°C, J/K: -100~1372°C, R/S: -50~1760°C



Forbes Marshall
Krohne Marshall
Forbes Marshall Arca
Codel International
Forbes Solar
Forbes Vyncke
Forbes Marshall Steam Systems

Plot No. A-19/2 & T-4/2, I.D.A Nacharam,
Hyderabad - 500 076
Tel: +91-40-27179223, 27171909, 27170732
CIN: U241111TG1991PTC013030

B-85, Phase II, Chakan Indl Area
Sawardari, Chakan, Tal. Khed Dist.

A-34/35, MIDC H Block, Pimpri, Pune-411 018. INDIA.
Tel: 91(0)20-27442020, 39851199
Tel: 91(0)2135-393400 CIN No.: U28996PN1985PTC037806

Email: sales-gauges@forbesmarshall.com, ccmidc@forbesmarshall.com www.forbesmarshall.com

© All rights reserved. Any reproduction or distribution in part or as a whole without written permission of Forbes Marshall Pvt Ltd, its associate companies or its subsidiaries ("FM Group") is prohibited.

Information, designs or specifications in this document are subject to change without notice. Responsibility for suitability, selection, installation, use, operation or maintenance of the product(s) rests solely with the purchaser and/or user.

The contents of this document are presented for informational purposes only. FM Group disclaims liabilities or losses that may be incurred as a consequence of the use of this information.