

FMTT-712 HART Smart Head Mount Temperature Transmitter

General Features


The TT-FMTT-712 is a HART Smart DIN B Head Mount Temperature Transmitter. It features universal input support for RTD and Thermocouple, Voltage, and resistance. It offers 4-20mA + HART 7 output, configurable via PC software and field configurator.

Ordering Information

The FMTT-712 is a drop-in replacement for the Rosemount 248 model, inheriting its standard HART 7 protocol. It accepts universal input including RTD (Pt100, Pt1000, Cu100, Cu50), Thermocouples (K, E, S, B, J, T, R, N, WRe5, WRe3), Resistance, and Voltage, and converts these to a stable 4-20 mA + HART 7 output. With 1500 VAC galvanic isolation between input, output, and power supply, the FMTT-712 delivers high accuracy (0.1% for RTD, 0.2% for TC) and robust surge and reverse-connection protection. It can be installed in Form B connection boxes and configured via PC software or field configurator, making it ideal for demanding industrial temperature measurement applications.



Dimension

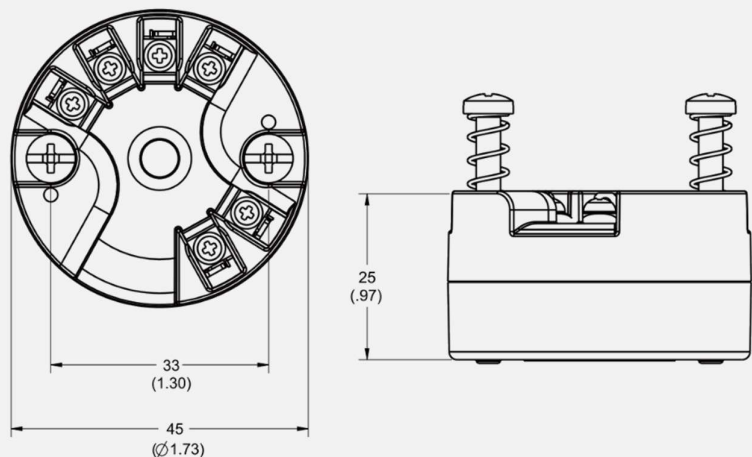

General Features

- Universal input support: RTD and Thermocouple, Voltage, resistance
- Output 4-20mA + HART 7
- Input configurable via PC software and field configurator
- Compatible with Rosemount 275, 375 and other mainstream field configurators
- Input/output/power supply isolated with each other
- Can be installed in Form B connection box
- High accuracy: 0.1% for RTD, 0.2% for TC
- 12-35 VDC power supply
- Surge protection and reverse connection protection
- 1500 VAC galvanic isolation

Industries & Applications

- Chemical & Petrochemical Plants
- Pharmaceutical & Biotechnology Facilities
- Power Generation & Utilities
- Oil & Gas (Upstream, Midstream & Downstream)
- Water & Wastewater Treatment
- Food & Beverage Processing
- Pulp & Paper Industry
- Metals, Cement & Mining
- HVAC & Building Automation
- OEM Machinery & Packaged Skids
- Automation, PLC & DCS Systems
- Refineries & Industrial Utilities
- Renewable Energy Systems

General Specifications – FMTT-712 (HART Smart Head Mount Temperature Transmitter)

Model	: FMTT-712
Sensor Type	: RTD: Pt100, Pt1000, Cu100, Cu50
	: Thermocouple: K, E, S, B, J, T, R, N, WRe5, WRe3; Resistance, Voltage
Operating / Storage Temperature	: -30°C to +80°C (Operating) / -40°C to +120°C (Storage)
Housing Material	: PA66
Accuracy (Ambient 20 °C)	: RTD: ±0.1% of Full Scale
	: TC: ±0.2% of Full Scale
Temperature Drift	: ≤25 ppm/°C F.S
Energizing Current for Sensor	: 210 µA
Output Signal	: 4-20mA + HART 7
Sensor Break Output Current	: 20.8 mA
Power Supply	: 12–35 VDC
Load Resistance	: 250Ω or 500Ω
Protection	: Surge and reverse connection
Isolation	: 1500 VAC galvanic isolation
Ambient Temperature	: -30°C to +80°C
Warranty	: 12 months
Mounting Type	: DIN B Head Mount, Form B connection box compatible
Mounting Screws	: M3*2
Measuring Range	: RTD: -200 to 600°C; TC: up to 2300°C (WRe5); Resistance: 0-4000Ω; Voltage: -800mV to +800mV



Forbes Marshall
Krohne Marshall
Forbes Marshall Arca
Codel International
Forbes Solar
Forbes Vyncke
Forbes Marshall Steam Systems

Plot No. A-19/2 & T-4/2, I.D.A Nacharam,
Hyderabad - 500 076
Tel: +91-40-27179223, 27171909, 27170732
CIN: U241111TG1991PTC013030

B-85, Phase II, Chakan Indl Area
Sawardari, Chakan, Tal. Khed Dist.

A-34/35, MIDC H Block, Pimpri, Pune-411 018, INDIA.
Tel: 91(0)20-27442020, 39851199
Tel: 91(0)2135-393400 CIN No.: U28996PN1985PTC037806

Email: sales-gauges@forbesmarshall.com, ccmidc@forbesmarshall.com www.forbesmarshall.com

© All rights reserved. Any reproduction or distribution in part or as a whole without written permission of Forbes Marshall Pvt Ltd, its associate companies or its subsidiaries ("FM Group") is prohibited.

Information, designs or specifications in this document are subject to change without notice. Responsibility for suitability, selection, installation, use, operation or maintenance of the product(s) rests solely with the purchaser and/or user.

The contents of this document are presented for informational purposes only. FM Group disclaims liabilities or losses that may be incurred as a consequence of the use of this information.