

# FRC JAVA PROGRAMMING

---

CREATED BY TAYLER UVA  
FRC TEAM 3255 - THE SUPERNURDS

[GITHUB.COM/TAYLERUVA](https://github.com/tayleruva)  
[SUPERNURDS.COM](http://supernurds.com)

# TABLE OF CONTENTS

- ▶ Learning the basics
- ▶ [Part A: The roboRIO](#)
- ▶ [Part B: Sensors](#)
- ▶ [Part C: Software installation and setup](#)
- ▶ [Part D: WPILib and Programming Basics](#)
- ▶ Optional - Installing 3rd Party Libraries
- ▶ [Part E: Installing CTRE CANTalon Libraries](#)
- ▶ [Part F: Installing KauaiLabs navX Libraries](#)
- ▶ Programming for an FRC Robot
  - ▶ [Part 1: Creating a Basic Driving Robot](#)
  - ▶ [Part 2: Using Pneumatics](#)
  - ▶ [Part 3: Using Sensors and Switches](#)
  - ▶ [Part 4: Using SmartDashboard](#)
  - ▶ [Part 5: Using RobotPreferences](#)
  - ▶ [Part 6: Creating an Autonomous Command](#)
  - ▶ [Part 7: Getting started with PID](#)

Note: This tutorial builds on itself and will not repeat the same tasks for each new section.  
Please read previous sections if there is a part you are confused with.



## PARTS A-F: STEP AND BASICS OF WPILIB AND PROGRAMMING

---

# LEARNING THE BASICS



**PART A:**  
**THE BRAINS OF THE BOT**  

---


**THE ROBORIO**

## THE ROBORIO

- ▶ The roboRIO is the brain of a FRC robot.
- ▶ It is the main processing unit and is where the code is stored and run.
- ▶ It is very similar to something like a Raspberry Pi, it's a mini computer!
- ▶ The roboRIO has many different interfaces to connect it to motor controllers, servos, and sensors. Some include:
  - ▶ Digital I/O, PWM, CAN Bus, Ethernet, USB, MXP

# THE ROBORIO IO

- ▶ Digital IO (DIO) used for sensors and switches
- ▶ PWM used for motor controllers and servos
- ▶ CAN used for motor controllers and sensors
- ▶ MXP used for functionality expansion
- ▶ Check the roboRIO [user manual](#) for more details

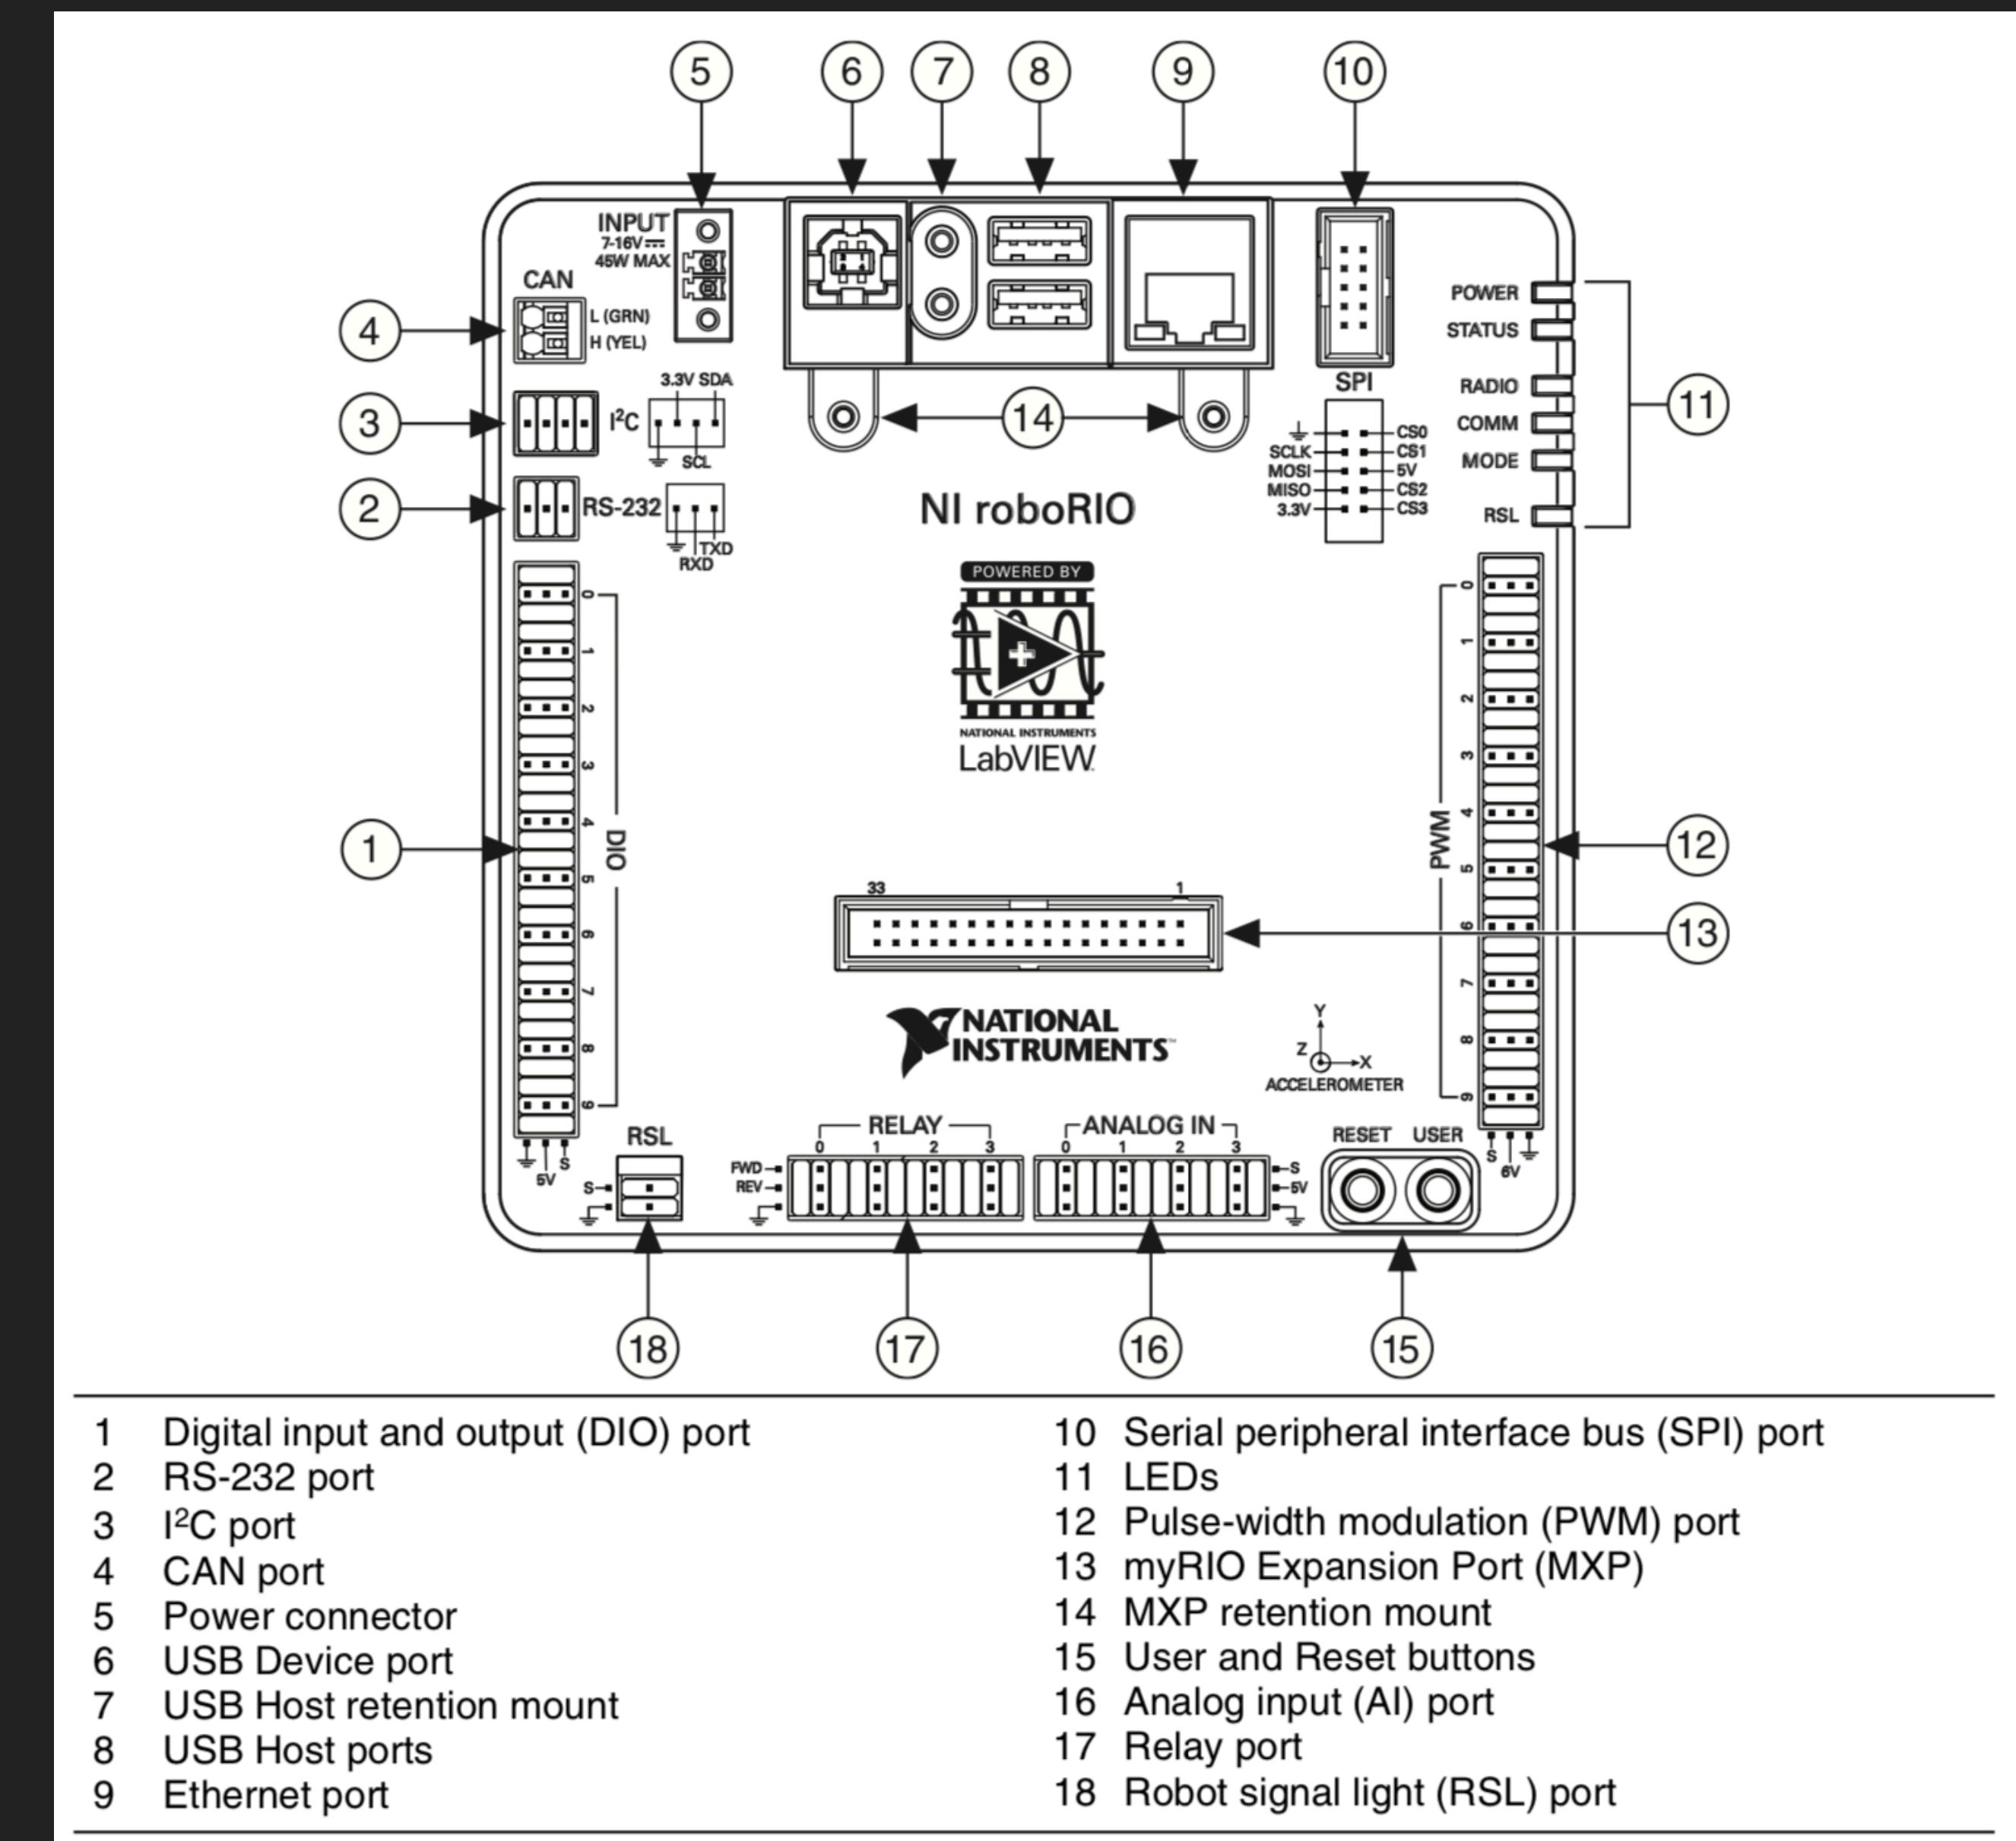



**PART B:**  
**HOW DOES THE ROBOT SEE?**

---

**SENSORS**

## SOME TYPES OF SENSORS


- ▶ Limit Switches - detects contact
- ▶ Camera - provide sight
- ▶ Encoders - measures rotational or linear motion
- ▶ Ultrasonic - measures distances
- ▶ Gyroscope - measures orientation
- ▶ Processed Vision - measures targets distance, angle, and offset from robot
  - ▶ See more info on [NURDVision](#)
  - ▶ For more info on sensors see: [High Tech High Top Hat Technicians - Electrical Tutorial](#)



Limit Switch



Grayhill brand  
Quadrature  
Encoder

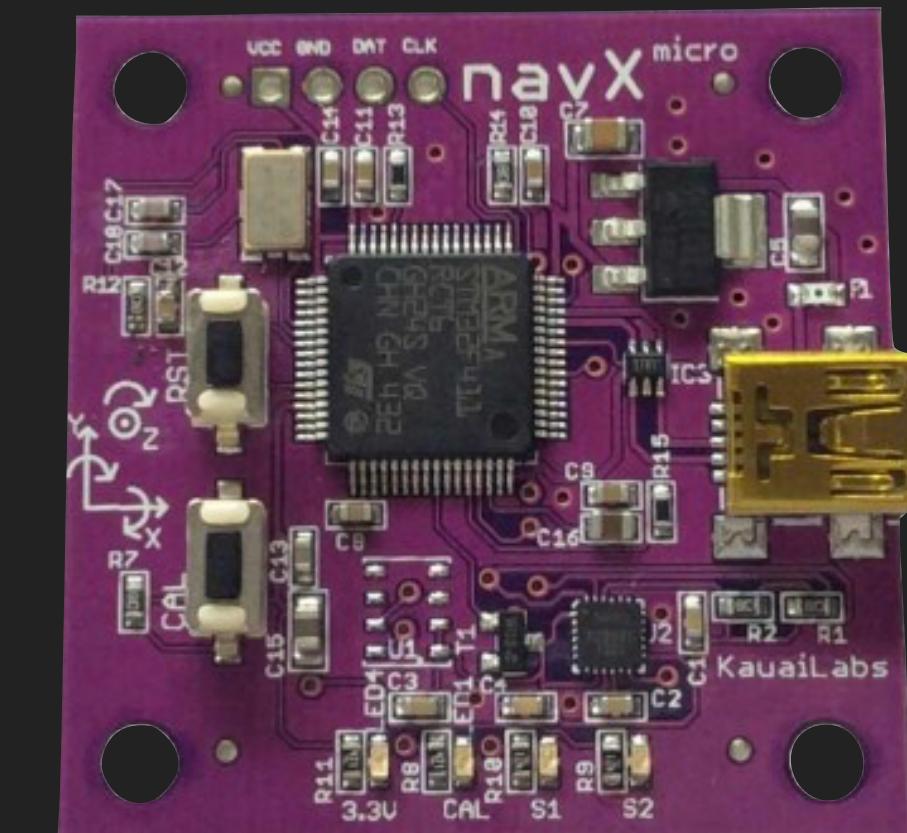

[Kauai Labs navX](#)  
Gryo / Accelerometer



**PART C:**  
**LETS GET STARTED**

---

**INSTALLING  
NECESSARY SOFTWARE**

# PLEASE FOLLOW OFFICIAL FIRST INSTALLATION GUIDES

All these steps must be **COMPLETED** and in **THIS ORDER!**

Official FIRST Installation Guides:

[Installing Eclipse \(C++/Java\)](#)

[Installing the FRC Update Suite \(All Languages\)](#)

[Imaging your roboRIO](#)

[Installing Java 8 on the roboRIO using the FRC roboRIO Java Installer](#)

These links should automatically update for the 2018 season.





**PART D:**  
**WHAT DOES THIS ALL MEAN?**  

---

**WPILIB AND GENERAL  
PROGRAMMING BASICS**

# GENERAL PROGRAMMING BASICS

```
int total;
bool isFinished;

int calculateSum();

int add(num1, num2);

double half(int num1){
    double multiplier = 0.5;
    return num1*multiplier;
}

int value;
void increment(){
    value++;
}

//This is a comment
```

- ▶ Variables - objects that contain data, they are characterized by date type.
- ▶ Methods/Functions - can be thought of as subprograms or routines that run inside of your main program.
- ▶ Parameters - variables that are passed (sent to) a method for it to use.
- ▶ Scope - where a variable can be seen.
  - ▶ A variable created in a method can only be seen in that method. This is a **local** variable.
  - ▶ A variable created outside a method can be seen in all methods of that class (file). This is a **global** variable.
- ▶ Comment - a programmer-readable explanation or annotation in the source code of a program. It does not affect what the code does.

## GENERAL PROGRAMMING BASICS

- ▶ Programs use key words to define characteristics of variables or objects.
- ▶ Some data types for variables:
  - ▶ int - integers (whole numbers)
  - ▶ double - double precision floating point (fractional/decimal values)
  - ▶ boolean - true or false (true = 1 or false = 0) values.
- ▶ Other keywords:
  - ▶ void - a method that returns no value
  - ▶ public - an object accessible by other classes (files)
  - ▶ private - an object only accessible by its containing class (file).
  - ▶ protected - like private but can be seen by subclasses
  - ▶ return - value to return or give back after method execution (run).

## GENERAL PROGRAMMING BASICS

- ▶ There are also many different conventions when programming, this ensures that programs are readable between different people.
- ▶ A common naming convention:
  - ▶ Programming is often done in CamelCase or lowerCamelCase
    - ▶ Multiple words that are joined together as a single word with the first letter of each of the multiple words capitalized so that each word that makes up the name can easily be read
    - ▶ For example:
      - ▶ ThreeMotorDrive
      - ▶ driveForward
      - ▶ setSpeed
    - ▶ There are other naming conventions but for this tutorial we will use the camel cases

## WPILIB - COMMAND BASED ROBOT

- ▶ For our programming tutorial we will be creating a Command based robot
- ▶ A command based robot is made up of 3 packages (folders) labeled `.robot`, `.commands`, and `.subsystem`
- ▶ Broken down into **subsystems** and **commands**.
- ▶ Command Based Robots are much like Legos, with very basic pieces you can make something **simple** like a house or **complicated** like a replica StarWars Millennium Falcon
- ▶ There are other types of robots but we will use Command Based

## WPILIB - COMMAND BASED ROBOT - SUBSYSTEMS

- ▶ A **subsystem** in programming (like in mechanical) is a subpart of the whole robot. (i.e. Drivetrain, Collector).
- ▶ Here we define the components subsystem is made up of.
- ▶ Defining motor controllers, sensors, etc.
- ▶ Using a dog as an example: the **legs**, **tail**, and **head** are a **subsystems**.
- ▶ The head is made up of eyes, nose, ears.

# WPILIB - COMMAND BASED ROBOT - COMMANDS


- ▶ A **command** tells the robot to do something. (i.e. MoveForward).
  - ▶ A **command** is an action a **subsystem(s)** performs.
  - ▶ Telling a dog the **command MoveForward** will make the **subsystem "legs"** move forward.
  - ▶ A **command** calls a **method(s)** from a **subsystem(s)** to make something happen.
    - ▶ **setSpeed(1.0)**
    - ▶ You teach a dog the command "**chase**" by having him **setSpeed(1.0)** (run) from his "**legs**" subsystem
    - ▶ When you yell **chase** he will start running at full speed
  - ▶ For example, I have a **Drivetrain** subsystem with the method **setSpeed**. I then tell the robot to run the command **DriveForward** which uses the **setSpeed** method from Drivetrain.

## WPILIB - COMMAND BASED ROBOT - METHODS

- ▶ Subsystems and Commands are made up of methods or functions.
- ▶ A **method** defines what a **subsystem** or **command** is able to do or modify (i.e. **setSpeed**, **resetEncoders**)
- ▶ A dog's tail is able to wag and its legs are able to move at a certain speed
- ▶ **Subsystem legs** has method **setSpeed**

## WPILIB - COMMAND BASED ROBOT - SUMMARY

- ▶ A **subsystem** is a part of a whole. A **method** is what each part can do. And a **command** tells the whole to do something and which parts (**methods**) its needs to do it.
- ▶ A Dog has **legs (subsystem)**. Its **legs** can **setSpeed(command)**. You can tell him **chase(command)** which will make him use his **legs(subsystem)** to run at full speed (**setSpeed (method)**)

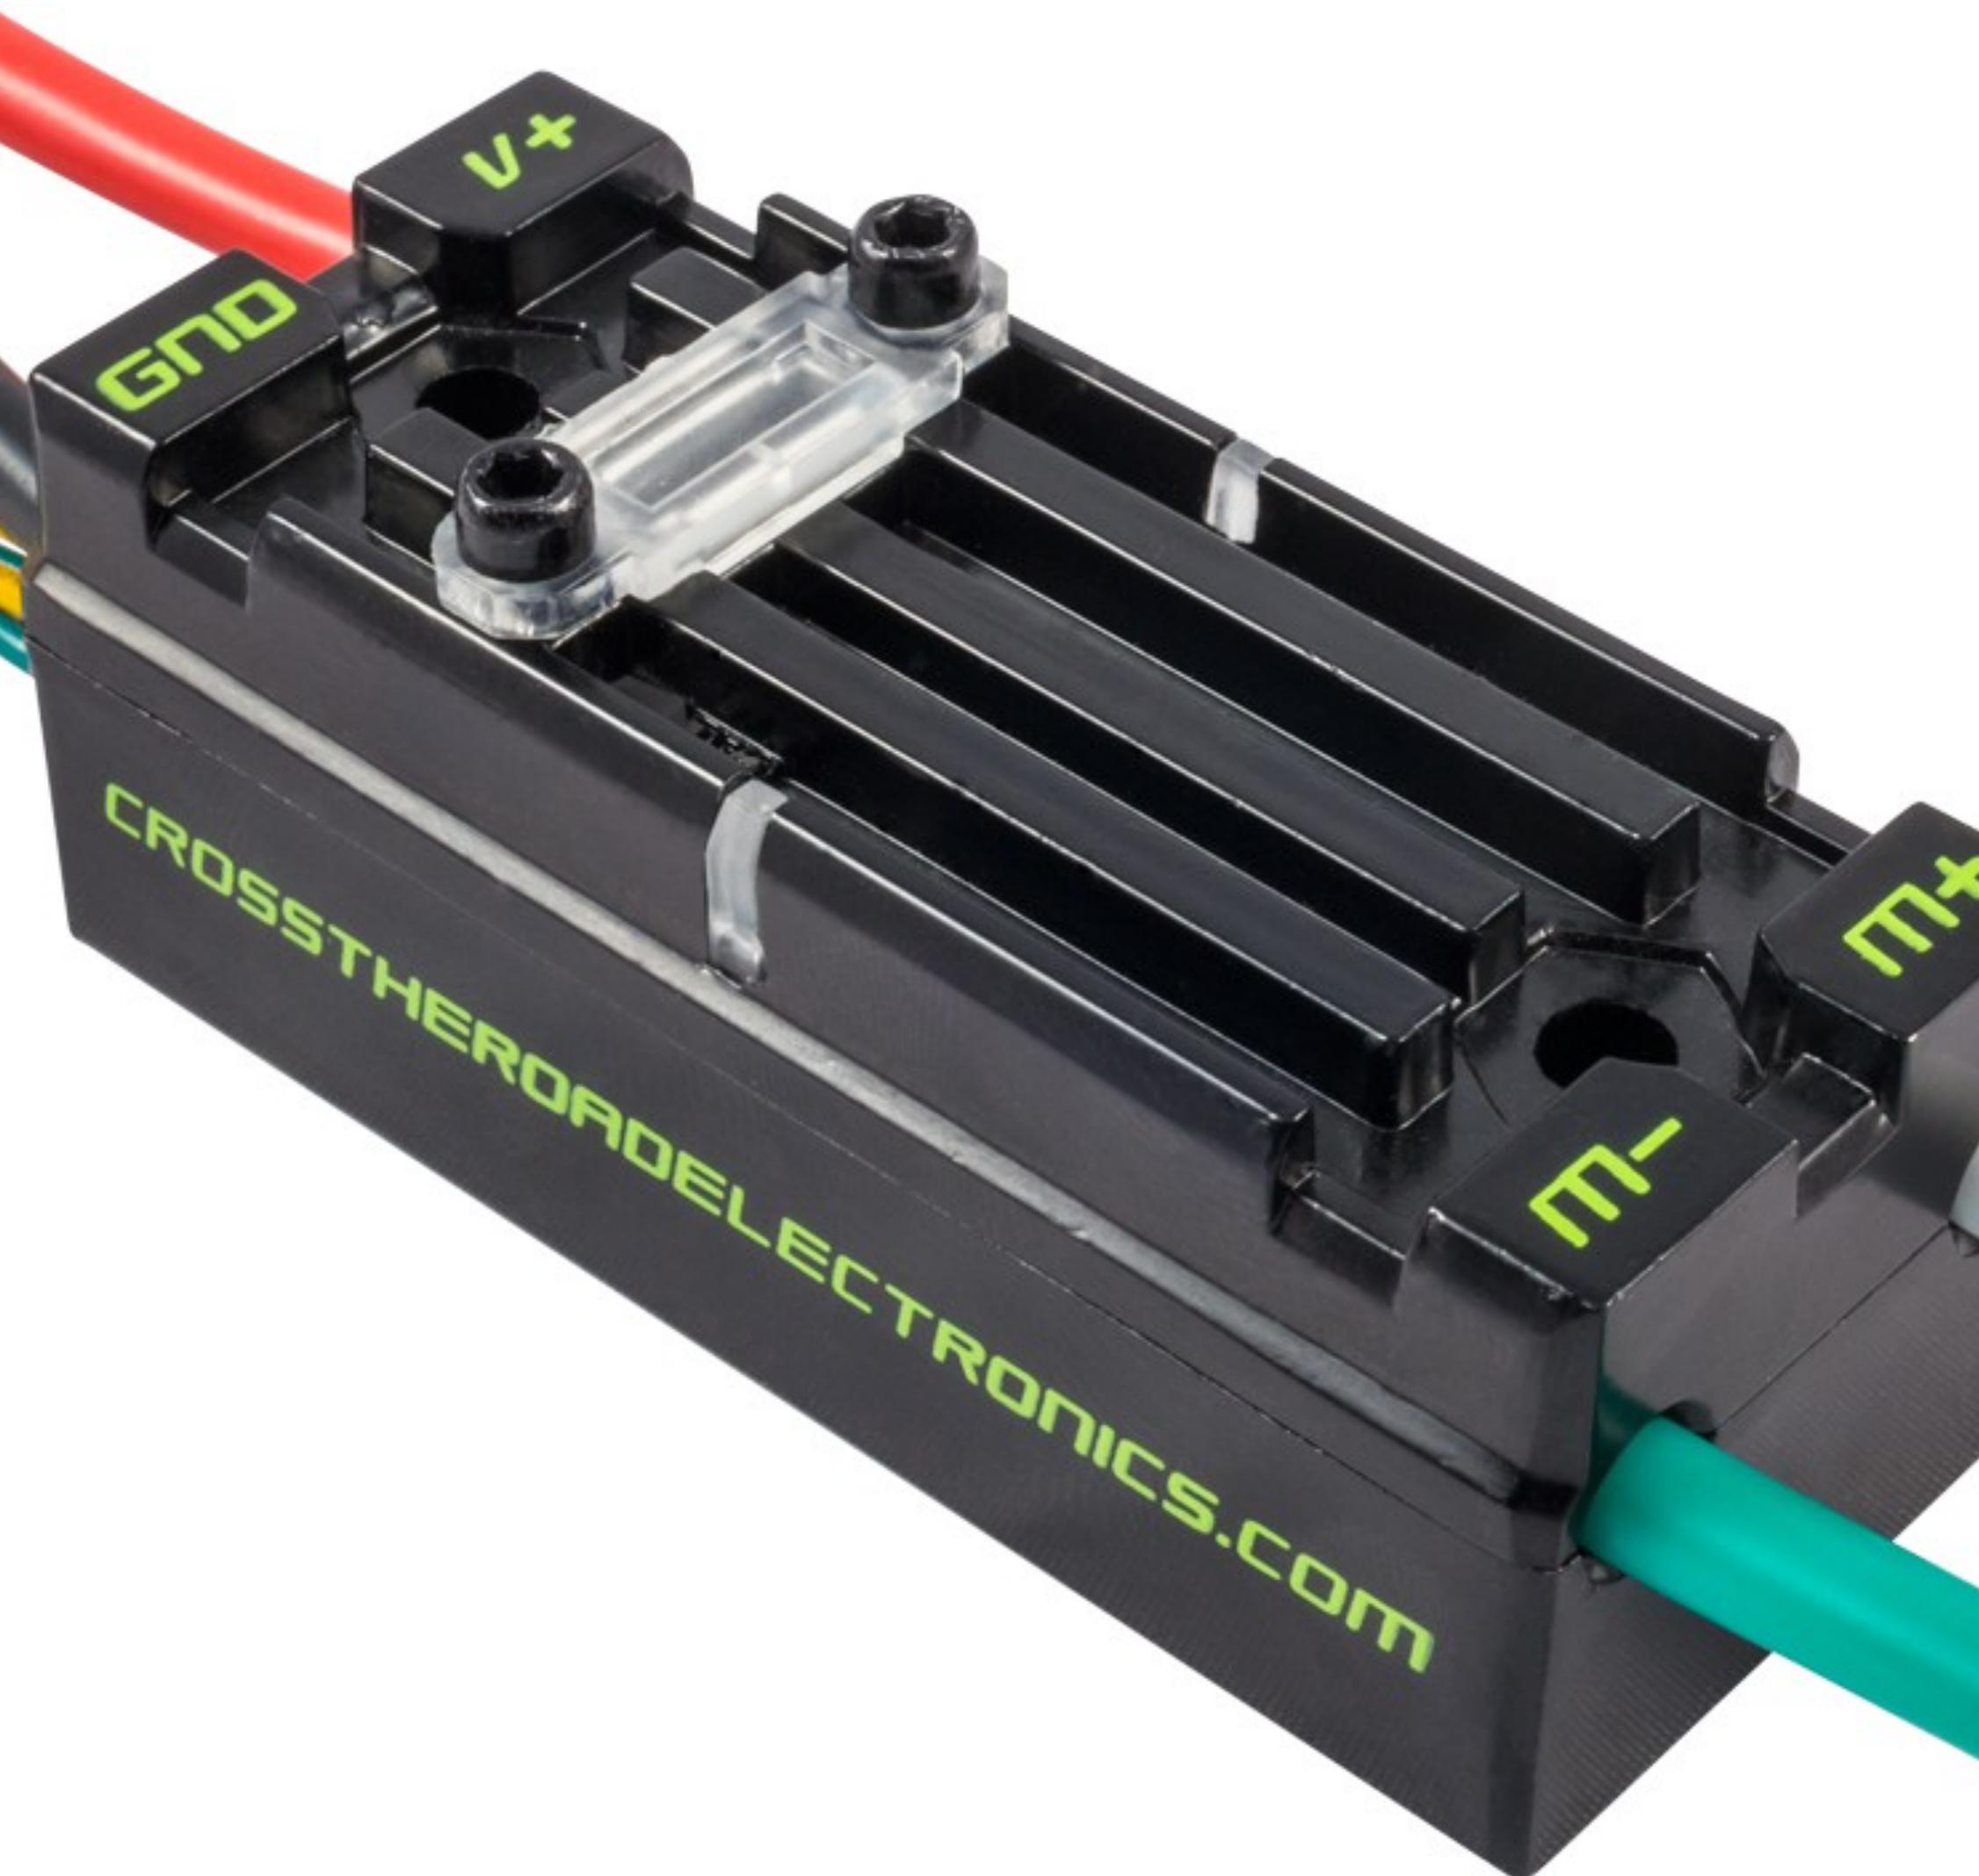


THIS SECTION HAS NOT YET BEEN CREATED

**PART E:**  
**SETTING UP A TALON SRX**  

---

**INSTALLING CTRE  
CANTALON LIBRARIES**

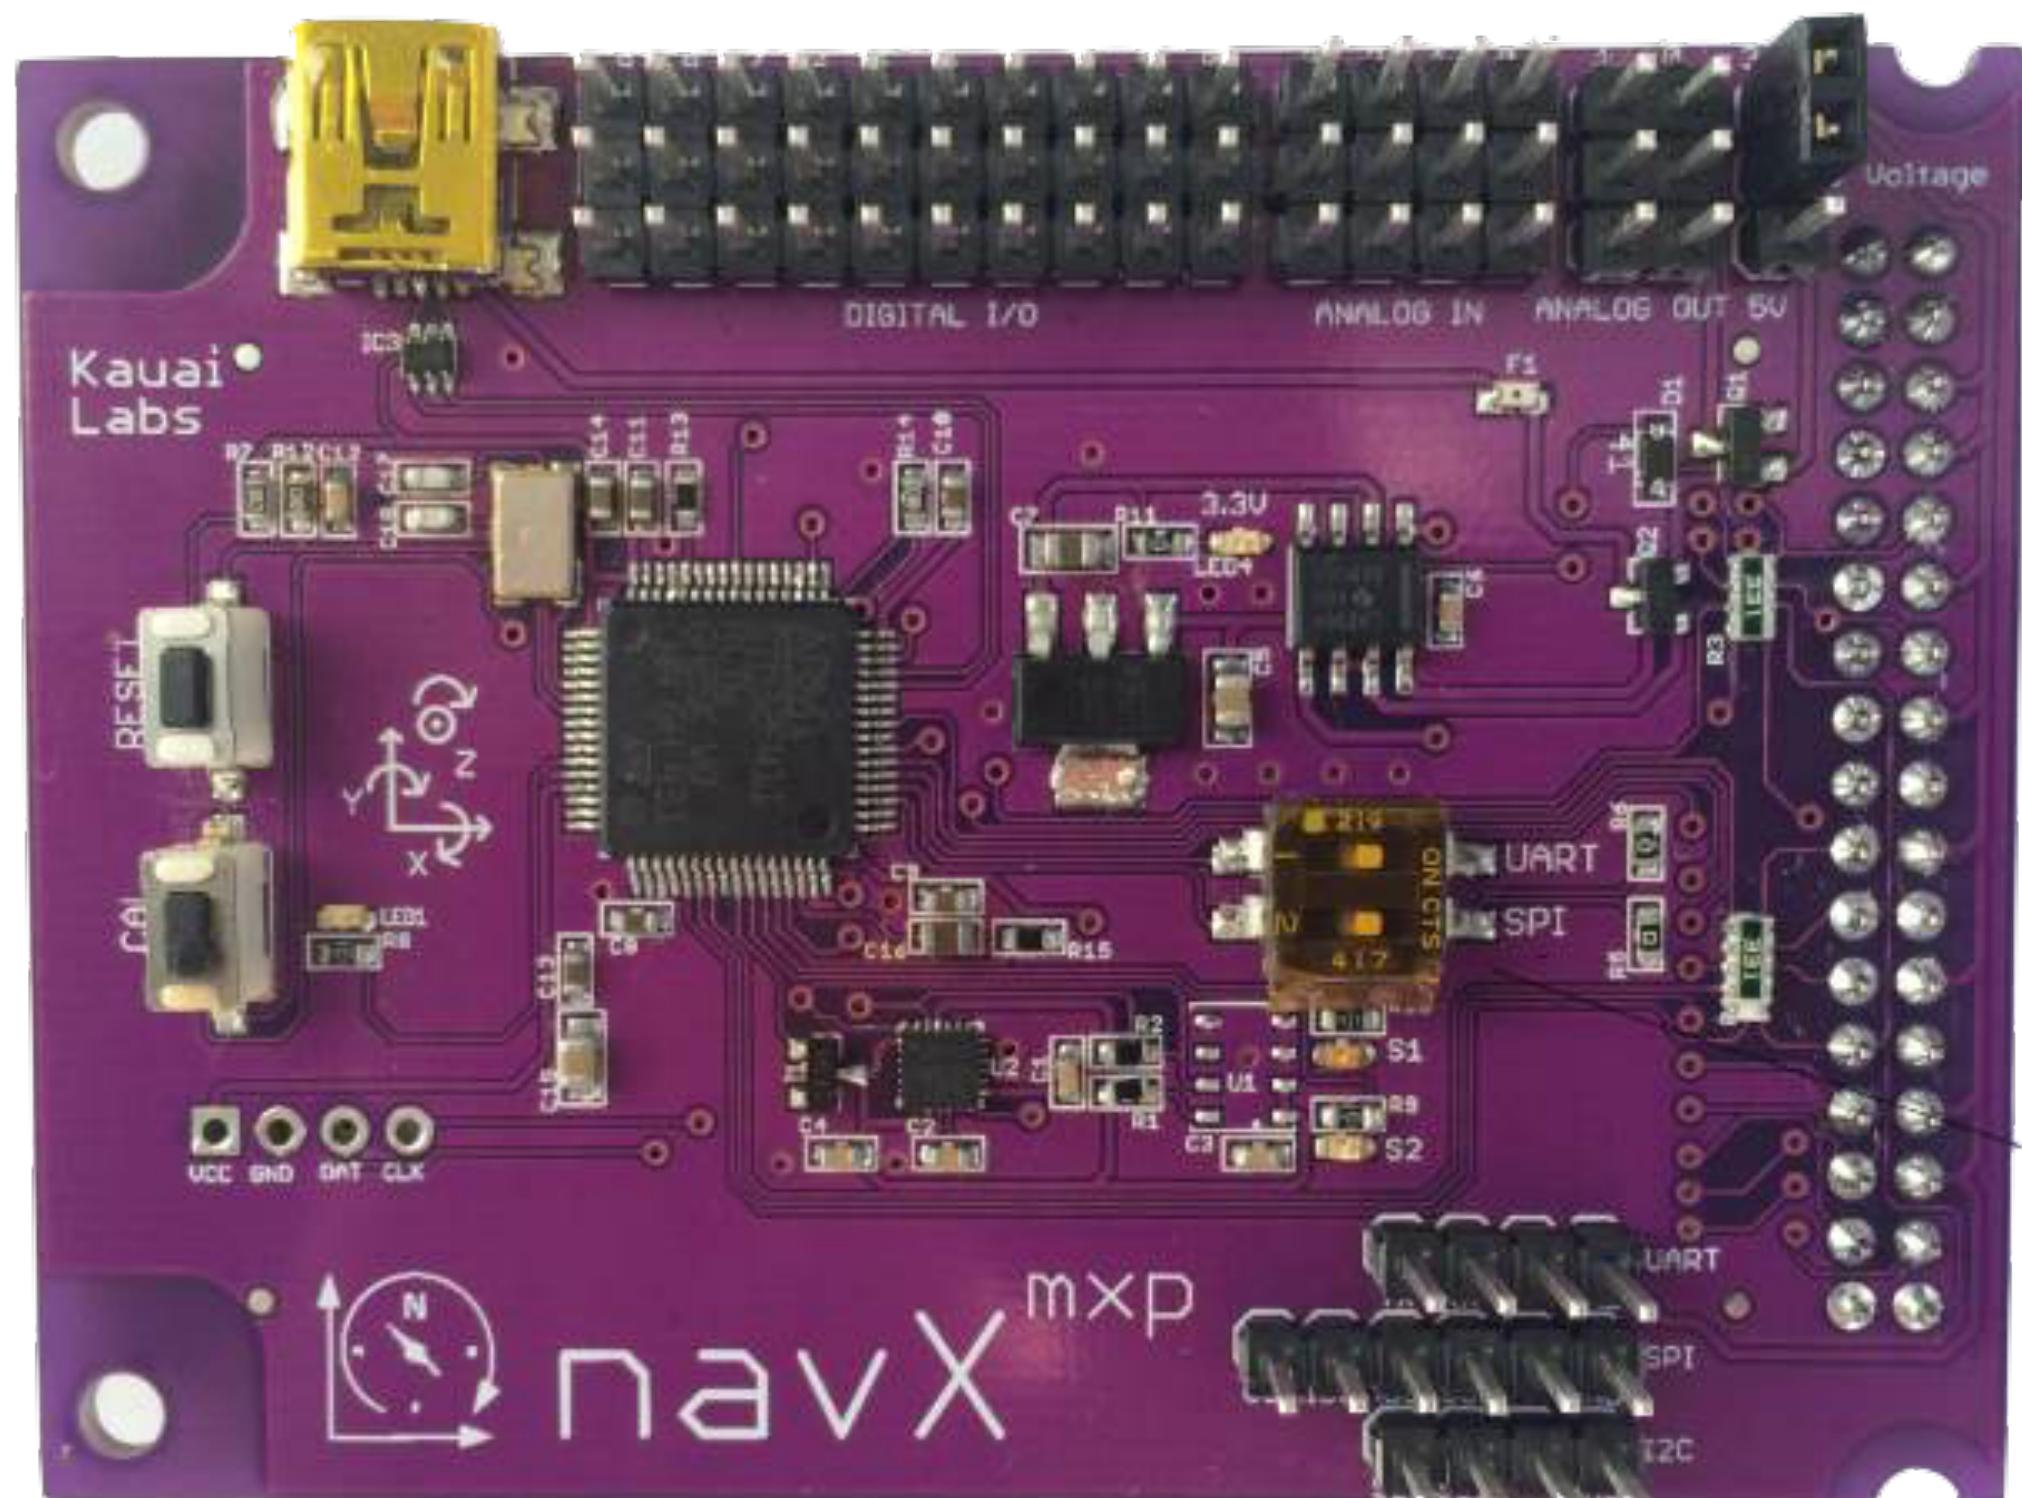

THIS SECTION HAS NOT YET BEEN CREATED

## PART F: SETTING UP THE NAVX


---

# INSTALLING KAUAILABS NAVX LIBRARIES

# PARTS 1-7: PROGRAMMING IN JAVA WITH WPILIB

---

# PROGRAMMING FOR AN FRC ROBOT

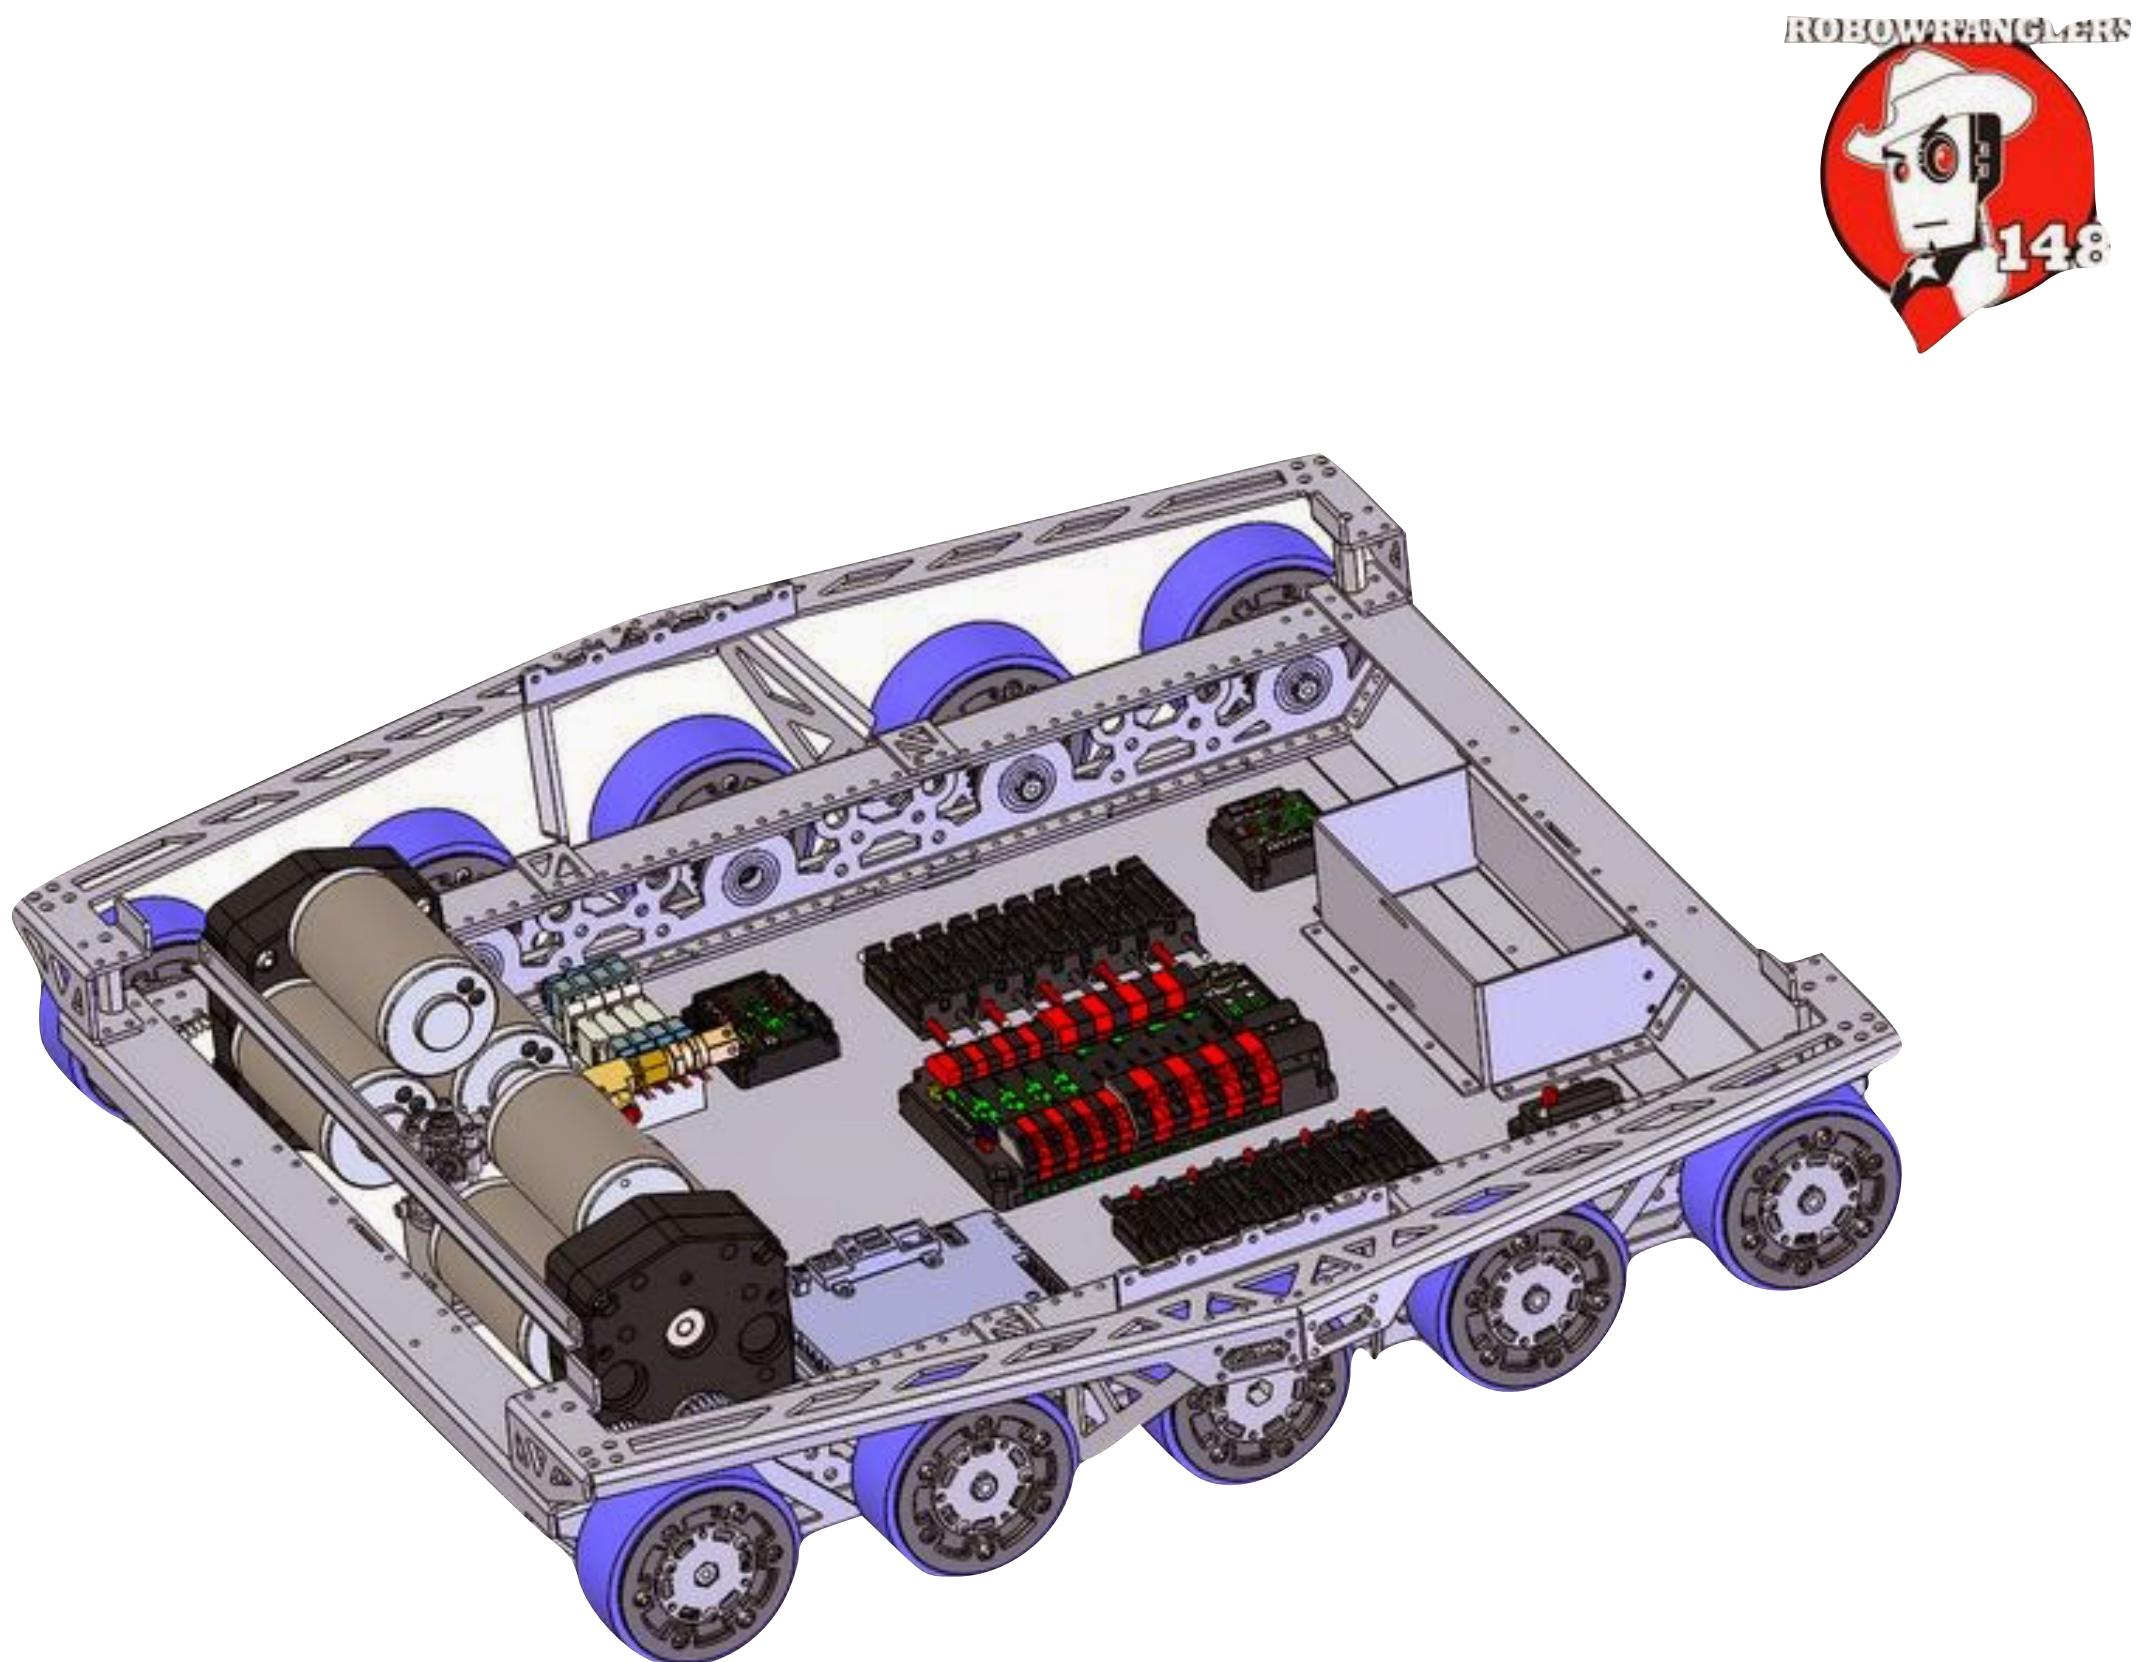

**PART 1:**  
**LETS GET MOVING**

---

**CREATING A BASIC  
DRIVING ROBOT**



WHAT IS IN THIS ROBOT?

---

CREATING THE DRIVETRAIN  
SUBSYSTEM




## CREATING A NEW PROJECT

- ▶ Select File -> New -> Other -> WPILIB Robot Java Development -> Robot Java Project -> Command-Based Robot
  - ▶ Control (Mac OS: Command) N will bring up new -> other dialogue box - we will use this method from now on.
- ▶ If prompted, input your team number (this can be changed later in Preferences -> WPILib Preferences)
- ▶ Choose a name for your project (i.e. Robot2018)
  - ▶ You can also change the robot portion of the package to more easily identify different robot programs you have. (This is completely optional)
- ▶ Select Finish

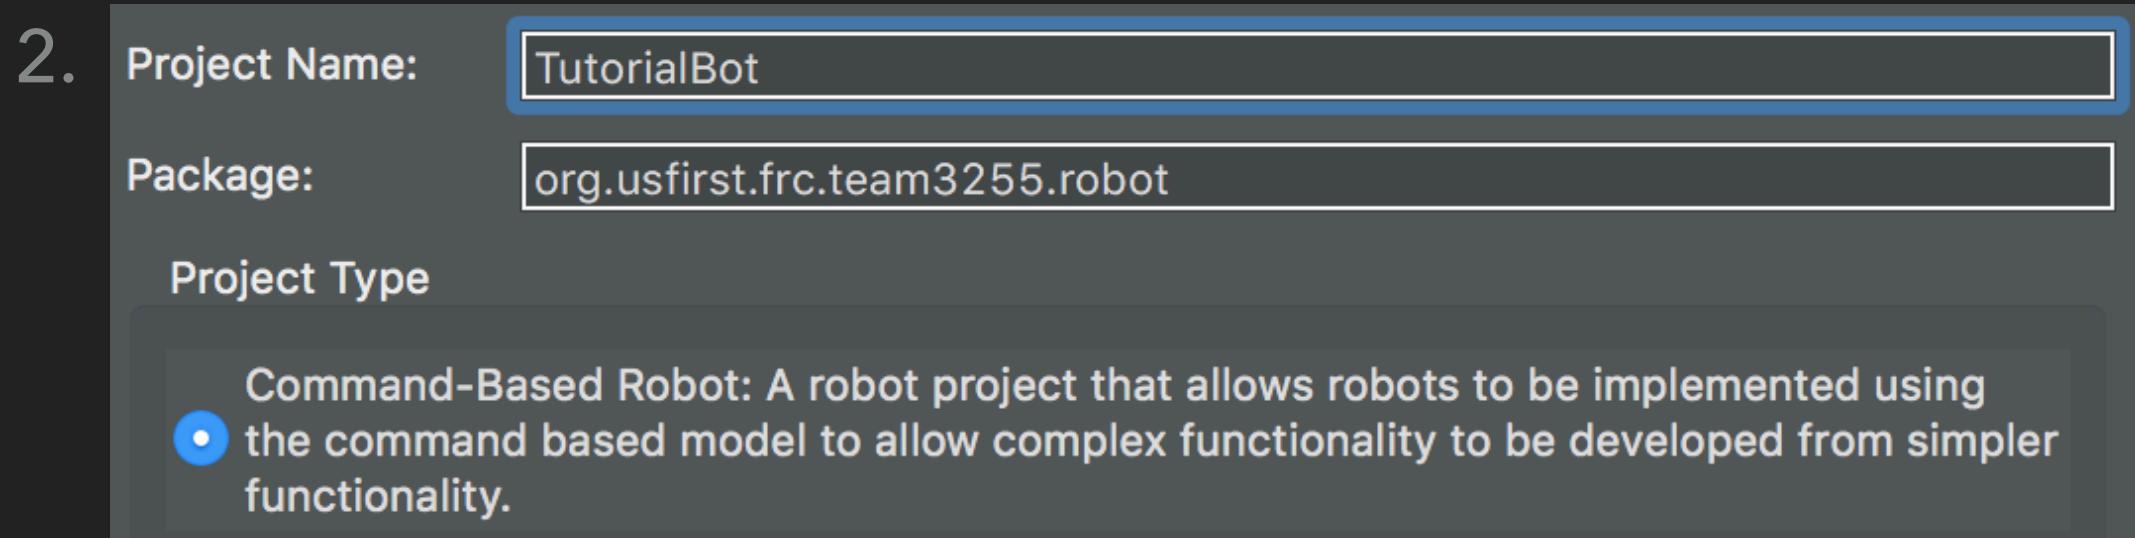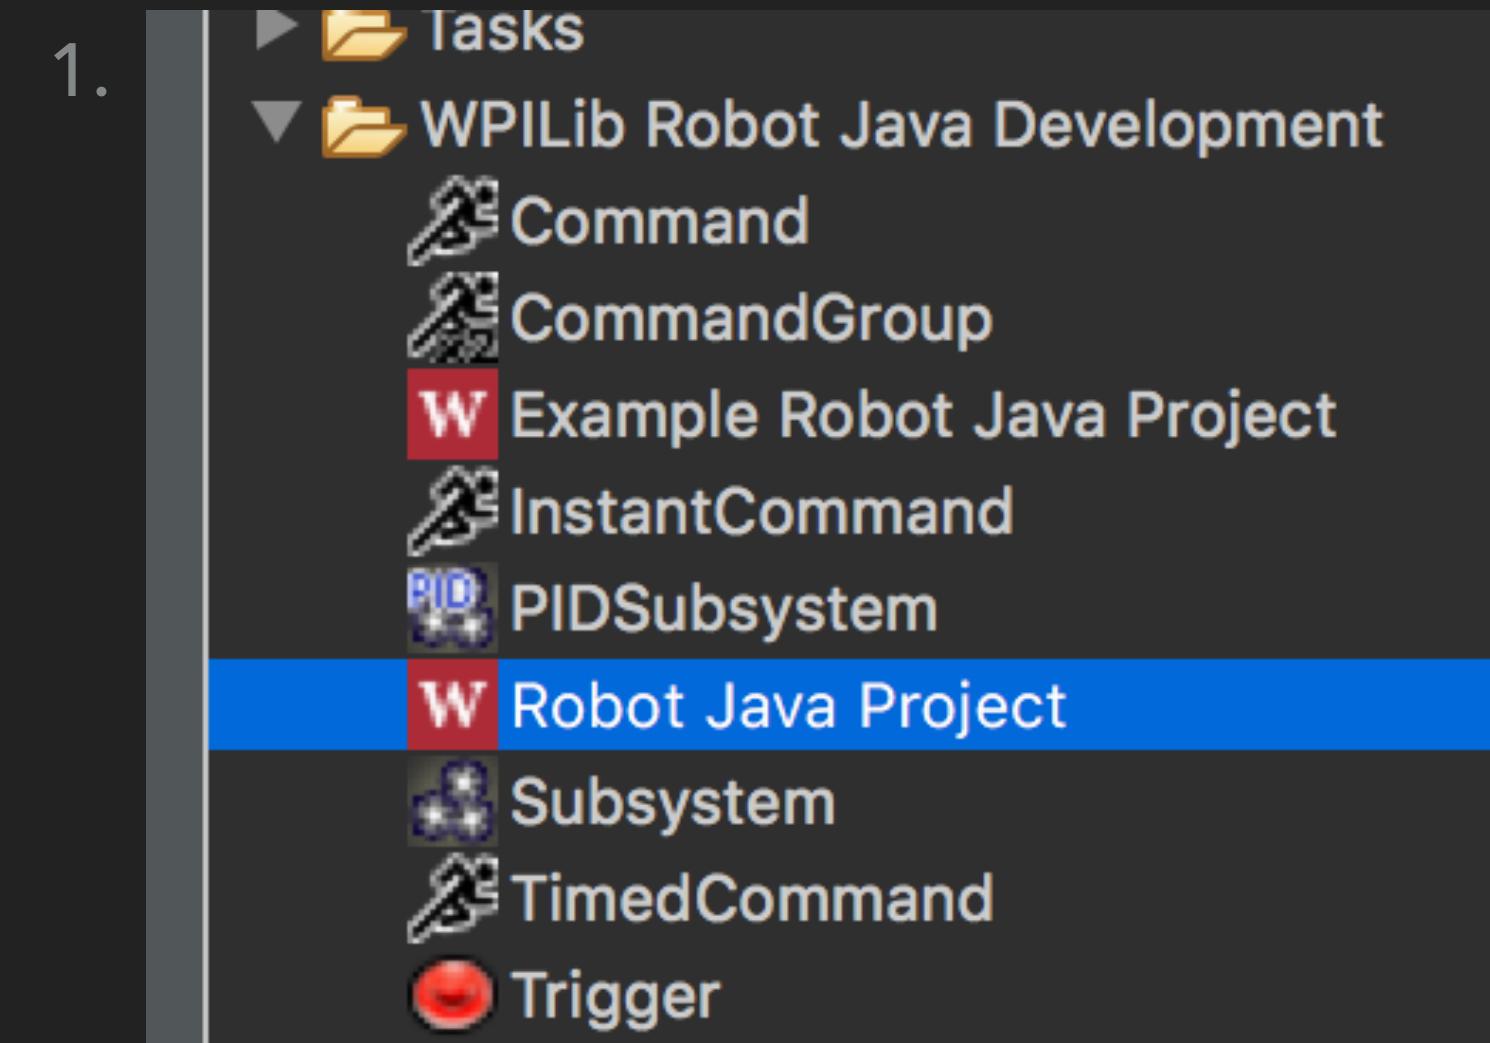

# CREATING A NEW SUBSYSTEM

- ▶ Double click on your project to expand it. Do the same for the src, .robot, .commands, and .subsystems.
- ▶ Select .subsystems create a new subsystem (ctrl N -> WPILib -> Subsystem)
- ▶ Under Class Name type: Drivetrain
- ▶ Open Drivetrain.java

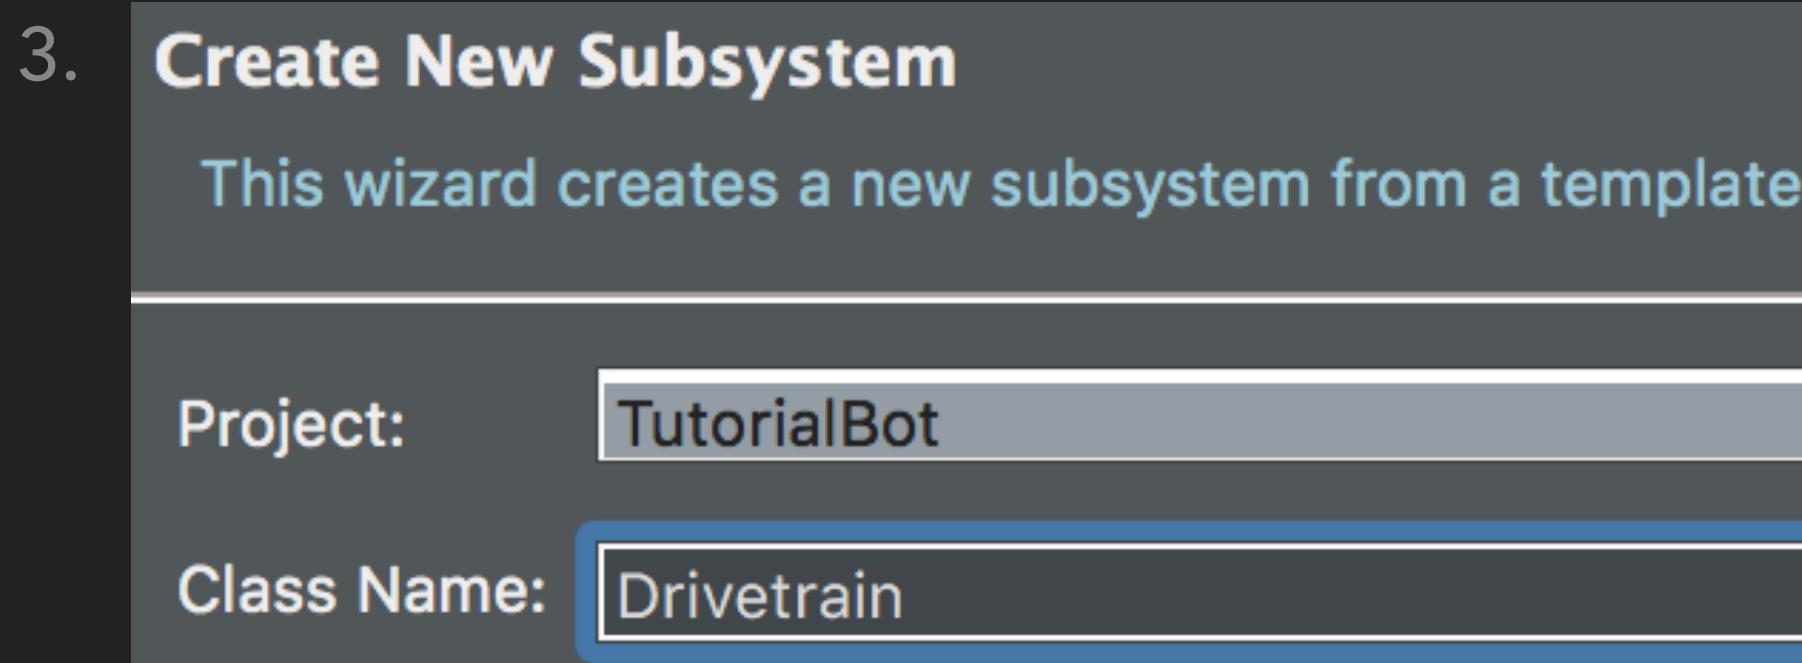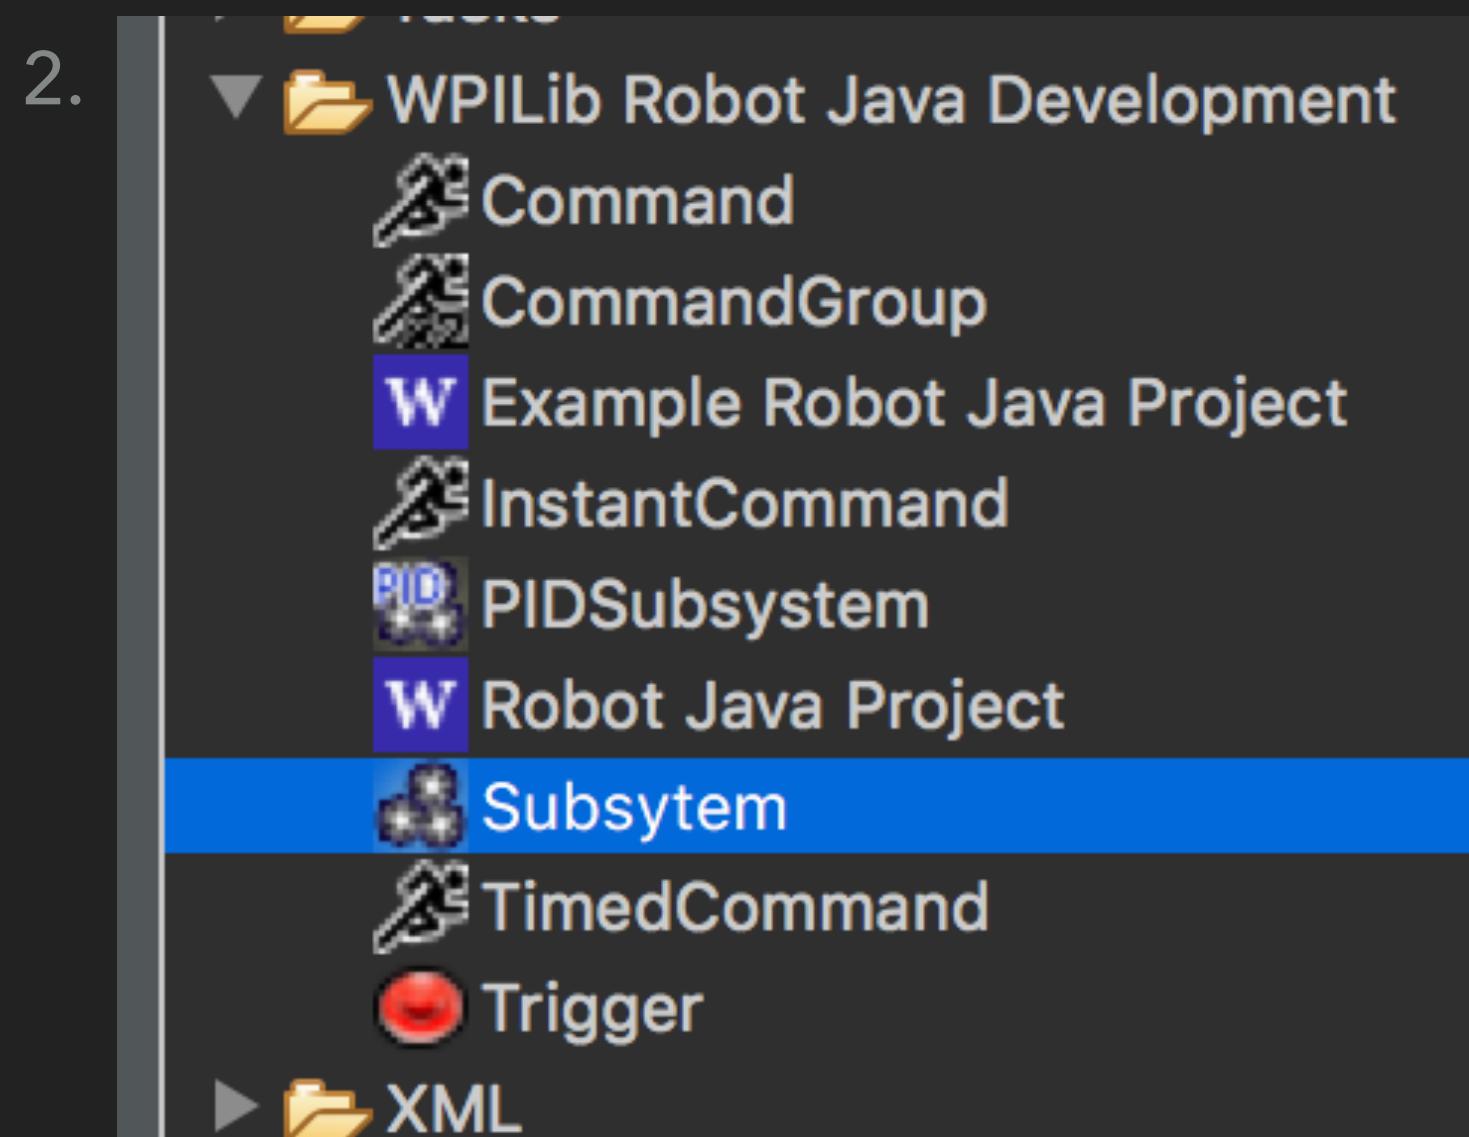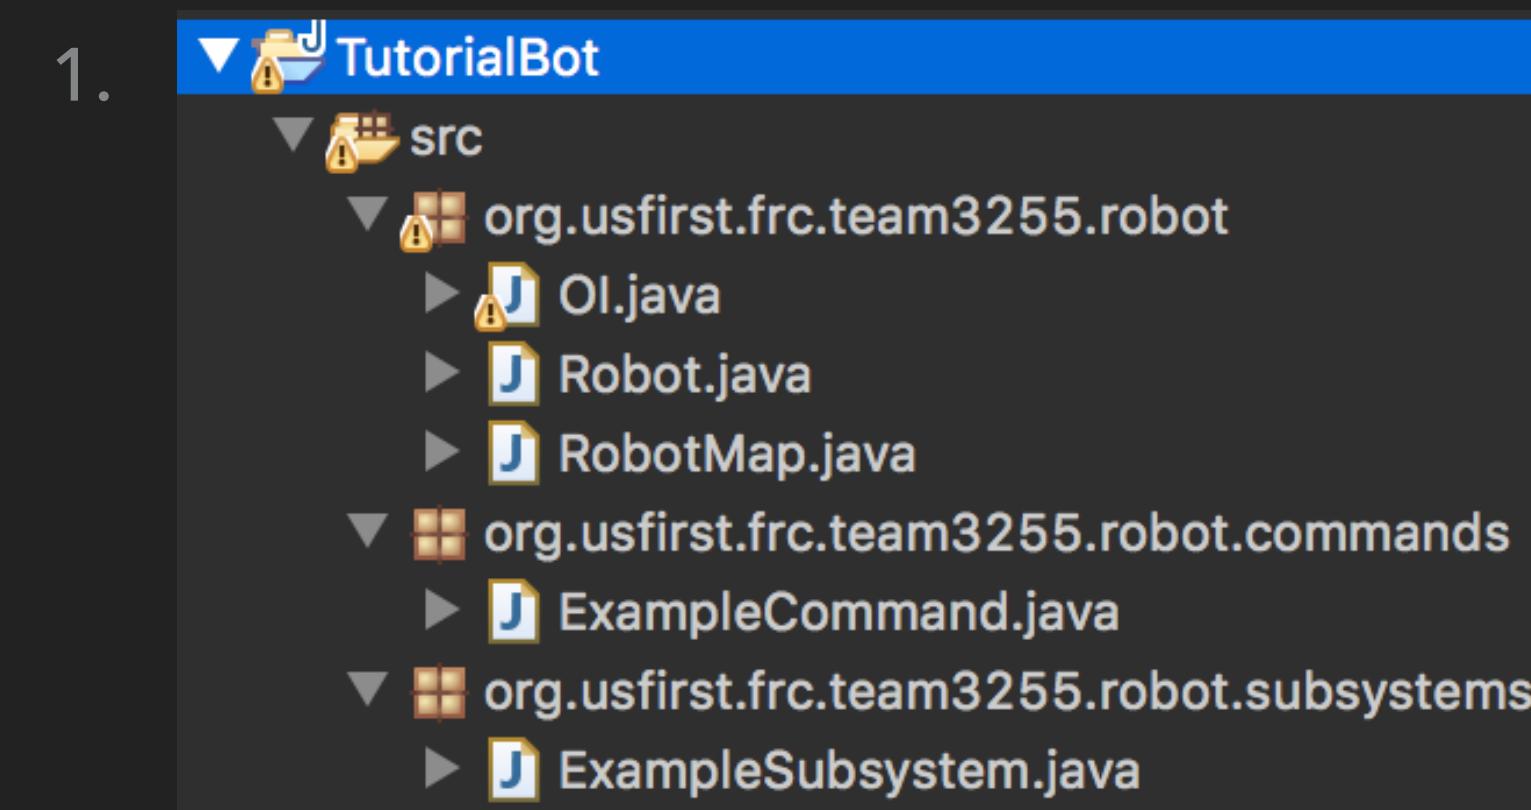

## WHAT'S IN THE SUBSYSTEM?

- ▶ In the file of the Drivetrain we will tell the subsystem what type of components it will be using.
- ▶ A Drivetrain needs motor controllers. In our case we will use 4 Talon SRs (brand of controller).
  - ▶ You could use other motor controllers such as Victor SPs or Talon SRXs but we will be using Talon SRs
- ▶ Lets create the talons and set their value to null.
  - ▶ null means they have a value of nothing and are empty.
    - ▶ We explicitly do this to make sure its empty at this point.
    - ▶ We will set their value later.
- ▶ We will name them leftFrontTalon, rightFrontTalon, leftBackTalon, rightBackTalon
  - ▶ These are variables that hold values
  - ▶ Class wide variables are normally created at the top level.
    - ▶ This is so they can be seen in all methods.

## HOW IT SHOULD BE LOOKING...

```
8 public class Drivetrain extends Subsystem {  
9  
10    Talon leftFrontTalon = null;  
11    Talon leftBackTalon = null;  
12    Talon rightFrontTalon = null;  
13    Talon rightBackTalon = null;  
14}
```

- ▶ In Eclipse (our programming software) red dotted lines means there is an error in your code. You can hover over them to see what the error is and **quick fixes**.




- ▶ In this case the Talons class needs to be imported. The code doesn't know what type "Talon" is until we import the class.
- ▶ From this point on the tutorial will assume you do import quick fixes
- ▶ Click Import 'Talon' and the errors should clear. (Don't forget to save!)

## CREATING A CONSTRUCTOR

- ▶ Lets also create a constructor for the class (similar to a method). (See image)
- ▶ A constructor is a special method that uses the name of the class itself. (i.e. Drivetrain class has Drivetrain() constructor). Constructors are used when trying to access the class in other files.
- ▶ Methods within this constructor will run as soon as the drivetrain class is called (loaded) in the code.
- ▶ Now that we have created the Talons we must initialize them and tell them what port on the roboRIO they are on.
- ▶ Lets initialize (set value of) leftFrontTalon to 'new Talon(0)' this initialized a new talon, leftFrontTalon, in a new piece of memory and states it is on port 0.
  - ▶ This is done within the constructor 'Drivetrain()'
  - ▶ This calls the constructor Talon(int) in the Talon class. The constructor Talon(int) takes a variable of type int. In this case the int (integer) refers to the port number on the roboRIO.

```
public class Drivetrain extends Subsystem {  
  
    //Motor Controllers  
    Talon leftFrontTalon = null;  
    Talon leftBackTalon = null;  
    Talon rightFrontTalon = null;  
    Talon rightBackTalon = null;  
  
    public Drivetrain() {  
        //Talons  
        leftFrontTalon = new Talon(0);  
    }  
}
```

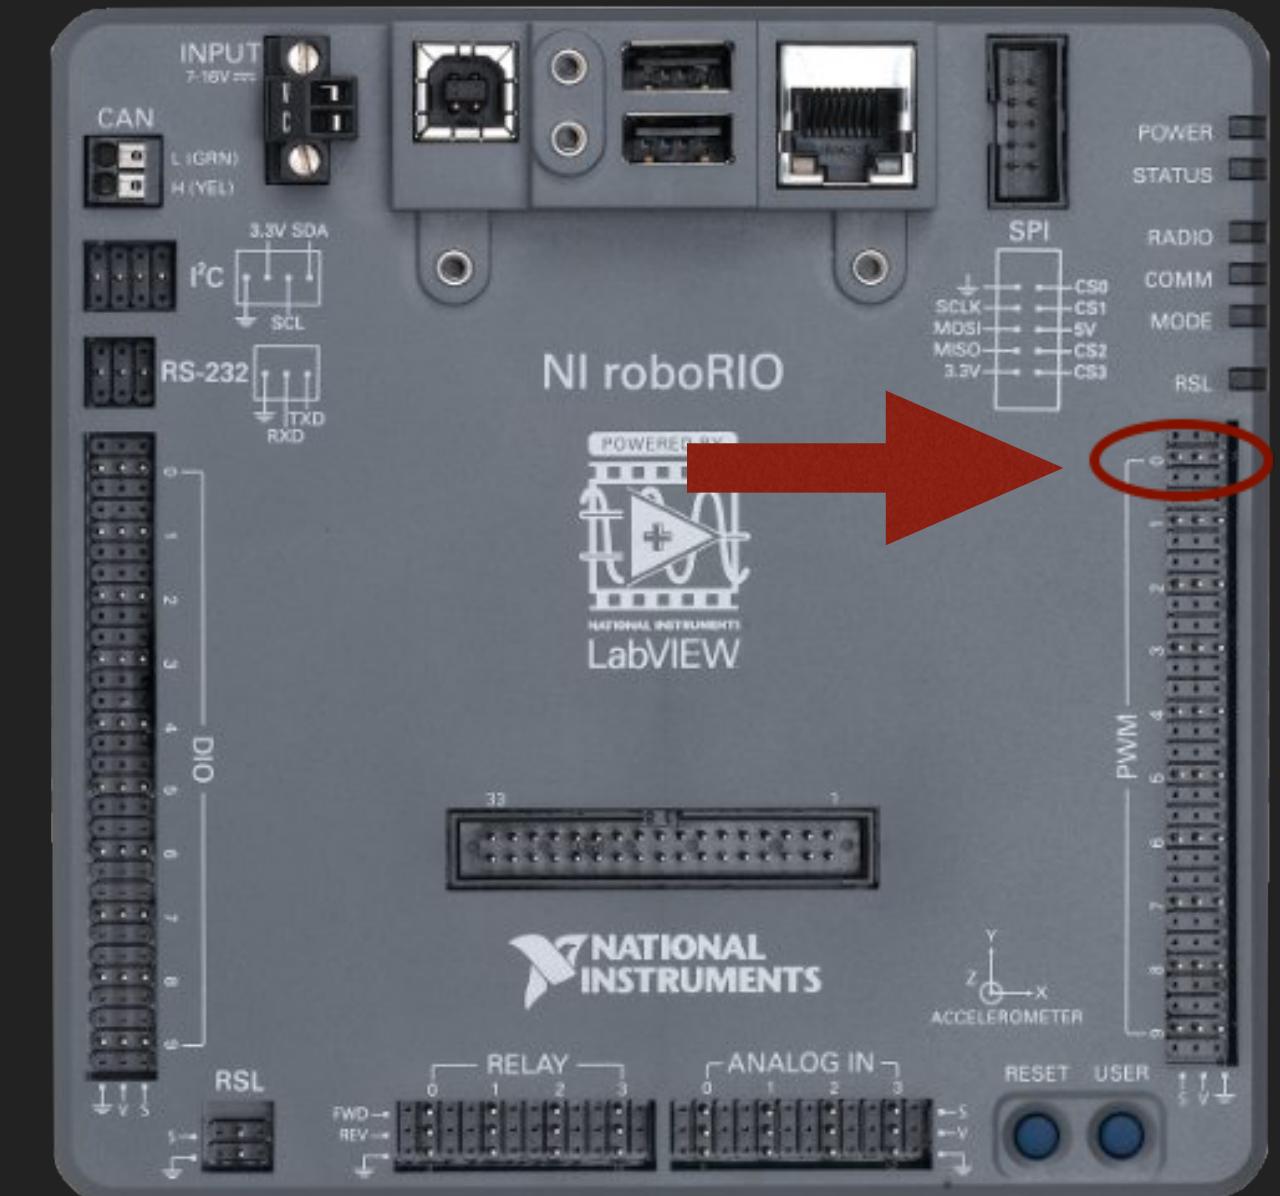

# ROBOT MAP

- ▶ Since each subsystem has its own components with their own ports, it is easy to lose track of which ports are being used and for what. To counter this you can use a class called a **RobotMap**
- ▶ To use RobotMap instead of putting '0' for the port on the Talon type: 'RobotMap.DRIVETRAIN\_LEFT\_FRONT\_TALON'.
  - ▶ Names should follow the pattern **SUBSYSTEM\_NAME\_OF\_COMPONENT**
  - ▶ The name is all caps since it is a final (can only be changed by the user) global (accessible by all classes) variable. This is naming convention for finals (constants).
  - ▶ Use the quick fix method to import the class.
  - ▶ Use the quick fix method to create a constant.
  - ▶ This will open the RobotMap file.
  - ▶ Change the 0 to the actual port on your roboRIO
  - ▶ Remember to save! (Ctrl S)
  - ▶ Repeat these steps for the remaining Talons.

The screenshot shows a Java code editor with four numbered steps illustrating the creation of a RobotMap constant:

1. 

```
public DrivetrainO {  
    // Talons  
    leftFrontTalon = new Talon(RobotMap.DRIVETRAIN_LEFT_FRONT_TALON);
```
2. 

```
public DrivetrainO {  
    // Talons  
    leftFrontTalon = new Talon(RobotMap.DRIVETRAIN_LEFT_FRONT_TALON);  
}  
  
// Put methods for controlling  
// here. Call these from Commands.
```

A tooltip appears: **RobotMap cannot be resolved to a variable**. Below it, a list of 15 quick fixes is shown, with the first one being **Import 'RobotMap' (org.usfirst.frc.team3255.robot)**.
3. 

```
Talon(RobotMap.DRIVETRAIN_LEFT_FRONT_TALON);
```

A tooltip appears: **DRIVETRAIN\_LEFT\_FRONT\_TALON cannot be resolved or is not a field**. Below it, a list of 2 quick fixes is shown, with the first one being **Create constant 'DRIVETRAIN\_LEFT\_FRONT\_TALON' in type 'RobotMap'**.
4. 

```
public static final int DRIVETRAIN_LEFT_FRONT_TALON = 0;
```

## YOUR CODE SHOULD LOOK SIMILAR TO THIS IN DRIVETRAIN.JAVA AND ROBOTMAP.JAVA

```
public class Drivetrain extends Subsystem {  
  
    // Motor Controllers  
    Talon leftFrontTalon = null;  
    Talon leftBackTalon = null;  
    Talon rightFrontTalon = null;  
    Talon rightBackTalon = null;  
  
    public Drivetrain() {  
        // Talons  
        leftFrontTalon = new Talon(RobotMap.DRIVETRAIN_LEFT_FRONT_TALON);  
        leftBackTalon = new Talon(RobotMap.DRIVETRAIN_LEFT_BACK_TALON);  
        rightFrontTalon = new Talon(RobotMap.DRIVETRAIN_RIGHT_FRONT_TALON);  
        leftBackTalon = new Talon(RobotMap.DRIVETRAIN_RIGHT_BACK_TALON);  
    }  
  
    // Put methods for controlling this subsystem  
    // here. Call these from Commands.  
  
    public void initDefaultCommand() {  
        // Set the default command for a subsystem here.  
        //setDefaultCommand(new MySpecialCommand());  
    }  
}
```

```
public class RobotMap {  
  
    // For example to map the left and right motors, you could define the  
    // following variables to use with your drivetrain subsystem.  
    // public static int leftMotor = 1;  
    // public static int rightMotor = 2;  
  
    public static final int DRIVETRAIN_LEFT_FRONT_TALON = 0;  
    public static final int DRIVETRAIN_LEFT_BACK_TALON = 1;  
    public static final int DRIVETRAIN_RIGHT_FRONT_TALON = 2;  
    public static final int DRIVETRAIN_RIGHT_BACK_TALON = 3;  
}
```

NOW THAT WE'VE CREATE OUR DRIVETRAIN, LETS MAKE A WAY TO CONTROL IT!





WE ARE MISSING A CRUCIAL STEP!

---

ADDING THE SUBSYSTEM TO  
ROBOT.JAVA

# ADDING THE SUBSYSTEM TO ROBOT.JAVA

- ▶ When a robot program runs on the roboRIO it only runs the main file Robot.java and anything Robot.java links to.
- ▶ We have created a new subsystem but we have not yet linked it to Robot.java. **WE MUST ALWAYS DO THIS!**
- ▶ In Robot.java we will create a new **global** variable of type Drivetrain named drivetrain and set its value to null.
  - ▶ Quick fix -> import Drivetrain
  - ▶ In the robotInit() method add: `drivetrain = new Drivetrain();`
  - ▶ **IMPORTANT:** This must always be done above OI and Telemetry/ SmartDashboard (if present).
  - ▶ Now when use this subsystem in commands we must call Robot.drivetrain to get access to it and its methods.

```
1. public class Robot extends IterativeRobot {  
  
    public static final ExampleSubsystem exampleSubsystem;  
    public static Drivetrain drivetrain = null;  
    public static OI oi;  
  
2. public void robotInit() {  
    drivetrain = new Drivetrain();  
  
    oi = new OI(); // MUST ALWAYS BE THE LAST SUBSYSTEM  
  
    chooser.addDefault("Default Auto", new ExampleCommand());  
    // chooser.addObject("My Auto", new MyAutoCommand());  
    SmartDashboard.putData("Auto mode", chooser);  
}
```

CREATING A BASIC  
DRIVING ROBOT

BACK TO CONTROLLING IT

---

SETTING UP JOYSTICKS

## CREATING A JOYSTICK

- ▶ Open OI.java
- ▶ We need to create a new joystick
  - ▶ Type: `public Joystick driverController = new Joystick(RobotMap.OI_DRIVER_CONTROLLER);`
  - ▶ A variable `driverController` of type `Joystick` pointing to a joystick on port `OI_DRIVER_CONTROLLER` from `RobotMap`
  - ▶ Quick fix create a new constant and set the value to the port number the joystick uses on the laptop (this can be found in the Driverstation software) (Go back to OI.java when finished)

## YOUR CODE SHOULD LOOK SIMILAR TO THIS IN OI.JAVA AND ROBOTMAP.JAVA

```
public class OI {  
  
    public Joystick driverController = new Joystick(RobotMap.OI_DRIVER_CONTROLLER);  
  
}  
  
public class RobotMap {  
  
    // For example to map the left and right motors, you could define the  
    // following variables to use with your drivetrain subsystem.  
    // public static int leftMotor = 1;  
    // public static int rightMotor = 2;  
  
    // Talons  
    public static final int DRIVETRAIN_LEFT_FRONT_TALON = 0;  
    public static final int DRIVETRAIN_LEFT_BACK_TALON = 1;  
    public static final int DRIVETRAIN_RIGHT_FRONT_TALON = 2;  
    public static final int DRIVETRAIN_RIGHT_BACK_TALON = 3;  
  
    // Joysticks  
    public static final int OI_DRIVER_CONTROLLER = 0;  
}
```

CREATING A BASIC  
DRIVING ROBOT

TIME FOR ROBOTDRIVE

---

LETS PROGRAM AN ARCADE  
DRIVE

## WHAT IS ROBOTDRIVE?

- ▶ The FIRST RobotDrive class has many preconfigured methods available to us including TankDrive, ArcadeDrive, and many alterations of MecanumDrive.
- ▶ For our tutorial we will be creating an ArcadeDrive
- ▶ An ArcadeDrive drive is a special preconfigured method created in the RobotDrive class by FIRST available to teams.
  - ▶ Arcade drives run by taking a moveSpeed and rotateSpeed. moveSpeed defines the forward and reverse speed and rotateSpeed defines the turning left and right speed.
  - ▶ To create an arcade drive we will be using our already existing Drivetrain code and adding to it.

## SETTING UP A ROBOT DRIVE

- ▶ In the same place we created our talons (outside of the constructor) we will create a new RobotDrive
- ▶ Type: RobotDrive `robotDrive = null;`
- ▶ We must also initialize the robotDrive like we did the talons. In the constructor...
- ▶ Type: `robotDrive = new RobotDrive(leftFrontTalon,  
leftBackTalon, rightFrontTalon,rightBackTalon).`
- ▶ The RobotDrive constructor we are using requires parameters of 4 motors in the order we used above.

## CREATING THE ARCADEDRIVE METHOD

- ▶ Now its time to make an arcadeDrive from our robotDrive.
- ▶ Lets create a public void method called arcadeDrive with type double parameters moveSpeed and rotateSpeed.
- ▶ By putting something in the parentheses it makes the method require a parameter when it is used. When the method gets used and parameters are passed, they will be store in moveSpeed and rotateSpeed (in that order).
- ▶ In the method type: `robotDrive.arcadeDrive(moveSpeed, rotateSpeed);`
- ▶ The arcadeDrive method takes parameters moveValue and rotateValue.
- ▶ It should look something like this (see image):

```
public void arcadeDrive(double moveSpeed, double rotateSpeed){  
    robotDrive.arcadeDrive(moveSpeed, rotateSpeed);  
}
```

## CREATING THE ARCADEDRIVE COMMAND

- ▶ Now that we have created the method, we need to create a command to call and use that method.
- ▶ Lets create a command called DriveArcade that calls arcadeDrive

## REMEMBER!

- ▶ Methods tell the robot what it can do, but in order to make it do these things we must give it a command.
- ▶ We will create a command that calls the method we want.

## CREATING A NEW COMMAND

- ▶ Select .command create a new command (ctrl N -> WPILib -> Command)
- ▶ Under Class Name type: DriveArcade
- ▶ Open DriveArcade

### 1. Create New Command

This wizard creates a new command from a template.

Project:

TutorialBot

Class Name:

DriveArcade


```
2. public class DriveArcade extends Command {  
  
    public DriveArcade() {  
        // Use requires() here to declare subsystem dependencies  
        // e.g. requires(chassis);  
    }  
  
    // Called just before this Command runs the first time  
    protected void initialize() {  
    }  
  
    // Called repeatedly when this Command is scheduled to run  
    protected void execute() {  
    }  
  
    // Make this return true when this Command no longer needs to run execute()  
    protected boolean isFinished() {  
        return false;  
    }  
  
    // Called once after isFinished returns true  
    protected void end() {  
    }  
  
    // Called when another command which requires one or more of the same  
    // subsystems is scheduled to run  
    protected void interrupted() {  
    }  
}
```

## PARTS OF A COMMAND

- ▶ Constructor - Called when the robot program is first loaded.
  - ▶ Subsystem dependencies are declared here.
- ▶ Initialize - Called just before this Command runs the first time
- ▶ Execute - Called repeatedly when this Command is scheduled to run
- ▶ isFinished - Make this return true when this Command no longer needs to run execute()
- ▶ End - Called once after isFinished returns true
- ▶ Interrupted - Called when another command which requires one or more of the same subsystems is scheduled to run

## DRIVEARCADE COMMAND

- ▶ In the constructor DriveArcade() type:  
requires(Robot.drivetrain).
- ▶ This means that this command will stop all other commands  
from accessing drivetrain while this command is using it.
- ▶ Quick fix -> import 'Robot'.
  - ▶ **IMPORTANT:** Be sure to import the one with  
`org.usfirst.frc.team`

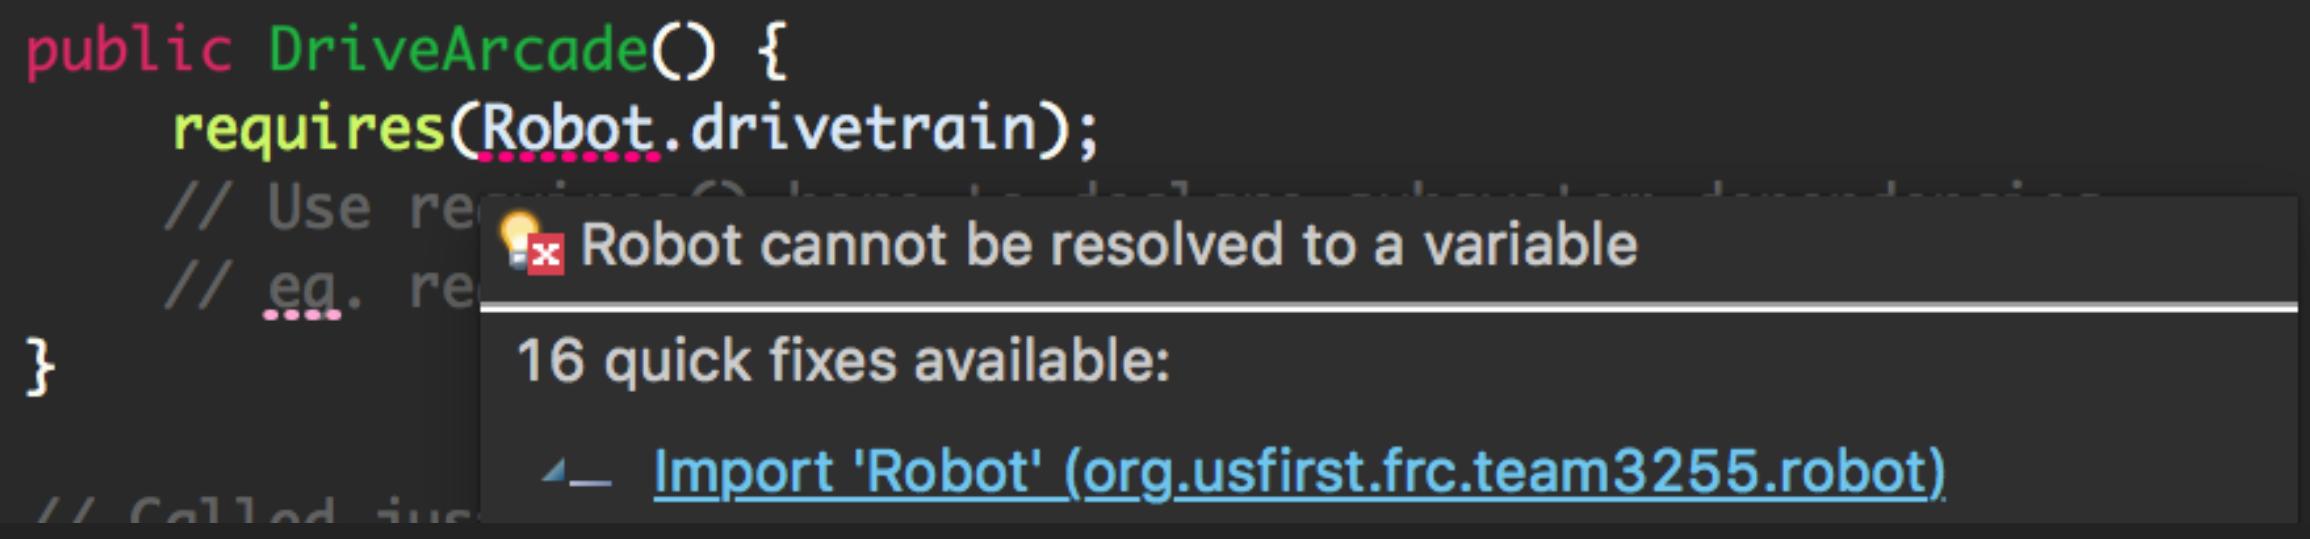

```
public DriveArcade() {
    requires(Robot.drivetrain);
    // Use requires(Robot.drivetrain);
    // etc.
}
```

Robot cannot be resolved to a variable

16 quick fixes available:

- ← Import 'Robot' (org.usfirst.frc.team3255.robot)

## IN EXECUTE( )...

- ▶ We will create 2 variables of type double called moveSpeed and rotateSpeed.
- ▶ We want these variables to be the value of the axeses of the controller we are using to drive the robot. So we will set them equal to that.
- ▶ We use negative in front since on our personal controllers since up reads -1 (this may differ.)
- ▶ The joystick we created has a special FIRST created method called getRawAxis. This will get the position value of the axis as you move it. The method takes parameter: axis number. (This can be found in the driver station and we will store it in RobotMap).
- ▶ Below that we want to call the arcadeDrive method we created in Drivetrain and give it the variables moveSpeed and rotateSpeed we created as parameters.

```
protected void execute() {  
    double moveSpeed = -Robot.oi.joystick.getRawAxis(RobotMap.JOYSTICK_MOVE_AXIS);  
    double rotateSpeed = Robot.oi.joystick.getRawAxis(RobotMap.JOYSTICK_ROTATE_AXIS);  
  
    Robot.drivetrain.arcadeDrive(moveSpeed, rotateSpeed);  
}
```

## IN END()...

- ▶ We will call the arcadeDrive method and give it 0 and 0 as the parameters.
- ▶ This make the motors stop running when the command ends by setting the movement speed to zero and rotation speed to zero.
- ▶ In interrupted() we will make it call end.
- ▶ This makes the end method get called if the command gets interrupted.

```
// Called once after isFinished returns true
protected void end() {
    Robot.drivetrain.arcadeDrive(0, 0);
}

// Called when another command which requires
// subsystems is scheduled to run
protected void interrupted() {
    end();
}
```

## YOUR CODE SHOULD LOOK SIMILAR TO THIS IN DRIVEARCADE.JAVA

```
public class DriveArcade extends Command {  
  
    public DriveArcade() {  
        // Use requires() here to declare subsystem dependencies  
        // e.g. requires(chassis);  
        requires(Robot.drivetrain);  
    }  
  
    // Called just before this Command runs the first time  
    protected void initialize() {  
    }  
  
    // Called repeatedly when this Command is scheduled to run  
    protected void execute() {  
        double moveSpeed = -Robot.oi.joystick.getRawAxis(RobotMap.JOYSTICK_MOVE_AXIS);  
        double rotateSpeed = Robot.oi.joystick.getRawAxis(RobotMap.JOYSTICK_ROTATE_AXIS);  
  
        Robot.drivetrain.arcadeDrive(moveSpeed, rotateSpeed);  
    }  
  
    // Make this return true when this Command no longer needs to run execute()  
    protected boolean isFinished() {  
        return false;  
    }  
  
    // Called once after isFinished returns true  
    protected void end() {  
        Robot.drivetrain.arcadeDrive(0, 0);  
    }  
  
    // Called when another command which requires one or more of the same  
    // subsystems is scheduled to run  
    protected void interrupted() {  
        end();  
    }  
}
```

## INITDEFAULTCOMMAND()

- ▶ Commands within this method run when the robot is enabled and run when no other commands require that subsystem.
- ▶ This is why we write requires in the commands we create, it stops other commands using that subsystem when that command is ran.
- ▶ Back in Drivetrain in the initDefaultCommand() method we will put our newly create command.


```
public void initDefaultCommand() {  
    // Set the default command for a subsystem here.  
    setDefaultCommand(new DriveArcade());  
}
```

- ▶ Quick fix import the command DriveArcade.

# DEPLOY!

---

YOUR CODE IS NOW READY TO RUN. DEPLOY CODE AND TRY MOVING THE JOYSTICKS ON YOUR CONTROLLER WHEN ENABLED.

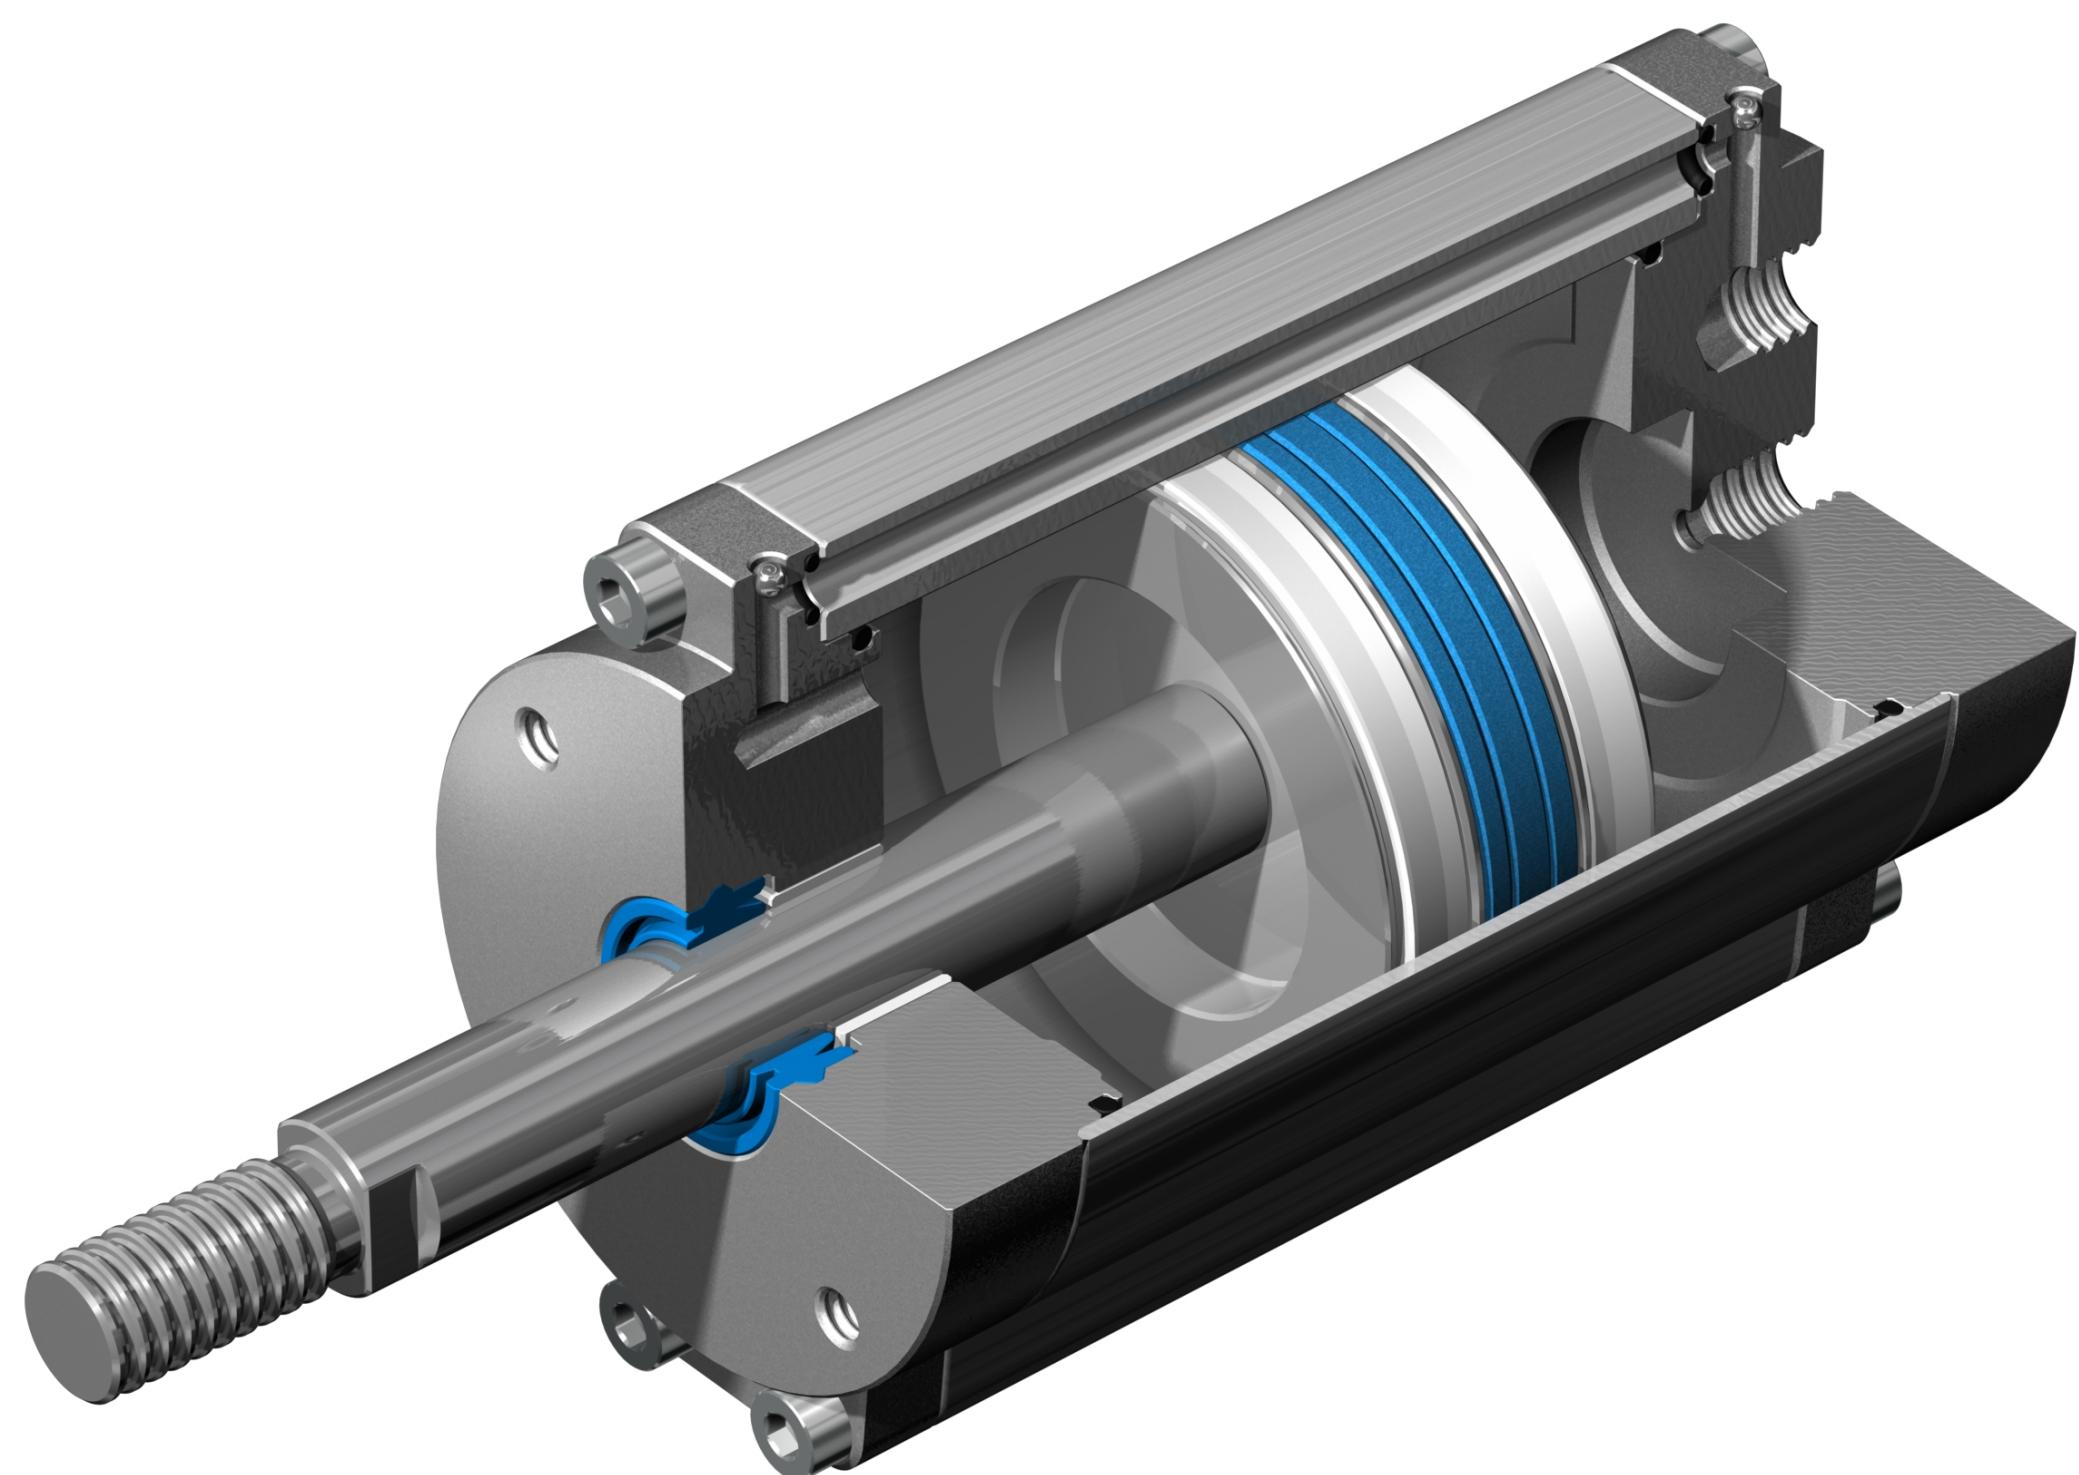

THIS SECTION HAS NOT YET BEEN CREATED

PART 2:  
CHECK THE AIR PRESSURE

---

USING  
PNEUMATICS



THIS SECTION HAS NOT YET BEEN CREATED

## PART 3: GIVING FEEDBACK

---

# USING SENSORS AND SWITCHES



THIS SECTION HAS NOT YET BEEN CREATED

## PART 4: GETTING FEEDBACK

---

# USING THE SMARTDASHBOARD



THIS SECTION HAS NOT YET BEEN CREATED

**PART 5:**  
**SETTING SETTINGS**  

---

**USING**  
**ROBOTPREFERENCES**



THIS SECTION HAS NOT YET BEEN CREATED

## PART 6: AUTOMATICALLY MOVE!

---

# CREATING AN AUTONOMOUS COMMAND



THIS SECTION HAS NOT YET BEEN CREATED

PART 7:  
PROPORTIONAL INTEGRAL DERIVATIVE

---

**GETTING STARTED  
WITH PID**