

# 0.5mm and 1mm Pitch FPC/FFC Connectors

FH12 Series

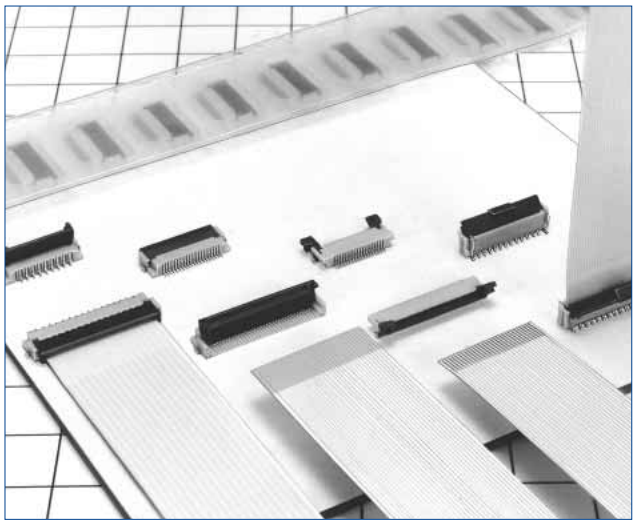

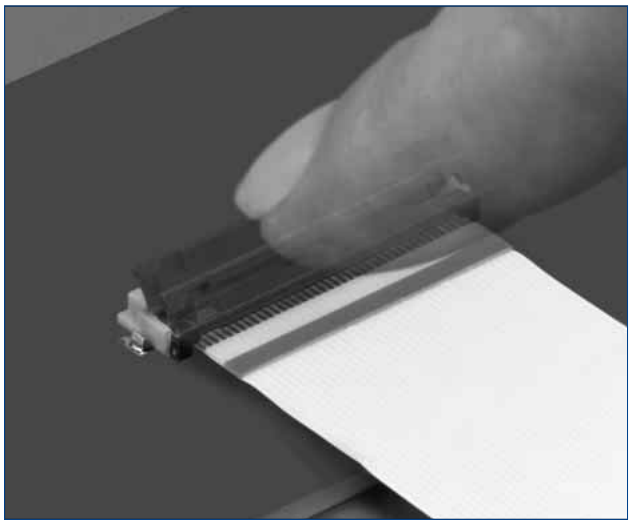

## ■Features

### 1. Rotating one-touch ZIF mechanism

The one-touch rotating ZIF mechanism is easier to operate and works with a light force.

### 2. Clear tactile click

A clear tactile click is delivered upon the successful completion of the mating process

### 3. Supports high density mounting

The FH12's one-touch ZIF system requires less space than a slide locking connector and can be mounted in the center of the PCB.

### 4. Top & Bottom Contact and Vertical Mount type

There are three connection types available : top contact, bottom contact and a Vertical mount.

### 5. 1mm pitch product


In addition to the 0.5mm pitch connector, we also offer a 1mm pitch connector.

### 6. Reinforced actuator


The FH12S version in 30, 40, 45, 50, and 53 pin counts are offered with a reinforced actuator that provides an extra measure of security against actuator breakage.

**Rotating one-touch ZIF mechanism**


①

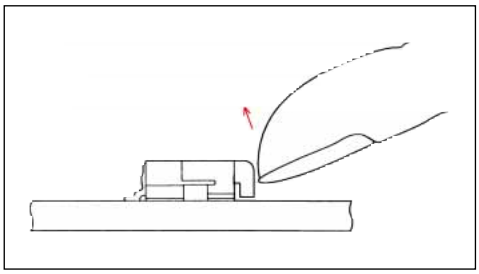

②

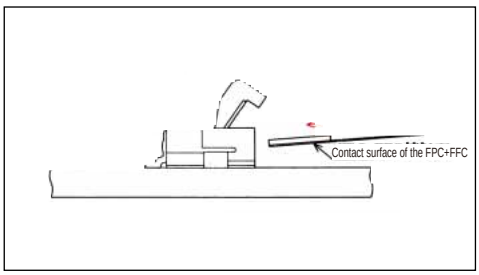


③

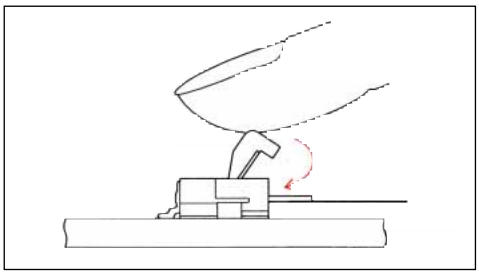

Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

## ■Product Specifications

| | | | |
|---|---|---|---|
| Rating | Current rating : 0.5A DC(Note 1)<br>Voltage rating : 50V AC | Operating Temperature Range : −40 to +85℃ (Note 2)<br>Operating Humidity Range : Relative humidity, 90% max.<br>(Not dewed) | Storage Temperature Range : −10 to +50℃ (Note 3)<br>Storage Humidity Range : Relative humidity, 90% max.<br>(Not dewed) |

| | |
|---|---|
| Adaptive FPC/FFC contact specifications | t=0.3±0.05 Gold plated |

| Item | Specification | Conditions |
|---|---|---|
| 1. Insulation resistance | 500MΩ minimum | 100V DC |
| 2. Withstanding voltage | No flashover or insulation breakdown. | 150V AC/1 minute |
| 3. Contact resistance | 50mΩ maximum | 1mA |
| 4. Durability (Insertion/withdrawal) | Contact resistance : 50mΩ maximum<br>No damage, cracks, or parts dislocation. | 20 cycles |
| 5. Vibration | No electrical discontinuity of 1μs or more<br>Contact resistance : 50mΩ maximum.<br>No damage, cracks, or parts dislocation. | Frequency : 10 to 55Hz, single amplitude of 0.75mm, for 10 cycles in 3 axial directions |
| 6. Shock | No electrical discontinuity of 1μs or more<br>Contact resistance : 50mΩ maximum.<br>No damage, cracks, or parts dislocation. | Acceleration of 981m/s², 6ms duaration, sine half-wave waveform, 3 cycles in each of the 3 axis |
| 7. Humidity(Steady state) | Contact resistance : 50mΩ maximum.<br>Insulation resistance : 50MΩ minimum.<br>No damage, cracks, or parts dislocation. | 96 hours at 40℃ and humidity of 90% to 95% |
| 8. Temperature Cycle | Contact resistance : 50mΩ maximum.<br>Insulation resistance : 50MΩ minimum.<br>No damage, cracks, or parts dislocation. | Temperature : -40℃ → 15 to 35℃ → 85℃ → 15 to 35℃,<br>Time: 30 → 2 to 3 → 30 → 2 to 3(minutes)<br>5 cycles |
| 9.Resistance to Soldering heat | No deformation of components affecting performance. | Reflow : At the recommended temperature profile<br>Manual soldering : 350±10℃ for 5 seconds |

Note 1 : When passing the current through all of the contacts,use 70% of the current rating.
Note 2 : Includes temperature rise caused by current flow.
Note 3 : The term "storage" refers to products stored for long period of time prior to mounting and use. Operating Temperature Range and Humidity range covers nonconducting condition of installed connectors in storage, shipment or during transportation.

## ■Materials / Finish

| Part | Material | Finish | Remarks |
|---|---|---|---|
| Insulator | Polyamide, LCP(60 pos.) | Color : Beige | UL94V-0 |
| | PPS | Color : Dark brown | |
| Contact | Phosphor bronze | Gold plated | ——— |
| Metal Fittings | Brass | Tin plated | |

## ■Product Number Structure






Refer to the chart below when determining the product specifications from the product number.
Please select from the product numbers listed in this catalog when placing orders.

**FH 12 A - 10 (4) S A - 0.5 SH (**)**
❶ ❷ ❸ ❹ ❺ ❻ ❼ ❽ ❾ ❿

| | |
|---|---|
| ❶ Series Name : FH | ❻ Contact alignment : Single |
| ❷ Series No. : 12 | ❼ Eccentric direction :<br>Blank : standard type<br>A : Eccentric type |
| ❸ Blank : standard type<br>A : Top contact type<br>S : Type with strengthed flip-lock actuator | ❽ Contacts Pitch : 0.5mm, 1mm |
| ❹ Standard type : Number of contacts<br>Eccentric type : Number of contacts in 0.5mm housing | ❾ Contact type<br>SH : SMT horizontal mounting type<br>SVA : SMT vertical mounting type |
| ❺ Standard type : Blank<br>Eccentric type : Number of contacts | ❿ Plating specification<br>(54) : Selective gold plated<br>(55) : Gold plated<br>(1)(98) : Gold plated 500 pieces/reel |

Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.


## ■Series Configuration
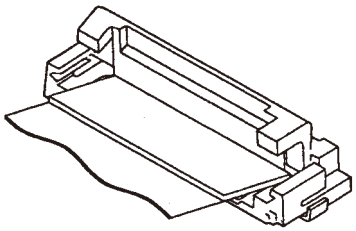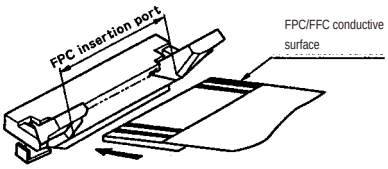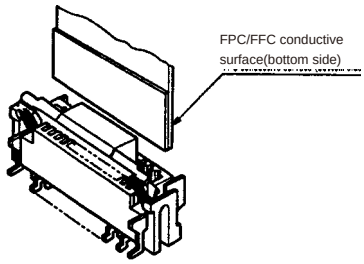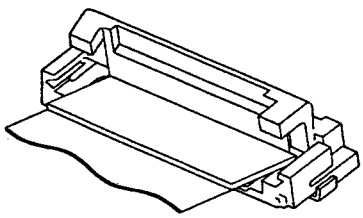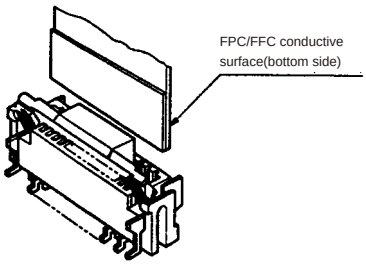
| Pitch | Bottom Contact Type | Top Contact Type | Vertical mounting Type |
|---|---|---|---|
| 0.5mm |  <br>**FH12- ✻✻ S-0.5SH** P.4<br>Number of contacts 6, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 22, 24, 25, 26, 28, 30, 32, 33, 34, 35, 36, 40, 45, 50, 53<br>Type with Strengthened Lock Lever<br>**FH12S- ✻✻ S-0.5SH** P.5<br>Number of contacts 30, 40, 45, 50, 53 |  <br>**FH12A- ✻✻ S-0.5SH** P.6<br>Number of contacts 10, 12 ,15, 16, 18, 20, 22, 24, 26, 28, 29, 30, 32, 33, 34, 36, 40, 42, 45, 50 |  <br>**FH12- ✻✻ S-0.5SVA** P.7<br>Number of contacts 6, 10, 12, 13, 15, 16, 17, 18, 20, 22, 24, 26, 30, 32, 33, 34, 36, 40, 45, 49, 50, 60 |
| 1mm |  <br>Standard **FH12- ✻✻ S-1SH** P.8<br>Eccentric **FH12- ✻✻ (✻✻) SA-1SH**<br>Standard<br>Number of contacts 5, 6, 7, 8, 9, 11, 12,16,17,22,26<br>Eccentric<br>Number of contacts 4, 6, 8, 10, 11, 14, 19, 24 | |  <br>**FH12- ✻✻ S-1SVA** P.9<br>Number of contacts 6, 7, 8, 16, 20, 22, 24 |

Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

# ■0.5mm Pitch Bottom Contact Type



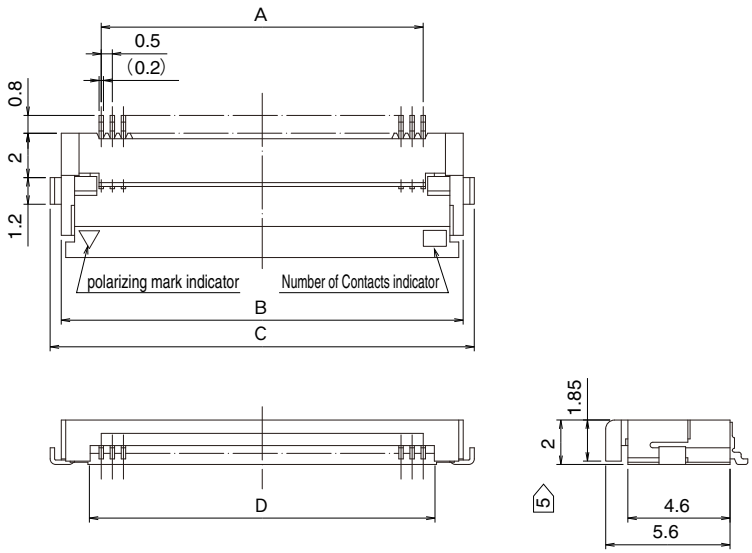


Note 1 : The coplanarity of each terminal lead within specified dimension is 0.1mm Max.
Note 2 : Packaged on tape and reel only. Check packaging specification.
Note 3 : Slight variations in color of the plastic compounds do not affect form, fit or function of the connector.
Note 4 : After reflow, the terminal plating may change color, however this does not represent a quality issue.
Note 5 : If there is no problem with the connector height, we recommend the type with the strengthened Flip-lock actuator (FH12S-*S-0.5SH). Standard type connector height : 2mm Connector height of type with strengthened Flip-lock actuator : 2.4mm


Unit : mm


| Part No. | HRS No. | No. of Contacts | A | B | C | D |
|---|---|---|---|---|---|---|
| FH12-6S-0.5SH(**) | 586-0582-5 ** | 6 | 2.5 | 6.1 | 7.1 | 3.57 |
| FH12-8S-0.5SH(**) | 586-0744-5 ** | 8 | 3.5 | 7.1 | 8.1 | 4.57 |
| FH12-10S-0.5SH(**) | 586-0522-3 ** | 10 | 4.5 | 8.1 | 9.1 | 5.57 |
| FH12-11S-0.5SH(**) | 586-0600-5 ** | 11 | 5.0 | 8.6 | 9.6 | 6.07 |
| FH12-12S-0.5SH(**) | 586-0704-0 ** | 12 | 5.5 | 9.1 | 10.1 | 6.57 |
| FH12-13S-0.5SH(**) | 586-0549-0 ** | 13 | 6.0 | 9.6 | 10.6 | 7.07 |
| FH12-14S-0.5SH(**) | 586-0533-0 ** | 14 | 6.5 | 10.1 | 11.1 | 7.57 |
| FH12-15S-0.5SH(**) | 586-0523-6 ** | 15 | 7.0 | 10.6 | 11.6 | 8.07 |
| FH12-16S-0.5SH(**) | 586-0531-4 ** | 16 | 7.5 | 11.1 | 12.1 | 8.57 |
| FH12-17S-0.5SH(**) | 586-0606-1 ** | 17 | 8.0 | 11.6 | 12.6 | 9.07 |
| FH12-18S-0.5SH(**) | 586-0530-1 ** | 18 | 8.5 | 12.1 | 13.1 | 9.57 |
| FH12-19S-0.5SH(**) | 586-0534-2 ** | 19 | 9.0 | 12.6 | 13.6 | 10.07 |
| FH12-20S-0.5SH(**) | 586-0524-9 ** | 20 | 9.5 | 13.1 | 14.1 | 10.57 |
| FH12-22S-0.5SH(**) | 586-0532-7 ** | 22 | 10.5 | 14.1 | 15.1 | 11.57 |
| FH12-24S-0.5SH(**) | 586-0521-0 ** | 24 | 11.5 | 15.1 | 16.1 | 12.57 |
| FH12-25S-0.5SH(**) | 586-0692-3 ** | 25 | 12.0 | 15.6 | 16.6 | 13.07 |
| FH12-26S-0.5SH(**) | 586-0576-2 ** | 26 | 12.5 | 16.1 | 17.1 | 13.57 |
| FH12-28S-0.5SH(**) | 586-0612-4 ** | 28 | 13.5 | 17.1 | 18.1 | 14.57 |
| Note 5 FH12-30S-0.5SH(**) | 586-0525-1 ** | 30 | 14.5 | 18.1 | 19.1 | 15.57 |
| FH12-32S-0.5SH(**) | 586-0681-7 ** | 32 | 15.5 | 19.1 | 20.1 | 16.57 |
| FH12-33S-0.5SH(**) | 586-0520-8 ** | 33 | 16.0 | 19.6 | 20.6 | 17.07 |
| FH12-34S-0.5SH(**) | 586-0617-8 ** | 34 | 16.5 | 20.1 | 21.1 | 17.57 |
| FH12-35S-0.5SH(**) | 586-0740-4 ** | 35 | 17.0 | 20.6 | 21.6 | 18.07 |
| FH12-36S-0.5SH(**) | 586-0526-4 ** | 36 | 17.5 | 21.1 | 22.1 | 18.57 |
| Note 5 FH12-40S-0.5SH(**) | 586-0527-7 ** | 40 | 19.5 | 23.1 | 24.1 | 20.57 |
| Note 5 FH12-45S-0.5SH(**) | 586-0528-0 ** | 45 | 22.0 | 25.6 | 26.6 | 23.07 |
| Note 5 FH12-50S-0.5SH(**) | 586-0529-2 ** | 50 | 24.5 | 28.1 | 29.1 | 25.57 |
| Note 5 FH12-53S-0.5SH(**) | 586-0595-7 ** | 53 | 26.0 | 29.6 | 30.6 | 27.07 |

Note 1 : Embossed tape reel packaging (2,000 pcs/reel, 500 pcs/reel). Order by number of reels.

Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

# ■0.5mm Pitch Bottom Contact Type with Strengthened Flip-lock Actuator

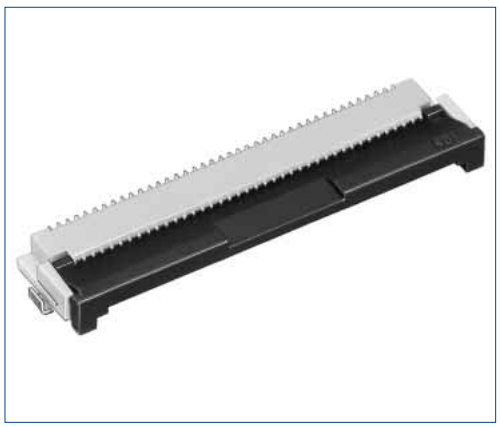

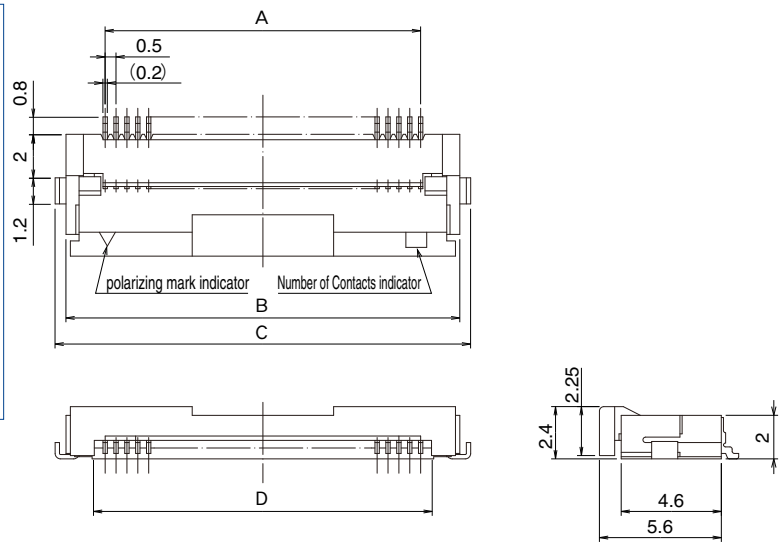


Note 1 : The coplanarity of each terminal lead within specified dimension is 0.1mm Max.
Note 2 : Packaged on tape and reel only. Check packaging specification.
Note 3 : Slight variations in color of the plastic compounds do not affect form, fit or function of the connector.
Note 4 : After reflow, the terminal plating may change color, however this does not represent a quality issue.


Unit : mm


| Part No. | HRS No. | No. of Contacts | A | B | C | D |
|---|---|---|---|---|---|---|
| FH12S-30S-0.5SH(**) | 586-0667-6 ** | 30 | 14.5 | 18.1 | 19.1 | 15.57 |
| FH12S-40S-0.5SH(**) | 586-0640-0 ** | 40 | 19.5 | 23.1 | 24.1 | 20.57 |
| FH12S-45S-0.5SH(**) | 586-0665-0 ** | 45 | 22.0 | 25.6 | 26.6 | 23.07 |
| FH12S-50S-0.5SH(**) | 586-0642-5 ** | 50 | 24.5 | 28.1 | 29.1 | 25.57 |
| FH12S-53S-0.5SH(**) | 586-0691-0 ** | 53 | 26.0 | 29.6 | 30.6 | 27.07 |

Note 1 : Embossed tape reel packaging (2,000 pcs/reel, 500 pcs/reel).
Order by number of reels.

Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

## ■0.5mm Pitch Top Contact Type

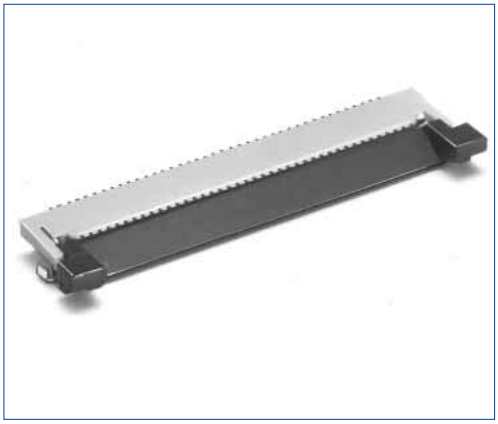

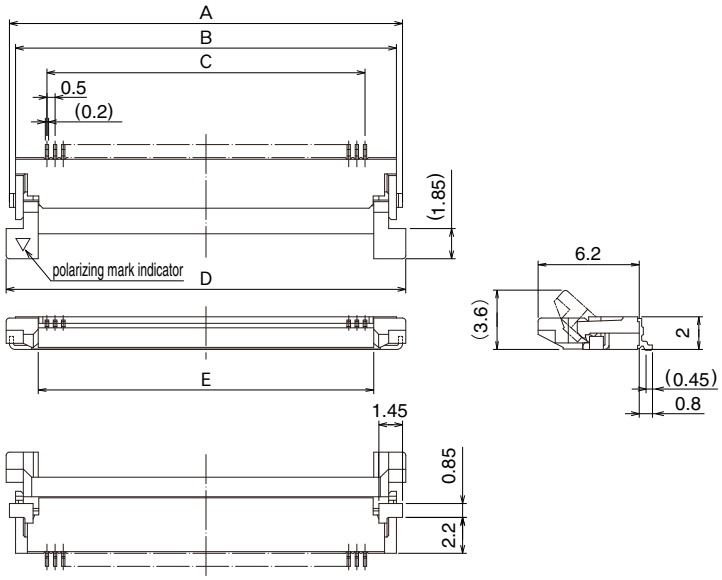


Note 1 : The coplanarity of each terminal lead within specified dimension is 0.1mm Max.
Note 2 : Packaged on tape and reel only. Check packaging specification.
Note 3 : Slight variations in color of the plastic compounds do not affect form, fit or function of the connector.
Note 4 : After reflow, the terminal plating may change color, however this does not represent a quality issue.


Unit : mm


| Part No. | HRS No. | No. of Contacts | A | B | C | D | E |
|---|---|---|---|---|---|---|---|
| FH12A-10S-0.5SH(**) | 586-0550-9 ** | 10 | 9.1 | 8.35 | 4.5 | 9.5 | 5.57 |
| FH12A-12S-0.5SH(**) | 586-0696-4 ** | 12 | 10.1 | 9.35 | 5.5 | 10.5 | 6.57 |
| FH12A-15S-0.5SH(**) | 586-0551-1 ** | 15 | 11.6 | 10.85 | 7.0 | 12.0 | 8.07 |
| FH12A-16S-0.5SH(**) | 586-0552-4 ** | 16 | 12.1 | 11.35 | 7.5 | 12.5 | 8.57 |
| FH12A-18S-0.5SH(**) | 586-0553-7 ** | 18 | 13.1 | 12.35 | 8.5 | 13.5 | 9.57 |
| FH12A-20S-0.5SH(**) | 586-0554-0 ** | 20 | 14.1 | 13.35 | 9.5 | 14.5 | 10.57 |
| FH12A-22S-0.5SH(**) | 586-0686-0 ** | 22 | 15.1 | 14.35 | 10.5 | 15.5 | 11.57 |
| FH12A-24S-0.5SH(**) | 586-0555-2 ** | 24 | 16.1 | 15.35 | 11.5 | 16.5 | 12.57 |
| FH12A-26S-0.5SH(**) | 586-0663-5 ** | 26 | 17.1 | 16.35 | 12.5 | 17.5 | 13.57 |
| FH12A-28S-0.5SH(**) | 586-0725-0 ** | 28 | 18.1 | 17.35 | 13.5 | 18.5 | 14.57 |
| FH12A-29S-0.5SH(**) | 586-0585-3 ** | 29 | 18.6 | 17.85 | 14.0 | 19.0 | 15.07 |
| FH12A-30S-0.5SH(**) | 586-0556-5 ** | 30 | 19.1 | 18.35 | 14.5 | 19.5 | 15.57 |
| FH12A-32S-0.5SH(**) | 586-0687-3 ** | 32 | 20.1 | 19.35 | 15.5 | 20.5 | 16.57 |
| FH12A-33S-0.5SH(**) | 586-0570-6 ** | 33 | 20.6 | 19.85 | 16.0 | 21.0 | 17.07 |
| FH12A-34S-0.5SH(**) | 586-0670-0 ** | 34 | 21.1 | 20.35 | 16.5 | 21.5 | 17.57 |
| FH12A-36S-0.5SH(**) | 586-0662-2 ** | 36 | 22.1 | 21.35 | 17.5 | 22.5 | 18.57 |
| FH12A-40S-0.5SH(**) | 586-0557-8 ** | 40 | 24.1 | 23.35 | 19.5 | 24.5 | 20.57 |
| FH12A-42S-0.5SH(**) | 586-0698-0 ** | 42 | 25.1 | 24.35 | 20.5 | 25.5 | 21.57 |
| FH12A-45S-0.5SH(**) | 586-0558-0 ** | 45 | 26.6 | 25.85 | 22.0 | 27.0 | 23.07 |
| FH12A-50S-0.5SH(**) | 586-0559-3 ** | 50 | 29.1 | 28.35 | 24.5 | 29.5 | 25.57 |

Note 1 : Embossed tape reel packaging (2,000 pcs/reel).
Order by number of reels.

Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

# ■0.5mm Pitch Vertical mounting Type

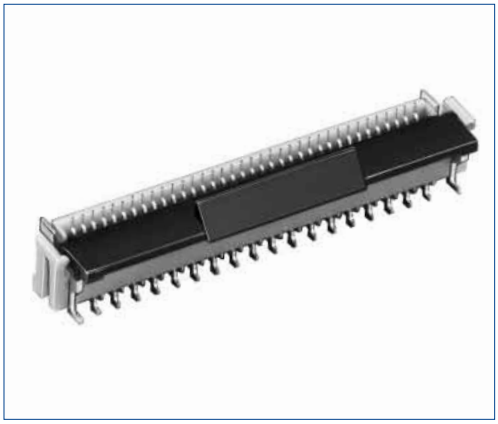

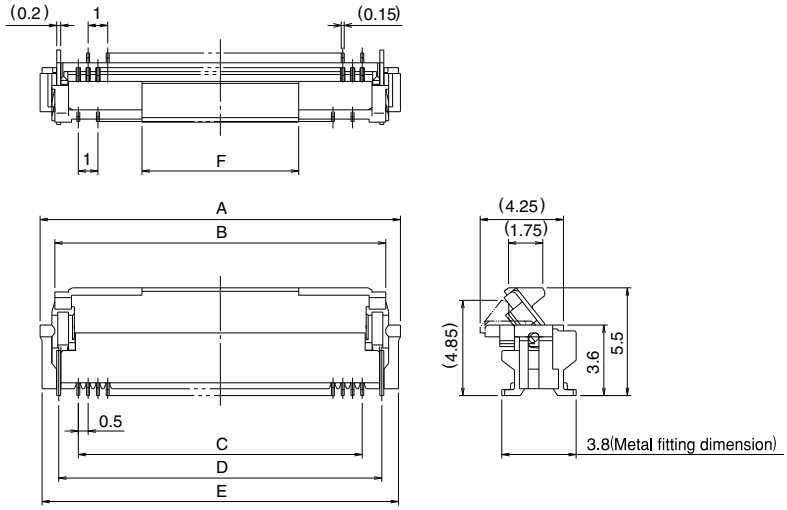


Note 1 : The coplanarity of each terminal lead within specified dimension is 0.1mm Max.
Note 2 : Packaged on tape and reel only. Check packaging specification.
Note 3 : Slight variations in color of the plastic compounds do not affect form, fit or function of the connector.
Note 4 : After reflow, the terminal plating may change color, however this does not represent a quality issue.


Unit : mm


| Part No. | HRS No. | No. of Contacts | A | B | C | D | E | F |
|---|---|---|---|---|---|---|---|---|
| FH12-6S-0.5SVA(54) | 586-0756-4 54 | 6 | 6.4 | 4.9 | 2.5 | 4.5 | 6.2 | 4 |
| FH12-10S-0.5SVA(54) | 586-0806-0 54 | 10 | 8.4 | 6.9 | 4.5 | 6.5 | 8.2 | 4 |
| FH12-12S-0.5SVA(54) | 586-0757-7 54 | 12 | 9.4 | 7.9 | 5.5 | 7.5 | 9.2 | 4 |
| FH12-13S-0.5SVA(54) | 586-0807-3 54 | 13 | 9.9 | 8.4 | 6.0 | 8.0 | 9.7 | 4 |
| FH12-15S-0.5SVA(54) | 586-0808-6 54 | 15 | 10.9 | 9.4 | 7.0 | 9.0 | 10.7 | 4 |
| FH12-16S-0.5SVA(54) | 586-0809-9 54 | 16 | 11.4 | 9.9 | 7.5 | 9.5 | 11.2 | 4 |
| FH12-17S-0.5SVA(54) | 586-0810-8 54 | 17 | 11.9 | 10.4 | 8.0 | 10.0 | 11.7 | 4 |
| FH12-18S-0.5SVA(54) | 586-0811-0 54 | 18 | 12.4 | 10.9 | 8.5 | 10.5 | 12.2 | 4 |
| FH12-20S-0.5SVA(54) | 586-0812-3 54 | 20 | 13.4 | 11.9 | 9.5 | 11.5 | 13.2 | 4 |
| FH12-22S-0.5SVA(54) | 586-0813-6 54 | 22 | 14.4 | 12.9 | 10.5 | 12.5 | 14.2 | 8 |
| FH12-24S-0.5SVA(54) | 586-0814-9 54 | 24 | 15.4 | 13.9 | 11.5 | 13.5 | 15.2 | 8 |
| FH12-26S-0.5SVA(54) | 586-0815-1 54 | 26 | 16.4 | 14.9 | 12.5 | 14.5 | 16.2 | 8 |
| FH12-30S-0.5SVA(54) | 586-0750-8 54 | 30 | 18.4 | 16.9 | 14.5 | 16.5 | 18.2 | 8 |
| FH12-32S-0.5SVA(54) | 586-0816-4 54 | 32 | 19.4 | 17.9 | 15.5 | 17.5 | 19.2 | 8 |
| FH12-33S-0.5SVA(54) | 586-0818-0 54 | 33 | 19.9 | 18.4 | 16.0 | 18.0 | 19.7 | 8 |
| FH12-34S-0.5SVA(54) | 586-0817-7 54 | 34 | 20.4 | 18.9 | 16.5 | 18.5 | 20.2 | 8 |
| FH12-36S-0.5SVA(54) | 586-0819-2 54 | 36 | 21.4 | 19.9 | 17.5 | 19.5 | 21.2 | 8 |
| FH12-40S-0.5SVA(54) | 586-0804-5 54 | 40 | 23.4 | 21.9 | 19.5 | 21.5 | 23.2 | 8 |
| FH12-45S-0.5SVA(54) | 586-0820-1 54 | 45 | 25.9 | 24.4 | 22.0 | 24.0 | 25.7 | 8 |
| FH12-49S-0.5SVA(54) | 586-0821-4 54 | 49 | 27.9 | 26.4 | 24.0 | 26.0 | 27.7 | 8 |
| FH12-50S-0.5SVA(54) | 586-0805-8 54 | 50 | 28.4 | 26.9 | 24.5 | 26.5 | 28.2 | 8 |
| FH12-60S-0.5SVA(54) | 586-0749-9 54 | 60 | 33.4 | 31.9 | 29.5 | 31.5 | 33.2 | 8 |

Note 1 : Embossed tape reel packaging (1,000 pcs/reel, 500 pcs/reel).
Order by number of reels.

Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

# ■1mm Pitch Type Bottom Contact Type

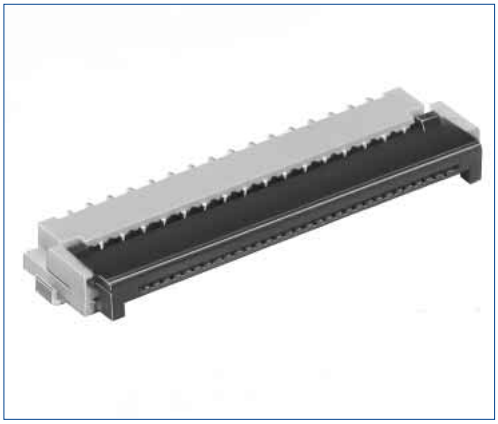

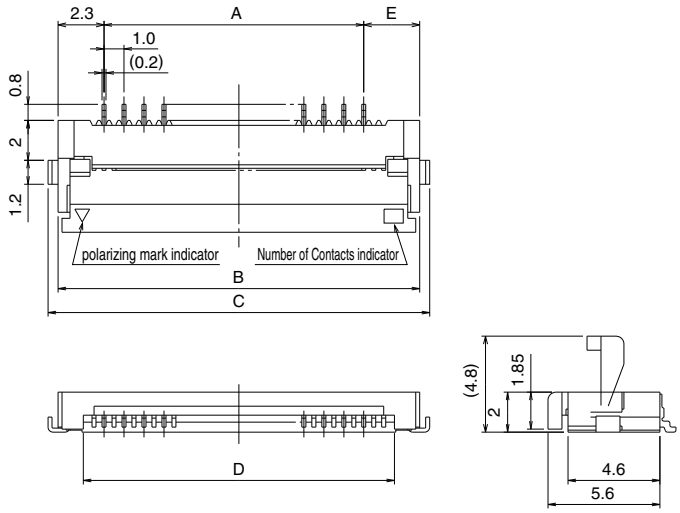


Note 1 : The coplanarity of each terminal lead within specified dimension is 0.1mm Max.
Note 2 : Packaged on tape and reel only. Check packaging specification.
Note 3 : Slight variations in color of the plastic compounds do not affect form, fit or function of the connector.
Note 4 : After reflow, the terminal plating may change color, however this does not represent a quality issue.

Unit : mm


| | Part No. | HRS No. | No. of Contacts | A | B | C | D | E |
|---|---|---|---|---|---|---|---|---|
| Standard type | FH12-5S-1SH(**) | 586-0591-6 ** | 5 | 4 | 8.6 | 9.6 | 6.07 | 2.3 |
| | FH12-6S-1SH(**) | 586-0607-4 ** | 6 | 5 | 9.6 | 10.6 | 7.07 | 2.3 |
| | FH12-7S-1SH(**) | 586-0535-5 ** | 7 | 6 | 10.6 | 11.6 | 8.07 | 2.3 |
| | FH12-8S-1SH(**) | 586-0579-0 ** | 8 | 7 | 11.6 | 12.6 | 9.07 | 2.3 |
| | FH12-9S-1SH(**) | 586-0540-5 ** | 9 | 8 | 12.6 | 13.6 | 10.07 | 2.3 |
| | FH12-11S-1SH(**) | 586-0668-9 ** | 11 | 10 | 14.6 | 15.6 | 12.07 | 2.3 |
| | FH12-12S-1SH(**) | 586-0741-7 ** | 12 | 11 | 15.6 | 16.6 | 13.07 | 2.3 |
| | FH12-16S-1SH(**) | 586-0536-8 ** | 16 | 15 | 19.6 | 20.6 | 17.07 | 2.3 |
| | FH12-17S-1SH(**) | 586-0739-5 ** | 17 | 16 | 20.6 | 21.6 | 18.07 | 2.3 |
| | FH12-22S-1SH(**) | 586-0547-4 ** | 22 | 21 | 25.6 | 26.6 | 23.07 | 2.3 |
| | FH12-26S-1SH(**) | 586-0592-9 ** | 26 | 25 | 29.6 | 30.6 | 27.07 | 2.3 |
| Eccentric type | FH12-10(4)SA-1SH(**) | 586-0537-0 ** | 4 | 3 | 8.1 | 9.1 | 5.57 | 2.8 |
| | FH12-14(6)SA-1SH(**) | 586-0538-3 ** | 6 | 5 | 10.1 | 11.1 | 7.57 | 2.8 |
| | FH12-18(8)SA-1SH(**) | 586-0539-6 ** | 8 | 7 | 12.1 | 13.1 | 9.57 | 2.8 |
| | FH12-22(10)SA-1SH(**) | 586-0541-8 ** | 10 | 9 | 14.1 | 15.1 | 11.57 | 2.8 |
| | FH12-24(11)SA-1SH(**) | 586-0542-0 ** | 11 | 10 | 15.1 | 16.1 | 12.57 | 2.8 |
| | FH12-30(14)SA-1SH(**) | 586-0543-3 ** | 14 | 13 | 18.1 | 19.1 | 15.57 | 2.8 |
| | FH12-40(19)SA-1SH(**) | 586-0546-1 ** | 19 | 18 | 23.1 | 24.1 | 20.57 | 2.8 |
| | FH12-50(24)SA-1SH(**) | 586-0548-7 ** | 24 | 23 | 28.1 | 29.1 | 25.57 | 2.8 |

Note 1 : Embossed tape reel packaging (2,000 pcs/reel, 500 pcs/reel).
Order by number of reels.

Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

# ■1mm Pitch Vertical Mounting Type



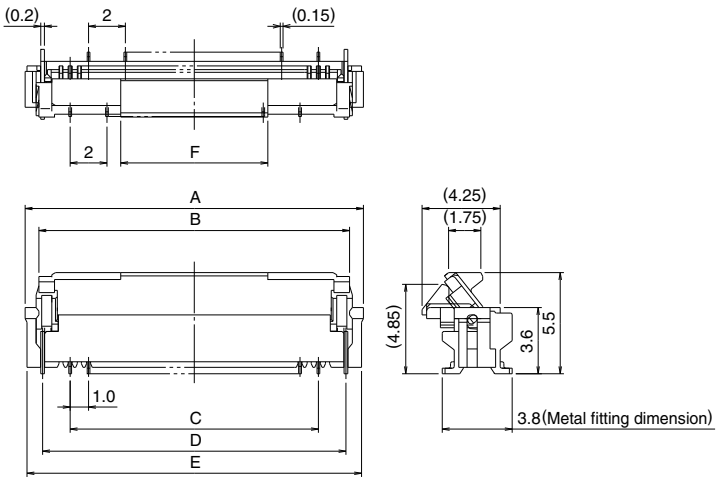


Note 1 : The coplanarity of each terminal lead within specified dimension is 0.1mm Max.
Note 2 : Packaged on tape and reel only. Check packaging specification.
Note 3 : Slight variations in color of the plastic compounds do not affect form, fit or function of the connector.
Note 4 : After reflow, the terminal plating may change color, however this does not represent a quality issue.

Unit : mm

| Part No. | HRS No. | No. of Contacts | A | B | C | D | E | F |
|---|---|---|---|---|---|---|---|---|
| FH12- 6S-1SVA(54) | 586-0822-0 54 | 6 | 9.9 | 8.4 | 5 | 8 | 9.7 | 4 |
| FH12- 7S-1SVA(54) | 586-0823-0 54 | 7 | 10.9 | 9.4 | 6 | 9 | 10.7 | 4 |
| FH12- 8S-1SVA(54) | 586-0824-0 54 | 8 | 11.9 | 10.4 | 7 | 10 | 11.7 | 4 |
| FH12-16S-1SVA(54) | 586-0825-0 54 | 16 | 19.9 | 18.4 | 15 | 18 | 19.7 | 8 |
| FH12-20S-1SVA(54) | 586-0826-0 54 | 20 | 23.9 | 22.4 | 19 | 22 | 23.7 | 8 |
| FH12-22S-1SVA(54) | 586-0827-0 54 | 22 | 25.9 | 24.4 | 21 | 24 | 25.7 | 8 |
| FH12-24S-1SVA(54) | 586-0828-0 54 | 24 | 27.9 | 26.4 | 23 | 26 | 27.7 | 8 |

Note 1 : Embossed tape reel packaging (1,000 pcs/reel, 500 pcs/reel).
Order by number of reels.


Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

# ◆Recommended FPC/FFC dimensions and Land/Metal Mask dimensions

## ●0.5mm Pitch Product

### 0.5mm Pitch Bottom Contact Type

#### FPC/FFC dimensions

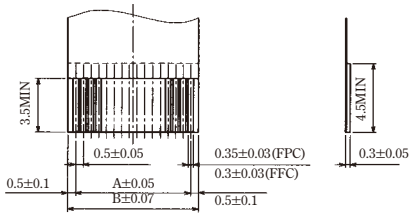



∗Set the stiffener thickness to 0.188 (7.5mil) min.

Unit : mm

| Number of Contacts | A | B | Number of Contacts | A | B |
|---|---|---|---|---|---|
| 6 | 2.5 | 3.5 | 25 | 12.0 | 13.0 |
| 8 | 3.5 | 4.5 | 26 | 12.5 | 13.5 |
| 10 | 4.5 | 5.5 | 28 | 13.5 | 14.5 |
| 11 | 5.0 | 6.0 | 29 | 14.0 | 15.0 |
| 12 | 5.5 | 6.5 | 30 | 14.5 | 15.5 |
| 13 | 6.0 | 7.0 | 32 | 15.5 | 16.5 |
| 14 | 6.5 | 7.5 | 33 | 16.0 | 17.0 |
| 15 | 7.0 | 8.0 | 34 | 16.5 | 17.5 |
| 16 | 7.5 | 8.5 | 35 | 17.0 | 18.0 |
| 17 | 8.0 | 9.0 | 36 | 17.5 | 18.5 |
| 18 | 8.5 | 9.5 | 40 | 19.5 | 20.5 |
| 19 | 9.0 | 10.0 | 42 | 20.5 | 21.5 |
| 20 | 9.5 | 10.5 | 45 | 22.0 | 23.0 |
| 22 | 10.5 | 11.5 | 50 | 24.5 | 25.5 |
| 24 | 11.5 | 12.5 | 53 | 26.0 | 27.0 |

#### Land / Metal Mask dimensions

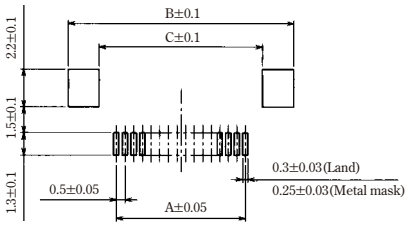



Recommended metal mask thickness : 0.15mm

Unit : mm

| Number of Contacts | A | B | C | Number of Contacts | A | B | C |
|---|---|---|---|---|---|---|---|
| 6 | 2.5 | 8.1 | 4.5 | 25 | 12.0 | 17.6 | 14.0 |
| 8 | 3.5 | 9.1 | 5.5 | 26 | 12.5 | 18.1 | 14.5 |
| 10 | 4.5 | 10.1 | 6.5 | 28 | 13.5 | 19.1 | 15.5 |
| 11 | 5.0 | 10.6 | 7.0 | 29 | 14.0 | 19.6 | 16.0 |
| 12 | 5.5 | 11.1 | 7.5 | 30 | 14.5 | 20.1 | 16.5 |
| 13 | 6.0 | 11.6 | 8.0 | 32 | 15.5 | 21.1 | 17.5 |
| 14 | 6.5 | 12.1 | 8.5 | 33 | 16.0 | 21.6 | 18.0 |
| 15 | 7.0 | 12.6 | 9.0 | 34 | 16.5 | 22.1 | 18.5 |
| 16 | 7.5 | 13.1 | 9.5 | 35 | 17.0 | 22.6 | 19.0 |
| 17 | 8.0 | 13.6 | 10.0 | 36 | 17.5 | 23.1 | 19.5 |
| 18 | 8.5 | 14.1 | 10.5 | 40 | 19.5 | 25.1 | 21.5 |
| 19 | 9.0 | 14.6 | 11.0 | 42 | 20.5 | 26.1 | 22.5 |
| 20 | 9.5 | 15.1 | 11.5 | 45 | 22.0 | 27.6 | 24.0 |
| 22 | 10.5 | 16.1 | 12.5 | 50 | 24.5 | 30.1 | 26.5 |
| 24 | 11.5 | 17.1 | 13.5 | 53 | 26.0 | 31.6 | 28.0 |

### 0.5mm Pitch Top Contact Type

#### FPC/FFC dimensions

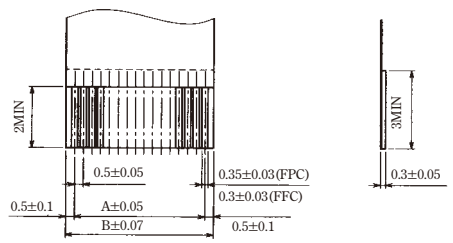



∗Set the stiffener thickness to 0.188 (7.5mil) min.

Unit : mm

| Number of Contacts | A | B | Number of Contacts | A | B |
|---|---|---|---|---|---|
| 6 | 2.5 | 3.5 | 26 | 12.5 | 13.5 |
| 10 | 4.5 | 5.5 | 30 | 14.5 | 15.5 |
| 12 | 5.5 | 6.5 | 32 | 15.5 | 16.5 |
| 13 | 6.0 | 7.0 | 33 | 16.0 | 17.0 |
| 15 | 7.0 | 8.0 | 34 | 16.5 | 17.5 |
| 16 | 7.5 | 8.5 | 36 | 17.5 | 18.5 |
| 17 | 8.0 | 9.0 | 40 | 19.5 | 20.5 |
| 18 | 8.5 | 9.5 | 45 | 22.0 | 23.0 |
| 20 | 9.5 | 10.5 | 49 | 24.0 | 25.0 |
| 22 | 10.5 | 11.5 | 50 | 24.5 | 25.5 |
| 24 | 11.5 | 12.5 | 60 | 29.5 | 30.5 |

#### Land / Metal Mask dimensions

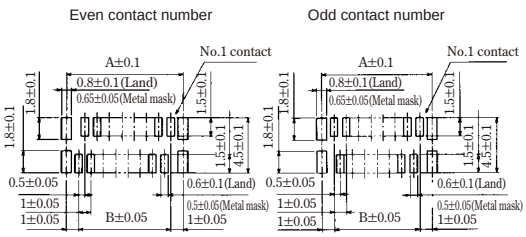


Recommended metal mask thickness : 0.15mm

Unit : mm

| Number of Contacts | A | B | Number of Contacts | A | B |
|---|---|---|---|---|---|
| 10 | 6.5 | 4.5 | 26 | 14.5 | 12.5 |
| 12 | 7.5 | 5.5 | 30 | 16.5 | 14.5 |
| 13 | 8.0 | 6.0 | 32 | 17.5 | 15.5 |
| 15 | 9.0 | 7.0 | 33 | 18.0 | 16.0 |
| 16 | 9.5 | 7.5 | 34 | 18.5 | 16.5 |
| 17 | 10.0 | 8.0 | 36 | 19.5 | 17.5 |
| 18 | 10.5 | 8.5 | 40 | 21.5 | 19.5 |
| 20 | 11.5 | 9.5 | 45 | 24.0 | 22.0 |
| 22 | 12.5 | 10.5 | 49 | 26.0 | 24.0 |
| 24 | 13.5 | 11.5 | 50 | 26.5 | 24.5 |
| | | | 60 | 31.5 | 29.5 |

### 0.5mm Pitch Vertical Mounting Type


Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

# ◆Recommended FPC/FFC dimensions and Land/Metal Mask dimensions

## ●1mm Pitch Product

### 1mm Pitch Bottom Contact Type

#### FPC/FFC dimensions

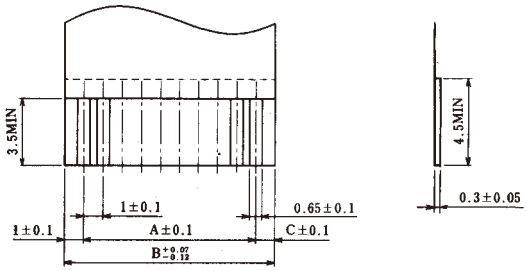



※Set the stiffener thickness to 0.188 (7.5mil) min.

Unit : mm

| Type | Number of Contacts | A | B | C |
|---|---|---|---|---|
| Standard Type | 5 | 4 | 6 | 1 |
| | 6 | 5 | 7 | 1 |
| | 7 | 6 | 8 | 1 |
| | 8 | 7 | 9 | 1 |
| | 9 | 8 | 10 | 1 |
| | 11 | 10 | 12 | 1 |
| | 12 | 11 | 13 | 1 |
| | 16 | 15 | 17 | 1 |
| | 17 | 16 | 18 | 1 |
| | 22 | 21 | 23 | 1 |
| | 26 | 25 | 27 | 1 |

| Type | Number of Contacts | A | B | C |
|---|---|---|---|---|
| Eccentric Type | 4 | 3 | 5.5 | 1.5 |
| | 6 | 5 | 7.5 | 1.5 |
| | 8 | 7 | 9.5 | 1.5 |
| | 10 | 9 | 11.5 | 1.5 |
| | 11 | 10 | 12.5 | 1.5 |
| | 14 | 13 | 15.5 | 1.5 |
| | 19 | 18 | 20.5 | 1.5 |
| | 24 | 23 | 25.5 | 1.5 |

#### Land / Metal Mask dimensions

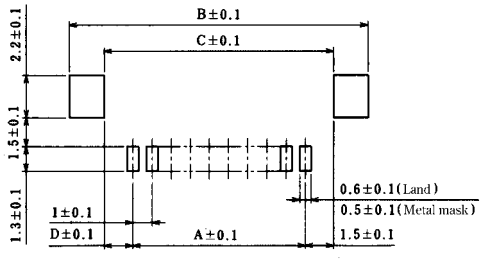


Recommended metal mask thickness : 0.15mm


Unit : mm

| Type | Number of Contacts | A | B | C | D |
|---|---|---|---|---|---|
| Standard Type | 5 | 4 | 10.6 | 7 | 1.5 |
| | 6 | 5 | 11.6 | 8 | 1.5 |
| | 7 | 6 | 12.6 | 9 | 1.5 |
| | 8 | 7 | 13.6 | 10 | 1.5 |
| | 9 | 8 | 14.6 | 11 | 1.5 |
| | 11 | 10 | 16.6 | 13 | 1.5 |
| | 12 | 11 | 17.6 | 14 | 1.5 |
| | 16 | 15 | 21.6 | 18 | 1.5 |
| | 17 | 16 | 22.6 | 19 | 1.5 |
| | 22 | 21 | 27.6 | 24 | 1.5 |
| | 26 | 25 | 31.6 | 28 | 1.5 |

| Type | Number of Contacts | A | B | C | D |
|---|---|---|---|---|---|
| Eccentric Type | 4 | 3 | 10.1 | 6.5 | 2 |
| | 6 | 5 | 12.1 | 8.5 | 2 |
| | 8 | 7 | 14.1 | 10.5 | 2 |
| | 10 | 9 | 16.1 | 12.5 | 2 |
| | 11 | 10 | 17.1 | 13.5 | 2 |
| | 14 | 13 | 20.1 | 16.5 | 2 |
| | 19 | 18 | 25.1 | 21.5 | 2 |
| | 24 | 23 | 30.1 | 26.5 | 2 |

### 1mm Pitch Vertical Mounting Type

#### FPC/FFC dimensions

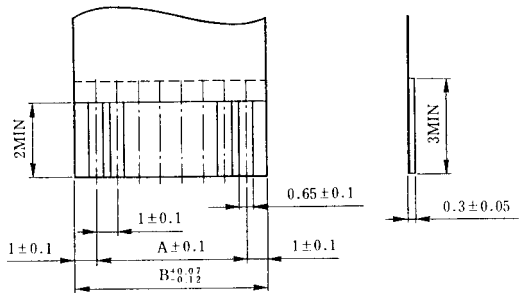



※Set the stiffener thickness to 0.188 (7.5mil) min.

Unit : mm

| Number of Contacts | A | B |
|---|---|---|
| 6 | 5 | 7 |
| 7 | 6 | 8 |
| 8 | 7 | 9 |
| 16 | 15 | 17 |
| 20 | 19 | 21 |
| 22 | 21 | 23 |
| 24 | 23 | 25 |

#### Land / Metal Mask dimensions

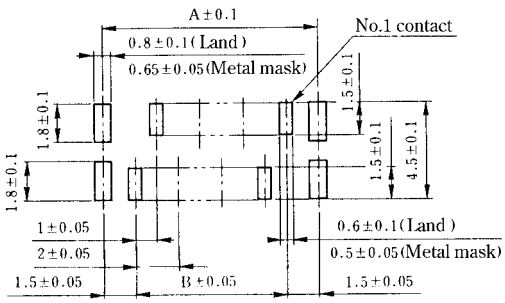


Recommended metal mask thickness : 0.15mm

Unit : mm


| Number of Contacts | A | B |
|---|---|---|
| 6 | 8 | 5 |
| 7 | 9 | 6 |
| 8 | 10 | 7 |
| 16 | 18 | 15 |
| 20 | 22 | 19 |
| 22 | 24 | 21 |
| 24 | 26 | 23 |


Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

# ◆Packaging Specification


## Embossed Carrier Tape Dimensions


### Horizontal Type (Common to Bottom/Top Contact, 0.5mm/1mm Pitch)

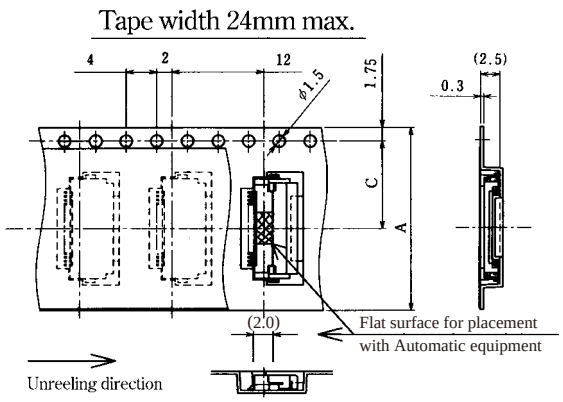

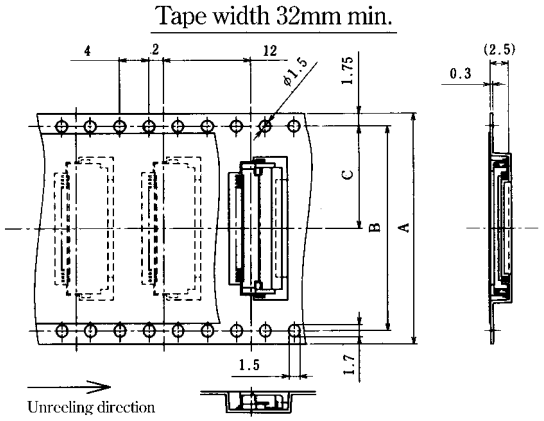
### Reel Dimensions (Common to All Types)

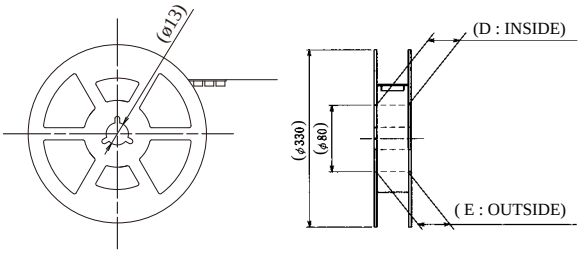


### ●0.5mm Pitch Bottom/Top Contact Type

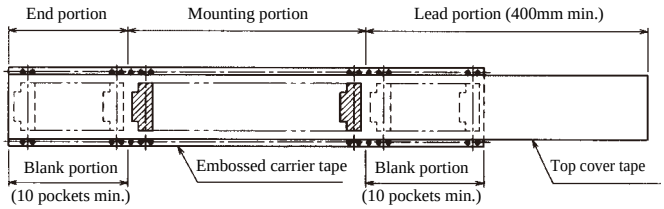Unit : mm

| Number of Contacts \ Dimension | A | B | C | D | E |
|---|---|---|---|---|---|
| 6 | 16 | —— | 7.5 | 17.4 | 21.4 |
| 8 | 16 | —— | 7.5 | 17.4 | 21.4 |
| 10 | 16 | —— | 7.5 | 17.4 | 21.4 |
| 11 | 16 | —— | 7.5 | 17.4 | 21.4 |
| 12 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 13 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 14 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 15 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 16 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 17 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 18 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 19 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 20 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 22 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 24 | 24 | —— | 11.5 | 25.4 | 29.4 |

| Number of Contacts \ Dimension | A | B | C | D | E |
|---|---|---|---|---|---|
| 25 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 26 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 28 | 32 | 28.4 | 14.2 | 33.4 | 37.4 |
| 29 | 32 | 28.4 | 14.2 | 33.4 | 37.4 |
| 30 | 32 | 28.4 | 14.2 | 33.4 | 37.4 |
| 32 | 32 | 28.4 | 14.2 | 33.4 | 37.4 |
| 33 | 32 | 28.4 | 14.2 | 33.4 | 37.4 |
| 34 | 32 | 28.4 | 14.2 | 33.4 | 37.4 |
| 35 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| 36 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| 40 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| 42 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| 45 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| 50 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| 53 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |

### ● 1mm Pitch Bottom Contact Type

Unit : mm


| | Number of Contacts \ Dimension | A | B | C | D | E |
|---|---|---|---|---|---|---|
| Standard Type | 5 | 16 | —— | 7.5 | 17.4 | 21.4 |
| | 6 | 24 | —— | 11.5 | 25.4 | 29.4 |
| | 7 | 24 | —— | 11.5 | 25.4 | 29.4 |
| | 8 | 24 | —— | 11.5 | 25.4 | 29.4 |
| | 9 | 24 | —— | 11.5 | 25.4 | 29.4 |
| | 11 | 24 | —— | 11.5 | 25.4 | 29.4 |
| | 12 | 24 | —— | 11.5 | 25.4 | 29.4 |
| | 16 | 32 | 28.4 | 14.2 | 33.4 | 37.4 |
| | 17 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| | 22 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| | 26 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |

| | Number of Contacts \ Dimension | A | B | C | D | E |
|---|---|---|---|---|---|---|
| Eccentric Type | 4 | 16 | —— | 7.5 | 17.4 | 21.4 |
| | 6 | 24 | —— | 11.5 | 25.4 | 29.4 |
| | 8 | 24 | —— | 11.5 | 25.4 | 29.4 |
| | 10 | 24 | —— | 11.5 | 25.4 | 29.4 |
| | 11 | 24 | —— | 11.5 | 25.4 | 29.4 |
| | 14 | 32 | 28.4 | 14.2 | 33.4 | 37.4 |
| | 19 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| | 24 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |


Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

## Vertical Mounting Type (Common to 0.5mm/1mm Pitch)


Tape width 24mm max.

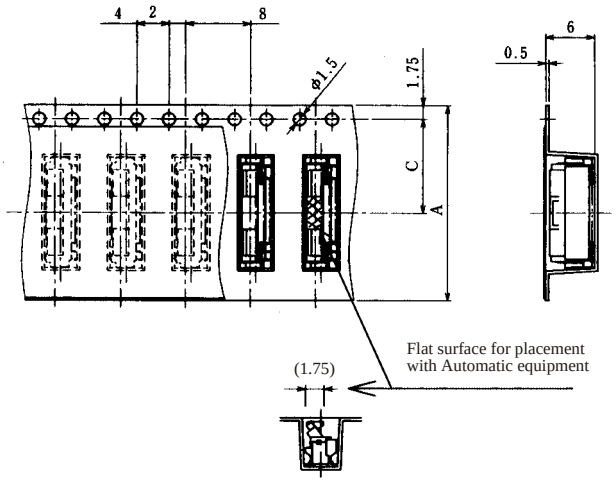



Tape width 32mm min.

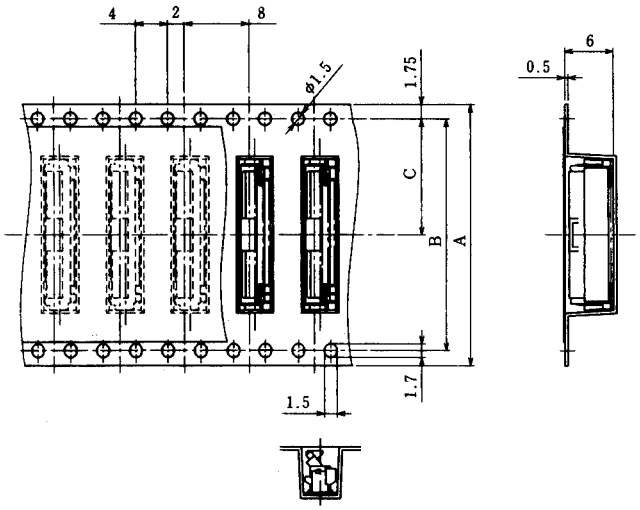


### Reel Dimensions (Common to All Types)

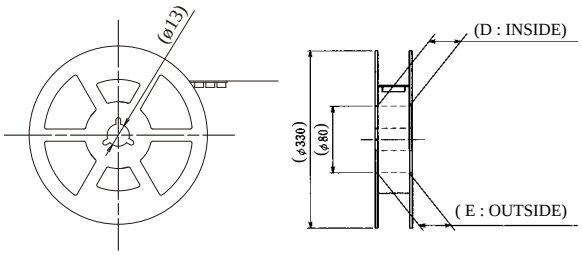

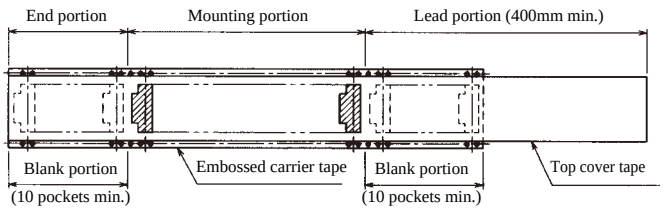
### ●0.5mm Pitch Vertical mounting Type

Unit : mm

| Dimension / Number of Contacts | A | B | C | D | E |
|---|---|---|---|---|---|
| 6 | 16 | —— | 7.5 | 17.4 | 21.4 |
| 10 | 16 | —— | 7.5 | 17.4 | 21.4 |
| 12 | 16 | —— | 7.5 | 17.4 | 21.4 |
| 13 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 15 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 16 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 17 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 18 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 20 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 22 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 24 | 24 | —— | 11.5 | 25.4 | 29.4 |

| Dimension / Number of Contacts | A | B | C | D | E |
|---|---|---|---|---|---|
| 26 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 30 | 32 | 28.4 | 14.2 | 33.4 | 37.4 |
| 32 | 32 | 28.4 | 14.2 | 33.4 | 37.4 |
| 33 | 32 | 28.4 | 14.2 | 33.4 | 37.4 |
| 34 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| 36 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| 40 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| 45 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| 49 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| 50 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| 60 | 56 | 52.4 | 26.2 | 57.4 | 61.4 |

### ●1mm Pitch Vertical mounting Type

Unit : mm


| Dimension / Number of Contacts | A | B | C | D | E |
|---|---|---|---|---|---|
| 6 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 7 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 8 | 24 | —— | 11.5 | 25.4 | 29.4 |
| 16 | 32 | 28.4 | 14.2 | 33.4 | 37.4 |
| 20 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| 22 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |
| 24 | 44 | 40.4 | 20.2 | 45.4 | 49.4 |

Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

# ◆FH12 Series FPC/FFC Construction (Recommended Specifications)

## 1. FFC

### FFC : Flexible Flat Cable

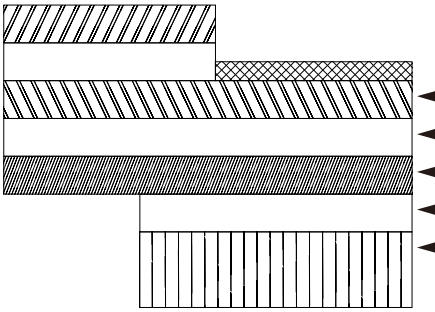


| Material Name | Material | Thickness (μm) | |
|---|---|---|---|
| Polyester film | | (12) | |
| Adhesive | Thermoplastic polyester | (30) | |
| (Nickel under plated / Gold plated), soft copper film | | 35 | |
| Adhesive | Polyester type | 30 | |
| Polyester | | 12 | |
| Adhesive | Polyester type | 30 | |
| Stiffener | Polyester type | 188 | (Note) |
| | Total | 295 | |

✻Real tolerance of thickness dimension is on the order of ±20μm (275 to 315μm)

Note : Use of a thicker FFC results in a stiffer lock action and the lock is more easily released.
A factor that contributes to thicker FFC is the use of 250μm stiffener which is thicker than the standard (188μm) product. This results in a total thickness of 357μm.
When using FFC, control of FFC thickness becomes easy if you indicate to us the thickness of the stiffener.

## 2. FPC

### FPC : Flexible Printed Circuit

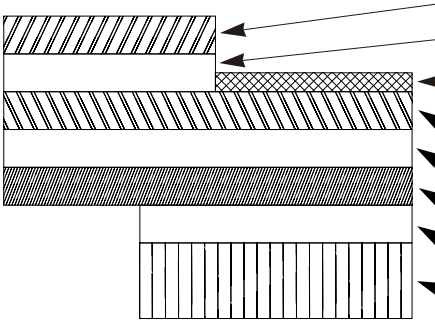


| Material Name | Material | Thickness (μm) |
|---|---|---|
| Covering layer film | Polyimide 1 mil | (25) |
| Cover adhesive | | (25) |
| Surface treatmenta | Nickel under plated 1to 5μm / Gold plated 0.2μm | 3 |
| Copper foil | Cu 1oz | 35 |
| Base adhesive | Heat-hardened adhesive | 25 |
| Base film | Polyimide 1 mil | 25 |
| Reinforcement material adhesive | Heat-hardened adhesive | 30 |
| Stiffener | Polyimide 7 mil | 175 |
| | Total | 293 |

## 3. Precautions

1. This specification is a recommendation for the construction of the FH12 Series FPC and FFC (t=0.3±0.05).
2. For details about the construction, please contact the FPC/FFC manufacturers.

# ■Recommended Temperature Profile

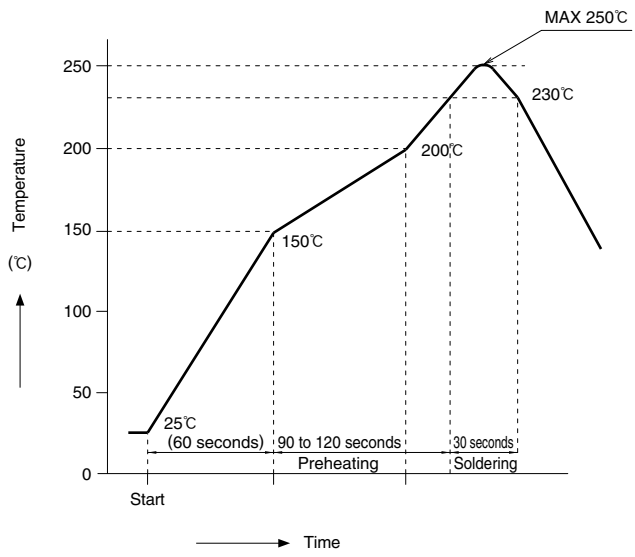


**HRS test conditions**








| | |
|---|---|
| Solder method | : Reflow, IR/hot air |
| Environment | : Room air |
| Solder composition | : Paste, 96.5%Sn/3%Ag/0.5%Cu (Senju Metal Industry, Co., Ltd.'s Part Number: M705-221CM5-32-10.5) |
| Test board | : Glass epoxy 40mm×80mm×1.6mm thick |
| Land dimensions | : Top and bottom contact type 0.3mm×1.3mm Vertical mounting type 0.6mm×1.5mm |
| Metal mask | : Top and bottom contact type 0.25mm×1.3mm×0.15mm thick Vertical mounting type 0.5mm×1.5mm×0.15mm thick |

This temperature profile is based on the above conditions. In individual applications the actual temperature may vary, depending on solder paste type, volume/thickness and board size/thickness. Consult your solder paste and equipment manufacturer for specific recommendations.

Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.






## ◆Connector Operating Instructions, precautions and recommendations

## ●Bottom Contact Type (common for 0.5mm/1mm Pitch)
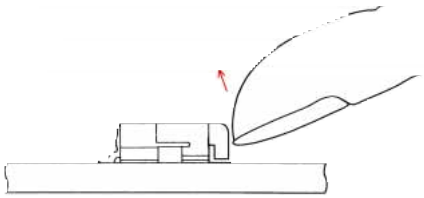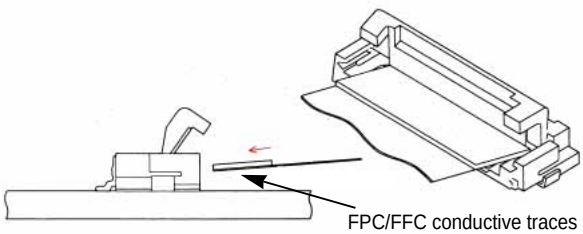
| Operation | Precautions |
|---|---|
| **1. FPC/FFC Termination procedure. Connector installed on the board.**<br>1) Lift up the actuator. Use thumb or index finger.<br>  <br>2) Fully insert the FPC/FFC parallel to mounting surface, with the exposed conductive traces facing down.<br>  | 1) Avoid grasping the actuator with two fingers or lifting the actuator with fingernail.<br>  <br>2) Do not use a thin tool such as the tip of a screwdriver to release the lock lever. Doing so will cause deformation of the contacts.<br>  <br>3) Do not apply force in the direction of arrows A, B, or C while the lock lever is open.<br>Doing so will cause the lock lever to become disen gaged, or will damage the hook portion of the connector body.<br>  <br>4) When inserting the FPC/FFC, do not forcefully rub against the surface beneath the connector insertion slot.<br>Doing so will result in the FPC/FFC forcefully striking the contacts and this will cause contact deformation, peeling of the FPC/FFC conductors, and other irregularities.<br>  <br>5) Insert the FPC/FFC at the proper position of the connector insertion slot, and insert perpendicularly with respect to the connector. Improper insertion will cause continuity problems, disengagement of the lock lever, and damage to the hook portion.<br>  |









Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

## ●Bottom Contact Type (common for 0.5mm/1mm Pitch)
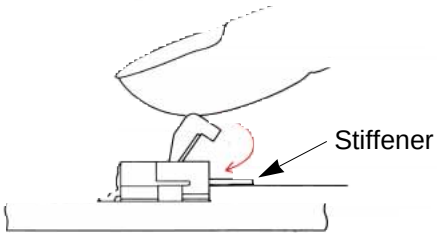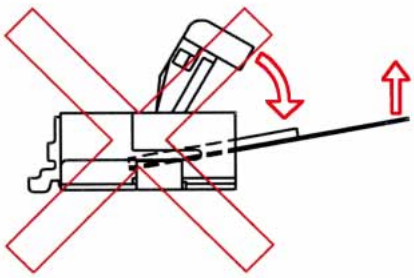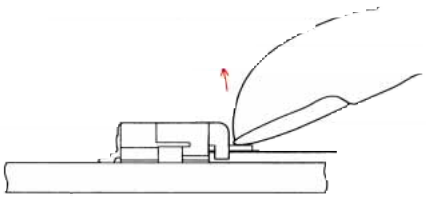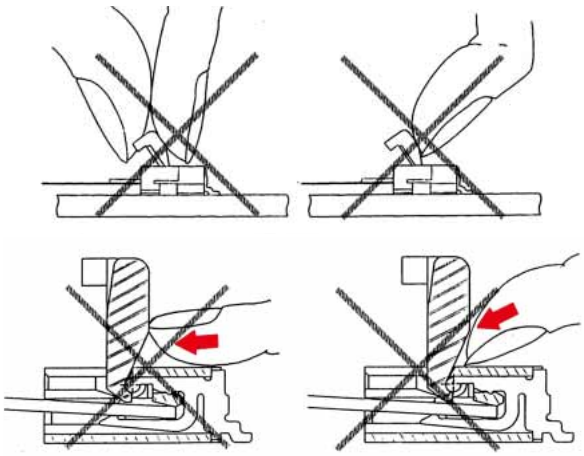
| Operation | Precautions |
|---|---|
| 3) Rotate down the actuator until firmly closed. It is critical that the inserted FPC/FFC is not moved and remains fully inserted. Should the FPC/FFC be moved, open the actuator and repeat the process, starting with Step 1. | 6) Partial insertion of the FPC/FFC, offset insertion, and diagonal insertion will result in an unfavorable engagement of the lock lever in which the lock lever is raised. To correct this, first remove the FPC/FFC and then reinsert it. Forcing the lock will damage the connector. |
|  |  |
| | 7) When locking, handle the FPC/FFC so that a load is not applied to the FPC/FFC as would occur by pulling the FPC/FFC, or lifting it, etc. When a load is applied in the opposite direction to the rotational movement of the lock, an excessive load will be applied and this will cause connector damage. |
| **2. FPC/FFC Removal**<br>1) Lift up the actuator.<br>2) Carefully remove the FPC/FFC. |  |
|  | 8) At the time of lock operation, application of force such as that indicated by the arrows in the diagrams below will cause the lock lever to disengage. When the lock lever has become disengaged, please exchange the entire connector. |
| |  |

Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

## ●Top Contact Type
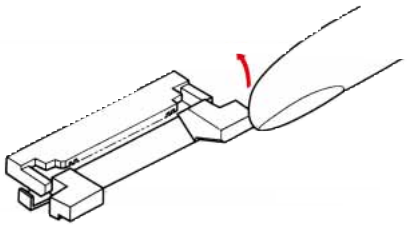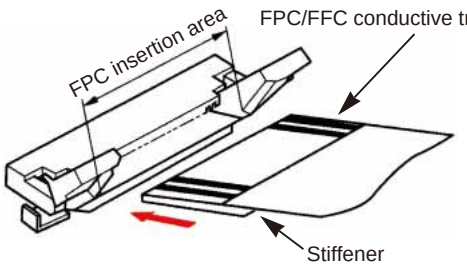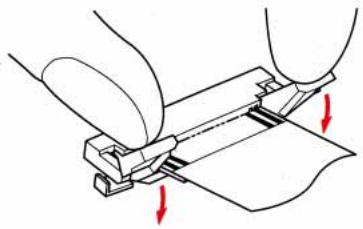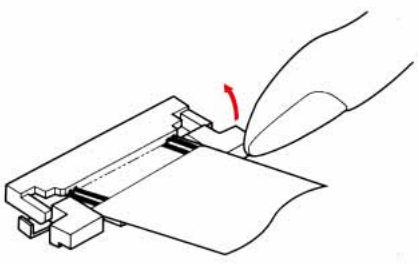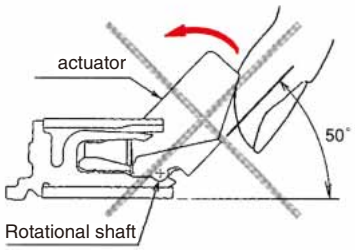
| Operation | Precautions |
|---|---|
| **1. FPC/FFC Termination procedure. Connector installed on the board.**<br>1) Lift up the actuator. Use thumb or index finger.<br>  <br>2) Fully insert the FPC/FFC parallel to mounting surface, with the exposed conductive traces facing UP.<br>  <br>3) Rotate down the actuator until firmly closed. It is critical that the inserted FPC/FFC is not moved and remains fully inserted. Should the FPC/FFC be moved, open the actuator and repeat the process, starting with Step 1 above.<br>  <br>**2. FPC/FFC Removal**<br>1) Lift up the actuator.<br>2) Carefully remove the FPC/FFC.<br>  | 1) Avoid further lifting of the actuator once the lock has been released. Doing so will cause the lock lever to separate from the rotational shaft, and the lock lever will become disengaged or the hook portion of the connector body will be damaged.<br>  <br>2) Avoid further pressing of the lock portion from the locked condition when the FPC/FFC has not yet been inserted. Doing so will cause the lock lever to become disengaged from the rotational shaft, and the hook portion of the connector body will be damaged.<br>  <br>3) Do not insert the FPC/FFC diagonally. D o i n g so will result in the corners of the FPC/FFC catching on the contacts and will cause deformation of the contacts.<br>  <br>4) When closing down the actuator apply equal pressure to both sides of the actuator.<br>  |


Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

## ●Vertical Mounting type (common for 0.5mm/1mm pitch)


| Operation | Precautions |
|---|---|

### 1. FPC/FFC Termination procedure. Connector installed on the board.


1) Verify that the actuator is positioned upright. If the actuator has rotated to the side, carefully rotate it upright.




2) Insert the FPC/FFC vertically in the connector slot assuring that the conductive traces of the FPC/FFC are facing away from the actuator.

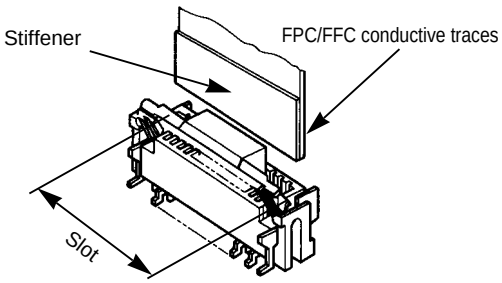



3) Press down the actuator in the direction shown.

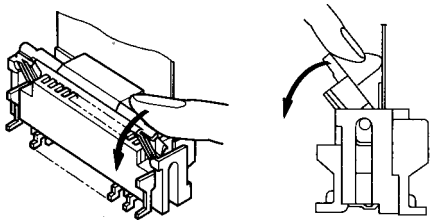


### 2. FPC/FFC Removal


Rotate the actuator upward and withdraw the FPC/FFC.

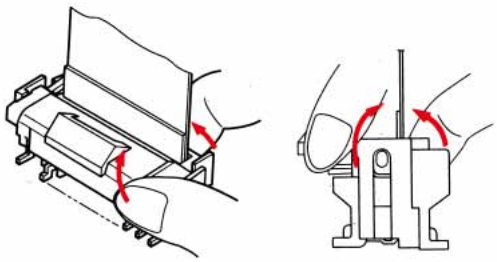


1) Avoid forcing the actuator up or down without the FPC/FFC inserted.

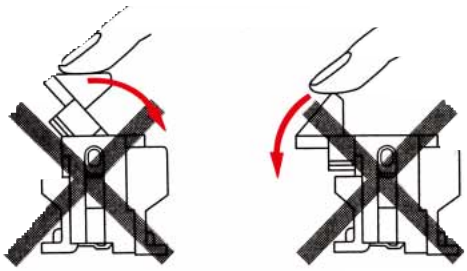


2) Do not attempt to open or over rotate an already released actuator (refer to the diagram below). These actions may damage the actuator.



3) Do not insert the FPC/FFC diagonally. Doing so will result in the corners of the FPC/FFC catching on the contacts and will cause deformation of the contacts.



4) Do not press down vertically on the actuator when the FPC/FFC already inserted, it needs to be rotated to engage the lock. Refer to the diagram below.
Doing so may cause actuator failure.



Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

# MEMO：

Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

**USA:**
**HIROSE ELECTRIC (U.S.A.), INC. HEADQUARTERS CHICAGO OFFICE**
2300 Warrenville Road, Suite 150,
Downers Grove, IL 60515
Phone : +1-630-282-6700
http://www.hirose.com/us/

**USA:**
**HIROSE ELECTRIC (U.S.A.), INC. SAN JOSE OFFICE**
2841 Junction Ave, Suite 200
San Jose, CA. 95134
Phone : +1-408-253-9640
Fax : +1-408-253-9641
http://www.hirose.com/us/

**USA:**
**HIROSE ELECTRIC (U.S.A.), INC. DETROIT OFFICE (AUTOMOTIVE)**
17197 N. Laurel Park Drive, Suite 253,
Livonia, MI 48152
Phone : +1-734-542-9963
Fax : +1-734-542-9964
http://www.hirose.com/us/

**THE NETHERLANDS:**
**HIROSE ELECTRIC EUROPE B.V.**
Hogehillweg #8 1101 CC Amsterdam Z-O
Phone : +31-20-6557460
Fax : +31-20-6557469
http://www.hirose.com/eu/

**GERMANY:**
**HIROSE ELECTRIC EUROPE B.V. GERMAN BRANCH**
Schoenbergstr. 20, 73760 ostfildern
Phone : +49-711-456002-1
Fax : +49-711-456002-299
http://www.hirose.com/eu/

**GERMANY:**
**HIROSE ELECTRIC EUROPE B.V. NUREMBERG OFFICE**
Neumeyerstrasse 22-26, 90411 Nurnberg
Phone : +49-911 32 68 89 63
Fax : +49-911 32 68 89 69
http://www.hirose.com/eu/

**GERMANY:**
**HIROSE ELECTRIC EUROPE B.V. HANOVER OFFICE**
Bayernstr. 3, Haus C 30855 Langenhagen, Germany
Phone : +49-511 97 82 61 30
Fax : +49-511 97 82 61 35
http://www.hirose.com/eu/

**FRANCE:**
**HIROSE ELECTRIC EUROPE B.V. PARIS OFFICE**
Regus La Garenne Colombes,Place de La Belgique,
71 Boulevard National La Garenne Colombes, 92250, France
Phone : +33 (0) 1 7082 3170
Fax : +33 (1) 7082 3101
http://www.hirose.com/eu/

**UNITED KINGDOM:**
**HIROSE ELECTRIC EUROPE BV (UK BRANCH)**
4 Newton Court, Kelvin Drive, Knowlhill,
Milton Keynes, MK5 8NH
Phone : +44-1908 202050
Fax : +44-1908 202058
http://www.hirose.com/eu/

**CHINA:**
**HIROSE ELECTRIC (SHANGHAI) CO., LTD.**
1601, Henderson Metropolitan, NO.300, East Nanjing Road, Huangpu District, Shanghai, China 200001
Phone : +86-21-6391-3355
Fax : +86-21-6391-3335
http://www.hirose.com/cn/

**CHINA:**
**HIROSE ELECTRIC (SHANGHAI) CO.,LTD. BEIJING BRANCH**
A1001, Ocean International Center, Building 56# East 4th Ring Middle Road, ChaoYang District, Beijing, 100025
Phone : +86-10-5165-9332
Fax : +86-10-5908-1381
http://www.hirose.com/cn/

**CHINA:**
**HIROSE ELECTRIC TECHNOLOGIES (SHENZHEN) CO., LTD.**
Room 09-13, 19/F, Office Tower Shun Hing Square, Di Wang Commercial Centre, 5002 Shen Nan Dong Road, Shenzhen City, Guangdong Province, 518008
Phone : +86-755-8207-0851
Fax : +86-755-8207-0873
http://www.hirose.com/cn/

**HONG KONG:**
**HIROSE ELECTRIC HONGKONG TRADING CO., LTD.**
Room 1001, West Wing, Tsim Sha Tsui Centre, 66 Mody Road, Tsim Sha Tsui East, Kowloon, Hong Kong
Phone : +852-2803-5338
Fax : +852-2591-6560
http://www.hirose.com/hk/

**TAIWAN:**
**HIROSE ELECTRIC TAIWAN CO., LTD.**
103 8F, No.87, Zhengzhou Rd., Taipei
Phone : +886-2-2555-7377
Fax : +886-2-2555-7350
http://www.hirose.com/tw/

**KOREA:**
**HIROSE KOREA CO.,LTD.**
250, Huimanggongwon-ro, Siheung-si,
Gyeonggi-do, Korea, 15083
Phone : +82-31-496-7000 or 7124
Fax : +82-31-496-7100
http://www.hirose.co.kr/

**SINGAPORE:**
**HIROSE ELECTRIC SINGAPORE PTE. LTD.**
10 Anson Road #26-16, International Plaza 079903, Singapore
Phone : +65-6324-6113
Fax : +65-6324-6123
http://www.hirose.com/sg/

**INDIA:**
**HIROSE ELECTRIC SINGAPORE PTE. LTD. DELHI LIAISON OFFICE**
Office NO.552, Regus-Green Boulevard, Level5, Tower C, Sec62, Plot B-9A, Block B, Noida, 201301, Uttar Pradesh, India
Phone : +91-12-660-8018
Fax : +91-120-4804949
http://www.hirose.com/sg/

**INDIA:**
**HIROSE ELECTRIC SINGAPORE PTE. LTD. BANGALORE LIAISON OFFICE**
Unit No-403, 4th Floor, No-84, Barton Centre, Mahatma Gandhi (MG) Road, Bangalore 560 001, Karnataka, India
Phone : +91-80-4120 1907
Fax : +91-80-4120 9908
http://www.hirose.com/sg/

**MALAYSIA:**
**PENANG REPRESENTATIVE OFFICE**
1-21-01, Suntech @ Penang Cybercity (1164), Lintang Mayang Pasir 3,11950, Bayan Baru, Penang, Malaysia.
Phone : +604-619-2564
Fax : +604-619-2574
http://www.hirose.com/sg/

**THAILAND:**
**BANGKOK OFFICE (REPRESENTATIVE OFFICE)**
Unit 4703, 47th FL., 1 Empire Tower, South Sathorn Road, Yannawa, Sathorn, Bangkok 10120 Thailand
Phone : +66-2-686-1255
Fax : +66-2-686-3433
http://www.hirose.com/sg/

Creative Links to World Electronics ®

HRS

**HIROSE ELECTRIC CO.,LTD.**
**2-6-3,Nakagawa Chuoh,Tsuzuki-Ku,Yokohama-Shi 224-8540,JAPAN**
**TEL: +81-45-620-3526 Fax: +81-45-591-3726**
**http://www.hirose.com**
**http://www.hirose-connectors.com**

Nov.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.



The characteristics and the specifications contained herein are for reference purpose. Please refer to the latest customer drawings prior to use.
The contents of this catalog are current as of date of 01/2017. Contents are subject to change without notice for the purpose of improvements.