

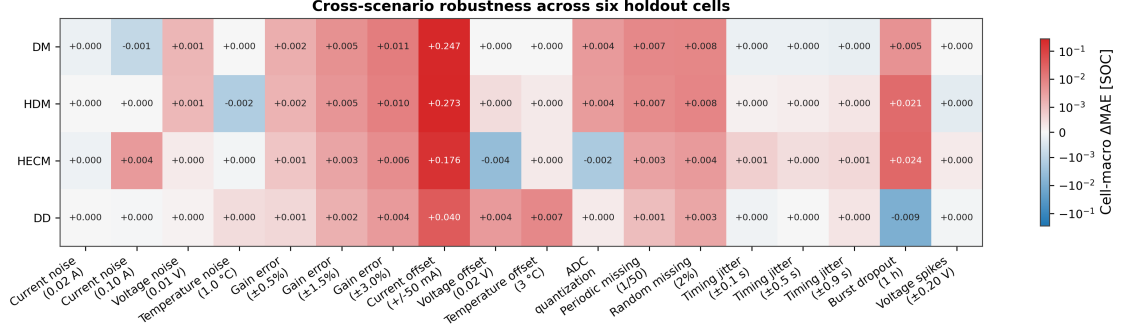


Figure 6.15: Cell-macro Δ MAE across 18 measurement-corruption and signal-integrity rows. Current-gain and current-offset rows use adverse directions from matched signed sweeps. Positive values denote degradation relative to each model’s paired baseline, while small negative values arise from finite-window compensation. Initialization recovery is evaluated separately.

Figure 6.16 combines relative accuracy, family-balanced robustness, and recovery and illustrates how deployment priorities alter the combined assessment. Under the family-balanced definition, robustness scores are 0.452 for DM, 0.351 for HDM, 0.360 for HECM, and 0.967 for DD. Equal weighting per scenario gives 0.549, 0.476, 0.552, and 0.793. A highest-level-plus-offset variant gives 0.573, 0.469, 0.562, and 0.693. DD leads all three aggregations. The changing score distances and the changing order of DM and HECM demonstrate the influence of the aggregation rule. The scenario-level heatmap remains necessary for identifying the disturbance mechanisms behind these relative summaries.