

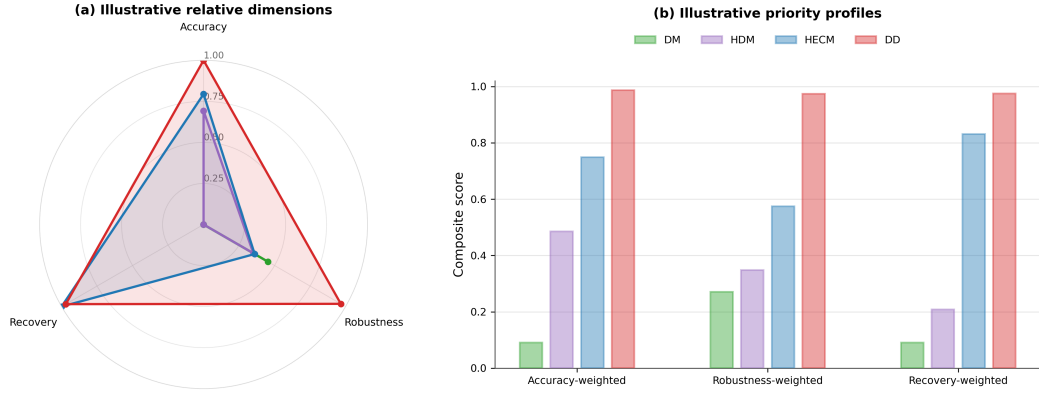


Figure 6.16: Decision-oriented synthesis for the four representatives. Panel (a) compares min–max-normalized accuracy, family-balanced robustness across eight disturbance families, and observed persistent recovery. Panel (b) applies three illustrative priority profiles that assign 60% to one dimension and 20% to each remaining dimension. The summary must be interpreted together with the scenario-level evidence in Figure 6.15.

6.4.12 Embedded performance and recurrent execution modes

The hardware experiment first verifies numerical equivalence before comparing speed and memory. Across the six nominal cell sequences, mean hardware and software MAE remains below 4×10^{-4} percentage points for every SOC core, as shown in Figure 6.17. These differences are orders of magnitude smaller than the estimator-to-dataset errors. The float32 C implementations therefore reproduce their software references sufficiently closely for deployment measurements.