Doc Code: PA..
Document Description: Power of Attorney

PTO/AIA/82A (07-13)
Approved for use through 03/31/2021. OMB 0651-0035
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

TRANSMITTAL FOR POWER OF ATTORNEY TO ONE OR MORE REGISTERED PRACTITIONERS

NOTE: This form is to be submitted with the Power of Attorney by Applicant form (PTO/AIA/82B) to identify the application to which the Power of Attorney is directed, in accordance with 37 CFR 1.5, unless the application number and filing date are identified in the Power of Attorney by Applicant form. If neither form PTO/AIA/82A nor form PTO/AIA82B identifies the application to which the Power of Attorney is directed, the Power of Attorney will not be recognized in the application.

Application Number	To be assigned
Filing Date	Herewith
First Named Inventor	KO, Jae Jun
Title	RADON MANAGEMENT SYSTEM USING RADON DETECTOR
Art Unit	To be assigned
Examiner Name	To be assigned
Attorney Docket Number	4016-1060

SIGNATURE of Applicant or Patent Practitioner

Signature	/Yun H. Choe/	Date (Optional)	
Name	Yun H. Choe	Registration Number	61798
Title (if Applicant is a juristic entity)			
Applicant Name (if Applicant is a juristic entity)			

NOTE: This form must be signed in accordance with 37 CFR 1.33. See 37 CFR 1.4(d) for signature requirements and certifications. If more than one applicant, use multiple forms.

☑ *Total of 1 forms are submitted.

This collection of information is required by 37 CFR 1.131, 1.32, and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Docket No. 4016-1060

POWER OF ATTORNEY
TO PROSECUTE APPLICATIONS BEFORE THE USPTO

I am the Applicant:

☐ Inventor or Joint Inventor

☐ Legal Representative of a Deceased or Legally Incapacitated Inventor

☒ Assignee or Person to Whom the Inventor is Under an Obligation to Assign

☐ Person Who Otherwise Shows Sufficient *Proprietary* Interest in Accordance with 35 U.S.C. § 118 and 37 CFR 1.46 (*e.g.*, a petition under 37 CFR 1.46(b)(2) was granted in the application or is being filed concurrently with this document)

I hereby revoke all previous powers of attorney given in the application identified in the attached transmittal letter.

☒ I hereby appoint Practitioner(s) associated with the following Customer Number as my/our attorney(s) or agent(s) and to transact all business in the United States Patent and Trademark Office connected therewith for the application referenced in the attached transmittal letter.

20311

Please recognize or change the correspondence address for the application to the address associated with the above-mentioned Customer Number.

APPLICANT INFORMATION

The undersigned (whose title is supplied below) is authorized to act on behalf of the applicant (*e.g.*, where the applicant is a juristic entity).

Name of Applicant:	FTLAB CO., LTD.	
Applicant's Signature:		Date: 7/7 (Optional)
Name:	Jaejun Ko	
Title:	CEO	

Note: This form must be signed in accordance with 37 CFR 1.33. See 37 CFR 1.4 for signature requirements and certifications. Submit multiple forms for more than one signature and indicate the total number of forms below.

☒ A total of form(s) is/are submitted.

LUCAS & MERCANTI, LLP
30 BROAD STREET, 21st FLOOR
NEW YORK, NY 10004

Docket No.	4016-1060

DECLARATION (37 CFR § 1.63) FOR UTILITY OR DESIGN APPLICATION USING AN APPLICATION DATA SHEET (37 CFR § 1.76)

TITLE OF INVENTION	**RADON MANAGEMENT SYSTEM USING RADON DETECTOR**

As the below named inventor, I hereby declare that:

This declaration is directed to:

☒ The attached application, or

☐ United States application or PCT international application number

_____on_____.

The above-identified application was made or authorized to be made by me.

I believe that I am the original inventor or an original joint inventor of a claimed invention in the application.

I hereby acknowledge that any willful false statement made in this declaration is punishable under 18 U.S.C. § 1001 by fine or imprisonment of not more than five (5) years, or both.

LEGAL NAME OF INVENTOR

Inventor Name:	KO, Jae Jun	
Signature:		Date (Optional): 7/7

Note: An application data sheet (PTO/SB/14 or equivalent), including naming the entire inventive entity must accompany this form. Use an additional declaration form for each additional inventor.

LUCAS & MERCANTI, LLP
30 Broad Street, 21st Floor
New York, NY 10004

Docket No.	4016-1060

DECLARATION (37 CFR § 1.63) FOR UTILITY OR DESIGN APPLICATION USING AN APPLICATION DATA SHEET (37 CFR § 1.76)

TITLE OF INVENTION	**RADON MANAGEMENT SYSTEM USING RADON DETECTOR**

As the below named inventor, I hereby declare that:

This declaration is directed to:

☒ The attached application, or

☐ United States application or PCT international application number

_____on_____.

The above-identified application was made or authorized to be made by me.

I believe that I am the original inventor or an original joint inventor of a claimed invention in the application.

I hereby acknowledge that any willful false statement made in this declaration is punishable under 18 U.S.C. § 1001 by fine or imprisonment of not more than five (5) years, or both.

LEGAL NAME OF INVENTOR		
Inventor Name:	KIM, Young Gweon	
Signature:		Date (Optional): 2021-7-7

Note: An application data sheet (PTO/SB/14 or equivalent), including naming the entire inventive entity must accompany this form. Use an additional declaration form for each additional inventor.

LUCAS & MERCANTI, LLP
30 Broad Street, 21st Floor
New York, NY 10004

Please wait...

If this message is not eventually replaced by the proper contents of the document, your PDF viewer may not be able to display this type of document.

You can upgrade to the latest version of Adobe Reader for Windows®, Mac, or Linux® by visiting http://www.adobe.com/go/reader_download.

For more assistance with Adobe Reader visit http://www.adobe.com/go/acrreader.

Windows is either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries. Mac is a trademark of Apple Inc., registered in the United States and other countries. Linux is the registered trademark of Linus Torvalds in the U.S. and other countries.

PTO-1390 (01-18)
Approved for use through 8/31/2019. OMB 0651-0021
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A SUBMISSION UNDER 35 U.S.C. 371

Attorney Docket No.	
4016-1060	
U.S. Application No. (if known, see 37 CFR 1.5)	

International Application No.	International Filing Date	Priority Date Claimed
PCT/KR2020/012685	September 21, 2020	October 28, 2019

Title of Invention
RADON MANAGEMENT SYSTEM USING RADON DETECTOR

First Named Inventor
KO, Jae Jun

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information.

1. ☑ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). NOTE: The express request under 35 U.S.C. 371(f) will not be effective unless the requirements under 35 U.S.C. 371(c)(1), (2), and (4) for payment of the basic national fee, copy of the International Application and English translation thereof (if required), and the oath or declaration of the inventor(s) have been received.
2. ☑ A copy of the International Application (35 U.S.C. 371(c)(2)) is attached hereto (not required if the International Application was previously communicated by the International Bureau or was filed in the United States Receiving Office (RO/US)).
3. An English language translation of the International Application (35 U.S.C. 371(c)(2))
   a. ☑ is attached hereto.
   b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
4. An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4))
   a. ☑ is attached.
   b. ☐ was previously filed in the international phase under PCT Rule 4.17(iv).

Items 5 to 8 below concern amendments made in the international phase.

PCT Article 19 and 34 amendments

5. ☐ Amendments to the claims under PCT Article 19 are attached (not required if communicated by the International Bureau) (35 U.S.C. 371(c)(3)).
6. ☐ English translation of the PCT Article 19 amendment is attached (35 U.S.C. 371(c)(3)).
7. ☐ English translation of annexes (Article 19 and/or 34 amendments only) of the International Preliminary Examination Report is attached (35 U.S.C. 371(c)(5)).

Cancellation of amendments made in the international phase

8a. ☐ Do not enter the amendment made in the international phase under PCT Article 19.

8b. ☐ Do not enter the amendment made in the international phase under PCT Article 34.

NOTE: A proper amendment made in English under Article 19 or 34 will be entered in the U.S. national phase application absent a clear instruction from applicant not to enter the amendment(s).

The following items 9 to 17 concern a document(s) or information included.

9. ☑ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
10. ☑ A preliminary amendment.
11. ☑ An Application Data Sheet under 37 CFR 1.76.
12. ☐ A substitute specification. NOTE: A substitute specification cannot include claims. See 37 CFR 1.125(b).
13. ☑ A power of attorney and/or change of address letter.
14. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13*ter*.3 and 37 CFR 1.821-1.825 (not required if sequence listing in text format was indicated on the PCT Request as part of the International Application and the sequence listing was published as part of the international application).
15. ☑ Assignment papers *(cover sheet and document(s))*. Name of Assignee: FTLAB CO., LTD.
16. ☐ 37 CFR 3.73(c) Statement *(when there is an Assignee)*.

This collection of information is required by 37 CFR 1.414 and 1.491-1.492. The information is required to obtain or retain a benefit by the public, which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 15 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Mail Stop PCT, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

U.S. APPLN. No. (if known – see 37 CFR 1.5)	INTERNATIONAL APPLICATION No.	ATTORNEY DOCKET No.
	PCT/KR2020/012685	4016-1060

17. ☐ Other items or information:

The following fees have been submitted.	CALCULATIONS
18. ■ Basic national fee (37 CFR 1.492(a)) …….. **$300**	$ 320
19. ■ Examination fee (37 CFR 1.492(c)) • If the written opinion prepared by ISA/US or the international preliminary examination report prepared by IPEA/US indicates all claims satisfy provisions of PCT Article 33(1)-(4)…….. **$0** • All other situations …….. **$760**	$ 800
20. ■ Search fee (37 CFR 1.492(b)) • If the written opinion prepared by ISA/US or the international preliminary examination report prepared by IPEA/US indicates all claims satisfy provisions of PCT Article 33(1)-(4)…….. **$0** • Search fee (37 CFR 1.445(a)(2)) has been paid on the international application to the USPTO as an International Searching Authority ……..**$140** • International Search Report prepared by an ISA other than the US and provided to the Office or previously communicated to the US by the IB……**$520** • All other situations ……..**$660**	540 $
TOTAL OF 18, 19, and 20 =	$ 1660
☐ Additional fee for specification and drawings filed in paper over 100 sheets (excluding sequence listing in compliance with 37 CFR 1.821(c) or (e) in an electronic medium or computer program listing in an electronic medium) (37 CFR 1.492(j)). Fee for each additional 50 sheets of paper or fraction thereof …….. **$400**	0

Total Sheets	Extra Sheets	Number of each additional 50 or fraction thereof (round **up** to a whole number)	RATE	
- 100 =	/ 50 =	0	x **$400**	$

Surcharge for furnishing any of the search fee, examination fee, or the oath or declaration after the date of commencement of the national stage (37 CFR 1.492(h))……..**$140**	$

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	- 20 =		x **$100**	$
Independent claims	- 3 =		x **$460**	$
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ **$820**	$

Fee for submission of Sequence Listing text file of 300 MB to 800 MB (37 CFR 1.21(o)(1))……..**$1,000**	$
Fee for submission of Sequence Listing text file of more than 800 MB (37 CFR 1.21(o)(2))……**$10,000**	$
Processing fee for furnishing the English translation later than 30 months from the earliest claimed priority date (37 CFR 1.492(i))……..**$140 +**	$
TOTAL OF ABOVE CALCULATIONS =	$ 1660
■ **Applicant asserts small entity status.** See 37 CFR 1.27. Fees above are reduced by ½.	
☐ **Applicant certifies micro entity status.** See 37 CFR 1.29. Fees above are reduced by ¾. Applicant must attach form PTO/SB/15A or B or equivalent.	
TOTAL NATIONAL FEE =	$
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31)…….. **$50.00** per property **+**	$
TOTAL FEES ENCLOSED =	$ 830

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

a. ☐ A check in the amount of $_____ to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of $_____ to cover the above fees.

c. ☒ The Director is hereby authorized to charge additional fees which may be required, or credit any overpayment, to Deposit Account No. 02-2275 as follows:

i. ☐ any required fee.

ii. ☒ any required fee except for excess claims fees required under 37 CFR 1.492(d) and (e) and multiple dependent claim fee required under 37 CFR 1.492(f).

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038. The PTO-2038 should only be mailed or faxed to the USPTO. However, when paying the basic national fee, the PTO-2038 may NOT be faxed to the USPTO.

ADVISORY: If filing by EFS-Web, do **NOT** attach the PTO-2038 form as a PDF along with your EFS-Web submission. Please be advised that this is **not** recommended and by doing so your **credit card information may be displayed via PAIR**. To protect your information, it is recommended to pay fees online by using the electronic payment method.

NOTE: Where an appropriate time limit under 37 CFR 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the International Application to pending status.

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications

☐ This application (1) claims priority to or the benefit of an application filed before March 16, 2013, and (2) also contains, or contained at any time, a claim to a claimed invention that has an effective filing date on or after March 16, 2013.

NOTE 1: By providing this statement under 37 CFR 1.55 or 1.78, **this application, with a filing date on or after March 16, 2013, will be examined under the first inventor to file provisions of the AIA**.

NOTE 2: A U.S. national stage application may not claim priority to the international application of which it is the national phase. The filing date of a U.S. national stage application is the international filing date. See 35 U.S.C. 363.

Correspondence Address

☒ The address associated with Customer Number: 20311 **OR** ☐ Correspondence address below

Name					
Address					
City		State		Zip Code	
Country		Telephone			
Email					

Signature	/Yun H. Choe/	Date	2021-07-13
Name (Print/Type)	Yun H. Choe	Registration No. (Attorney/Agent)	61798

Privacy Act Statement

The **Privacy Act of 1974 (P.L. 93-579)** requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (*i.e.*, GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

DESCRIPTION

RADON MANAGEMENT SYSTEM USING RADON DETECTOR

Technical Field

[0001] The present invention relates to a radon management system using a radon detector.

Background Art

[0002] In general, radon (Rn) is a kind of radioactive gas that has an alpha decay with a half-life of 3.8 days, and is colorless, odorless, and inert. Radon mainly enters a room through cracks in a building from the ground of a floor of the building, and is also generated from decay of uranium contained in cement and soil used in building construction, and other interior and exterior materials, thereby entering the room.

[0003] When such radon enters the lungs through the respiratory organs, the radon kills the cells in the lungs and causes cancer, so the World Health Organization (WHO) and the U.S. Environmental Protection Agency (USEPA) define radon as the second major causative agent of lung cancer after smoking and recommend controlling radon concentration in indoor air. Radon is present in outdoor air or groundwater, but indoor air accounts for about 95% of exposure.

[0004] That is, since radon is the heaviest gas on Earth, once radon enters a room, radon is not well discharged, but accumulates in the room, and through human breathing, radon enters the lungs and disintegrates in the lungs, thereby releasing alpha radiation. The

alpha radiation consists of the nucleus of helium (He2+) and has weaker penetration power than that of beta or gamma radiation, but the relatively large mass of radon causes destruction of the lung cells.

[0005] Meanwhile, in order to reduce radon gas entering a room, periodic ventilation is required mainly by a resident, but during cold winter or at night, the room is not properly ventilated, so the resident is exposed to radon gas, thereby being vulnerable to being seriously harmed.

[0006] In particular, in the case of classrooms where students live in groups, there is no systematic management against radon gas exposure, so the health of students is a concern. In order to solve such a problem, by means of an amendment to the School Health Act, the government mandates that a facility measures and reduces radon gas so that radon gas must be kept below the level of 148 Bq/m^3 in each classroom of the first floor or lower.

Disclosure

Technical Problem

[0007] The present invention is devised to solve the above-described problems, and an objective of the present invention is to provide a radon management system using a radon detector, in which radon concentration of a specific space indoors and/or outdoors is obtained, in real time and/or periodically, by using at least one radon detector installed in the corresponding specific space, radon concentration data for each radon detector is converted into a database (DB) to be stored and managed therein by using a radon

management server connected to each radon detector through a communication network, and cloud computing services are provided in response to a request from an external terminal, thereby enabling efficient management of radon concentration data of each radon detector installed in the specific space indoors and/or outdoors.

Technical Solution

[0008] In order to achieve the above-described objective, an aspect of the present invention is to provide a radon management system using a radon detector, the radon management system including: at least one of radon detectors installed in a specific space indoors or outdoors, and configured to detect in real time alpha particles present in the specific space, output a predetermined alpha particle detection signal, count for a measurement time preset based on the output alpha particle detection signal to calculate an alpha particle concentration value, and transmit unique device identification information together with the calculated alpha particle concentration value; and a radon management server configured to collect the unique device identification information together with the alpha particle concentration value transmitted from each radon detector during a preset measurement period, calculate and quantify an average value of the collected alpha particle concentration values, convert the average value into a database (DB) for each radon detector, store and manage the average value, compare the alpha particle concentration value transmitted in real time from each radon detector and the average value of the previously stored alpha particle concentration values with each

other, calculate an amount of change in the alpha particle concentration value, and generate radon generation event information data according to the amount of change in the calculated alpha particle concentration value.

[0009] Here, the radon management server may generate the radon generation event information data when the calculated amount of change in the alpha particle concentration value is greater than a preset reference amount of change.

[0010] Preferably, the radon management server may transmit the generated radon generation event information data to at least one external terminal through a communication network.

[0011] Preferably, the radon management server may convert user action mission information corresponding to the amount of change in the calculated alpha particle concentration value into the database (DB) for each amount of change in each alpha particle concentration value, store and manage the user action mission information in a separate storage device, extract the amount of change in the alpha particle concentration value at a time of generating the radon generation event information data, read, from the storage device, the user action mission information corresponding to the amount of change in the extracted alpha particle concentration value, use the read user action mission information, and generate the radon generation event information data.

[0012] Preferably, the user action mission information may include information of action mission contents and action mission execution time so as to reduce the amount of change in the alpha particle concentration value.

[0013] Preferably, when collecting the alpha particle concentration value transmitted from each radon detector during the preset measurement period, the radon management server may determine the alpha particle concentration value transmitted from each radon detector as noise in a case where the alpha particle concentration value is greater than a preset maximum alpha particle concentration value or less than a preset minimum alpha particle concentration value, use only the alpha particle concentration value excluding the alpha particle concentration value determined as the noise among the collected alpha particle concentration values, and calculate the average value of the alpha particle concentration values.

[0014] Preferably, the radon management server may convert the user action mission information corresponding to the amount of change in the calculated alpha particle concentration value into the database (DB) for each amount of change in the alpha particle concentration value so as to reduce the amount of change in the alpha particle concentration value and include information of action mission contents and action mission execution time, store and manage the user action mission information in a separate storage device, wherein the radon management server may extract the amount of change in the alpha particle concentration value at a time of generating the radon generation event information data, read, from the storage device, the user action mission information corresponding to the amount of change in the extracted alpha particle concentration value, and determine that the action mission contents included in the read user action mission information has been performed by a user, when the alpha particle concentration value transmitted in real time from

each radon detector within the action mission execution time included in the read user action mission information is less than the average value of the alpha particle concentration values previously stored in the storage device.

[0015] Preferably, when it is determined that the action mission contents included in the read user action mission information has been performed by the user, the radon management server may provide a preset reward on the basis of information on the corresponding user.

[0016] Preferably, the radon management server may collect the unique device identification information together with the alpha particle concentration value transmitted from each radon detector during a preset first measurement period, analyze the alpha particle concentration values collected during the first measurement period, extract a first alpha particle concentration pattern, convert the extracted first alpha particle concentration pattern into the database (DB) for each radon detector, and store and manage the first alpha particle concentration pattern.

[0017] Preferably, the radon management server may collect the unique device identification information along with the alpha particle concentration value transmitted from each radon detector during a preset second measurement period, analyze the alpha particle concentration values collected during the second measurement period, extract a second alpha particle concentration pattern, determine that a change has occurred in a periodic action pattern of the corresponding user in a specific place when the second alpha particle concentration pattern does not match the first

alpha particle concentration pattern, generate a notification message, and then transmit the generated notification message to a preset external terminal held by the corresponding user.

[0018] Preferably, the radon management server may convert user action recommendation information corresponding to the average value of the alpha particle concentration values collected during the second measurement period into the database (DB) for each average value of the alpha particle concentration values, store and manage the user action recommendation information in a separate storage device, calculate the average value of the alpha particle concentration values collected during the second measurement period when the second alpha particle concentration pattern does not match the first alpha particle concentration pattern, read, from the storage device, the user action recommendation information corresponding to the average value of the calculated alpha particle concentration values, and generate the notification message by using the read user action recommendation information.

[0019] Preferably, the radon management system may further include a radon reduction facility including at least one discharging fan that suctions air entering a specific space through a vent pipe connected to the specific space, discharges the suctioned air to an external space, and reduces concentration of the alpha particles contained in the suctioned air,

[0020] Preferably, the radon management server may collect the unique device identification information together with the alpha particle concentration value transmitted from each radon detector during a preset first measurement period, analyze the alpha particle

concentration values collected during the first measurement period, extract a first alpha particle concentration pattern, convert the extracted first alpha particle concentration pattern into the database (DB) for each radon detector, store and manage the first alpha particle concentration pattern, collect the unique device identification information along with the alpha particle concentration value transmitted from each radon detector during a preset second measurement period, analyze the alpha particle concentration values collected during the second measurement period, extract a second alpha particle concentration pattern, determine that a change has occurred in a periodic action pattern of the corresponding user in the specific place when the second alpha particle concentration pattern does not match the first alpha particle concentration pattern, and control an operation of the radon reduction facility.

[0021] Preferably, the radon management server may transfer a request message asking whether a change has occurred in the periodic action pattern of the corresponding user to a preset external terminal held by the corresponding user when it is determined that the change has occurred in the periodic action pattern of the corresponding user in the specific place, and control each radon reduction facility to operate until a value where the alpha particle concentration value transmitted from each radon detector is less than the alpha particle concentration value obtained before the change in the corresponding user's periodic action pattern occurs is detected when there is no response to the request message during a preset response time from the preset external terminal or when

receiving a response notifying that the change has occurred in the user's periodic action pattern.

[0022] Preferably, the radon management server may determine that the radon reduction facility is not operating properly when receiving the response notifying that no change has occurred in the user's periodic action pattern from the preset external terminal, generate a warning message notifying that the radon reduction facility is in an abnormal state, and transmit the warning message to the preset external terminal through the communication network.

[0023] Preferably, the radon management server may determine that the radon reduction facility is not operating properly when the alpha particle concentration value transmitted from each radon detector after the preset radon reduction reference time is unable to become a value which is less than the alpha particle concentration value obtained before the change of the corresponding user's periodic action pattern occurs, determine that the radon reduction facility is not operating properly, generate a warning message notifying that the radon reduction facility is in an abnormal state, and transmit the warning message to the preset external terminal through the communication network.

[0024] Preferably, the preset measurement period may be set as a period of measurement every 10 minutes for an hour.

[0025] Preferably, the radon management server may collect the unique device identification information along with the alpha particle concentration value transmitted from each radon detector during the preset measurement period, learn and analyze the collected alpha particle concentration values, generate a radon

concentration pattern over time, convert the radon concentration pattern into the database (DB) for each radon detector, store and manage the radon concentration pattern in a separate storage device, generate a push alarm message for notifying a radon concentration risk when the alpha particle concentration value transmitted in real time from each radon detector is greater than a value of the radon concentration pattern previously stored in the storage device or greater than the preset radon concentration risk reference value, and transmit the push alarm message to a preset external terminal through the communication network.

[0026] Preferably, the push alarm message for notifying the radon concentration risk may include ventilation time information corresponding to the alpha particle concentration value transmitted from each radon detector.

[0027] Preferably, the radon management server may provide a cloud computing service in response to a request from at least one client terminal, and provide a cloud web service so as to download, through each client terminal, radon management-related information data converted into the database (DB) and stored in a separate storage device.

[0028] Preferably, the radon management server may encrypt and store the radon management-related information data by using a symmetrical or asymmetric encryption method in a case of converting the radon management-related information into the database (DB) so as to be stored in the storage device, and provide a service so that a decryption key capable of decrypting the encrypted radon

management-related information data is transmitted to each client terminal.

[0029] Preferably, each client terminal may search in real time the radon management-related information data stored in the storage device of the radon management server by using the cloud web service of a client member login of the radon management server, display the radon management-related information data on a display screen, decrypt the radon management-related information data encrypted and stored in the storage device of the radon management server by using the corresponding client member login information together with the decryption key transmitted from the radon management server, search in real time and display the radon management-related information data on the display screen, search in real time the radon management-related information data stored in the storage device of the radon management server through a radon management-related application downloaded from the radon management server, and display the radon management-related information data on the display screen.

[0030] Preferably, based on the unique device identification information together with the alpha particle concentration value transmitted from each radon detector or the average value of the calculated alpha particle concentration values, the radon management server may provide a service for the radon management-related information data to be displayed on a display screen of an administrator or displayed on the user's display screen provided in an external terminal, so that the administrator may be able to monitor the radon management-related information data for each radon detector on a daily, day of the week, weekly, monthly, quarterly,

and yearly basis, and on the basis of a real-time GIS (Geographic Information System).

Advantageous Effects

[0031] According to a radon management system using a radon detector of the present invention described above, the radon management system has an advantage in that radon concentration of a specific space indoors and/or outdoors is obtained, in real time and/or periodically, by using at least one radon detector installed in the corresponding specific space, radon concentration data for each radon detector is converted into a database (DB) to be stored and managed therein by using a radon management server connected to each radon detector through a communication network, and cloud computing services are provided in response to a request from an external terminal, so as to enable efficient management of radon concentration data of each radon detector installed in the specific space indoors and/or outdoors.

Description of Drawings

[0032] FIG. 1 is an overall block diagram illustrating a radon management system using a radon detector according to an exemplary embodiment of the present invention.

[0033] FIG. 2 is a detailed block diagram illustrating an external terminal applied to the exemplary embodiment of the present invention.

Best Mode

[0034] The above-described objectives, features, and advantages will be described later in detail with reference to the accompanying drawings, and accordingly, those skilled in the art to which the present invention pertains will be able to easily implement the technical idea of the present invention. In addition, in describing the present disclosure, when it is determined that a detailed description of a known technology related to the present disclosure may unnecessarily obscure the subject matter of the present disclosure, the detailed description thereof will be omitted.

[0035] It will be understood that, although the terms including ordinal numbers, such as first, second, etc. may be used herein to describe various elements, these elements should not be limited by these terms. These terms are only used for the purpose of distinguishing one element from another element. For example, the first component may be referred to as a second component without departing from the scope of the present disclosure, and similarly, the second component may be referred to as a first component. The terminology used herein is for the purpose of describing particular exemplary embodiments only and is not intended to be limiting. As used herein, the singular forms are intended to include the plural forms as well, unless the context clearly indicates otherwise.

[0036] The terms used in the present disclosure have selected general terms that are currently widely used as possible while considering functions in the embodiments of the present disclosure, but this may vary according to the intention of a technician working in the field, the judicial precedent, the emergence of new technologies, etc. In addition, in certain cases, there are terms

arbitrarily selected by the applicant, and in this case, the meaning of the terms will be described in detail in the description of the corresponding embodiments of the present disclosure. Therefore, the terms used in the present disclosure should be defined based on the meaning of the terms and the overall contents of the present disclosure, not simple names of the terms.

[0037] Throughout the description of the present invention, when a part is said to "include" or “comprise” a certain component, it means that it may further include or comprise other components, except to exclude other components unless the context clearly indicates otherwise. In addition, terms such as "... unit" and "... module" described in the specification mean units that process at least one function or operation, which may be implemented as hardware or software, or a combination of hardware and software.

[0038] Hereinafter, an exemplary embodiment of the present invention will be described in detail with reference to the accompanying drawings. It should be understood that the exemplary embodiment of the present invention may be changed to a variety of embodiments and the scope and spirit of the present invention are not limited to the exemplary embodiment described hereinafter. The embodiments of the present invention are provided to more completely describe the present invention to those skilled in the art.

[0039] Combinations of each block of an attached block diagram and each step of the flowchart may be performed by computer program instructions (i.e., execution engine), and since these computer program instructions can be loaded on a processor of a general purpose computer, special purpose computer, or other programmable

data processing equipment, the instructions, executed by the processor of the computer or other programmable data processing equipment, will produce means for performing the functions described in each block of the attached block diagram or each step of the flowchart. In order to implement functionality in a specific way, these computer program instructions may also be stored in a computer usable or computer readable memory capable of supporting a computer or other programmable data processing equipment, so that the instructions stored in the computer usable or computer readable memory are able to produce articles of manufacture containing an instruction means for performing functions described in each block in the block diagram or in each step in the flowchart.

[0040] In addition, since the computer program instructions may be loaded on the computer or other programmable data processing equipment, a series of operational steps are performed on the computer or other programmable data processing equipment to generate a computer-executed process, so that it is also possible for instructions executing the computer or other programmable data processing equipment to provide steps for executing the functions described in each block of the block diagram and each step of the flowchart.

[0041] In addition, it should be noted that each block or each step may represent a module, segment, or part of code that contains one or more executable instructions for executing specified logical functions, and in some alternative embodiments, it is also possible for the functions mentioned in the blocks or steps to be performed out of order. For example, two blocks or steps shown in succession

may in fact be performed substantially simultaneously, and the blocks or steps may be performed in the reverse order of the corresponding functions as necessary.

[0042] FIG. 1 is an overall block diagram illustrating a radon management system using a radon detector according to an exemplary embodiment of the present invention, and FIG. 2 is a detailed block diagram illustrating an external terminal applied to the exemplary embodiment of the present invention.

[0043] Referring to FIGS. 1 and 2, the radon management system using the radon detector according to the exemplary embodiment of the present invention includes at least one of radon detectors 100-1 to 100-N, and a radon management server 200, etc. In addition, the radon management system using the radon detector according to the exemplary embodiment of the present invention may further include at least one of radon reduction facility 300-1 to 300-N, at least one external terminal 20, etc. Meanwhile, since the components shown in FIGS. 1 and 2 are not essential, the radon management system using the radon detector according to the exemplary embodiment of the present invention may have more components or fewer components than the components shown in FIGS. 1 and 2.

[0044] Hereinafter, components of a radon management system using a radon detector according to the exemplary embodiment of the present invention will be described in detail.

[0045] Each radon detector 100-1 to 100-N is installed in a specific space indoors and/or outdoors (e.g., building, home, hospital, school, and the like), alpha particles present in the specific space are detected in real time so that a predetermined

alpha particle detection signal is output, and a preset measurement time is counted on the basis of the output alpha particle detection signal, thereby calculating an alpha particle concentration value.

[0046] In addition, each radon detector 100-1 to 100-N performs a function of transmitting unique device identification information together with the calculated alpha particle concentration value to a radon management server 200.

[0047] In this case, the preset unique device identification information preferably includes at least one piece of information, including: for example, a name, a password, a serial number, a type, a manufacturer, a MAC (Media Access Control) address, a unique IP (Internet Protocol) address, a model, a version, and authentication information generated by a private key or a PKI-based private key.

[0048] Each of these radon detectors 100-1 to 100-N is preferably composed of, for example, a pulsed ionization chamber type radon detector, but is not limited thereto, and for example, a surface barrier type detector, a high purity semiconductor detector (i.e., a pure Ge detector), a scintillation detector, a solid state junction counter, and the like may be applied as the device for detecting alpha particles.

[0049] That is, a radon detector with a pulsed ionization chamber type has a structure in which an electrode with a shape of a probe is installed in the center of a cylindrical box made of metal and an electric field is generated by applying a bias voltage between the metal cylindrical box and the probe therein.

[0050] When alpha decay occurs inside the ionization chamber and alpha particles are emitted, even though the alpha particles are

extinct due to a collision with air, ion charges are generated. Accordingly, when absorbing the ion charges through a central probe and amplifying signals, the alpha particles may be detected. Since the sensor itself is composed of a metal cylinder and a probe, the sensor has an advantage of being very inexpensive, having good durability, and improving ventilation due to the fact that the sensor is not affected by light.

[0051] Referring to the surface barrier type detector, due to a surface level or an oxide film, a surface of a semiconductor is formed with a depletion layer such as a PN junction, whereby the vicinity of the surface becomes an obstacle for charge transfer. For practical use, gold is deposited on a surface of n-type Si at about 100μm/cm^2, and is used as one electrode, so that radiation is incident on a back surface thereof. Here, the depletion layer has various thicknesses of about 50 ~ 500 μm, and since energy loss at the surface is small, the depletion layer is mainly used for detection of charged particles generated by alpha radiation and has good energy resolution.

[0052] The high-purity semiconductor detector is generally referred to as a pure Ge detector. The pure Ge detector is composed of a high-purity Ge crystal having very small impurity concentrations and defects, having a very high electrical resistance at low temperatures, and having a high bias voltage applied thereto as well. The difference between pure Ge and Ge(Li) is that the pure Ge is able to be stored at room temperature, is convenient for maintenance because pure Ge can be used after cooling with liquid

nitrogen only when measuring, and has energy resolution that is not inferior to Ge(Li), thereby being put into practical use.

[0053] Referring to the scintillation detector, the phenomenon of emitting light when charged particles collide with a substance has been known for a long time, and light emission of NaI coating or zinc sulfide (ZnS) by alpha radiation is particularly strong and is able to be detected and counted with a magnifying glass in a dark room.

[0054] Such light emission is called scintillation, and the substance that exhibits this phenomenon is called a scintillator. In addition, the scintillator coupled with a photomultiplier tube is called a scintillation detector, and in particular, a device using a method for counting by a pulse output is called a scintillation counter tube.

[0055] Meanwhile, a device using a method of reading an output by direct current is mainly used for dosimetry, and since a scintillator is used, the device is called a scintillation dosimeter. For the scintillator, any solid, liquid, or gas is used, and when liquid is used, the scintillator is called a liquid scintillation counting device.

[0056] The solid junction counter is a solid reverse-biased PN junction semiconductor, is a counter configured to collect ionic charges from alpha particles passing through a depletion layer, and may be manufactured in a small, mobile type.

[0057] In addition, the radon management server 200 is connected to each radon detector 100-1 to 100-N through a communication network 10, and in this case, the communication network 10 is a

high-speed backbone network of a large communication network capable of providing large-volume, long-distance voice and data services, and may be a next-generation wireless communication network including WiFi, WiGig, Wibro (Wireless Broadband Internet), and Wimax (World Interoperability for Microwave Access), which are for providing Internet or high-speed multimedia services.

[0058] The Internet refers to a worldwide open computer network structure that provides various services present on a TCP/IP protocol and an upper layer of the TCP/IP, the services including: HTTP (Hyper Text Transfer Protocol), Telnet, FTP (File Transfer Protocol), DNS (Domain Name System), SMTP (Simple Mail Transfer Protocol), SNMP (Simple Network Management Protocol), NFS (Network File Service), NIS (Network Information Service), etc. The Internet provides an environment in which each radon detector 100-1 to 100-N and/or an external terminal 20 are allowed to be connected to the radon management server 200. Meanwhile, the Internet may be a wired or wireless Internet, or may be a core network integrated with a wired public network, a wireless mobile communication network, or a mobile Internet.

[0059] When provided with a mobile communication network, the communication network 10 may be a synchronous mobile communication network or an asynchronous mobile communication network. A wideband code division multiple access (WCDMA) communication network may be referred to as an exemplary embodiment of the asynchronous mobile communication network. In this case, although not shown in the drawings, the mobile communication network may include, for example, a Radio Network Controller (RNC), etc. Meanwhile, although the

WCDMA network is referred to as an example, the communication network 10 may be a next-generation communication network such as a cellular-based 3G network, an LTE network, a 4G network, a 5G network, and other IP-based IP networks. Such a communication network 10 serves to allow the communication part 900 and the external terminal 20 to mutually transmit signals and data therebetween.

[0060] In addition, the radon management server 200 performing a function, including: collecting the unique device identification information along with the alpha particle concentration value transmitted from each radon detector 100-1 to 100-N during a preset measurement period; calculating and quantifying an average value of the collected alpha particle concentration values; converting the average value into a database (DB) for each radon detector; and storing and managing the average value in a separate storage device 250.

[0061] In addition, the radon management server 200 performs a function, including: comparing the alpha particle concentration value transmitted in real time from each radon detector 100-1 to 100-N and the previously stored alpha particle concentration average values, calculating an amount of change in the alpha particle concentration value, and generating radon generation event information data according to the amount of change in the calculated alpha particle concentration value.

[0062] In addition, the radon management server 200 may perform a function of generating the radon generation event information data when the calculated amount of change in the alpha particle

concentration value is greater than a preset reference amount of change.

[0063] In addition, the radon management server 200 may perform a function of transmitting the generated radon generation event information data to at least one of external terminals 20 (e.g., a user terminal, an administrator terminal, a client terminal, etc.) through the communication network 10.

[0064] In addition, the radon management server 200 may perform a function of converting user action mission information corresponding to the calculated amount of change in the alpha particle concentration value into the database (DB) for each amount of change in each alpha particle concentration value, and storing and managing the user action mission information in a separate storage device 250.

[0065] In addition, the radon management server 200 may perform a function, including: extracting the amount of change in the alpha particle concentration value at the time of generating the radon generation event information data, reading, from the storage device 250, the user action mission information corresponding to the amount of change in the extracted alpha particle concentration value, and generating the radon generation event information data by using the read user action mission information.

[0066] In this case, it is preferable that the user action mission information includes, for example, information of action mission contents and/or action mission execution time, etc., so as to reduce the amount of change in the alpha particle concentration value.

[0067] In addition, when collecting the alpha particle concentration value transmitted from each radon detector 100-1 to 100-N during a preset measurement period, the radon management server 200 may perform a function, including: determining the alpha particle concentration value transmitted from each radon detector 100-1 to 100-N as noise in a case where the alpha particle concentration values is greater than the preset maximum alpha particle concentration value or less than the preset minimum alpha particle concentration value; and calculating an average value of the alpha particle concentration values by using only the alpha particle concentration value, excluding the alpha particle concentration value determined as the noise, among the collected alpha particle concentration values. In this case, it is preferable that the preset measurement period is set as, for example, a period of measurement every 10 minutes for 1 hour.

[0068] In addition, the radon management server 200 may perform a function, including: converting the user action mission information corresponding to the calculated amount of change in the alpha particle concentration value into the database (DB) for each amount of change in the alpha particle concentration value, so that the information of the action mission contents and/or action mission execution time is included and the amount of change in the alpha particle concentration value is reduced; and storing and managing the user action mission information in a separate storage device 250.

[0069] In addition, the radon management server 200 may perform a function, including: extracting an amount of change in the alpha particle concentration value at the time of generating the radon

generation event information data; reading, from the storage device 250, the user action mission information corresponding to the amount of change in the extracted alpha particle concentration value; and determining that the action mission contents included in the read user action mission information has been performed by a user, when the alpha particle concentration value transmitted in real time from each radon detector 100-1 to 100-N within the action mission execution time included in the read user action mission information is less than the average value of the alpha particle concentration values previously stored in the storage device 250.

[0070] In addition, when it is determined that the action mission contents included in the read user action mission information has been performed by the corresponding user, the radon management server 200 may perform a function of providing a preset reward (e.g., reward points, reward products, reward cash, and the like) on the basis of the information on the corresponding user.

[0071] In addition, the radon management server 200 may perform a function, including: collecting unique device identification information together with the alpha particle concentration value transmitted from each radon detector 100-1 to 100-N during a preset first measurement period; analyzing the alpha particle concentration values collected during the first measurement period; extracting a first alpha particle concentration pattern; converting the extracted first alpha particle concentration pattern into the database (DB) for each radon detector; and storing and managing the first alpha particle concentration pattern. In this case, it is preferable that

the preset first measurement period is set as, for example, a period of measurement every 10 minutes for 1 hour.

[0072] In addition, the radon management server 200 may perform a function, including: collecting unique device identification information along with the alpha particle concentration value transmitted from each radon detector 100-1 to 100-N during a preset second measurement period; analyzing the alpha particle concentration values collected during the second measurement period; extracting a second alpha particle concentration pattern; generating a notification message by determining that a change has occurred in a periodic action pattern of a corresponding user in a specific place, in a case where the second alpha particle concentration pattern does not match the first alpha particle concentration pattern; and then transmitting the generated notification message to a preset external terminal 20 held by the corresponding user. In this case, it is preferable that the preset second measurement period is set as, for example, a period of measurement every 10 minutes for 1 hour.

[0073] In addition, the radon management server 200 may perform a function, including: converting user action recommendation information corresponding to an average value of the alpha particle concentration values collected during the second measurement period into the database (DB) for each average value of the alpha particle concentration values; storing and managing the user action recommendation information in a separate storage device 250; calculating an average value of the alpha particle concentration values collected during the second measurement period when the

second alpha particle concentration pattern does not match the first alpha particle concentration pattern; reading, from the storage device 250, the user action recommendation information corresponding to the average value of the calculated alpha particle concentration values; and generating a notification message by using the read user action recommendation information.

[0074] In addition, the radon management server 200 may perform a function, including: collecting the unique device identification information together with the alpha particle concentration value transmitted from each radon detector 100-1 to 100-N during the preset first measurement period; analyzing the alpha particle concentration values collected during the first measurement period; extracting the first alpha particle concentration pattern; converting the extracted first alpha particle concentration pattern into the database (DB) for each radon detector; and storing and managing the first alpha particle concentration pattern in the separate storage device 250.

[0075] In addition, the radon management server 200 may perform a function, including: collecting unique device identification information along with an alpha particle concentration value transmitted from each radon detector 100-1 to 100-N during a preset second measurement period; analyzing alpha particle concentration values collected during the second measurement period; extracting a second alpha particle concentration pattern; determining that a change has occurred in a periodic action pattern of a corresponding user in a specific place, in a case where the second alpha particle concentration pattern does not match the first alpha particle

concentration pattern; and controlling an operation of each radon reduction facility 300-1 to 300-N.

[0076] In addition, the radon management server 200 may perform a function, including: transferring a request message asking whether a change has occurred in the periodic action pattern of the corresponding user to a preset external terminal 20 held by the corresponding user when it is determined that the change has occurred in the periodic action pattern of the corresponding user in the specific place; and controlling each radon reduction facility 300-1 to 300-N to operate until a value where the alpha particle concentration value transmitted from each radon detector 100-1 to 100-N is less than the alpha particle concentration value obtained before the change in the corresponding user's periodic action pattern occurs is detected, when there is no response to the request message during a preset response time from the preset external terminal 20 or when receiving a response notifying that a change has occurred in the corresponding user's periodic action pattern.

[0077] In addition, the radon management server 200 may perform a function, including: determining that each radon reduction facility 300-1 to 300-N is not operating properly, when a response is received notifying that no change has occurred in the user's periodic action pattern from the preset external terminal 20; generating a warning message notifying that each radon reduction facility 300-1 to 300-N is in an abnormal state; and transmitting the warning message to the preset external terminal 20 through the communication network 10.

[0078] In addition, the radon management server 200 may perform a function, including: determining that each radon reduction facility 300-1 to 300-N is not operating properly when the alpha particle concentration value, transmitted from each radon detector 100-1 to 100-N after a preset radon reduction reference time, is unable to become a value which is less than the alpha particle concentration value obtained before the change of the corresponding user's periodic action pattern occurs; determining that each radon reduction facility 300-1 to 300-N is not operating properly; generating a warning message notifying that each radon reduction facility 300-1 to 300-N is in an abnormal state; and transmitting the warning message to the preset external terminal 20 through the communication network 10. In this case, it is preferable that the preset measurement period is set as, for example, a period of measurement every 10 minutes for 1 hour.

[0079] In addition, the radon management server 200 may perform a function, including: collecting unique device identification information along with the alpha particle concentration value transmitted from each radon detector 100-1 to 100-N during the preset measurement period; learning and analyzing the collected alpha particle concentration values; generating a radon concentration pattern over time; converting the radon concentration pattern into the database (DB) for each radon detector; and storing and managing the radon concentration pattern in the separate storage device 250.

[0080] In addition, the radon management server 200 may perform a function, including: generating a push alarm message for notifying

a risk of radon concentration, when the alpha particle concentration value transmitted in real time from each radon detector 100-1 to 100-N is greater than the value of the radon concentration pattern previously stored in the storage device 250 or greater than the preset radon concentration risk reference value; and transmitting the push alarm message to the preset external terminal 20 through the communication network 10.

[0081] In this case, the push alarm message for notifying the risk of radon concentration preferably includes, for example, ventilation time information corresponding to the alpha particle concentration value transmitted from each radon detector 100-1 to 100-N.

[0082] In addition, the radon management server 200 may perform a function of providing a cloud computing service in response to a request from the external terminal 20 (e.g., a user terminal, an administrator terminal, a client terminal, and the like) through the communication network 10.

[0083] That is, the radon management server 200 is physical equipment that is connected to a plurality of terminals 20, held by an administrator, on a network through a communication network 10, and provides system resources (i.e., this is a concept including an OS, CPU, memory, storage device, and the like) to the plurality of terminals 20. In a cloud service environment, a plurality of servers is connected to the plurality of terminals 20 on a network. In this case, the radon management server 200 is illustrated as a concept including the plurality of servers, and for example, through a guest machine in a virtual space generated through virtualization

technology, the plurality of terminals 20 distributes the system resources to be used. These configurations may be understood as well-known general concepts.

[0084] In this case, the cloud service environment is referred to as the technology of Internet-based (i.e., cloud) computing. Such cloud computing is illustrated as a computer network diagram expressing the Internet as a cloud, having a hidden complex infrastructure, and having a computing style in which IT-related functions are provided in the form of services. Users are able to use the Internet to access the services provided by the cloud computing.

[0085] In addition, the cloud computing is applied by mixing various computing concepts and communication technologies such as virtualized computing, utility computing, and on-demand computing, and is referred to as the technology in which a single virtual computer or service is generally implemented by integrating a plurality of data centers composed of a plurality of computers with virtualization technology, and users are allowed to access the virtual computer or service and then provided with various software, security solutions, and computing capabilities in an on-demand method.

[0086] That is, the cloud computing is an "on-demand outsourcing service of IT resources through the Internet", and is a method in which programs or documents that were individually stored on personal computers or corporate servers are stored in an Internet-based virtual server or storage, and cloud applications such as web

browsers are executed by using various terminals including personal computers, thereby allowing the users to perform desired operations.

[0087] In this case, the users may select and use computing resources such as cloud applications, storage, OS, and security as much as they desire at the time they desire, and pay a price based on the usage.

[0088] The above-described radon management server 200 may perform a function of providing a cloud computing service in response to a request from at least one external terminal 20.

[0089] That is, the radon management server 200 is a server that provides the cloud computing service to at least one external terminal 20, and provides computing resources requested by the at least one external terminal 20 to the users through the communication network 10. The radon management server 200 may provide the computing service for using a device requested by the at least one external terminal 20.

[0090] Such a radon management server 200 is provided with a plurality of storage devices, that is, storages that store files provided from a service provider (i.e., contents provider) who provides large-volume data, including: for example, an application program file, a game program file, a text data file, a document file, a picture file, a music file, a video file, a bar code file, etc.

[0091] In addition, the radon management server 200 may perform a function of providing a cloud web service so that radon management-related information data that is converted into the database (DB) and stored in a separate storage device 250 through each external terminal 20 may be downloaded, the radon management-

related information data including: for example, an alpha particle concentration value, an average value of alpha particle concentration values, a radon concentration pattern, a warning message, a push alarm message, etc.

[0092] In addition, when the radon management-related information is converted into the database (DB) and stored in the storage device 250, the radon management server 200 may perform a function, including: encrypting and storing the radon management-related information data by using a symmetric or asymmetric encryption method; and providing a service so that a decryption key capable of decrypting the encrypted radon management-related information data is transmitted to each external terminal 20.

[0093] In addition, based on the unique device identification information together with the alpha particle concentration value transmitted from each radon detector 100-1 to 100-N and/or the average value of the calculated alpha particle concentration values, the radon management server 200 may perform a function of providing a service to be displayed on a display screen of an administrator or displayed on a user's display screen provided in an external terminal 20, so that the administrator may monitor the radon management-related information data for each radon detector on a daily, day of the week, weekly, monthly, quarterly, and/or yearly basis, and on the basis of a real-time GIS (Geographic Information System).

[0094] In addition, the radon management server 200 may further include: at least one radon reduction facility 300-1 to 300-N that includes at least one discharging fan (not shown) that suctions air

introduced into a specific space through a vent pipe and/or a vacuum pipe (not shown), which are connected to the specific space, discharges the suctioned air to an external space, and reduces the concentration of alpha particles contained in the suctioned air.

[0095] Although not illustrated in the drawings, each radon reduction facility 300-1 to 300-N preferably further includes: an outdoor air inlet pipe (not shown) connected to the outside so that diluted air for radon vapor flows under a floor of a specific space; and a valve (not shown) for controlling the flow of air in the outdoor air inlet pipe.

[0096] In addition, each radon reduction facility 300-1 to 300-N may further include: a heat recovery fan (not shown) and/or an energy recovery fan (not shown) for reducing energy loss through heat exchange of air in the specific space and the outdoors.

[0097] Meanwhile, although not specifically shown in the drawing, each radon reduction facility 300-1 to 300-N may be implemented by applying commonly well-known related art, for example, the technologies disclosed in Korean Patent No. 10-0988022 (published on October 18, 2010), Korean Patent No. 10-1569270 (published on November 13, 2015), Korean Patent No. 10-1650436 (published on August 23, 2016), Korean Patent Application Publication No. 10-2016-0024076 (published on March 4, 2016), etc.

[0098] Furthermore, at least one external terminal 20 (e.g., a user terminal, an administrator terminal, a client terminal, and the like) may be further included in each radon reduction facility 300-1 to 300-N.

[0099] Each of these external terminals 20 performs a function, including: using a cloud web service for a client member login of the radon management server 200; searching, in real time, radon management-related information data stored in the storage device 250 of the radon management server 200; and displaying the radon management-related information data on a display screen.

[00100] In addition, each external terminal 20 may perform a function, including: using the decryption key transmitted from the radon management server 200 together with the corresponding information of the client member login; decrypting the radon management-related information data encrypted and stored in the storage device 250 of the radon management server 200; and searching and displaying the radon management-related information data on a display screen in real time.

[00101] In addition, each external terminal 20 may perform a function, including: searching, in real time, the radon management-related information data stored in the storage device 250 of the radon management server 200 through a radon management-related application downloaded from the radon management server 200; and displaying the radon management-related information data on a display screen.

[00102] Meanwhile, each external terminal 20 applied to the exemplary embodiment of the present invention preferably includes at least any one of mobile terminal devices, including: a smart phone, a smart pad, or a smart note, which communicates through wireless Internet or mobile Internet, and may be collectively referred to as

any wired or wireless home appliance/communication device having a user interface for accessing the radon management server 200.

[00103] As shown in FIG. 2, each of these external terminals 20 may include: a wireless communication module 21, an audio/video (A/V) input module 22, a user input module 23, a sensing module (24), an output module 25, a storage module 26, an interface module 27, a terminal control module 28, a power module 29, etc. Meanwhile, since the components shown in FIG. 2 are not essential, the external terminal 20 may have more components or fewer components than the components shown in FIG. 2.

[00104] Hereinafter, a detailed description of the components of each external terminal 20 is as follows.

[00105] The wireless communication module 21 may include one or more modules that enable wireless communication between each external terminal 20 and the radon management server 200. For example, the wireless communication module 21 may include a broadcast receiving module 21a, a mobile communication module 21b, a wireless Internet module 21c, a short-range communication module 21d, a location information module 21e, etc.

[00106] The broadcast receiving module 21a receives broadcast signals (e.g., TV broadcast signals, radio broadcast signals, data broadcast signals, and the like) and/or broadcast-related information from an external broadcast management server through various broadcast channels (e.g., satellite channels, terrestrial channels, and the like).

[00107] The mobile communication module 21b transmits and receives a wireless signal with at least one of a base station, each

external terminal 20, and a server on a mobile communication network. The wireless signal may include a voice call signal, a video call signal, or various types of data according to transmission/reception of text/multimedia messages.

[00108] The wireless Internet module 21c is a module for wireless Internet access, and may be built-in or external to each external terminal 20. As the wireless Internet technology, for example, WLAN (Wi-Fi), Wibro, Wimax, HSDPA, LTE, and the like may be used.

[00109] The short-range communication module 21d is a module for short-range communication, and may use, for example, Bluetooth communication, ZigBee communication, UWB (Ultra-Wideband) communication, RFID (Radio Frequency Identification) communication, or infrared (IrDA, infrared Data Association) communication, etc.

[00110] The location information module 21e is a module for checking or obtaining a location of each external terminal 20, and may obtain current location information of each external terminal 20 by using a Global Position System (GPS), etc.

[00111] Meanwhile, it is possible to perform data communication with the radon management server 200 by using a specific application program stored in the storage module 26 through the above-described wireless communication module 21 and/or wired communication module (not shown) under the control of the terminal control module 28.

[00112] The A/V input module 22 is a module for inputting an audio signal or a video signal, and may fundamentally include a camera 22a, a microphone part 22b, etc. The camera 22a processes image frames such as still images or moving pictures that are obtained by an image sensor in a video call mode or a photographing

mode. The microphone part 22b receives an external sound signal by a microphone in a call mode, a recording mode, or a voice recognition mode, and processes the external sound signal as electrical voice data.

[00113] The user input module 23 is a module that generates input data for controlling an operation of the external terminal 20, and in particular, performs a function of inputting a selection signal for any one piece of the data management information displayed through the display 25a of the output module 25. The selection signal may be, for example, a touch panel type input by a user's touch (with a static pressure/electricity type) or may be input by using a separate input device (e.g., a keypad dome switch, a jog wheel, a jog switch, and the like).

[00114] The sensing module 24 generates a sensing signal for controlling the operation of the external terminal 20 by detecting a current state of the external terminal 20, the current state being an open/closed state of the external terminal 20, a location of the external terminal 20, presence or absence of user contact, user's action of touching to a specific part, an orientation of the external terminal 20, acceleration/deceleration of the external terminal 20, etc. Such a sensing signal is transmitted to the terminal control module 28, and may serve as a basis for the terminal control module 28 to perform a specific function.

[00115] The output module 25 is a module for generating an output related to a visual, auditory, or tactile sense, and fundamentally, may include a display 25a, a sound output part 25b, an alarm part 25c, and a haptic part 25d, and the like.

[00116] The display 25a is for displaying and outputting information processed by the external terminal 20. For example, when the external terminal 20 is in a call mode, a user interface (UI) or a GUI (Graphical User Interface), which are related to a call, is displayed, and when the external terminal 20 is in a video call mode or a photographing mode, a photographed and/or received image, and UI or GUI are displayed on the display 25a.

[00117] For example, in a mode including: a call signal reception mode; a call mode or a recording mode; a voice recognition mode; a broadcast reception mode; and the like, the sound output part 25b may output audio data which is stored in the storage module 26 or received from the wireless communication module.

[00118] The alarm part 25c may output a signal for notifying the occurrence of an event of each external terminal 20. Examples of events occurring in the external terminal 20 include call signal reception, message reception, key signal input, touch input, etc.

[00119] The haptic part 25d generates various tactile effects that a user may feel. A typical example of the tactile effect generated by the haptic part 25d is vibration. The intensity and pattern of the vibration generated by the haptic part 25d may be controlled.

[00120] The storage module 26 may store a program for an operation of the terminal control module 28, and may temporarily store input/output data (e.g., data related to a phonebook, a message, a still image, a video, and the like).

[00121] In addition, the storage module 26 may store data on numerous vibration and sound of various patterns, which are output

when inputting a touch on a touch screen, and may store an application program related to the radon measurement.

[00122] In addition, since the storage module 26 may store source data for generating radon management-related information, radon management-related data may be constructed in a form composed of images and sounds, and a process and result of generating the radon management-related data may also be stored together.

[00123] Such a storage module 26 may include at least one type of storage medium, including a flash memory type storage, a hard disk type storage, a multimedia card micro type storage, a card type memory (e.g., SD or XD memory, etc.), a RAM, a SRAM, a ROM, an EEPROM, a PROM, a magnetic memory, a magnetic disk, an optical disc, etc.

[00124] The interface module 27 serves as a passage for all external devices connected to the external terminal 20. The interface module 27 receives data transmitted from an external device or power supplied from an external device, so as to transmit the data or power to each component inside each external terminal 20 or transmit the data inside the external terminal 20 to an external device.

[00125] The terminal control module 28 generally controls the overall operation of each external terminal 20, and performs related control and processing related to, for example, a voice call, data communication, a video call, execution of various applications, etc.

[00126] That is, the terminal control module 28 performs a control function so as to control a radon management-related application program stored in the storage module 26 to be executed,

request generation of radon management-related data through execution of the radon management-related application program, and receive the radon management-related data for the above request.

[00127] In addition, through the execution of the radon measurement-related application program, the terminal control module 28 performs a control function so that in the process of generating the radon measurement-related data desired by a user, the auxiliary elements including at least one of video, audio, and sound are output to at least one of devices including the display 25a and other output devices (e.g., the sound output part 25b, the alarm part 25c, the haptic part 25d, and the like).

[00128] In addition, the terminal control module 28 may monitor the charging current and charging voltage of the battery 29a at all times, and temporarily store the monitored value in the storage module 26. In this case, it is preferable that the storage module 26 stores not only battery charging status information such as the monitored charging current and charging voltage, but also battery specification information (i.e., product code, rating, and the like).

[00129] The power module 29 receives external power and internal power applied under the control of the terminal control module 28 to supply the power necessary for the operation of each component. The power module 29 supplies power from the built-in battery 29a to each component to operate, and is capable of charging the battery by using a charging terminal (not shown).

[00130] Various exemplary embodiments described herein may be implemented in a recording medium that can be read by a computer or

a similar device by using, for example, software, hardware, or a combination thereof.

[00131] According to the hardware implementation, the exemplary embodiment described herein may be implemented by using at least one of electrical parts for performing functions, including: ASICs (application specific integrated circuits), DSPs (digital signal processors), DSPDs (digital signal processing devices), PLDs (programmable logic devices), FPGAs (field programmable gate arrays), processors, controllers, microcontrollers, and microprocessors. In some cases, such exemplary embodiments may be implemented by the terminal control module 28.

[00132] According to the software implementation, the exemplary embodiments such as procedures or functions may be implemented together with separate software modules that perform at least one of functions or operations. A software code may be implemented by a software application written in an appropriate programming language. In addition, the software code may be stored in the storage module 26 and executed by the terminal control module 28.

[00133] Unlike ordinary mobile phones (also known as feature phones), when the external terminal 20 is configured to include a smartphone, the smartphone is to be a phone based on an open operating system that allows users to download, freely use, and delete various application programs they desire. The smartphone is preferably referred to as a communication device that includes: not only all mobile phones provided with mobile office functions, but also functions such as voice/video calls and Internet data communication, which are generally used; or any Internet phone or a

tablet PC that does not have a voice call function, but is capable of accessing the Internet.

[00134] Such a smartphone may be implemented by applying a smartphone equipped with a variety of open operating systems, and the open operating systems may include, for example, Symbian of NOKIA, Blackberry of RIMS, iOS of Apple, Windows Mobile of Microsoft, Android of Google, Bada of Samsung Electronics, etc.

[00135] As described above, since a smartphone uses the open operating system, unlike a mobile phone having a closed operating system, a user is able to arbitrarily install and manage various application programs.

[00136] That is, the above-described smartphone fundamentally includes: a control part, a memory, a screen output part, a key input part, a sound output part, a sound input part, a camera, a wireless network communication module, a short-range wireless communication module, and a battery for power supply, etc.

[00137] The control part is a generic term for referring to a functional component that controls the operation of a smart phone, includes at least one processor and a memory for execution, and is connected to each part of the functional component provided in the smart phone through a bus.

[00138] Such an above-described control part loads and operates at least one program code provided in a smartphone through the processor into the memory for execution, and transfers the operation result to at least one part of the functional component through the bus so as to control the operation of the smartphone.

[00139] The memory is a generic term for a nonvolatile memory provided in a smartphone, and stores and maintains at least one program code executed through the control part and at least one data set used by the program code. The memory fundamentally stores: a system program code and a system data set corresponding to an operating system of a smartphone; a communication program code and a communication data set for processing wireless communication connection of the smartphone; and at least one application program code and application data set, wherein a program code and a data set for implementing the present invention are stored in the memory as well.

[00140] The screen output part is composed of a screen output device (e.g., liquid crystal display (LCD) device) and an output module that drives the screen output device, and is connected to the control part via the bus, thereby outputting an operation result, corresponding to a screen output among various operation results of the control part, on the screen output device.

[00141] The key input part is composed of a key input device having at least one key button (or a touch screen device interlocking with the screen output part) and an input module that drives the key input part, and is connected to the control part via the bus, thereby inputting a command that instructs various operations of the control part or inputting data necessary for the operation of the control part.

[00142] The sound output part includes: a speaker that outputs a sound signal; and a sound module that drives the speaker, and is connected to the control part via the bus, thereby outputting,

through the speaker, an operation result corresponding to a sound output among various operation results of the control part. The sound module decodes sound data to be output through an existing speaker and converts the sound data into a sound signal.

[00143] The sound input part includes: a microphone that receives a sound signal; and a sound module that drives the microphone, and transmits the sound data input through the microphone to the control part. The sound module encodes the sound signal input through the microphone.

[00144] The camera includes an optical part, a charge coupled device (CCD), and a camera module for driving the same, and obtains bitmap data input to the CCD through the optical part. The bitmap data may include both video data and image data of a still image.

[00145] The wireless network communication module is a generic term for communication components for connecting wireless communication, is configured to include at least one of an antenna, an RF module, a baseband module, and a signal processing module, which are for transmitting and receiving radio frequency signals of a specific frequency band, and is connected to the control part via the bus, thereby transmitting, through wireless communication, an operation result corresponding to wireless communication among various operation results of the control part or receiving data through wireless communication, so as to transmit the data to the control part and simultaneously maintain the procedures of connection, registration, communication, and handoff of the wireless communication.

[00146] In addition, the wireless network communication module includes a mobile communication component that performs at least one of functions including: access to a mobile communication network, location registration, call processing, call connection, data communication, and handoff, in accordance with the CDMA/WCDMA standard. Meanwhile, according to the intention of those skilled in the art, the wireless network communication module according to the IEEE 802.16 standard further includes: a mobile Internet communication component for performing at least one of functions, including: access to the mobile Internet, location registration, data communication, and handoff, wherein It should be understood that the present invention is not limited by the wireless communication configuration provided by the wireless network communication module.

[00147] The short-range wireless communication module is configured to include a short-range wireless communication module that connects to a communication session by using a radio frequency signal as a communication medium within a predetermined distance, and according to ISO 180000 series standards, the short-range wireless communication module may preferably include at least one of RFID communication, Bluetooth communication, Wi-Fi communication, and public wireless communication. In addition, the short-range wireless communication module may be integrated with the wireless network communication module.

[00148] The smart phone configured as described above is referred to a terminal capable of performing wireless communication, and other than the smart phone, any device may be applicable as long as

the device is a terminal capable of transmitting and receiving data through a network including the Internet. That is, the smart phone may include at least one or more of a notebook PC, and a tablet PC, which have a function of transmitting a short message and a function of connecting to a network, in addition to a mobile terminal capable of being carried and moved.

[00149] The preferred exemplary embodiment of the radon management system using the radon detector according to the present invention has been described above, but is not limited thereto, and it is possible to embody the present invention with various modifications within the scope of the claims, the detailed description of the invention, and the accompanying drawings, and these embodiment also belongs to the present invention.

Industrial Applicability

[00150] The present invention is widely applicable in a radon management system.

CLAIMS

1. A radon management system using a radon detector, the radon management system comprising:

at least one of radon detectors installed in a specific space indoors or outdoors, and configured to detect in real time alpha particles present in the specific space, output a predetermined alpha particle detection signal, count for a measurement time preset based on the output alpha particle detection signal to calculate an alpha particle concentration value, and transmit unique device identification information together with the calculated alpha particle concentration value; and

a radon management server configured to collect the unique device identification information together with the alpha particle concentration value transmitted from each radon detector during a preset measurement period, calculate and quantify an average value of the collected alpha particle concentration values, convert the average value into a database (DB) for each radon detector, store and manage the average value, compare the alpha particle concentration value transmitted in real time from each radon detector and the average value of the previously stored alpha particle concentration values with each other, calculate an amount of change in the alpha particle concentration value, and generate radon generation event information data according to the amount of change in the calculated alpha particle concentration value.

2. The radon management system of claim 1, wherein the radon

management server generates the radon generation event information data when the calculated amount of change in the alpha particle concentration value is greater than a preset reference amount of change.

3. The radon management system of claim 1, wherein the radon management server transmits the generated radon generation event information data to at least one external terminal through a communication network.

4. The radon management system of claim 1, wherein the radon management server converts user action mission information corresponding to the amount of change in the calculated alpha particle concentration value into the database (DB) for each amount of change in each alpha particle concentration value, stores and manages the user action mission information in a separate storage device, extracts the amount of change in the alpha particle concentration value at a time of generating the radon generation event information data, reads, from the storage device, the user action mission information corresponding to the amount of change in the extracted alpha particle concentration value, uses the read user action mission information, and generates the radon generation event information data.

5. The radon management system of claim 4, wherein the user action mission information comprises information of action mission contents and action mission execution time so as to reduce the amount

of change in the alpha particle concentration value.

6. The radon management system of claim 1, wherein, when collecting the alpha particle concentration value transmitted from each radon detector during the preset measurement period, the radon management server determines the alpha particle concentration value transmitted from each radon detector as noise in a case where the alpha particle concentration value is greater than a preset maximum alpha particle concentration value or less than a preset minimum alpha particle concentration value, uses only the alpha particle concentration value excluding the alpha particle concentration value determined as the noise among the collected alpha particle concentration values, and calculates the average value of the alpha particle concentration values.

7. The radon management system of claim 1, wherein the radon management server converts the user action mission information corresponding to the amount of change in the calculated alpha particle concentration value into the database (DB) for each amount of change in the alpha particle concentration value so as to reduce the amount of change in the alpha particle concentration value and include information of action mission contents and action mission execution time, stores and manages the user action mission information in a separate storage device,

wherein the radon management server extracts the amount of change in the alpha particle concentration value at a time of generating the radon generation event information data, reads, from

the storage device, the user action mission information corresponding to the amount of change in the extracted alpha particle concentration value, and determines that the action mission contents included in the read user action mission information has been performed by a user, when the alpha particle concentration value transmitted in real time from each radon detector within the action mission execution time included in the read user action mission information is less than the average value of the alpha particle concentration values previously stored in the storage device.

8. The radon management system of claim 7, wherein, when it is determined that the action mission contents included in the read user action mission information has been performed by the user, the radon management server provides a preset reward on the basis of information on the corresponding user.

9. The radon management system of claim 1, wherein the radon management server collects the unique device identification information together with the alpha particle concentration value transmitted from each radon detector during a preset first measurement period, analyzes the alpha particle concentration values collected during the first measurement period, extracts a first alpha particle concentration pattern, converts the extracted first alpha particle concentration pattern into the database (DB) for each radon detector, and stores and manages the first alpha particle concentration pattern.

10. The radon management system of claim 9, wherein the radon management server collects the unique device identification information along with the alpha particle concentration value transmitted from each radon detector during a preset second measurement period, analyzes the alpha particle concentration values collected during the second measurement period, extracts a second alpha particle concentration pattern, determines that a change has occurred in a periodic action pattern of the corresponding user in a specific place when the second alpha particle concentration pattern does not match the first alpha particle concentration pattern, generates a notification message, and then transmits the generated notification message to a preset external terminal held by the corresponding user.

11. The radon management system of claim 10, wherein the radon management server converts user action recommendation information corresponding to the average value of the alpha particle concentration values collected during the second measurement period into the database (DB) for each average value of the alpha particle concentration values, stores and manages the user action recommendation information in a separate storage device, calculates the average value of the alpha particle concentration values collected during the second measurement period when the second alpha particle concentration pattern does not match the first alpha particle concentration pattern, reads, from the storage device, the user action recommendation information corresponding to the average value of the calculated alpha particle concentration values, and

generates the notification message by using the read user action recommendation information.

12. The radon management system of claim 1, further comprising:

a radon reduction facility including at least one discharging fan that suctions air entering a specific space through a vent pipe connected to the specific space, discharges the suctioned air to an external space, and reduces concentration of the alpha particles contained in the suctioned air,

wherein the radon management server collects the unique device identification information together with the alpha particle concentration value transmitted from each radon detector during a preset first measurement period, analyzes the alpha particle concentration values collected during the first measurement period, extracts a first alpha particle concentration pattern, converts the extracted first alpha particle concentration pattern into the database (DB) for each radon detector, stores and manages the first alpha particle concentration pattern, collects the unique device identification information along with the alpha particle concentration value transmitted from each radon detector during a preset second measurement period, analyzes the alpha particle concentration values collected during the second measurement period, extracts a second alpha particle concentration pattern, determines that a change has occurred in a periodic action pattern of the corresponding user in the specific place when the second alpha particle concentration pattern does not match the first alpha particle concentration pattern, and controls an operation of the

radon reduction facility.

13. The radon management system of claim 12, wherein the radon management server transfers a request message asking whether a change has occurred in the periodic action pattern of the corresponding user to a preset external terminal held by the corresponding user when it is determined that the change has occurred in the periodic action pattern of the corresponding user in the specific place, and controls each radon reduction facility to operate until a value where the alpha particle concentration value transmitted from each radon detector is less than the alpha particle concentration value obtained before the change in the corresponding user's periodic action pattern occurs is detected when there is no response to the request message during a preset response time from the preset external terminal or when receiving a response notifying that the change has occurred in the user's periodic action pattern.

14. The radon management system of claim 13, wherein the radon management server determines that the radon reduction facility is not operating properly when receiving the response notifying that no change has occurred in the user's periodic action pattern from the preset external terminal, generates a warning message notifying that the radon reduction facility is in an abnormal state, and transmits the warning message to the preset external terminal through the communication network.

15. The radon management system of claim 13, wherein the radon

management server determines that the radon reduction facility is not operating properly when the alpha particle concentration value transmitted from each radon detector after the preset radon reduction reference time is unable to become a value which is less than the alpha particle concentration value obtained before the change of the corresponding user's periodic action pattern occurs, determines that the radon reduction facility is not operating properly, generates a warning message notifying that the radon reduction facility is in an abnormal state, and transmits the warning message to the preset external terminal through the communication network.

16. The radon management system of claim 1, wherein the preset measurement period is set as a period of measurement every 10 minutes for an hour, and

the radon management server collects the unique device identification information along with the alpha particle concentration value transmitted from each radon detector during the preset measurement period, learns and analyzes the collected alpha particle concentration values, generates a radon concentration pattern over time, converts the radon concentration pattern into the database (DB) for each radon detector, stores and manages the radon concentration pattern in a separate storage device, generates a push alarm message for notifying a radon concentration risk when the alpha particle concentration value transmitted in real time from each radon detector is greater than a value of the radon concentration pattern previously stored in the storage device or greater than the preset radon concentration risk reference value, and transmits the push

alarm message to a preset external terminal through the communication network.

17. The radon management system of claim 16, wherein the push alarm message for notifying the radon concentration risk comprises ventilation time information corresponding to the alpha particle concentration value transmitted from each radon detector.

18. The radon management system of claim 1, wherein the radon management server provides a cloud computing service in response to a request from at least one client terminal, provides a cloud web service so as to download, through each client terminal, radon management-related information data converted into the database (DB) and stored in a separate storage device, encrypts and stores the radon management-related information data by using a symmetrical or asymmetric encryption method in a case of converting the radon management-related information into the database (DB) so as to be stored in the storage device, and provides a service so that a decryption key capable of decrypting the encrypted radon management-related information data is transmitted to each client terminal, and

each client terminal searches in real time the radon management-related information data stored in the storage device of the radon management server by using the cloud web service of a client member login of the radon management server, displays the radon management-related information data on a display screen, decrypts the radon management-related information data encrypted and stored in the storage device of the radon management server by using the

corresponding client member login information together with the decryption key transmitted from the radon management server, searches in real time and displays the radon management-related information data on the display screen, searches in real time the radon management-related information data stored in the storage device of the radon management server through a radon management-related application downloaded from the radon management server, and displays the radon management-related information data on the display screen.

19. The radon management system of claim 1, wherein, based on the unique device identification information together with the alpha particle concentration value transmitted from each radon detector or the average value of the calculated alpha particle concentration values, the radon management server provides a service for the radon management-related information data to be displayed on a display screen of an administrator or displayed on the user's display screen provided in an external terminal, so that the administrator is able to monitor the radon management-related information data for each radon detector on a daily, day of the week, weekly, monthly, quarterly, and yearly basis, and on the basis of a real-time GIS (Geographic Information System).

ABSTRACT

A radon management system using a radon detector is proposed. The system includes: at least one radon detector installed in a specific space indoors or outdoors, and configured to detect in real time alpha particles present in the specific space, output a predetermined alpha particle detection signal, count for a preset measurement time to calculate and transmit an alpha particle concentration value, and transmit unique device identification information; and a radon management server configured to collect the unique device identification information and alpha particle concentration value, calculate and quantify an average value of the collected alpha particle concentration values to be converted into a database for each radon detector, store and manage the average value, compare the alpha particle concentration value and the average values of the previously stored alpha particle concentration value to each other to calculate a change amount thereof, and generate radon generation event information data.

DRAWINGS

1/2

Fig 1

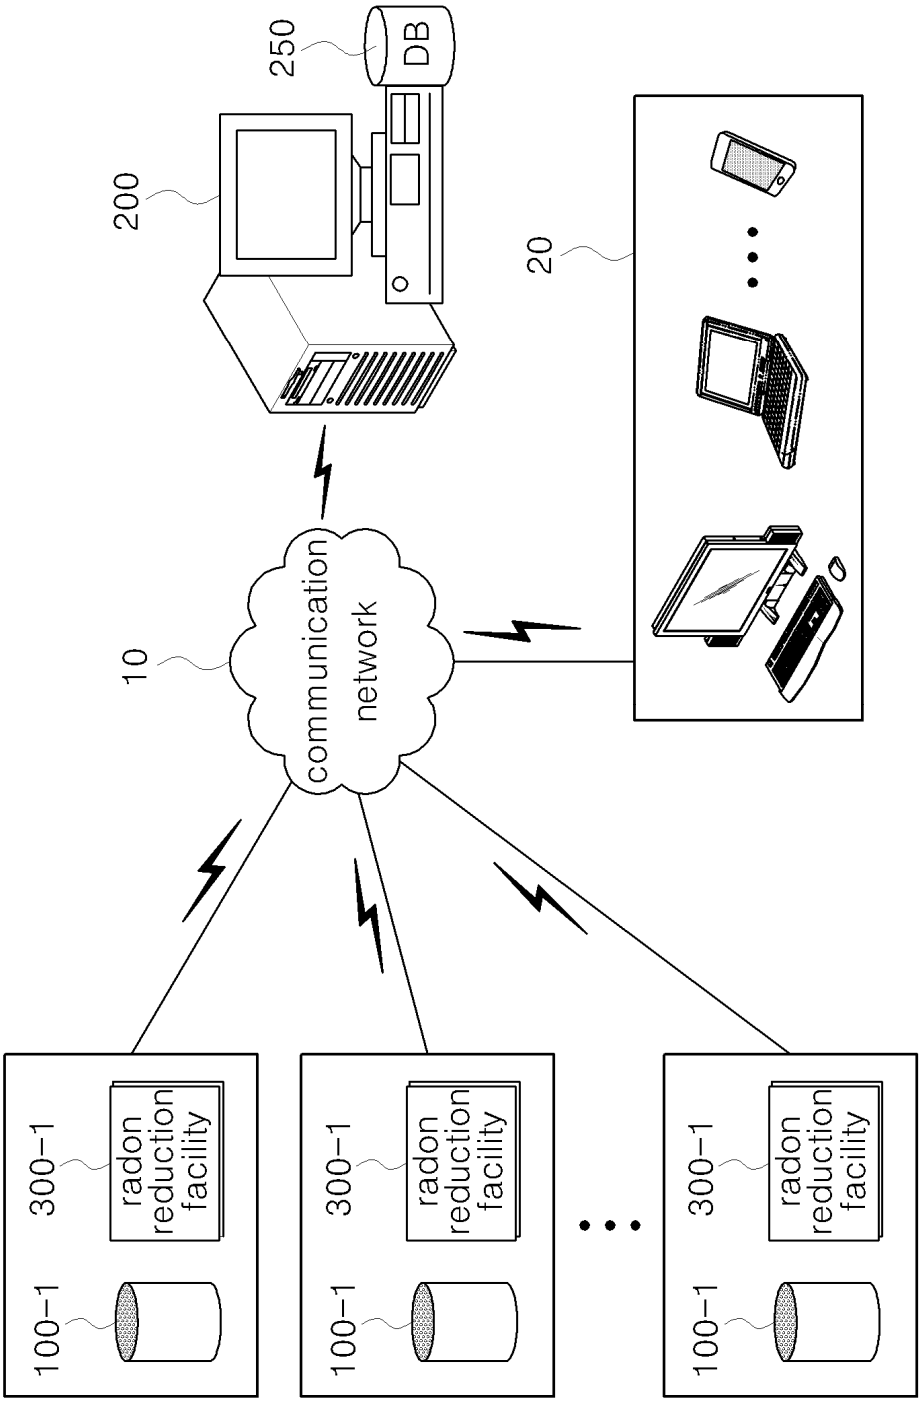
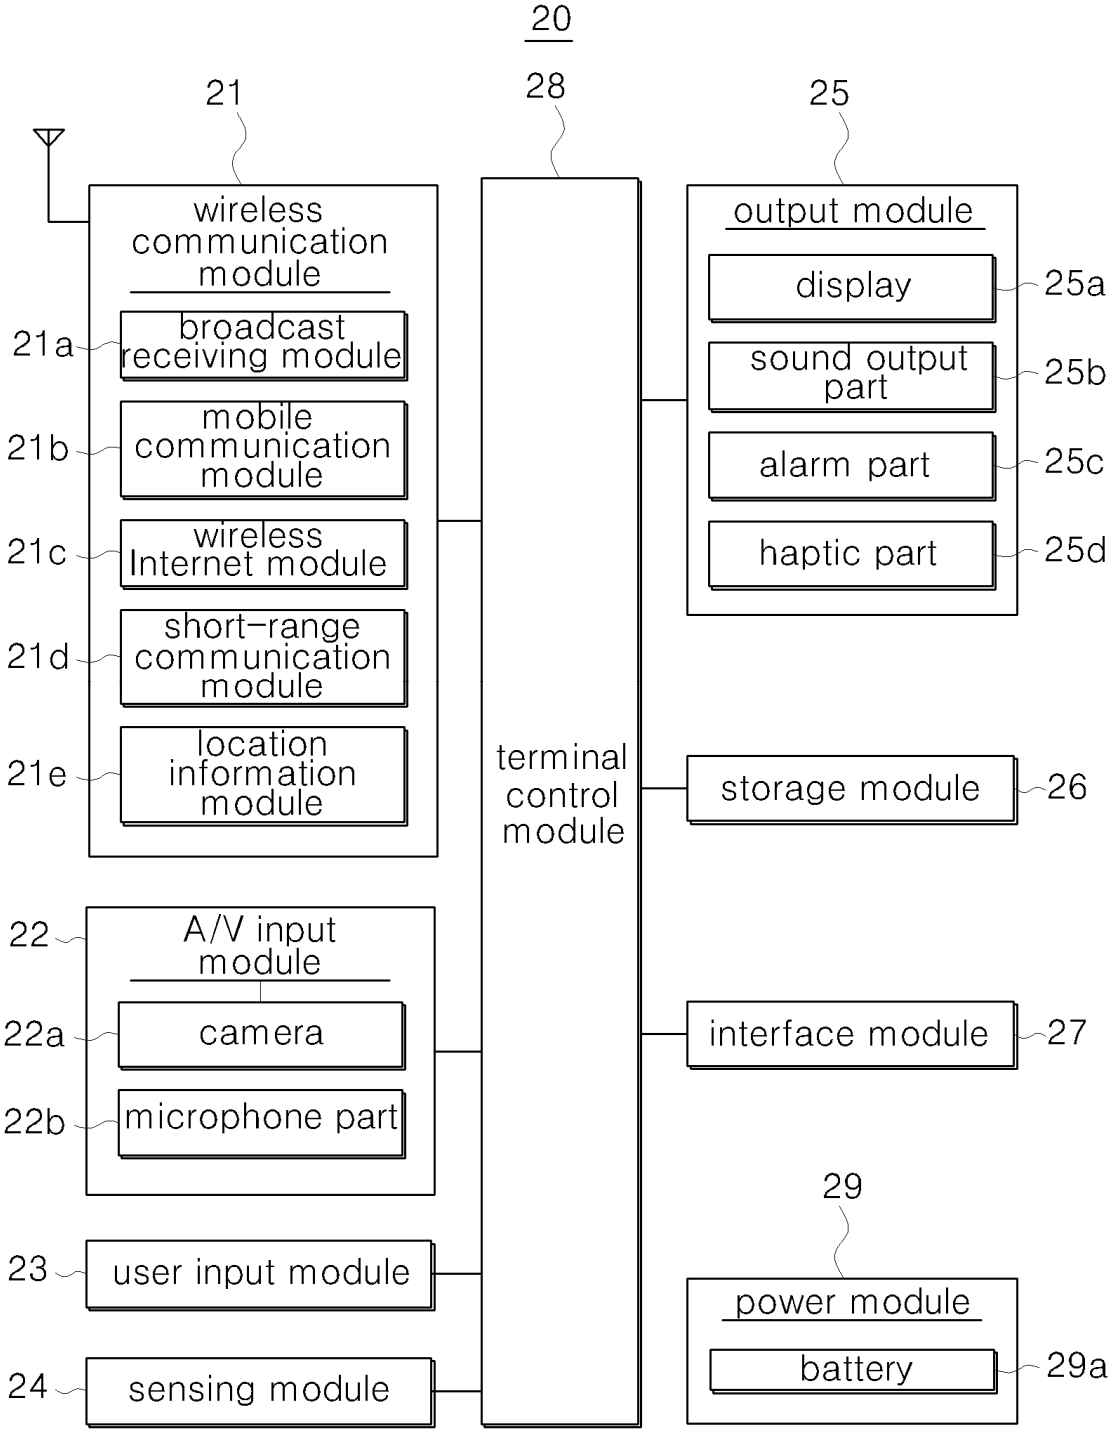


Fig 2


20
21
28
25
wireless communication module
21a
broadcast receiving module
21b
mobile communication module
21c
wireless Internet module
21d
short-range communication module
21e
location information module
terminal control module
output module
display
25a
sound output part
25b
alarm part
25c
haptic part
25d
storage module
26
22
A/V input module
22a
camera
22b
microphone part
interface module
27
23
user input module
24
sensing module
29
power module
battery
29a

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

First Named Inventor:	KO, Jae Jun	Examiner:	TBA
Serial No.:	TBA	Art Unit:	TBA
Filing Date:	Concurrently	Confirmation No.:	TBA

For: **RADON MANAGEMENT SYSTEM USING RADON DETECTOR**

PRELIMINARY AMENDMENT

Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

July 13, 2021

Sir:

Prior to the examination, please amend the above-identified patent application as follows:

Amendments to the Specification begin on page **2** of this paper.

Amendments to the Claims are reflected in the **Listing of Claims** which begins on page **3** of this paper.

Remarks/Arguments begin on page **3** of this paper.

CERTIFICATE OF ELECTRONIC TRANSMISSION
I hereby certify that this document is being electronically transmitted to the Commissioner for Patents via EFS-Web on **July 13, 2021**.

LUCAS & MERCANTI, LLP
BY: /Lammie Hong/
Lammie Hong

AMENDMENTS TO THE SPECIFICATION:

Please enter the following paragraph after the title on page 1:

CROSS-REFERENCE TO RELATED APPLICATION

This application is a 371 U.S. national stage of PCT/KR2020/012685, filed September 21, 2020 which claims the benefit of Korean Patent Application No. 10-2019-0134645, filed October 28, 2019, the contents of each of which are incorporated herein by reference.

REMARKS

The specification has been amended to provide an incorporation by reference.

No new matter is added.

It is respectfully submitted that the present application is in all respects complete and in condition for favorable consideration.

If the Examiner has any questions regarding the claim amendments presented herein, it is requested that the Examiner contact the undersigned at the telephone number shown below.

An early and favorable action on the merits is earnestly solicited.

Respectfully submitted,

LUCAS & MERCANTI, LLP

By: /Yun H. Choe/

Yun H. Choe
Registration No. 61,798

LUCAS & MERCANTI, LLP
30 Broad Street, 21st Floor
New York, New York 10004
Phone: 212-661-8000
Fax: 212-661-8002

YHC/lh

UNITED STATES PATENT AND TRADEMARK OFFICE

First Named Inventor:	KO, Jae Jun	Examiner:	TBA
Serial No.:	TBA	Art Unit:	TBA
Filing Date:	Concurrently	Confirmation No.:	TBA

For: **RADON MANAGEMENT SYSTEM USING RADON DETECTOR**

INFORMATION DISCLOSURE STATEMENT

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

July 13, 2021

Sir:

Pursuant to M.P.E.P. § 609 and 37 C.F.R. §§ 1.56, 1.97-1.99, Applicants herewith submit form PTO/SB/08a, which lists references cited in International Search Report dated January 8, 2021 for International Application No. 10-2019-0134645 and Applicants are aware of.

This submission does not represent that a search has been made or that no better art exists. While the term "references" is used in citing the documents called to the Examiner's attention herein, Applicants do not make any admission that each or all of them are "prior art" references within the meaning of the statutory and case law.

Applicants reserve the right to contend, where appropriate, that a reference asserted against any claim of the present application is not prior art under the facts and the law.

Applicants also reserve the right to present appropriate arguments and/or evidence to establish patentability over the references, should one or more of the references be applied against the claims of the present application.

Applicants request that the Examiner independently determine those items which the Examiner would consider the most pertinent of all the references cited herein.

This Information Disclosure Statement is filed with the application and thus, within three months from the filing date. Therefore, no fee is believed to be due. If, on the other hand, it is determined that any further fees are due, or any overpayment has been made, the Assistant Commissioner is hereby authorized to debit or credit such sum to Deposit Account No. 02-2275.

It is respectfully requested that the references cited in the enclosed Forms PTO/SB/08/a be considered and made of record.

Respectfully submitted,
LUCAS & MERCANTI, LLP

By: /Yun H. Choe/
Yun H. Choe
Registration No. 61,798

LUCAS & MERCANTI, LLP
30 Broad Street – 21st Floor
New York, NY 10004
Phone: 212-661-8000
Fax: 212-661-8002

YHC/lh

CERTIFICATE OF ELECTRONIC TRANSMISSION
I hereby certify that this document is being electronically transmitted to the Commissioner for Patents via EFS-Web on **July 13, 2021**.
LUCAS & MERCANTI, LLP

BY: /Lammie Hong/
Lammie Hong

UNITED STATES PATENT AND TRADEMARK OFFICE
P.O. Box 1450
Alexandria, VA 22313 - 1450
www.uspto.gov

ELECTRONIC ACKNOWLEDGEMENT RECEIPT

APPLICATION #	RECEIPT DATE / TIME	ATTORNEY DOCKET #
17/310,034	**07/13/2021 10:40:59 AM ET**	**4016-1060**

Title of Invention

RADON MANAGEMENT SYSTEM USING RADON DETECTOR

Application Information

APPLICATION TYPE	Utility - U.S. National Stage under 35 USC 371	PATENT #	-
CONFIRMATION #	2356	FILED BY	Lammie Hong
PATENT CENTER #	60238036	FILING DATE	-
CUSTOMER #	20311	FIRST NAMED INVENTOR	Jae Jun KO
INTL. APPLICATION #	PCT/KR2020/012685	INTL. FILING DATE	09/21/2020
CORRESPONDENCE ADDRESS	-	AUTHORIZED BY	Yun Choe

Documents

TOTAL DOCUMENTS: 16

DOCUMENT	PAGES	DESCRIPTION	SIZE (KB)
4016-1060_ADS.PDF	8	Application Data Sheet	1227 KB
4016-1060_DECL.PDF	2	Oath or Declaration filed	189 KB
4016-1060_POA.PDF	2	Power of Attorney	279 KB
4016-1060-APPL-PCT-KR2020-012685.PDF	35	Documents submitted with 371 Applications	700 KB
4016-1060_PTO1390.PDF	4	Transmittal of New Application	243 KB
4016-1060_SB08_IDS.PDF	4	Information Disclosure Statement (IDS) Form (SB08)	598 KB

4016-1060_LtrIDS_20210713.PDF	2	Miscellaneous Incoming Letter	167 KB
4016-1060_PREL.PDF	3	Preliminary Amendment	181 KB
4016-1060_Eng-APPL.PDF	59	Specification	340 KB
N1_Eng-ISR.PDF	2	Non Patent Literature	127 KB
F1_KR10-1912680B1.PDF	15	Foreign Reference	1140 KB
F2_KR10-1446285B1.PDF	19	Foreign Reference	975 KB
F3_KR10-1650436B1.PDF	27	Foreign Reference	959 KB
F4_KR10-1922211B1.PDF	36	Foreign Reference	2139 KB
F5_KR10-2017-0023601A.PDF	27	Foreign Reference	1674 KB
F6_KR10-1569270B1.PDF	10	Foreign Reference	747 KB

Digest

DOCUMENT	MESSAGE DIGEST(SHA-512)
4016-1060_ADS.PDF	071BEDCA500D5674C563E27322C832D4F391B93F213357D430A6883D055DAEAFBF7FDABBEF8D0C149992FC45241BCCC6EF822482D15057D3C553BF7097DF1722
4016-1060_DECL.PDF	9D5E9DF3BF0F8A65EEE5302747210530D1B5583186BE4A9B67B7A71AB3862ED26B8E7808EB06FD39D9BB1628AC2D21EBE166FB2DEBA8E90B38C42BAFCAF80E6D
4016-1060_POA.PDF	7EB7B83D012B6D74FD18340E3C7FB1718DCC94C95FA260507DB07D06DCDA71116ADF35EB8C81658E9B0B7C612F9A73B0A2D443EF01F0E8C6F44E0EEDCE415A8E

4016-1060-APPL-PCT-KR2020-012685.PDF	F59EA72A9D1D9A279A76BAB867A4B5C72108B568A392EA1E1A843B7BC0AA33627CEA0A032645C23416BB0F7EF02C5541313F394771443A9CA86B7E539AE8D860
4016-1060_PTO1390.PDF	1262F2AF436D68C14E4530C707B70880D4095F742F09B49648B72263052437F76C9C12B692B4C04B06C96D53E0FFA3B036723954E487187211AB90EEC99E44D8
4016-1060_SB08_IDS.PDF	E8F9AE37A06CFB72EBFE603A555E7B92F39BF05562AFFC119F5758842EC85B0D44A4CE82659034D0AB0F8C03CD071AD65CED2A538EEFE04CF30FAC5553A2AD5C
4016-1060_LtrIDS_20210713.PDF	ADB0D8E1F916E64B6C2BF521C70D50F3B6E25D53531978614CDA821B76BF8E49D95A1049DCED4593B45C9EF8553987E6F4D258145E96229CD913ED5BB97B74E2
4016-1060_PREL.PDF	B4C8316D80D1FA2B8A6D0ED84646CE7669C8566139C69337205AD6C299D219808F0B1909F79CBAB2106150BB75E5A125887714FFA88E7BF749C123C801B32BCD
4016-1060_Eng-APPL.PDF	DA7C2D019BC5C0906962FB22D211DA43207361B5E74FEF66DE1A0162BC6640D2ED775196F45DB39BD1D8066422A7870D3052211570BC14A318D70AC762D0F866
N1_Eng-ISR.PDF	F3D190130E9B03FEA105D4D6899EBB1A0853A421CB6060B39187C806E9C0A5537FF9E2C3B1E4C7D366473C852E6FB06BD5EB38453BA5C23B6C206B03378A05CE
F1_KR10-1912680B1.PDF	B39A4D8258B7D625A955DA3D5A7B55E80D07CA834E2078AD24F9369AF9543C6E7031CFEC9C759FCD0E267926A3316081F31AB39AEF23CA9D9126F41E89C1111B
F2_KR10-1446285B1.PDF	BA18F4BE6BBC4F8032B4085943B06BF98E3F566B0F68DAE044500D483329F6E554F923AEC0C350797009150E3B82C675F5F97BD4ACA810BA3E48FEFADFEBD552
F3_KR10-1650436B1.PDF	D7519FF76153039589C0F359522A996106A357871EA12EBA8A6D3304B4A6C405A7684D794FEA17F6D440A7BCB4DE2BEC715A58E132EF5CB2D808A7C263E2A589

F4_KR10-1922211B1.PDF	A344F9BDF447BE3A85D51BFD02FB109D2E4490EC21A155F41B0C34AE15D6BF79EE83F1EF8C69267D9C4F81432E3D21B119C29823F83A0AFD9CAA7BA7527E56EF
F5_KR10-2017-0023601A.PDF	91A1EE88FD248C8EA07FE45B56440539B863ABB6CDA53803F24E0CFD44C5ADB071470DB8D948C9F1EF4FA4E755F0ABE43D8A442FF20805454539E887276E1BC7
F6_KR10-1569270B1.PDF	10BE19FD25FDD77CE37C02EA7B7576DAACC40A2C34486227331EE299A8DDCFA7F455E4D418175336EABDECB2418BD256B9F74898BAE4C51C9EE2228EBD8449BD

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

UNITED STATES PATENT AND TRADEMARK OFFICE
P.O. Box 1450
Alexandria, VA 22313 - 1450
www.uspto.gov

ELECTRONIC PAYMENT RECEIPT

APPLICATION #	RECEIPT DATE / TIME	ATTORNEY DOCKET #
17/310,034	**07/13/2021 10:40:59 AM ET**	**4016-1060**

Title of Invention

RADON MANAGEMENT SYSTEM USING RADON DETECTOR

Application Information

APPLICATION TYPE	Utility - U.S. National Stage under 35 USC 371	PATENT #	-
CONFIRMATION #	2356	FILED BY	Lammie Hong
PATENT CENTER #	60238036	AUTHORIZED BY	Yun Choe
CUSTOMER #	20311	FILING DATE	-
INTL. APPLICATION #	PCT/KR2020/012685	INTL. FILING DATE	09/21/2020
CORRESPONDENCE ADDRESS	-	FIRST NAMED INVENTOR	Jae Jun KO

Payment Information

PAYMENT METHOD	PAYMENT TRANSACTION ID	PAYMENT AUTHORIZED BY
CARD / 4009	**E20217CA41553251**	**Lammie Hong**

FEE CODE	DESCRIPTION	ITEM PRICE($)	QUANTITY	ITEM TOTAL($)
2631	BASIC NATIONAL STAGE FEE	160.00	1	160.00
2633	NATIONAL STAGE EXAMINATION FEE - ALL OTHER SITUATIONS	400.00	1	400.00
2642	NATIONAL STAGE SEARCH FEE - SEARCH REPORT PREPARED AND PROVIDED TO USPTO	270.00	1	270.00
			TOTAL AMOUNT:	**$830.00**

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

Please wait...

If this message is not eventually replaced by the proper contents of the document, your PDF viewer may not be able to display this type of document.

You can upgrade to the latest version of Adobe Reader for Windows®, Mac, or Linux® by visiting http://www.adobe.com/go/reader_download.

For more assistance with Adobe Reader visit http://www.adobe.com/go/acrreader.

Windows is either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries. Mac is a trademark of Apple Inc., registered in the United States and other countries. Linux is the registered trademark of Linus Torvalds in the U.S. and other countries.

ASSIGNMENT OF RIGHTS, TITLE AND INTEREST IN INVENTION

This is an assignment of the following rights, title and interest (check all that apply):

- ☒ ***United States of America rights, title and interest in the invention***
- ☒ ***Foreign rights, title and interest in the invention***
- ☐ ***United States Patent Application Serial No.***
  Date of Execution: _____ ***Date of Filing:***
- ☐ ***United States Provisional Patent Application Serial No.***
- ☐ ***United States Patent No(s).*** _____
- ☒ **International (PCT) Patent Application Serial No.** PCT/KR2020/012685
- ☐ ***Other (specify):*** _____

Title of the Invention:

RADON MANAGEMENT SYSTEM USING RADON DETECTOR

Inventors (assignors):

Name	Address
KO, Jae Jun	101-4203, 241, Wangsimni-ro, Seongdong-gu, Seoul 04765 Republic of Korea
KIM, Young Gweon	101-302, 57, Gyeongsu-daero 707beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, 14078 Republic of Korea

Assignee:

Name	Address
FTLAB CO., LTD.	503, 8, Haebong-ro 330beon-gil, Danwon-gu, Ansan-si, Gyeonggi-do, 15425 Republic of Korea

WHEREAS, we, the above-identified Inventors, have invented certain new and useful improvements in the Invention identified above and described in the above-identified patent application(s) and /or patent(s) (hereinafter referred to as "Invention");

And, whereas we desire to assign our above-identified rights, title and interest in the Invention to the above-identified Assignee;

NOW, this indenture witnesseth, that in consideration of the sum of ONE DOLLAR ($1.00), the receipt of which is hereby acknowledged, and for other good and valuable consideration;

We hereby assign, sell and transfer our above-identified rights, title and interest in said Invention, said application(s) as identified above, including any divisions, continuations, and continuations-in-part thereof, and in and to any and all Letters Patent of the United States, and countries foreign thereto, which

may be granted for said Invention, and in and to any and all reissues and reexaminations thereof, which may be granted or have granted for said Invention, and in and to any and all priority rights, Convention rights, and other benefits accruing or to accrue to us with respect to the filing of applications for patents or securing of patents in the United States and countries foreign thereto, unto said Assignee;

And we hereby authorize and request the Commissioner of Patents and Trademarks to issue any United States Letters Patent which may issue for said Invention to said Assignee, as assignee of the whole right, title and interest thereto;

And we further agree to sign and execute all necessary and lawful future documents, including applications for foreign patents, for filing divisions, continuations and continuation-in-part of said application for patent and/or for obtaining any reissue or reissues of any Letters Patent which may be granted for my aforesaid Invention, as the Assignee or its Designee(s) may from time to time require and prepare at its own expense.

The undersigned hereby grant(s) the firm of LUCAS & MERCANTI, LLP, located at 30 Broad Street, New York, New York, 10004, the power to insert on this assignment any further identification which may be necessary or desirable in order to comply with the rules of the United States Patent Office for recordation of this document.

Inventors' Signatures:

Name	Signature	Date
KO, Jae Jun		1/7
KIM, Young Gweon		2021-1-7

Electronic Patent Assignment System

Confirmation Receipt

Your assignment has been received by the USPTO.
The coversheet of the assignment is displayed below:

PATENT ASSIGNMENT COVER SHEET

Electronic Version v1.1
Stylesheet Version v1.2

SUBMISSION TYPE:	NEW ASSIGNMENT
NATURE OF CONVEYANCE:	ASSIGNMENT

CONVEYING PARTY DATA

Name	Execution Date
JAE JUN KO	07/07/2021
YOUNG GWEON KIM	07/07/2021

RECEIVING PARTY DATA

Name:	FTLAB CO., LTD.
Street Address:	503, 8, HAEBONG-RO 330BEON-GIL, DANWON-GU
City:	ANSAN-SI, GYEONGGI-DO
State/Country:	KOREA, REPUBLIC OF
Postal Code:	15425

PROPERTY NUMBERS Total: 1

Property Type	Number
Application Number:	17310034

CORRESPONDENCE DATA

Fax Number:	(212)661-8002
Phone:	2126618000
Email:	INFO@LMIPLAW.COM

Correspondence will be sent to the e-mail address first; if that is unsuccessful, it will be sent using a fax number, if provided; if that is unsuccessful, it will be sent via US Mail.

Correspondent Name:	LUCAS & MERCANTI, LLP
Address Line 1:	30 BROAD STREET
Address Line 2:	FLOOR 21
Address Line 4:	NEW YORK, NEW YORK 10004

ATTORNEY DOCKET NUMBER:	4016-1060
NAME OF SUBMITTER:	YUN H. CHOE
Signature:	/Yun H. Choe/
Date:	07/13/2021

Total Attachments: 2
source=4016-1060_ASSN_Signed#page1.tif
source=4016-1060_ASSN_Signed#page2.tif

RECEIPT INFORMATION

EPAS ID:	PAT6809124
Receipt Date:	07/13/2021

Return to home page

| .HOME | INDEX | SEARCH | *e*BUSINESS | CONTACT US | PRIVACY STATEMENT