# AAAC 625

All Aluminium Alloy Conductor · Metric series · IEC 61089 · BS EN 50182 · EN 50183 · ES

| | |
|---|---|
| Product code | **ATC-AAA-015** |
| Designation | **625** |
| Aluminium area | **626.2 mm²** |
| Stranding, aluminium | **91 x 2.96 mm** |
| Overall diameter | **32.6 mm** |
| Approx. mass | **1737.7 kg/km** |
| DC resistance at 20 °C | **0.0534 Ohm/km** |
| Rated tensile strength | **184.73 kN** |
| Current rating | **1040 A** |

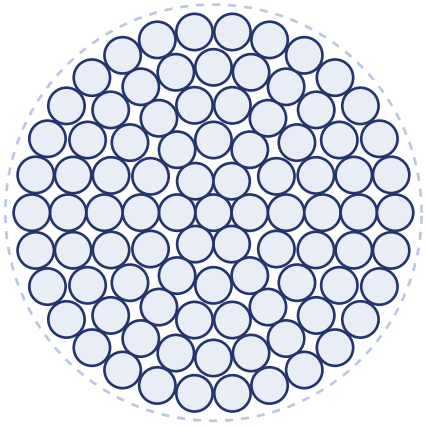

91 × 2.96 mm Al · Ø 32.6 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.