# AAAC 800

All Aluminium Alloy Conductor · Metric series · IEC 61089 · BS EN 50182 · EN 50183 · ES

| | |
|---|---|
| Product code | **ATC-AAA-016** |
| Designation | **800** |
| Aluminium area | **802.1 mm²** |
| Stranding, aluminium | **91 x 3.35 mm** |
| Overall diameter | **36.9 mm** |
| Approx. mass | **2225.8 kg/km** |
| DC resistance at 20 °C | **0.0417 Ohm/km** |
| Rated tensile strength | **236.62 kN** |
| Current rating | **1215 A** |

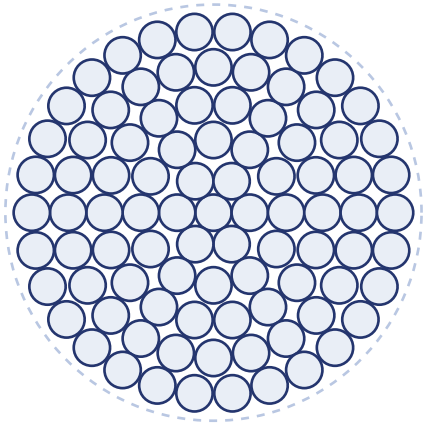

91 × 3.35 mm Al · Ø 36.9 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.