# AAC 185

All Aluminium Conductor · Metric series · IEC 61089 · BS EN 50182 · IEC 60889 · ES

| | |
|---|---|
| Product code | **ATC-AAC-010** |
| Designation | **185** |
| Aluminium area | **181.6 mm²** |
| Stranding, aluminium | **37 x 2.50 mm** |
| Overall diameter | **17.5 mm** |
| Approx. mass | **500.9 kg/km** |
| DC resistance at 20 °C | **0.1588 Ohm/km** |
| Rated tensile strength | **31.78 kN** |
| Current rating | **505 A** |

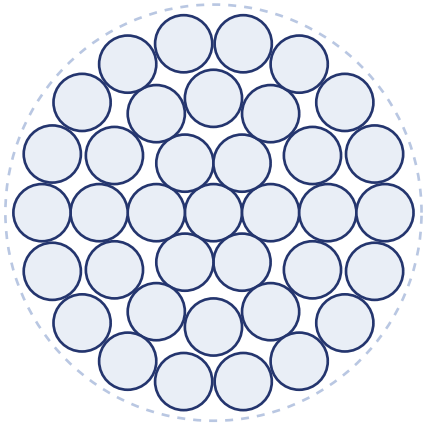

37 × 2.50 mm Al · Ø 17.5 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.