ACSR 16/2.5

Aluminium Conductor Steel Reinforced · Metric series · IEC 61089 · BS EN 50182 · EN 50189 · ES

Product code	**ATC-ACS-001**
Designation	**16/2.5**
Aluminium area	**15.3 mm²**
Steel area	**2.5 mm²**
Total area	**17.8 mm²**
Stranding, aluminium	**6 x 1.80 mm**
Stranding, steel	**1 x 1.80 mm**
Overall diameter	**5.4 mm**
Approx. mass	**62 kg/km**
DC resistance at 20 °C	**1.8769 Ohm/km**
Rated tensile strength	**5.80 kN**
Current rating	**110 A**

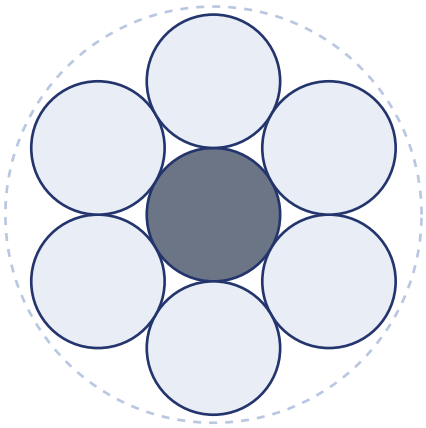

6 × 1.80 mm Al / 1 × 1.80 mm St · Ø 5.4 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.