ACSR Mole · 10.60 mm²

Aluminium Conductor Steel Reinforced · BS EN 50182 · BS EN 50182

Product code	**ATC-ACS-B01**
Code name	**Mole**
Designation	**10.60 mm²**
Aluminium area	**10.60 mm²**
Steel area	**1.77 mm²**
Total area	**12.4 mm²**
Stranding, aluminium	**6 x 1.50 mm**
Stranding, steel	**1 x 1.50 mm**
Overall diameter	**4.50 mm**
Approx. mass	**42.8 kg/km**
DC resistance at 20 °C	**2.7027 Ohm/km**
Rated tensile strength	**4.14 kN**
Current rating	**85 A**

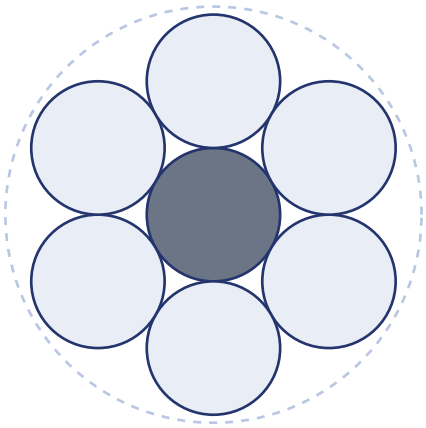

6 × 1.50 mm Al / 1 × 1.50 mm St · Ø 4.50 mm

Values are nominal unless stated; mass is approximate. Current rating per IEEE 738: 50 Hz, ambient 35 °C, conductor 80 °C, wind 0.6 m/s, solar 900 W/m², emissivity and absorptivity 0.5, sea level; for guidance only. Supplied on wooden or steel drums; grease to EN 50326 on request. Every drum ships with its routine test certificate. Other sizes, standards and product codes on request.